

Ningbo HengChuang Electric Appliance Co., LTD.

TEST REPORT

SCOPE OF WORK:

EMC report

Model:

HC-8003EH, details refer to Page 7

REPORT NUMBER

2502B0692SHA-001

ISSUE DATE

March 20, 2025

DOCUMENT CONTROL NUMBER

TTRF55014-01_V1

© 2021 Intertek



Report no. 2502B0692SHA-001

Applicant : Ningbo HengChuang Electric Appliance Co., LTD.
No.58 Jinjia, Chengzhong Village, Zhouxiang Town, Cixi City,
Zhejiang Province, China

Manufacturer : Ningbo HengChuang Electric Appliance Co., LTD.
No.58 Jinjia, Chengzhong Village, Zhouxiang Town, Cixi City,
Zhejiang Province, China

Factory : Ningbo HengChuang Electric Appliance Co., LTD.
No.58 Jinjia, Chengzhong Village, Zhouxiang Town, Cixi City,
Zhejiang Province, China

Summary

The equipment complies with the requirements according to the following standard(s) or Specification:

EN IEC 55014-1:2021: Electromagnetic compatibility-Requirements for household appliances, electric tools and similar apparatus Part 1: Emission


EN IEC 55014-2:2021: Electromagnetic compatibility - Requirements for household appliances, electric tools and similar apparatus Part 2: Immunity – Product family standard

EN IEC 61000-3-2:2019+A1:2021+A2:2024: Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions (equipment input current $\leq 16\text{A}$ per phase)

EN 61000-3-3:2013+A1:2019+A2:2021: Electromagnetic compatibility (EMC) - Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current $\leq 16\text{A}$ per phase and not subject to conditional connection

PREPARED BY:

REVIEWED BY:



Reggie Yuan
Project Engineer



Offa Zhou
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Contents

REVISION HISTORY.....	5
MEASUREMENT RESULT SUMMARY	6
1. GENERAL INFORMATION	7
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	7
1.2 DESCRIPTION OF TEST FACILITY	8
2. TEST SPECIFICATIONS.....	10
2.1 NORMATIVE STANDARDS.....	10
2.2 MODE OF OPERATION DURING THE TEST.....	11
2.3 TEST PERIPHERALS USED	11
2.4 RECORD OF CLIMATIC CONDITIONS	11
2.5 INSTRUMENT LIST	12
2.6 MEASUREMENT UNCERTAINTY	13
EMISSION TEST	14
3. MAINS/LOAD/CONTROL TERMINAL CONTINUOUS DISTURBANCE VOLTAGE.....	14
3.1 TERMINAL VOLTAGE LIMITS FOR THE FREQUENCY RANGE 9KHZ TO 30MHZ	14
3.1.1 <i>General limits</i>	14
3.1.2 <i>Limits for mains port of motor operated tools</i>	14
3.2 BLOCK DIAGRAM OF TEST SETUP	15
3.3 TEST SETUP AND TEST PROCEDURE	16
3.4 TEST PROTOCOL.....	17
4. MAINS TERMINAL DISCONTINUOUS DISTURBANCE VOLTAGE/CLICK	22
4.1 BLOCK DIAGRAM OF TEST SETUP	22
4.2 TEST SETUP AND TEST PROCEDURE	22
4.3 TEST PROTOCOL.....	23
5. CONTINUOUS DISTURBANCE POWER	27
5.1 CONTINUOUS DISTURBANCE POWER LIMIT.....	27
5.2 BLOCK DIAGRAM OF TEST SET UP	27
5.3 TEST PROCEDURE	27
5.4 TEST PROTOCOL.....	28
6. RADIATED EMISSION	32
6.1 LIMIT	32
6.2 BLOCK DIAGRAM AND TEST SET UP	33
6.3 TEST PROTOCOL.....	34
7. HARMONICS	35
7.1 BLOCK DIAGRAM OF TEST SETUP	35
7.2 TEST SETUP AND TEST PROCEDURE	35
7.3 TEST PROTOCOL.....	35
8. VOLTAGE FLUCTUATIONS-FLICKER.....	44
8.1 BLOCK DIAGRAM OF TEST SETUP	44
8.2 TEST SETUP AND TEST PROCEDURE	44
8.2.1 <i>Definition</i>	44
8.2.2 <i>Test condition</i>	44
8.3 TEST PROTOCOL.....	45
IMMUNITY TEST	47

9. ELECTROSTATIC DISCHARGE (ESD)	49
9.1 SEVERITY LEVEL AND PERFORMANCE CRITERION	49
9.1.1 <i>Test level</i>	49
9.1.2 <i>Performance Criterion</i>	49
9.2 BLOCK DIAGRAM OF TEST SETUP	50
9.3 TEST SETUP AND TEST PROCEDURE	51
9.4 TEST PROTOCOL	51
10. RADIO FREQUENCY ELECTROMAGNETIC FIELDS	52
10.1 SEVERITY LEVEL AND PERFORMANCE CRITERION	52
10.1.1 <i>Test level</i>	52
10.1.2 <i>Performance Criterion</i>	52
10.2 BLOCK DIAGRAM OF TEST SETUP	53
10.3 TEST SETUP AND TEST PROCEDURE	53
10.4 TEST PROTOCOL	53
11. FAST TRANSIENTS	54
11.1 SEVERITY LEVEL AND PERFORMANCE CRITERION	54
11.1.1 <i>Test level</i>	54
11.1.2 <i>Performance Criterion</i>	54
11.2 BLOCK DIAGRAM OF TEST SETUP	55
11.2.1 <i>Block Diagram for input a.c./d.c. power line</i>	55
11.2.2 <i>Block Diagram for output a.c./d.c. power line or signal/control lines</i>	56
11.3 TEST SETUP AND TEST PROCEDURE	56
11.4 TEST PROTOCOL	57
12. SURGES	58
12.1 SEVERITY LEVEL AND PERFORMANCE CRITERION	58
12.1.1 <i>Test level</i>	58
12.1.2 <i>Performance Criterion</i>	58
12.2 BLOCK DIAGRAM OF TEST SETUP	59
12.3 TEST SETUP AND TEST PROCEDURE	59
12.4 TEST PROTOCOL	59
13. INJECTED CURRENT	60
13.1 SEVERITY LEVEL AND PERFORMANCE CRITERION	60
13.1.1 <i>Test level</i>	60
13.1.2 <i>Performance Criterion</i>	60
13.2 BLOCK DIAGRAM OF TEST SETUP	60
13.3 TEST SETUP AND TEST PROCEDURE	61
13.4 TEST PROTOCOL	62
14. VOLTAGE DIPS	63
14.1 SEVERITY LEVEL AND PERFORMANCE CRITERION	63
14.1.1 <i>Test level</i>	63
14.1.2 <i>Performance Criterion</i>	63
14.2 BLOCK DIAGRAM OF TEST SETUP	64
14.3 TEST SETUP AND TEST PROCEDURE	64
14.4 TEST PROTOCOL	64
APPENDIX I: PHOTOGRAPH OF EQUIPMENT UNDER TEST	65

Revision History

Report No.	Version	Description	Issued Date
2502B0692SHA-001	Rev. 01	Initial issue of report	March 20, 2025

Measurement result summary

TEST ITEM	TEST RESULT	NOTE
Mains terminal continuous disturbance voltage	Pass	
Mains terminal discontinuous disturbance voltage/click	Pass	
Continuous disturbance power	Pass	
Radiated Emission	Pass	
Harmonics	Pass	
Voltage fluctuation-Flicker	Pass	
Electrostatic Discharge (ESD)	Pass	
Radio frequency electromagnetic fields	NA	
Fast transients	Pass	
Surges	Pass	
Injected Current	Pass	
Voltage dips	Pass	

Notes:

1. NA =Not Applicable
2. Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.
3. Additions, Deviations and Exclusions from Standards: None.

1. GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name : Hot-air fryer for household use

Type/Model : HC-8003EH, HC-8003EAH, HC-8003ETH, HC-8003EATH,
HC-8005EH, HC-8005EAH, HC-8005EATH, HC-8005ETH,
HC-8002EH, HC-8002ETH, HC-1101EH, HC-1101ETH,
HC-1102EH, HC-1102ETH

Description of EUT : Refer to Page 8

Rating : 220-240V~, 50/60Hz, Class I,
2200W for HC-8002EH, HC-8002ETH, HC-8003EH, HC-8003EAH,
HC-8003ETH, HC-8003EATH, HC-8005EH, HC-8005EAH, HC-8005EATH,
HC-8005ETH;
2300W for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH

Highest clock frequency : <15MHz

Brand name : /

Mains lead : 1.2m, (un)shielded, (non)detachable

Data cable : /

EUT type : ☒ Table-top
☐ Floor standing

Sample received date : February 21, 2025

Sample Identification No. : A250214-38-006/007/008/009

Date of test : February 21-March 04, 2025

Description of EUT:

The appliances covered by this report are portable Hot-air fryers for household indoor use only. All models employed interlock switch and thermal link to safeguard the appliances.
All models have same construction, the difference between them as following:

Models	Fan motor type	Power PCB type	Control panel PCB type	Power PCB+ Control panel PCB type
HC-8002EH, HC-8002ETH	HC-61-16	A1	B1	--
HC-8003EH, HC-8003ETH, HC-8005EH, HC-8005ETH	HC-61-16	A2	B2	--
HC-8003EAH, HC-8003EATH, HC-8005EAH, HC-8005EATH	HC-61-16	--	--	C1
HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH	HC-7213	A2	B3	--

1. HC-8003 series and HC-8005 series have the same appearance, except for a different top cover. So do HC-1101 series and HC-1102 series.
2. For the HC-8002EH, HC-8003EH, HC-8005EH, HC-8003EAH, HC-8005EAH, they have four optional basket, and HC-8002ETH, HC-8003ETH, HC-8005ETH, HC-8003EATH, HC-8005EATH they have two optional basket (Basket please refer to photo).
3. Letter "T" in the model name means the basket does have a viewable window.
4. The HC-8002 series, HC-8003 series and HC-8005 series have the same fan motor, but the appearance and Power PCB are different.
5. The HC-8003EH and HC-8003EAH use the same fan motor, but the HC-8003EAH control panel PCB and power PCB are integrated. So do HC-8003ETH and HC-8003EATH; HC-8005EH and HC-8005EAH; HC-8005ETH and HC-8005EATH.
6. All models of upper and lower heating elements can only work simultaneously.

After technical evaluation, model HC-8002EH, HC-8003ETH, HC-8003EAH, HC-1101EH were chosen to test as representative.

1.2 Description of Test Facility

Name : Intertek Testing Services (Shanghai FTZ) Co., Ltd.

Address : Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R.
China

Telephone : 86 21 61278200

Telefax : 86 21 54262353

The test facility is : CNAS Accreditation Lab
recognized, certified, Registration No. CNAS L21189
or accredited by these FCC Accredited Lab
organizations Designation Number: CN0175
IC Registration Lab
CAB identifier.: CN0014
VCCI Registration Lab
Member No: 3598 (Registration No.: R-14243, G-10845, C-14723, T-
12252)
A2LA Accreditation Lab
Certificate Number: 3309.02

2. TEST SPECIFICATIONS

2.1 Normative Standards

IEC 61000-4-2:2008: Electromagnetic Compatibility (EMC) – Part 4-2: testing and measurement techniques – electrostatic discharge immunity test

IEC 61000-4-3:2006+A1:2007+A2:2010: Electromagnetic Compatibility (EMC) – Part 4-3: testing and measurement techniques – radiated, radio frequency, electromagnetic field immunity test

IEC 61000-4-4:2012: Electromagnetic Compatibility (EMC) – Part 4-4: testing and measurement techniques – electric fast transient/burst immunity test

IEC 61000-4-5:2014+A1:2017: Electromagnetic Compatibility (EMC) – Part 4-5: testing and measurement techniques – section 5: surge immunity test

IEC 61000-4-6:2013: Electromagnetic Compatibility (EMC) – Part 4-6: testing and measurement techniques – section 6: immunity to conducted disturbance, induced by radio frequency field

IEC 61000-4-11:2020: Electromagnetic Compatibility (EMC) – Part 4-11: testing and measurement techniques –voltage dips, short interruption and voltage variations immunity test

IEC 61000-4-20:2010: Electromagnetic compatibility (EMC) – Part 4-20: Testing and measurement techniques - Emission and immunity testing in transverse electromagnetic (TEM) waveguides

IEC 61000-4-22:2010: Electromagnetic compatibility (EMC) – Part 4-22: Testing and measurement techniques – Radiated emissions and immunity measurements in fully anechoic rooms (FARs)

2.2 Mode of operation during the test

Within this test report, EUT was tested under all available operation modes and tested under its rating voltage and frequency. Other voltage and frequency is specified if used.

2.3 Test Peripherals used

Item No	Description	Band and Model	S/No
1	-	-	-

2.4 Record of climatic conditions

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (Kpa)
Mains terminal continuous disturbance voltage	22	42	NA
Mains terminal discontinuous disturbance voltage/click	22	42	NA
Continuous disturbance power	22	42	NA
Radiated Emission	NA	NA	NA
Harmonics	22	40	NA
Voltage fluctuation-Flicker	22	40	NA
Electrostatic Discharge (ESD)	23	45	101
RF electromagnetic field susceptibility	NA	NA	NA
Electric Fast Transient /Burst (EFT/B)	23	45	NA
Surge	23	45	NA
Injected Current	23	45	NA
Voltage dips and interruption	23	45	NA

Notes: NA =Not Applicable

2.5 Instrument list

Conducted Emission/Disturbance Power					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Test Receiver	R&S	ESR7	EC 6194	2026-02-28
☒	A.M.N.	R&S	ESH2-Z5	EC 3119	2025-11-19
☒	Absorbing clamp	R&S	MDS 21	EC 2108	2025-06-25
Discontinuous Disturbance Voltage					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Click meter	AFJ	DDA55	EC 5320	2025-11-19
☒	A.M.N.	AFJ	LS16C	EC 5320-1	2025-11-19
Harmonics / Flicker					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Three phase Harmonic-flicker system	EM TEST	DPA503N	EC 5383	2025-07-14
		EM TEST	NETWAVE-30-400	EC 5383-2	2025-07-14
ESD					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	ESD generator	TESEQ	NSG 437	EC 4792-4	2025-03-12
EFT/Surge/ Voltage Dips					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Conduct immunity system	EM TEST	UCS 500M6B	EC 2958	2025-03-21
☒	Automatic transformer	EM TEST	MV2616	EC 2957	2025-03-21
Conducted Immunity					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Signal generator	R&S	SML 01	EC 2338	2026-02-27
☒	Power amplifier	AR	75A250	EC 3043-1	2025-07-26
☒	Attenuator	EM TEST	ATT6/75	EC 3043-3	2026-02-27
☒	CDN	Frankonia	CDN M2M316	EC 5969	2025-07-04
Test Site					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Shielded room	Zhongyu	-	EC 2838	2026-01-11
☒	Shielded room	Zhongyu	-	EC 2839	2026-01-11
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Therom- Hydrograph	Testo	175h1	EC 6640	2025-08-28

☑	Therom-Hygrograph	Testo	175h1	EC 6641	2025-08-28
☑	Therom-Hygrograph	Testo	175h1	EC6642	2025-08-28
☑	Therom-Hygrograph	Testo	175h1	EC 6643	2025-08-28
☑	Pressure meter	YM3	Shanghai Mengde	EC 3320	2025-08-16

2.6 Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted emission at mains ports	9kHz ~ 150kHz	3.52 dB
	150kHz ~ 30MHz	3.19 dB
Continuous disturbance voltage at telecom ports	150kHz ~ 30MHz	3.64 dB
Continuous disturbance current at telecom ports	150kHz ~ 30MHz	2.62 dB
Mains terminal discontinuous disturbance voltage/click	-	3.76 dB
Continuous disturbance power	30MHz ~ 300MHz	4.35 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	4.90 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.02 dB
	6GHz ~ 18GHz	5.28 dB
Harmonic current emission	-	3.90%
Voltage fluctuations and flicker	-	10.34%
ESD	-	6.65%
Radiated susceptibility	-	2.38%
EFT test at main terminal	-	11.57%
EFT test at signal/telecom terminal	-	11.62%
Surge test at main terminal	-	11.57%
Injected current test at main terminal	-	1.88 dB
Injected current test at unshielded signal terminal	-	3.41 dB
Voltage dips and interruption	-	6.05%

Emission Test

3. Mains/Load/Control Terminal Continuous Disturbance Voltage

Test result: **PASS**

3.1 Terminal Voltage Limits for the frequency range 9kHz to 30MHz

3.1.1 General limits


Frequency range (MHz)	Mains ports		Auxiliary ports			
	Disturbance voltage		Disturbance voltage		Disturbance current	
	Limits dB(μV)		Limits dB(μV)		Limits dB(μA)	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	66 ~ 56 *	59 ~ 46 *	80	70	40 ~ 30 *	30 ~ 20 *
0.5 ~ 5.0	56	46	74	64	30	20
5.0 ~ 30	60	50	74	64		
Notes:						
1. * means the limit decreasing linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.						
2. If the quasi-peak measurements meet the average limit, the EUT shall be deemed to meet both limits and the measurements using the average detector need not be carried out.						

3.1.2 Limits for mains port of motor operated tools

Frequency range (MHz)	P ≤ 700 W		700 W < P ≤ 1 000 W		P > 1 000 W	
	Limits dB(μV)		Limits dB(μV)		Limits dB(μV)	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.35	66 ~ 59*	59 ~ 49*	70 ~ 63*	63 ~ 53*	76 ~ 69*	69 ~ 59 *
0.35 ~ 5	59	49	63	53	69	59
5 ~ 30	64	54	68	58	74	64
Notes: 1. * means the limit decreasing linearly with the logarithm of the frequency in the range 0.15MHz to 0.35MHz. 2. If the quasi-peak measurements meet the average limit, the EUT shall be deemed to meet both limits and the measurements using the average detector need not be carried out.						


3.2 Block Diagram of Test Setup

☒ At mains terminal

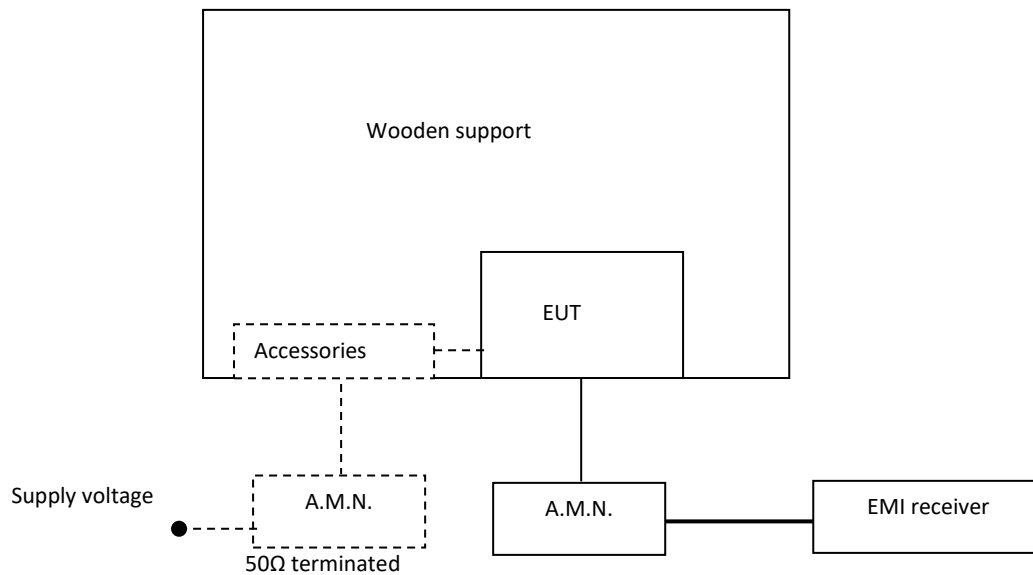

For table top equipment, wooden support is 0.8m height table.
For floor standing equipment, wooden support is 0.1m height rack.

☐ At Associated ports

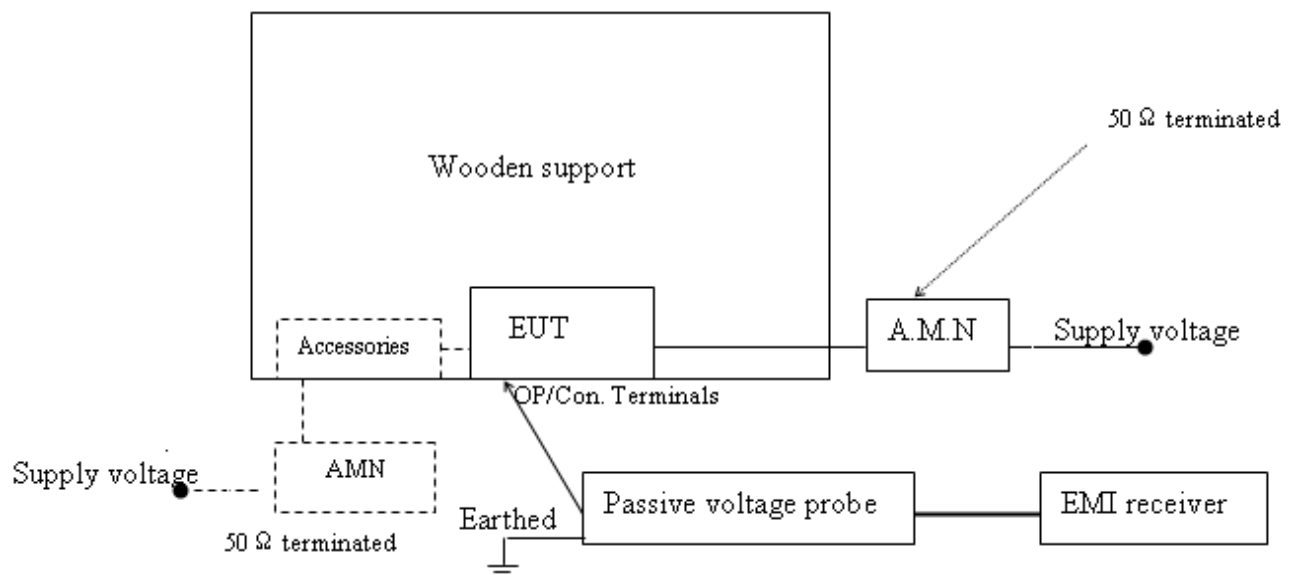

Note: — : power line
— : signal line
----- : means the test setup while available

3.3 Test Setup and Test Procedure

Measurement was performed in shielded room, and instruments used were according to clause 5.1 of EN 55014-1 if applicable.

Detailed test procedure and arrangement was according to clause 5.2 of EN 55014-1.

Measurement methods was according to clause 5.4 of EN 55014-1.

Operation conditions of EUT was according to clause 6 of EN 55014-1.


Frequency range 150kHz – 30MHz was checked and EMI receiver measurement bandwidth was set to 9kHz.

3.4 Test Protocol


For Mains ports: Pass

HC-8002EH

L line

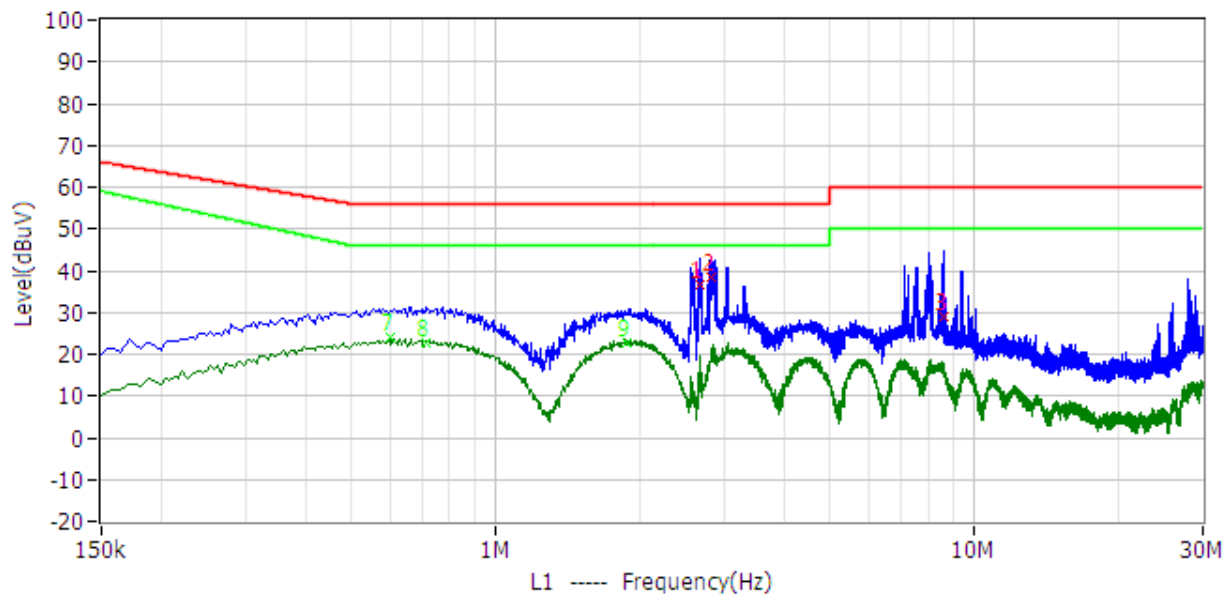


N line

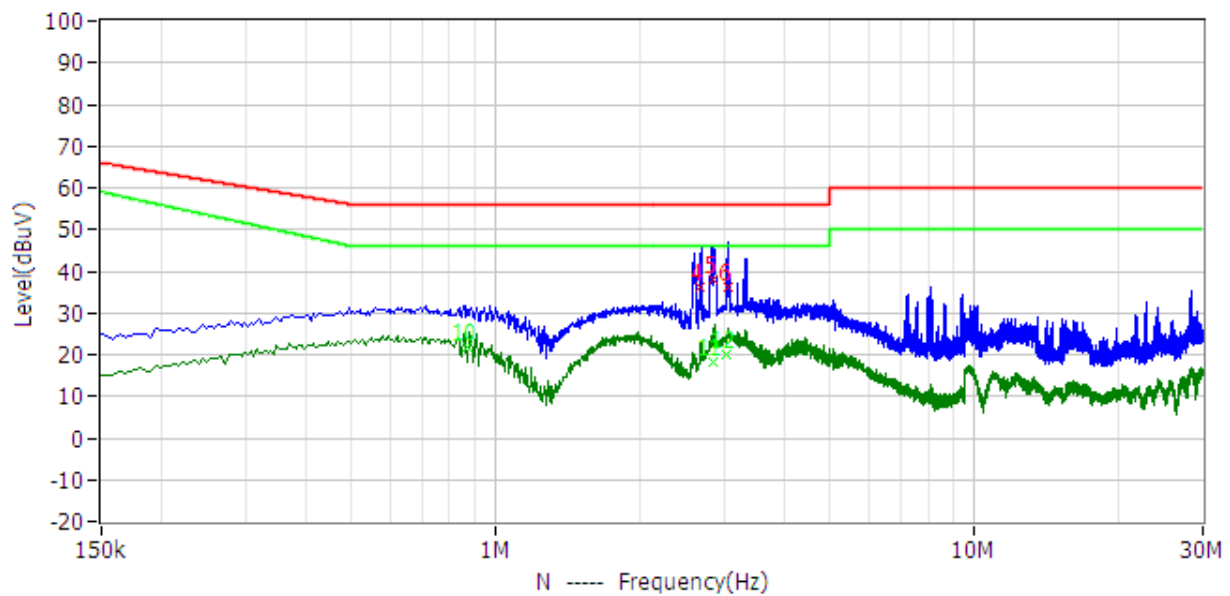


No.	Frequency	Limit dB μ V	Level dB μ V	Delta dB	Factor dB	Detector	Phase
1	2.670MHz	56.00	36.42	-19.58	10.20	QP	L1
2	2.828MHz	56.00	38.58	-17.42	10.20	QP	L1
3	8.597MHz	60.00	28.90	-31.10	10.40	QP	L1
4	2.675MHz	56.00	36.30	-19.70	10.10	QP	N
5	2.832MHz	56.00	38.18	-17.82	10.20	QP	N
6	3.044MHz	56.00	36.18	-19.82	10.20	QP	N
7	604.500kHz	46.00	23.93	-22.07	10.10	CAV	L1
8	717.000kHz	46.00	22.68	-23.32	10.10	CAV	L1
9	1.874MHz	46.00	22.58	-23.42	10.10	CAV	L1
10	874.500kHz	46.00	21.82	-24.18	10.00	CAV	N
11	2.837MHz	46.00	18.37	-27.63	10.20	CAV	N
12	3.030MHz	46.00	19.97	-26.03	10.20	CAV	N

HC-8003ETH

L line

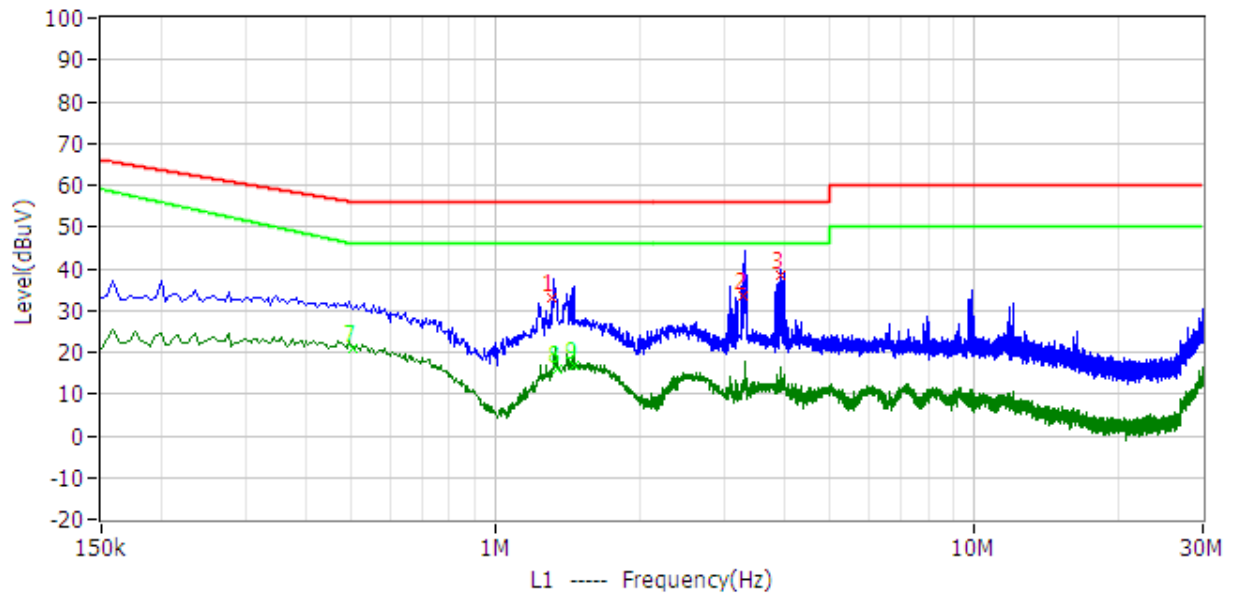


N line

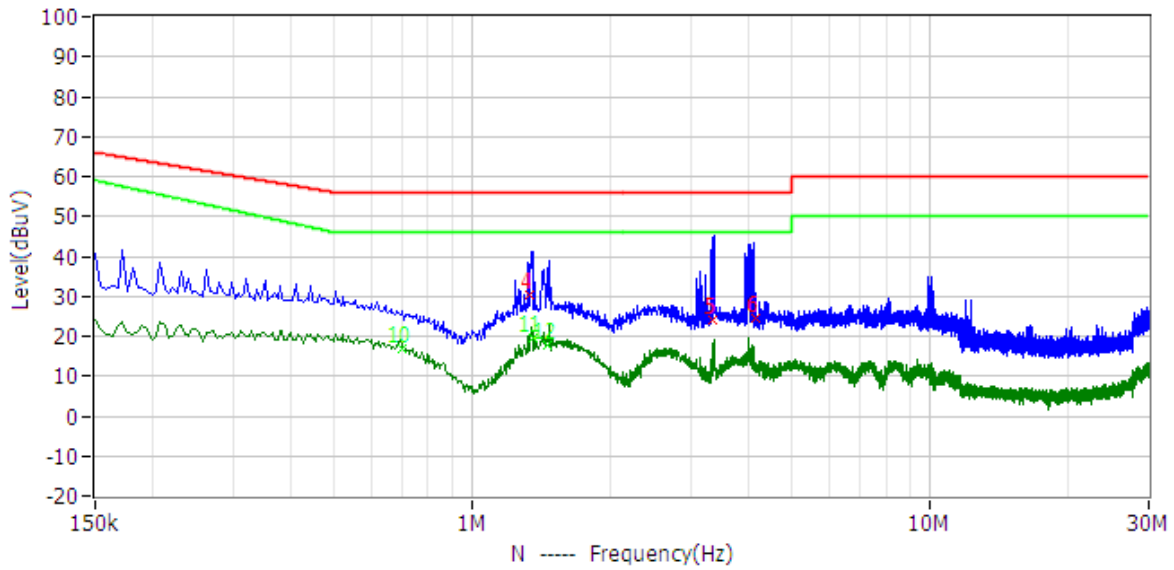


No.	Frequency	Limit dBμV	Level dBμV	Delta dB	Factor dB	Detector	Phase
1	1.311MHz	56.00	32.97	-23.03	10.10	QP	L1
2	3.273MHz	56.00	33.30	-22.70	10.20	QP	L1
3	3.953MHz	56.00	38.29	-17.71	10.20	QP	L1
4	1.329MHz	56.00	30.42	-25.58	10.10	QP	N
5	3.341MHz	56.00	24.20	-31.80	10.20	QP	N
6	4.142MHz	56.00	24.62	-31.38	10.20	QP	N
7	501.000kHz	46.00	21.01	-24.99	10.10	CAV	L1
8	1.343MHz	46.00	15.99	-30.01	10.10	CAV	L1
9	1.460MHz	46.00	16.80	-29.20	10.10	CAV	L1
10	699.000kHz	46.00	16.96	-29.04	10.00	CAV	N
11	1.361MHz	46.00	19.76	-26.24	10.10	CAV	N
12	1.455MHz	46.00	17.63	-28.37	10.10	CAV	N

HC-8003EAH

L line

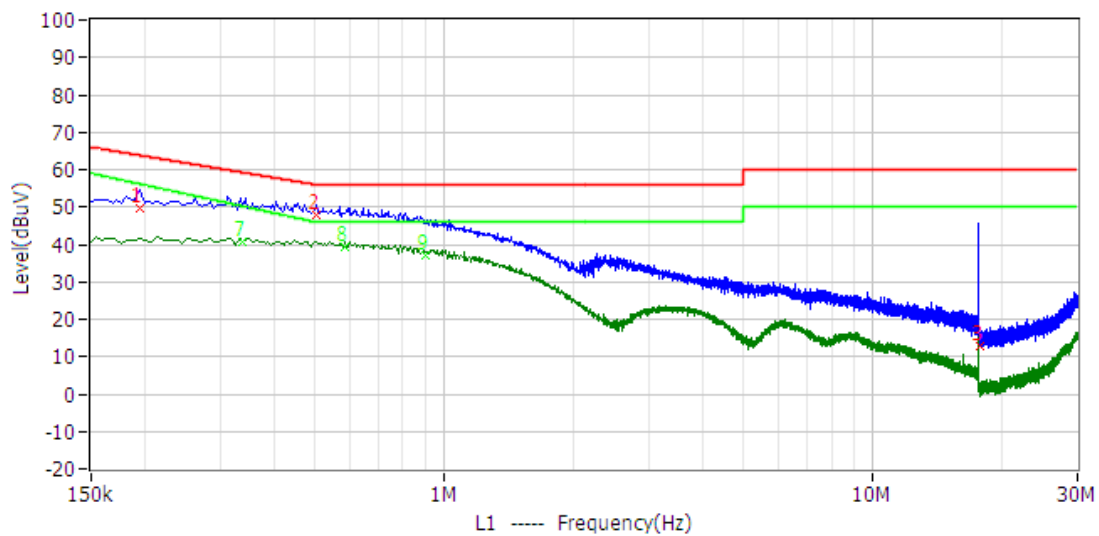


N line

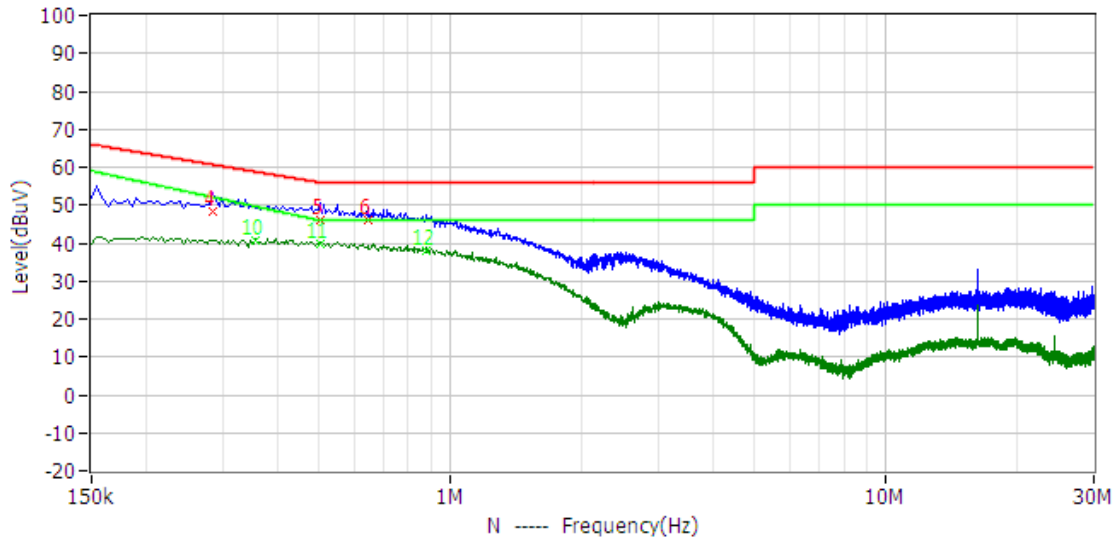


No.	Frequency	Limit dBμV	Level dBμV	Delta dB	Factor dB	Detector	Phase
1	195.000kHz	63.82	49.84	-13.98	10.00	QP	L1
2	501.000kHz	56.00	47.66	-8.34	10.10	QP	L1
3	17.709MHz	60.00	12.74	-47.26	10.80	QP	L1
4	285.000kHz	60.67	48.42	-12.25	10.10	QP	N
5	501.000kHz	56.00	46.04	-9.96	10.00	QP	N
6	645.000kHz	56.00	46.28	-9.72	10.00	QP	N
7	339.000kHz	50.20	40.85	-9.35	10.00	CAV	L1
8	586.500kHz	46.00	39.26	-6.74	10.10	CAV	L1
9	901.500kHz	46.00	37.10	-8.90	10.10	CAV	L1
10	357.000kHz	49.64	40.66	-8.98	10.00	CAV	N
11	501.000kHz	46.00	39.84	-6.16	10.00	CAV	N
12	879.000kHz	46.00	37.99	-8.01	10.00	CAV	N

HC-1101EH

L line

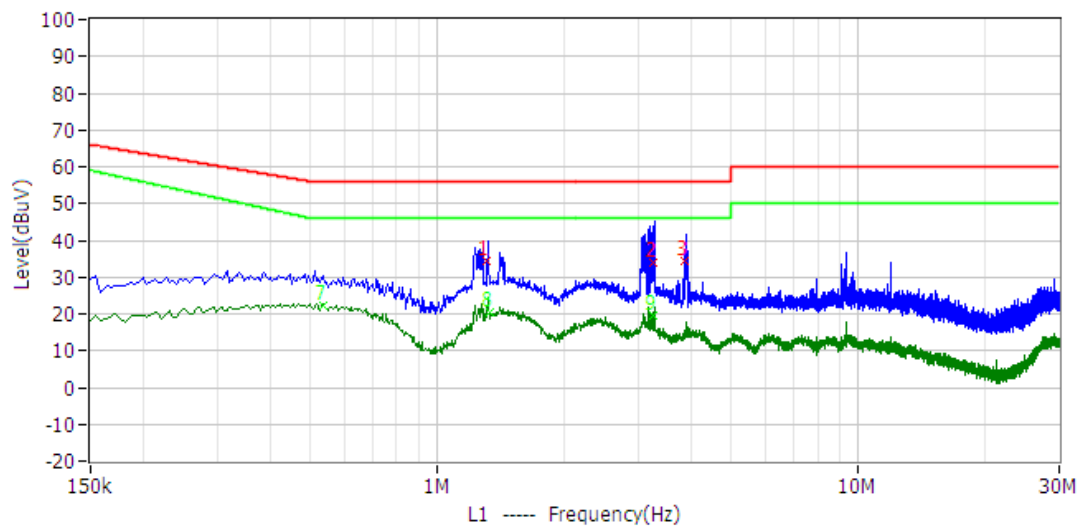

N line

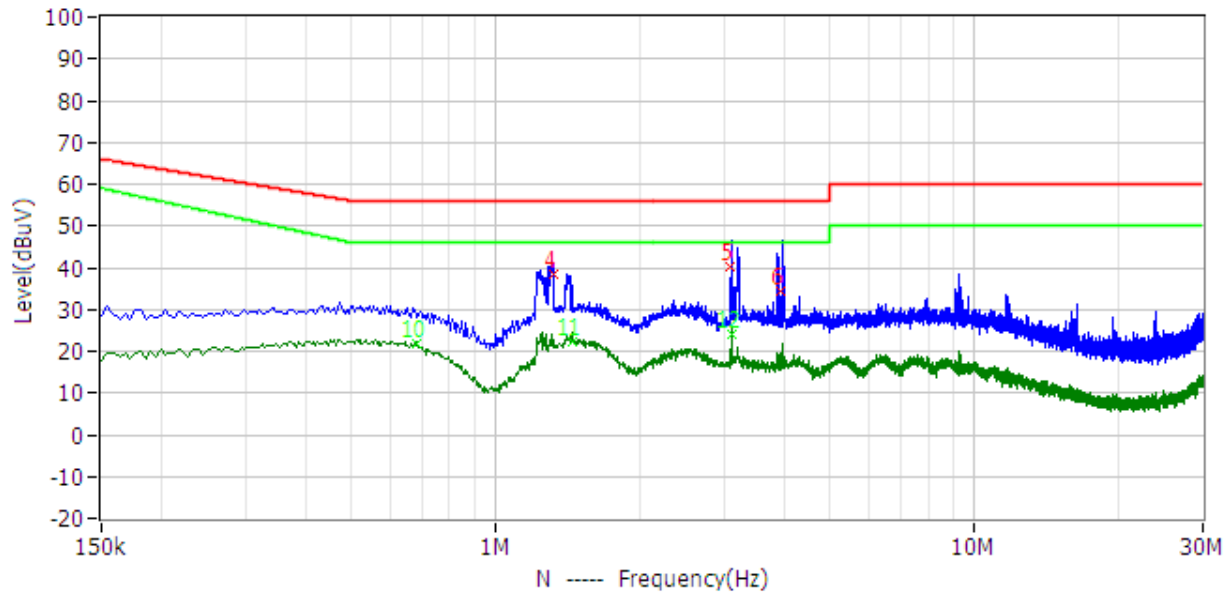

No.	Frequency	Limit dB μ V	Level dB μ V	Delta dB	Factor dB	Detector	Phase
1	1.311MHz	56.00	34.35	-21.65	10.10	QP	L1
2	3.251MHz	56.00	33.94	-22.06	10.20	QP	L1
3	3.867MHz	56.00	34.43	-21.57	10.20	QP	L1
4	1.316MHz	56.00	38.27	-17.73	10.10	QP	N
5	3.080MHz	56.00	40.04	-15.96	10.20	QP	N
6	3.944MHz	56.00	34.26	-21.74	10.20	QP	N
7	537.000kHz	46.00	22.28	-23.72	10.10	CAV	L1
8	1.334MHz	46.00	20.27	-25.73	10.10	CAV	L1
9	3.255MHz	46.00	19.48	-26.52	10.20	CAV	L1
10	685.500kHz	46.00	21.88	-24.12	10.00	CAV	N
11	1.442MHz	46.00	22.29	-23.71	10.10	CAV	N
12	3.102MHz	46.00	23.87	-22.13	10.20	CAV	N

For Associated ports: NA


Frequency (MHz)	Quasi-peak			Average		
	Corrected Reading (dB μ V)	Limit (dB μ V)	Margin (dB)	Corrected Reading (dB μ V)	Limit (dB μ V)	Margin (dB)

Note: * means the emission level 20dB below the relevant limit.

4. Mains terminal discontinuous disturbance voltage/click

Test result: **PASS**

4.1 Block Diagram of Test Setup

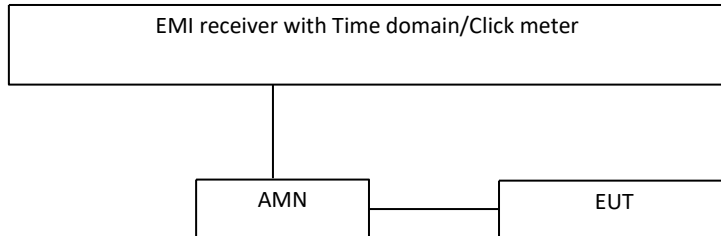

4.2 Test Setup and Test Procedure

Measurement was performed in shielded room, and instruments used were according to clause 5.1 of EN 55014-1 if applicable.

Detailed test procedure and arrangement was according to clause 5.2 of EN 55014-1.

Measurement methods was according to clause 5.4 of EN 55014-1.

Operation conditions of EUT was according to clause 6 of EN 55014-1.

0.15MHz, 0.5MHz, 1.4MHz and 30MHz were spot checked, and upper quartile methods used during measurement.

The final judgment of test result was according to figure 6 of EN 55014-1.

4.3 Test Protocol

HC-8002EH

Frequency (MHz)	0.15	0.5	1.4	30.0
Permitted limit for continuous interference (dB μ V)	66.0	56.0	56.0	60.0
Counted click number	40	30	30	0
Observed time (min)	100	100	100	100
Click duration (ms)	<10	<10	<10	-
Click rate N	<5	<5	<5	0
Factor	-	-	-	-
Permitted limits for clicks (dB μ V)	-	-	-	-
Counted clicks exceeding the limits	-	-	-	-
Test result	Pass	Pass	Pass	Pass
Any other descriptions: The click rate is less than 5, the caused clicks have a duration is less than 10ms, so it is deemed to comply with the limits without further testing.				

HC-8003ETH

Frequency (MHz)	0.15	0.5	1.4	30.0
Permitted limit for continuous interference (dB μ V)	66.0	56.0	56.0	60.0
Counted click number	40	40	40	0
Observed time (min)	100	100	100	100
Click duration (ms)	<10	<10	<10	-
Click rate N	<5	<5	<5	0
Factor	-	-	-	-
Permitted limits for clicks (dB μ V)	-	-	-	-
Counted clicks exceeding the limits	-	-	-	-
Test result	Pass	Pass	Pass	Pass
Any other descriptions: The click rate is less than 5, the caused clicks have a duration is less than 10ms, so it is deemed to comply with the limits without further testing.				

HC-8003EAH

Frequency (MHz)	0.15	0.5	1.4	30.0
Permitted limit for continuous interference (dB μ V)	66.0	56.0	56.0	60.0
Counted click number	40	28	28	0
Observed time (min)	70	70	70	70
Click duration (ms)	<10	<10	<10	-
Click rate N	<5	<5	<5	0
Factor	-	-	-	-
Permitted limits for clicks (dB μ V)	-	-	-	-
Counted clicks exceeding the limits	-	-	-	-
Test result	Pass	Pass	Pass	Pass
Any other descriptions: The click rate is less than 5, the caused clicks have a duration is less than 10ms, so it is deemed to comply with the limits without further testing.				

HC-1101EH

Frequency (MHz)	0.15	0.5	1.4	30.0
Permitted limit for continuous interference (dB μ V)	66.0	56.0	56.0	60.0
Counted click number	40	36	36	0
Observed time (min)	120	120	120	120
Click duration (ms)	<10	<10	<10	-
Click rate N	<5	<5	<5	0
Factor	-	-	-	-
Permitted limits for clicks (dB μ V)	-	-	-	-
Counted clicks exceeding the limits	-	-	-	-
Test result	Pass	Pass	Pass	Pass
Any other descriptions: The click rate is less than 5, the caused clicks have a duration is less than 10ms, so it is deemed to comply with the limits without further testing.				

5. Continuous disturbance power

Test result: **PASS**


5.1 Continuous disturbance power limit

	General		$P \leq 700 \text{ W}$		$700 \text{ W} < P \leq 1\,000 \text{ W}$		$P > 1\,000 \text{ W}$	
Frequency range (MHz)	Limits dB(pW)		Limits dB(pW)		Limits dB(pW)		Limits dB(pW)	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
30 ~ 300	45 ~ 55*	35 ~ 45*	45 ~ 55*	35 ~ 45*	49 ~ 59*	39 ~ 49*	55 ~ 65*	45 ~ 55*

Notes:

- * means the limit decreasing linearly with the logarithm of the frequency in the range 30MHz to 300MHz.
- If the quasi-peak measurements meet the average limit, the EUT shall be deemed to meet both limits and the measurements using the average detector need not be carried out.

5.2 Block diagram of test set up

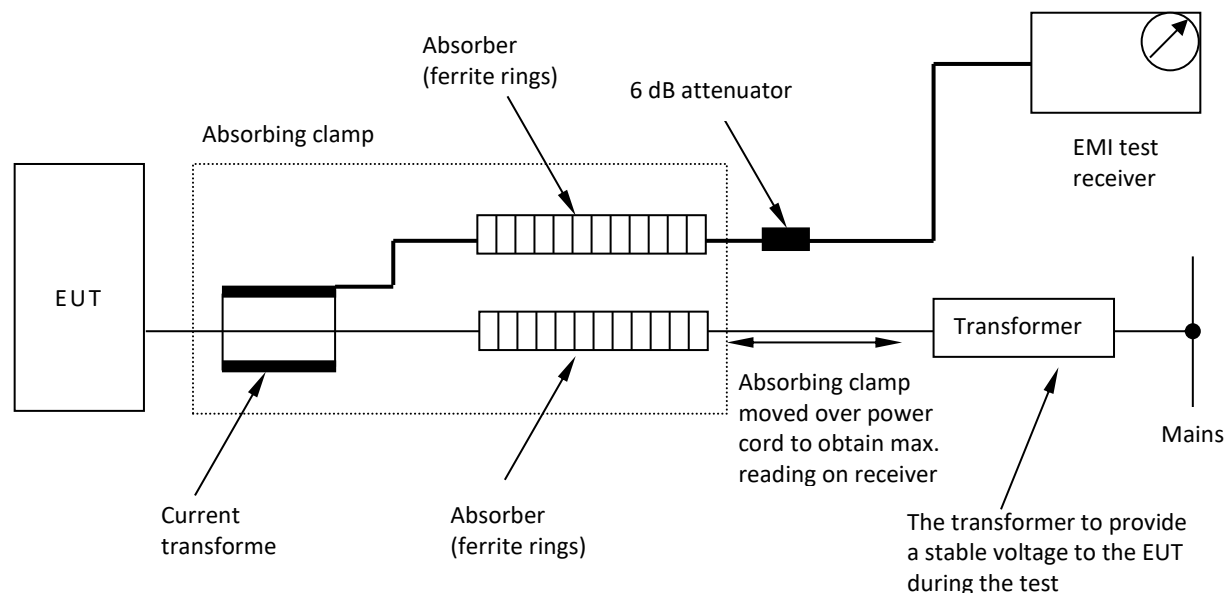

5.3 Test Procedure

Measurement was performed in shielded room, and instruments used were according to clause 5.1 of EN 55014-1 if applicable.

Detailed test procedure and arrangement was according to clause 5.3 of EN 55014-1.

Measurement methods was according to clause 5.4 of EN 55014-1.


Operation conditions of EUT was according to clause 6 of EN 55014-1.

Frequency range 30MHz – 300MHz was checked and EMI receiver measurement bandwidth was set to 120kHz.

5.4 Test Protocol


For Mains ports: Pass

HC-8002EH

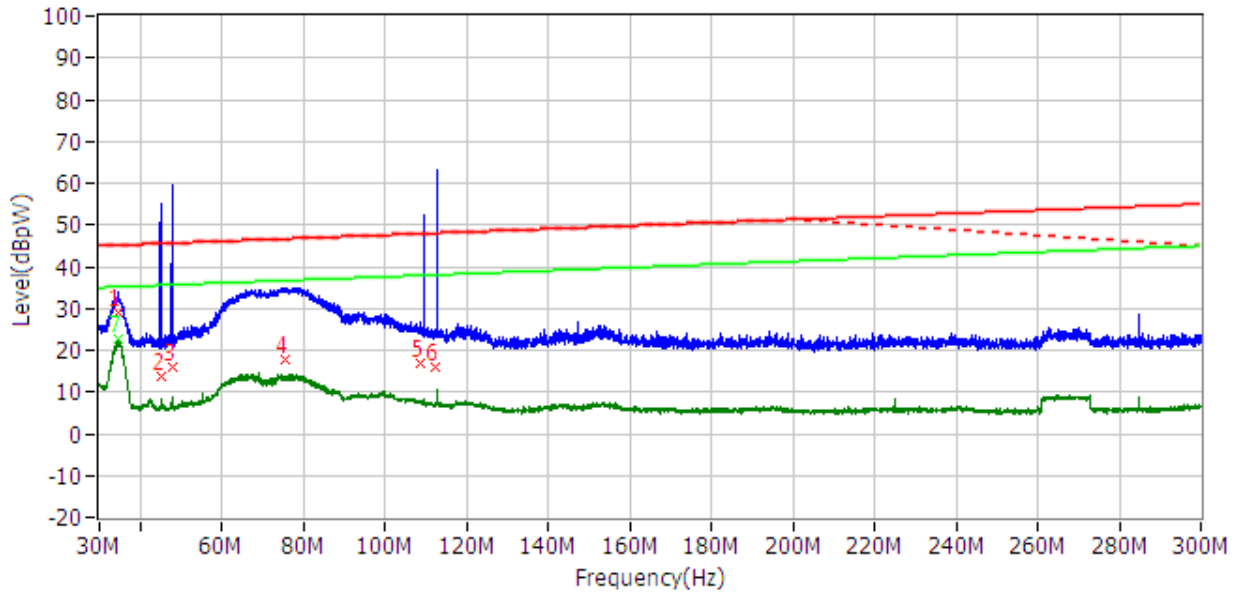


No.	Frequency	Limit dBpW	Level dBpW	Delta dB	Factor dB	Detector
1	34.560MHz	45.17	29.09	-16.08	6.10	QP
2	45.120MHz	45.56	13.51	-32.05	4.20	QP
3	48.000MHz	45.67	15.94	-29.73	4.50	QP
4	75.480MHz	46.68	17.92	-28.76	4.90	QP
5	108.540MHz	47.91	16.86	-31.05	3.50	QP
6	112.260MHz	48.05	15.86	-32.19	3.50	QP
7	34.500MHz	35.17	22.77	-12.40	6.10	CAV

HC-8003ETH

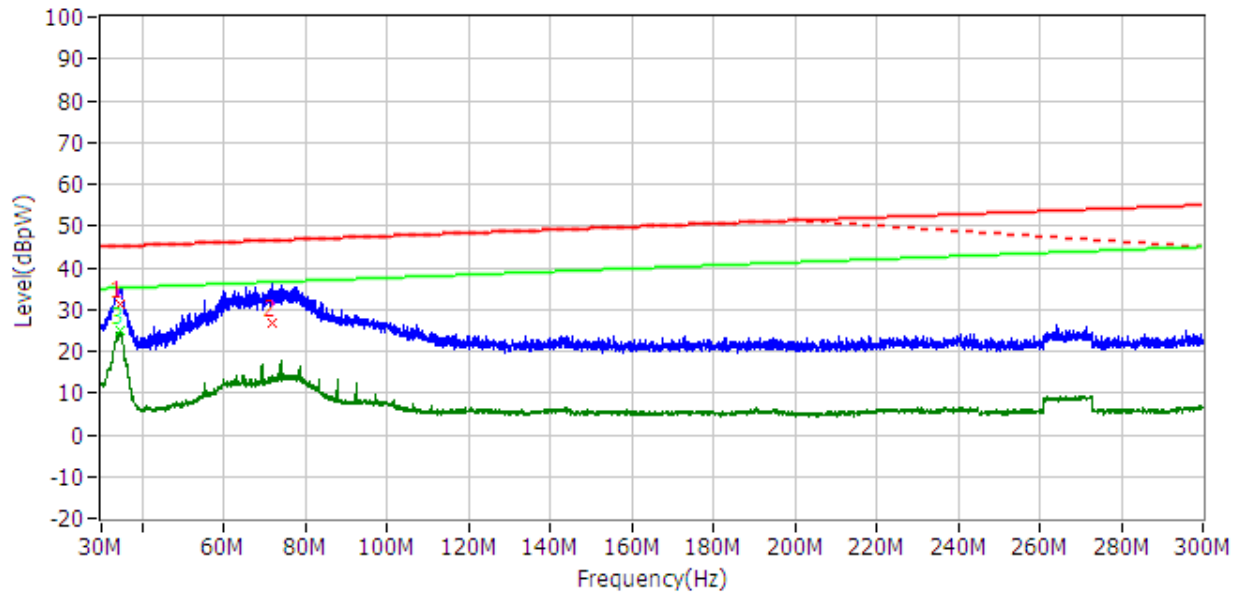


No.	Frequency	Limit dBpW	Level dBpW	Delta dB	Factor dB	Detector
1	34.620MHz	45.17	31.19	-13.98	6.10	QP
2	71.940MHz	46.55	26.66	-19.89	4.30	QP
3	34.440MHz	35.16	24.93	-10.23	6.10	CAV

HC-8003EAH

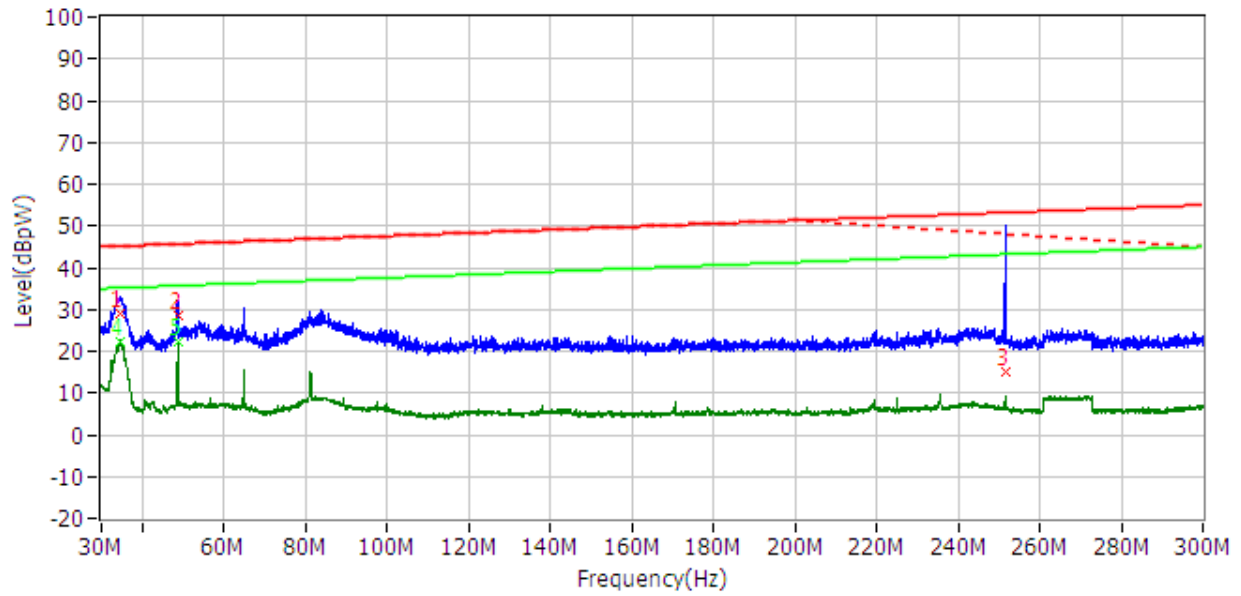

No.	Frequency	Limit dBpW	Level dBpW	Delta dB	Factor dB	Detector
1	34.680MHz	45.17	29.14	-16.03	6.10	QP
2	48.780MHz	45.70	28.53	-17.17	4.60	QP
3	251.760MHz	53.21	15.04	-38.17	4.60	QP
4	34.680MHz	35.17	22.46	-12.71	6.10	CAV
5	48.720MHz	35.69	22.33	-13.36	4.50	CAV

HC-1101EH

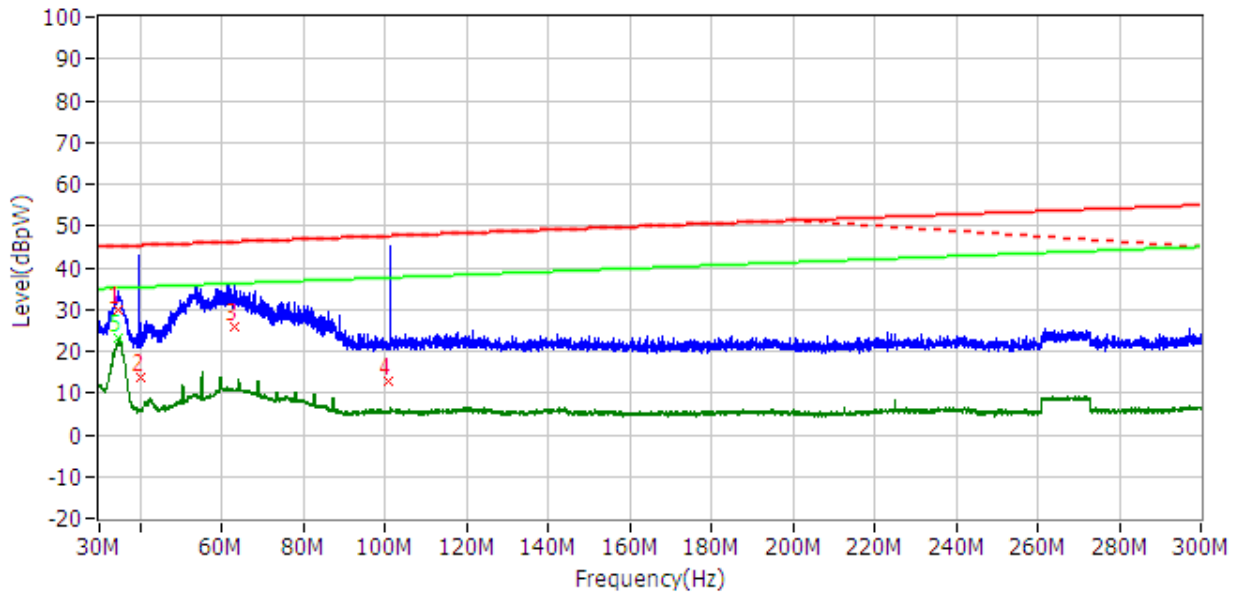

No.	Frequency	Limit dBpW	Level dBpW	Delta dB	Factor dB	Detector
1	34.680MHz	45.17	29.82	-15.35	6.10	QP
2	40.020MHz	45.37	13.60	-31.77	4.70	QP
3	63.240MHz	46.23	25.88	-20.35	5.00	QP
4	100.620MHz	47.62	12.69	-34.93	4.30	QP
5	34.500MHz	35.17	22.95	-12.22	6.10	CAV

For Associated ports: NA

Frequency (MHz)	Quasi-peak			Average		
	Corrected Reading (dBpW)	Limit (dBpW)	Margin (dB)	Corrected Reading (dBpW)	Limit (dBpW)	Margin (dB)

Note: * means the emission level 20dB below the relevant limit.

6. Radiated emission

Test result: **PASS**

- ☒ As for in the disturbance power test all emission readings from the EUT are lower than the applicable limits (Table 7) reduced by the margin (Table 8) and the maximum clock frequency is less than 30MHz, the EUT is deemed to comply with the Radiated Emission requirement without test.

6.1 Limit

- ☐ Radiated emission limit from frequency range 30MHz – 1000MHz

Frequency (MHz)	Permitted limit in dBμV/m (Quasi-peak) of Measurement Distance 3m	Permitted limit in dBμV/m (Quasi-peak) of Measurement Distance 10m
30 ~ 230	40	30
230 ~ 1000	47	37
Notes: 1. For the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades. 2. The gray rows are selected items.		


- ☐ Radiated emission limit from frequency range 1GHz – 6GHz

Frequency (MHz)	Permitted limit in dBμV/m (Average) of Measurement Distance 3m	Permitted limit in dBμV/m (Peak) of Measurement Distance 3m
1000 ~ 3000	50	70
3000 ~ 6000	54	74
Notes: 1. For the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades. 2. The gray rows are selected items.		

Required highest frequency for radiated electric field strength measurements

Highest clock frequency (F_x)	Highest measurement frequency
$F_x \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} < F_x \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} < F_x \leq 1 \text{ GHz}$	5 GHz
$F_x > 1 \text{ GHz}$	$5 \times F_x$ up to a maximum of 6 GHz

6.2 Block diagram and test set up

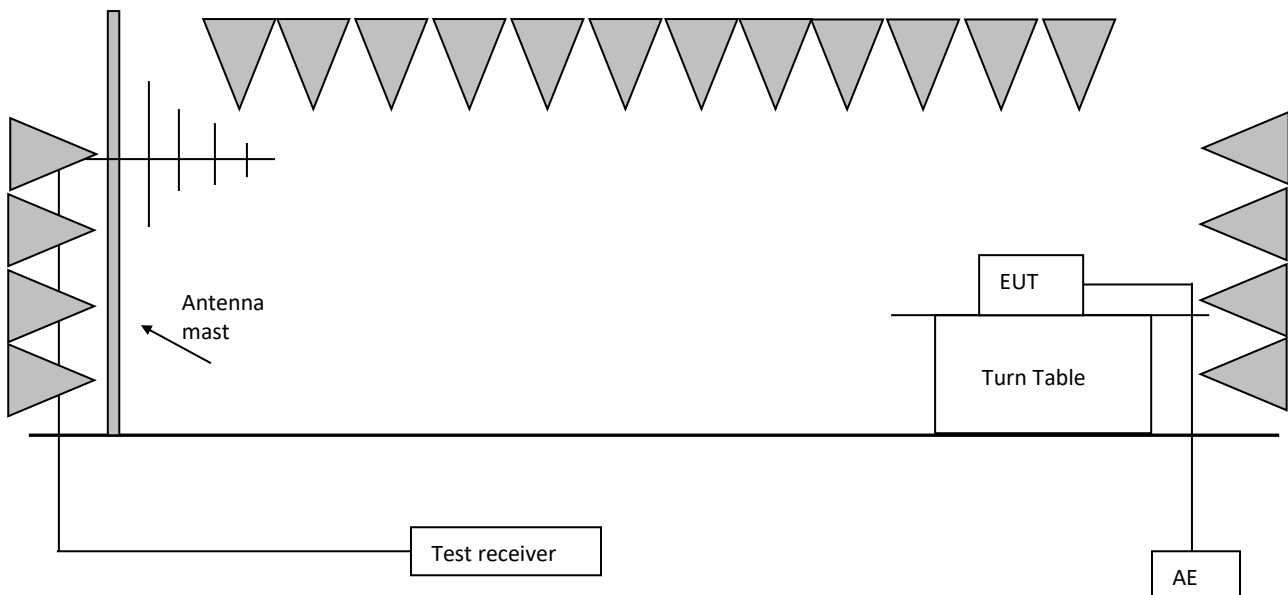

The measurement was applied in a semi-anechoic chamber.
Operation conditions of EUT was according to clause 6 of EN 55014-1.
Measurement was performed according to clause 10 of CISPR 32.
Setting of EUT is according to clause 5.3.4.3 of EN 55014-1.
The bandwidth setting on test receiver was 120kHz.
The frequency range from 30MHz to 6GHz was checked.

6.3 Test Protocol

Horizontal


Vertical

Polarization	Frequency (MHz)	Corrected Reading (dB μ V/m)	Corrected Factor (dB/m)	Limits (dB μ V/m)	Margin (dB μ V/m)
Horizontal					
Vertical					

7. Harmonics

Test result: **PASS**

7.1 Block Diagram of Test Setup



7.2 Test Setup and Test Procedure

Harmonics of the fundamental current were measured up to 40 order harmonics using a digital power meter with an analogue output and frequency analyser which was integrated in the harmonic & flicker test system. The measurements were carried out under steady conditions. Measuring instrumentation according to IEC 61000-4-7:2002+A1:2008

7.3 Test Protocol

- ☐ This product is not defined as lighting equipment, and has rated power less than 75W, therefore, no limit apply according to EN 61000-3-2
- ☐ The EUT is kitchen machines as listed in the scope of IEC 60335-2-14, therefore, is deemed to conform to the harmonic current limits of this standard without further testing.

HC-8002EH

Power and THD results - DS: 1

True power P:	2.095kW	Apparent power S:	2.096kVA
Reactiv power Q:	20.78var	Power factor:	1.000
THD (U):	0.002	THD (I):	0.002
Crest Factor (U):	1.411	Crest Factor (I):	1.412

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	3.082			
2	4.553E-3			PASS
3	12.456E-3			PASS
4	4.020E-3			PASS
5	3.687E-3			PASS
6	3.818E-3			PASS
7	3.015E-3			PASS
8	3.397E-3			PASS
9	3.767E-3			PASS
10	3.146E-3			PASS
11	2.080E-3			PASS
12	3.072E-3			PASS
13	3.488E-3			PASS
14	2.879E-3			PASS
15	2.599E-3			PASS
16	2.400E-3			PASS
17	2.372E-3			PASS
18	2.529E-3			PASS
19	1.657E-3			PASS
20	2.070E-3			PASS
21	3.132E-3			PASS
22	1.797E-3			PASS
23	1.997E-3			PASS
24	1.595E-3			PASS
25	1.881E-3			PASS
26	1.468E-3			PASS
27	1.474E-3			PASS
28	1.462E-3			PASS
29	1.723E-3			PASS
30	1.103E-3			PASS
31	1.668E-3			PASS
32	1.182E-3			PASS
33	1.738E-3			PASS
34	935.407E-6			PASS
35	1.109E-3			PASS
36	1.139E-3			PASS
37	1.104E-3			PASS
38	878.844E-6			PASS
39	971.674E-6			PASS
40	835.954E-6			PASS

Maximum harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	9.102			
2	73.449E-3	4.534	1.62	PASS
3	70.909E-3	2.055	3.45	PASS
4	47.824E-3			PASS
5	35.897E-3			PASS
6	30.663E-3			PASS
7	25.879E-3			PASS
8	23.121E-3			PASS
9	22.259E-3			PASS
10	18.855E-3			PASS
11	15.179E-3			PASS
12	15.853E-3			PASS
13	16.473E-3			PASS
14	14.062E-3			PASS
15	12.856E-3			PASS
16	12.268E-3			PASS
17	11.549E-3			PASS
18	11.100E-3			PASS
19	9.684E-3			PASS
20	9.532E-3			PASS
21	11.492E-3			PASS
22	8.832E-3			PASS
23	8.757E-3			PASS
24	7.980E-3			PASS
25	8.458E-3			PASS
26	7.465E-3			PASS
27	7.115E-3			PASS
28	7.198E-3			PASS
29	7.803E-3			PASS
30	6.451E-3			PASS
31	7.365E-3			PASS
32	6.361E-3			PASS
33	8.117E-3			PASS
34	6.024E-3			PASS
35	6.299E-3			PASS
36	5.900E-3			PASS
37	5.896E-3			PASS
38	5.423E-3			PASS
39	5.613E-3			PASS
40	5.268E-3			PASS

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

HC-8003ETH

Power and THD results - DS: 12

True power P:	2.155kW	Apparent power S:	2.155kVA
Reactiv power Q:	20.77var	Power factor:	1.000
THD (U):	0.001	THD (I):	0.002
Crest Factor (U):	1.414	Crest Factor (I):	1.449

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	3.654			
2	5.329E-3			PASS
3	13.595E-3			PASS
4	4.646E-3			PASS
5	4.198E-3			PASS
6	4.130E-3			PASS
7	3.281E-3			PASS
8	3.915E-3			PASS
9	4.517E-3			PASS
10	3.657E-3			PASS
11	2.111E-3			PASS
12	3.279E-3			PASS
13	3.790E-3			PASS
14	3.195E-3			PASS
15	2.878E-3			PASS
16	2.681E-3			PASS
17	2.528E-3			PASS
18	2.719E-3			PASS
19	2.018E-3			PASS
20	2.020E-3			PASS
21	3.222E-3			PASS
22	1.850E-3			PASS
23	2.034E-3			PASS
24	1.708E-3			PASS
25	2.262E-3			PASS
26	1.443E-3			PASS
27	1.492E-3			PASS
28	1.466E-3			PASS
29	1.819E-3			PASS
30	1.293E-3			PASS
31	1.628E-3			PASS
32	1.324E-3			PASS
33	2.041E-3			PASS
34	1.065E-3			PASS
35	1.669E-3			PASS
36	1.149E-3			PASS
37	1.472E-3			PASS
38	1.050E-3			PASS
39	895.289E-6			PASS
40	901.714E-6			PASS

Maximum harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	9.327			
2	72.606E-3	4.482	1.62	PASS
3	72.583E-3	2.104	3.45	PASS
4	53.479E-3			PASS
5	45.663E-3			PASS
6	41.876E-3			PASS
7	37.867E-3			PASS
8	35.219E-3			PASS
9	33.450E-3			PASS
10	30.082E-3			PASS
11	25.679E-3			PASS
12	25.402E-3			PASS
13	24.687E-3			PASS
14	21.143E-3			PASS
15	19.226E-3			PASS
16	16.914E-3			PASS
17	14.777E-3			PASS
18	13.337E-3			PASS
19	10.577E-3			PASS
20	9.821E-3			PASS
21	11.468E-3			PASS
22	8.906E-3			PASS
23	8.956E-3			PASS
24	8.150E-3			PASS
25	9.791E-3			PASS
26	8.463E-3			PASS
27	9.135E-3			PASS
28	9.483E-3			PASS
29	10.293E-3			PASS
30	9.518E-3			PASS
31	10.453E-3			PASS
32	9.503E-3			PASS
33	10.979E-3			PASS
34	9.149E-3			PASS
35	9.635E-3			PASS
36	8.524E-3			PASS
37	8.841E-3			PASS
38	7.324E-3			PASS
39	6.639E-3			PASS
40	6.204E-3			PASS

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

HC-8003EAH

Power and THD results - DS: 1

True power P:	2.129kW	Apparent power S:	2.129kVA
Reactiv power Q:	25.31var	Power factor:	1.000
THD (U):	0.001	THD (I):	0.002
Crest Factor (U):	1.414	Crest Factor (I):	1.413

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	4.937			
2	4.998E-3			PASS
3	13.844E-3			PASS
4	4.480E-3			PASS
5	3.634E-3			PASS
6	4.100E-3			PASS
7	3.307E-3			PASS
8	3.663E-3			PASS
9	4.467E-3			PASS
10	3.339E-3			PASS
11	1.658E-3			PASS
12	3.145E-3			PASS
13	3.936E-3			PASS
14	2.882E-3			PASS
15	2.675E-3			PASS
16	2.315E-3			PASS
17	2.296E-3			PASS
18	2.416E-3			PASS
19	1.502E-3			PASS
20	1.808E-3			PASS
21	3.441E-3			PASS
22	1.577E-3			PASS
23	2.152E-3			PASS
24	1.302E-3			PASS
25	2.164E-3			PASS
26	1.136E-3			PASS
27	1.383E-3			PASS
28	1.165E-3			PASS
29	1.692E-3			PASS
30	928.043E-6			PASS
31	1.830E-3			PASS
32	1.115E-3			PASS
33	2.185E-3			PASS
34	906.903E-6			PASS
35	1.485E-3			PASS
36	1.101E-3			PASS
37	1.393E-3			PASS
38	903.267E-6			PASS
39	1.004E-3			PASS
40	926.608E-6			PASS

Maximum harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	9.221			
2	81.343E-3	5.021	1.62	PASS
3	83.053E-3	2.407	3.45	PASS
4	55.888E-3	8.665	645.00E-3	PASS
5	43.182E-3			PASS
6	36.313E-3			PASS
7	30.083E-3			PASS
8	27.488E-3			PASS
9	26.335E-3			PASS
10	22.190E-3			PASS
11	18.230E-3			PASS
12	18.786E-3			PASS
13	18.979E-3			PASS
14	16.294E-3			PASS
15	15.215E-3			PASS
16	14.141E-3			PASS
17	13.673E-3			PASS
18	12.787E-3			PASS
19	11.536E-3			PASS
20	11.378E-3			PASS
21	13.070E-3			PASS
22	10.405E-3			PASS
23	10.321E-3			PASS
24	9.381E-3			PASS
25	9.909E-3			PASS
26	8.706E-3			PASS
27	8.463E-3			PASS
28	8.315E-3			PASS
29	8.994E-3			PASS
30	7.547E-3			PASS
31	8.537E-3			PASS
32	7.459E-3			PASS
33	9.028E-3			PASS
34	6.982E-3			PASS
35	7.467E-3			PASS
36	6.894E-3			PASS
37	7.130E-3			PASS
38	6.490E-3			PASS
39	6.660E-3			PASS
40	6.393E-3			PASS

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

HC-1101EH

Power and THD results - DS: 1

True power P:	2.24kW	Apparent power S:	2.24kVA
Reactiv power Q:	29.49var	Power factor:	1.000
THD (U):	0.001	THD (I):	0.003
Crest Factor (U):	1.414	Crest Factor (I):	1.449

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	6.742			
2	7.479E-3			PASS
3	8.934E-3			PASS
4	6.763E-3			PASS
5	5.716E-3			PASS
6	6.084E-3			PASS
7	5.483E-3			PASS
8	5.535E-3			PASS
9	6.616E-3			PASS
10	5.019E-3			PASS
11	3.272E-3			PASS
12	4.273E-3			PASS
13	6.383E-3			PASS
14	3.944E-3			PASS
15	2.532E-3			PASS
16	3.096E-3			PASS
17	3.206E-3			PASS
18	2.884E-3			PASS
19	2.622E-3			PASS
20	2.104E-3			PASS
21	3.402E-3			PASS
22	1.762E-3			PASS
23	2.552E-3			PASS
24	1.552E-3			PASS
25	3.170E-3			PASS
26	1.167E-3			PASS
27	1.759E-3			PASS
28	1.187E-3			PASS
29	1.281E-3			PASS
30	1.203E-3			PASS
31	2.202E-3			PASS
32	1.301E-3			PASS
33	1.995E-3			PASS
34	1.108E-3			PASS
35	2.733E-3			PASS
36	1.228E-3			PASS
37	1.832E-3			PASS
38	1.016E-3			PASS
39	1.560E-3			PASS
40	1.137E-3			PASS

Maximum harmonic current results


Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	9.710			
2	82.902E-3	5.117	1.62	PASS
3	71.030E-3	2.059	3.45	PASS
4	50.381E-3			PASS
5	39.867E-3			PASS
6	33.796E-3			PASS
7	28.662E-3			PASS
8	25.093E-3			PASS
9	24.276E-3			PASS
10	20.687E-3			PASS
11	17.200E-3			PASS
12	17.233E-3			PASS
13	18.194E-3			PASS
14	15.014E-3			PASS
15	12.990E-3			PASS
16	12.937E-3			PASS
17	12.209E-3			PASS
18	11.668E-3			PASS
19	11.107E-3			PASS
20	10.158E-3			PASS
21	11.347E-3			PASS
22	9.135E-3			PASS
23	9.468E-3			PASS
24	8.634E-3			PASS
25	9.694E-3			PASS
26	7.604E-3			PASS
27	7.584E-3			PASS
28	7.180E-3			PASS
29	7.122E-3			PASS
30	6.849E-3			PASS
31	7.993E-3			PASS
32	6.773E-3			PASS
33	7.692E-3			PASS
34	6.344E-3			PASS
35	7.562E-3			PASS
36	6.148E-3			PASS
37	7.060E-3			PASS
38	5.823E-3			PASS
39	6.020E-3			PASS
40	5.645E-3			PASS

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

8. Voltage Fluctuations-Flicker

Test result: **PASS**

8.1 Block Diagram of Test Setup



8.2 Test Setup and Test Procedure

8.2.1 Definition

Flicker: impression of unsteadiness of visual sensation induced by a light stimulus whose luminance or spectral distribution fluctuates with time.

Pst: Short-term flicker severity.

Plt: long-term flicker severity.

dc: maximum steady state voltage change during an observation period.

dmax: maximum absolute voltage change during an observation period.

d(t): time function of the relative r.m.s. voltage change evaluated as a single value for each successive half period between zero-crossings of the source voltage, except during time interval in which the voltage is a steady-state condition for at least 1s.

8.2.2 Test condition

The EUT was set to produce the most unfavorable sequence of voltage changes.

8.3 Test Protocol

The tested object operated under the operating condition specified in EN 61000-3-3
The following limits apply

- the value of Pst shall not be greater than 1,0.
- the value of Plt shall not be greater than 0,65.
- Tmax, the accumulated time value of d(t) with a deviation exceeding 3,3 % during a single voltage change at the EUT terminals, shall not exceed 500 ms.
- the maximum relative steady-state voltage change, dc, shall not exceed 3,3 %.
- the maximum relative voltage change dmax, shall not exceed:
 - ☒ 4% without additional conditions.
 - ☐ 6 % for equipment which is:
 - switched manually, or
 - switched automatically more frequently than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds), or manual restart, after a power supply interruption.
 - ☐ 7 % for equipment which is:
 - attended whilst in use (for example: hair dryers, vacuum cleaners, kitchen equipment such as mixers, garden equipment such as lawn mowers, portable tools such as electric drills), or
 - switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds) or manual restart, after a power supply interruption.
 - ☐ for manual switch, dmax is measured in accordance with Annex B of standard, average dmax is calculated from 24 times measurement.
 - ☐ The rate power of the EUT is no greater than 75W, which is unlikely to produce significant voltage fluctuations or flicker by technical analysis and evaluation. So it is deemed to fulfil the requirements without testing.

HC-8002EH

	EUT values	Limit	Result
Pst	0.588	1.00	PASS
Plt	0.582	0.65	PASS
dc [%]	1.673	3.30	PASS
dmax [%]	1.724	4.00	PASS
dt [s]	0.000	0.50	PASS

HC-8003ETH

	EUT values	Limit	Result
Pst	0.609	1.00	PASS
Plt	0.603	0.65	PASS
dc [%]	1.681	3.30	PASS
dmax [%]	1.723	4.00	PASS
dt [s]	0.000	0.50	PASS

HC-8003EAH

	EUT values	Limit	Result
Pst	0.645	1.00	PASS
Plt	0.642	0.65	PASS
dc [%]	1.684	3.30	PASS
dmax [%]	1.725	4.00	PASS
dt [s]	0.000	0.50	PASS

HC-1101EH

	EUT values	Limit	Result
Pst	0.606	1.00	PASS
Plt	0.602	0.65	PASS
dc [%]	1.768	3.30	PASS
dmax [%]	1.819	4.00	PASS
dt [s]	0.000	0.50	PASS

Immunity Test

Performance criteria

The performance criteria are based on the general criteria of the standard and derived from the product specification

Criterion A: The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

Criterion B: The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however no change of actual operating state or stored data is allowed to persist after the test. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

Criterion C: Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

Categories of apparatus

- ☐ **Category I:** equipment containing no electronic control circuitry. (fulfill the relevant immunity requirements without testing)
- ☒ **Category II:** mains operated equipment containing electronic control circuitry with no clock frequency higher than 15 MHz. (Shall fulfill the tests: ESD, EFT, Inject current (150 kHz to 230 MHz), Surge, Voltage dips)
- ☐ **Category III:** battery operated equipment not included in Category I. (Shall fulfill the tests: ESD, EFT, Inject current (150 kHz to 80 MHz), Radio frequency electromagnetic fields (80 MHz to (F) MHz), Surge)
Note: For Category III toys, the radio frequency electromagnetic fields test shall be applicable only for ride on toys.
- ☐ **Category IV:** mains operated equipment containing electronic control circuitry with a highest clock frequency greater than 15 MHz but lower than or equal to 200 MHz. (Shall fulfill the tests: ESD, EFT, Inject current (150 kHz to 80 MHz), Radio frequency electromagnetic fields (80 MHz to 1000 MHz), Surge, Voltage dips)
- ☐ **Category V:** mains operated equipment containing electronic control circuitry with a highest clock frequency greater than 200 MHz. (Shall fulfill the tests: ESD, EFT, Inject current (150 kHz to 80 MHz), Radio frequency electromagnetic fields (80 MHz to 6 GHz), Surge, Voltage dips)

9. Electrostatic Discharge (ESD)

Test result: **PASS**

9.1 Severity Level and Performance Criterion

9.1.1 Test level

1a – Contact discharge		1b – Air discharge	
Level	Test voltage kV	Level	Test voltage kV
1	2	1	2
2	4	2	4
3	6	3	8
4	8	4	15
X	Special	X	Special
Notes: 1. "X" is an open level. The level has to be specified in the dedicated equipment specification. If higher voltages than those shown are specified, special test equipment may be needed. 2. The gray rows were the selected test level.			


9.1.2 Performance Criterion

Performance criterion: **B/C***

*: Performance criterion C may be applied to toys not using score or data entered by the user (e.g. musical soft toys and sounding toys).


9.2 Block Diagram of Test Setup

For table-top equipment

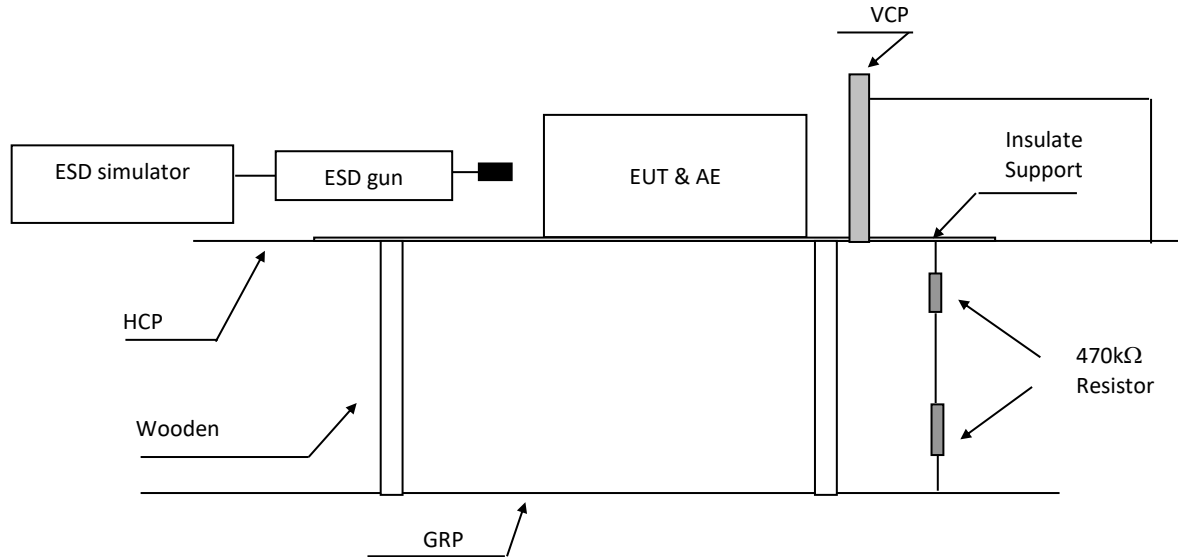

Note: HCP means Horizontal Coupling Plane
VCP means Vertical Coupling Plane
GRP means Ground Reference Plane
Wooden support is a 0.8m height table

For floor standing equipment

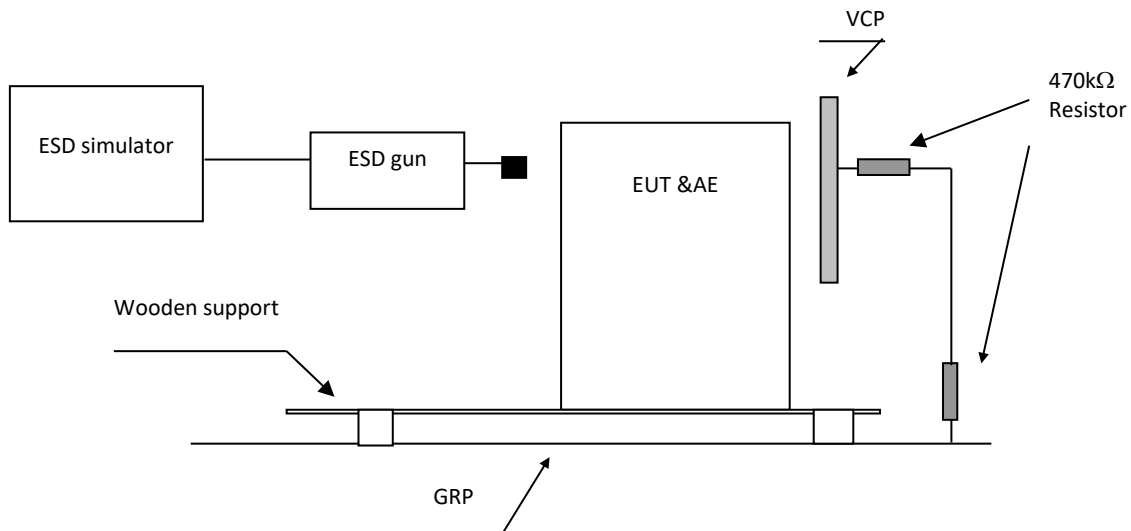

Note: VCP means Vertical Coupling Plane
GRP means Ground Reference Plane
Wooden support is a 0.1m height rack

9.3 Test Setup and Test Procedure

Measurement was performed in shielded room.

Measurement and setting of EUT was applied according to IEC 61000-4-2 Clause 7.

The test method and equipment was specified by IEC 61000-4-2 with the modifications by EN 55014-2 clause 5.1.

9.4 Test Protocol

Direct discharges were applied at the following selected points:

Test point #	Test level [kV]	Air/Contact	Polarity (+/-)	Pass/Fail/NA	Comment
A	4	Contact	+/-	Pass	All touchable screws of enclosure
B	4	Contact	+/-	Pass	Accessible metal parts of the EUT
C	8	Air	+/-	Pass	Air gap of the switch, button
D	8	Air	+/-	Pass	The air in-taking opening
E	8	Air	+/-	Pass	Slots around the EUT

Indirect contact discharges were applied to the VCP and the HCP at the following selected points:

Point	Description	Point	Pass/Fail/NA
VCP f	0,1m from the front of the EUT	Edge of centre, corner on VCP	Pass
VCP b	0,1m from the back of the EUT	Edge of centre, corner on VCP	Pass
VCP r	0,1m from the right of the EUT	Edge of centre, corner on VCP	Pass
VCP l	0,1m from the left of the EUT	Edge of centre, corner on VCP	Pass

For table top equipment

Point	Description	Point	Pass/Fail/NA
HCP f	0,1m from the front of the EUT	Edge of centre, corner on HCP	Pass
HCP b	0,1m from the back of the EUT	Edge of centre, corner on HCP	Pass
HCP r	0,1m from the right side of the EUT	Edge of centre, corner on HCP	Pass
HCP l	0,1m from the left side of the EUT	Edge of centre, corner on HCP	Pass

Observation: All the functions were operated as normal during and after test.

Conclusion: The EUT met the requirements.

10. Radio frequency electromagnetic fields

Test result: NA

10.1 Severity Level and Performance Criterion


10.1.1 Test level

Level	Test field strength V/m
1	1
2	3
3	10
X	Special
Notes: 1. X is an open test level. This level may be given in the product specification. 2. The gray row is the selected test level.	

10.1.2 Performance Criterion

Performance criterion: A

10.2 Block diagram of test setup

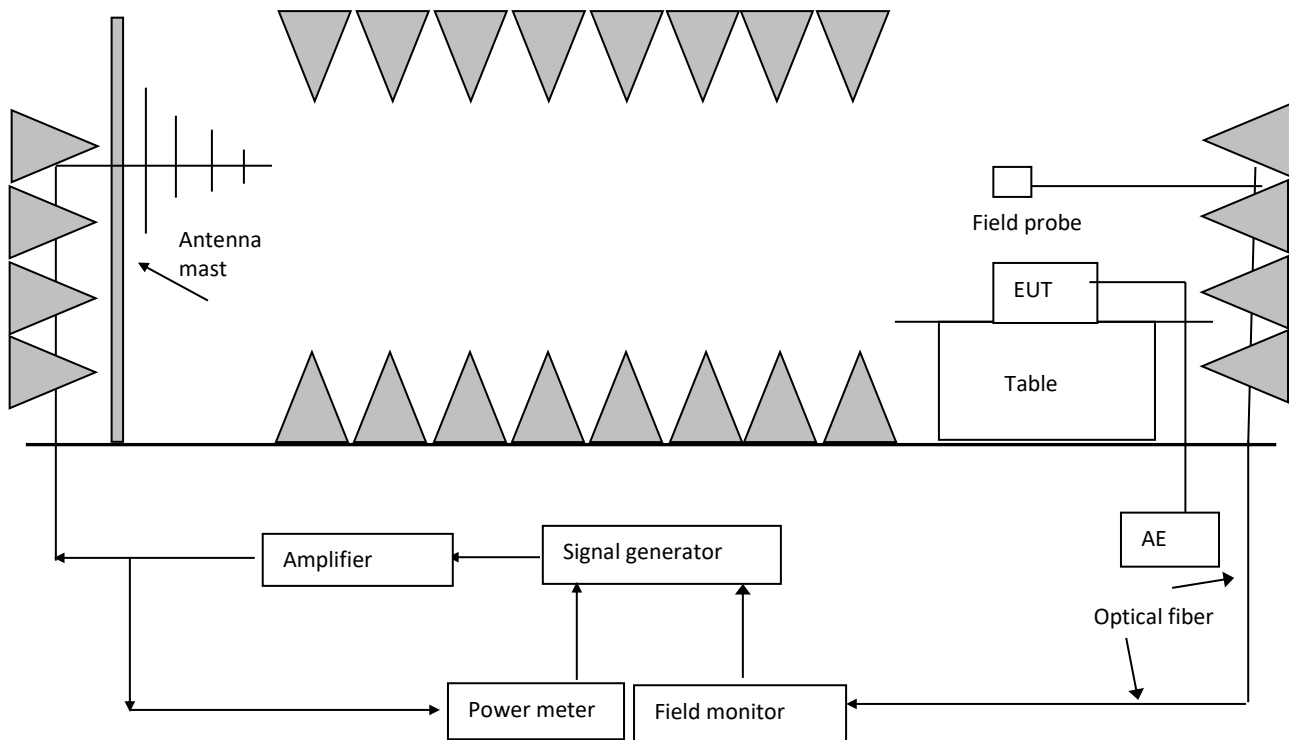

10.3 Test Setup and Test Procedure

Measurement was performed in full-anechoic chamber.

Measurement and setting of EUT was applied according to IEC 61000-4-3 clause 7.

The test method and equipment was specified by IEC 61000-4-3 with additions and modifications by EN 55014-2 clause 5.5.

10.4 Test Protocol

Test no.:	Frequency (MHz)	Polarization	Test level V/m	Modulation	Exposed location	Pass/Fail/NA	Comment
1	80-1000	H & V	3	1kHz, 80%, SW, AM, 1% step size	All sides		-
1	1000-6000	H & V	3	1kHz, 80%, SW, AM, 1% step size	All sides		-

Observation:

Conclusion:

11. Fast transients

Test result: **PASS**

11.1 Severity Level and Performance Criterion

11.1.1 Test level

Open circuit output test voltage ($\pm 10\%$) and repetition rate of the impulses ($\pm 20\%$)				
Level	Input and output AC power ports		Input and output DC power ports Signal ports, control ports and wired network ports	
	Voltage peak kV	Repetition rate kHz	Voltage peak kV	Repetition rate kHz
1	0.5	5	0.25	5
2	1	5	0.5	5
3	2	5	1	5
4	4	5	2	5
X	Special	Special	Special	Special
Notes : 1. "X" is an open level. The level has to be specified in the dedicated equipment specification. 2. The gray rows were the selected test level.				


11.1.2 Performance Criterion

Performance criterion **B**


11.2 Block Diagram of Test Setup

11.2.1 Block Diagram for input a.c./d.c. power line

For table-top equipment

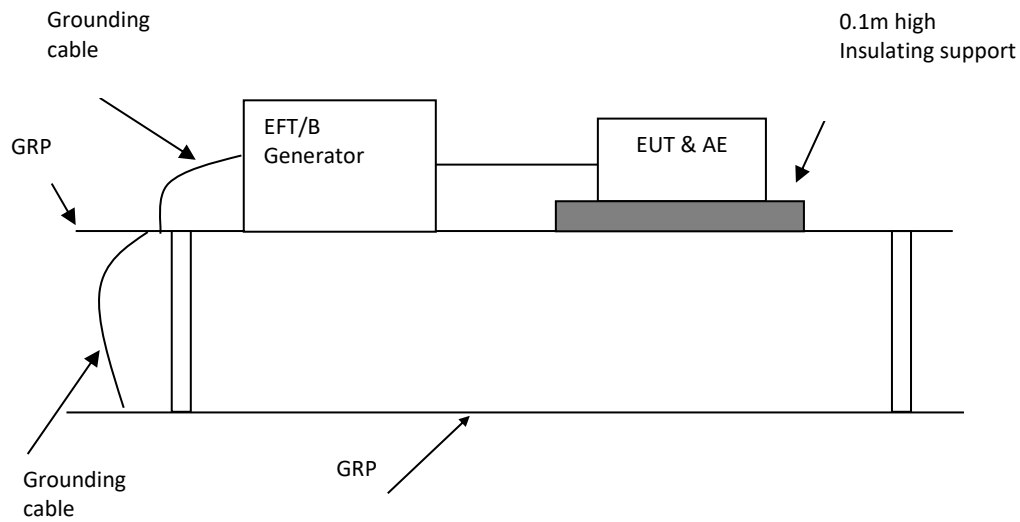


For floor standing equipment

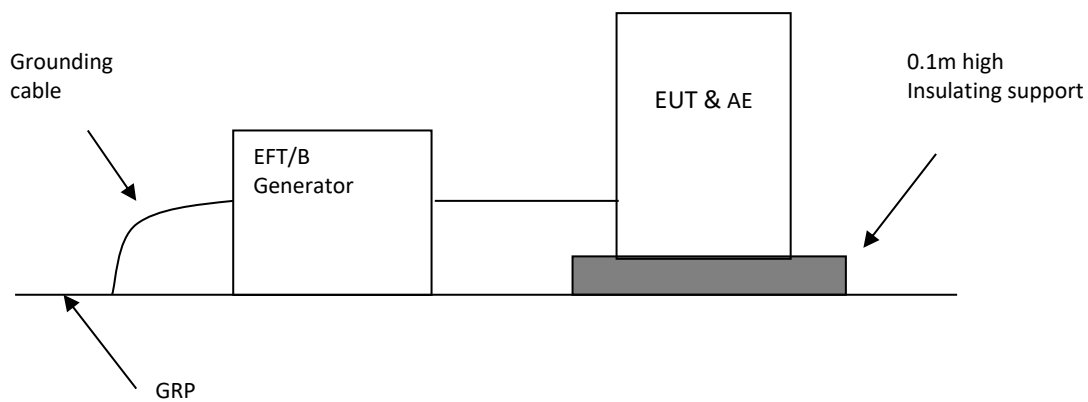


11.2.2 Block Diagram for output a.c./d.c. power line or signal/control lines

For table-top equipment

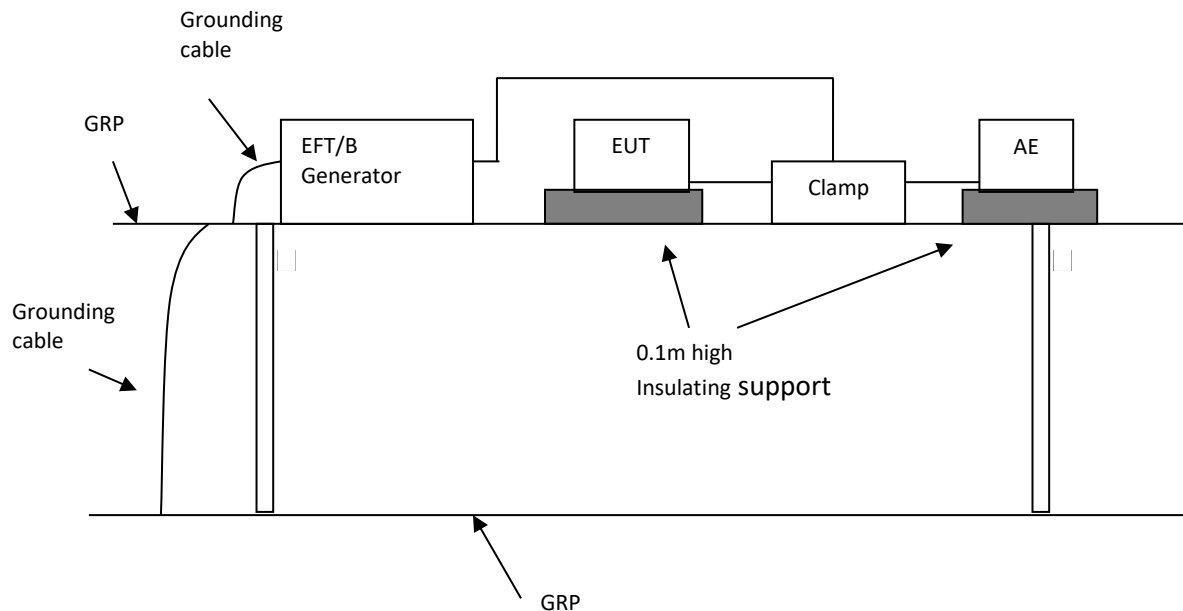

For floor standing equipment

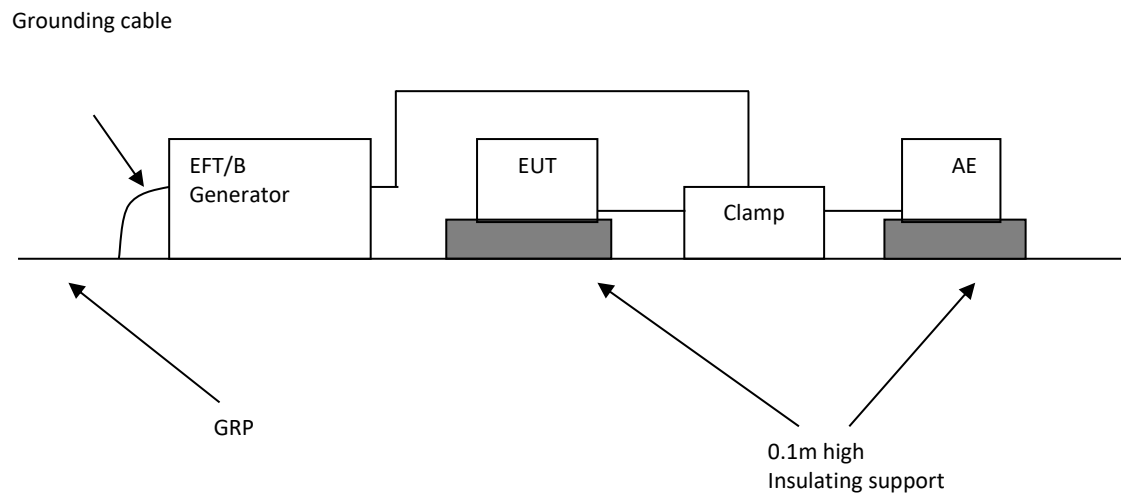

11.3 Test Setup and Test Procedure

Measurement was performed in shielded room.

Measurement and setting of EUT was applied according to IEC 61000-4-4 clause 7.

The test method and equipment was specified by IEC 61000-4-4 with additions and modifications by EN 55014-2 clause 5.2.

11.4 Test Protocol

Test No.	Level [kV]	Polarity +/-	Repetition rate kHz	Line for test	Pass/Fail/NA
1	1	+/-	5	Input and output AC power ports	Pass
2	0.5	+/-	5	Input and output DC power ports	NA
3	0.5	+/-	5	Signal ports, control ports and wired network ports	NA

Observation: All the functions were operated as normal during and after test.

Conclusion: The EUT met the requirements.

12. Surges

Test result: **PASS**

12.1 Severity Level and Performance Criterion


12.1.1 Test level

Level	Open-circuit test voltage $\pm 10\%$ kV
1	0.5
2	1.0
3	2.0
4	4.0
X*	Special
Notes: 1. "X" is an open class. This level can be specified in the product Specification 2. The gray rows are the selected level.	

12.1.2 Performance Criterion

Performance criterion **B**

12.2 Block Diagram of Test Setup

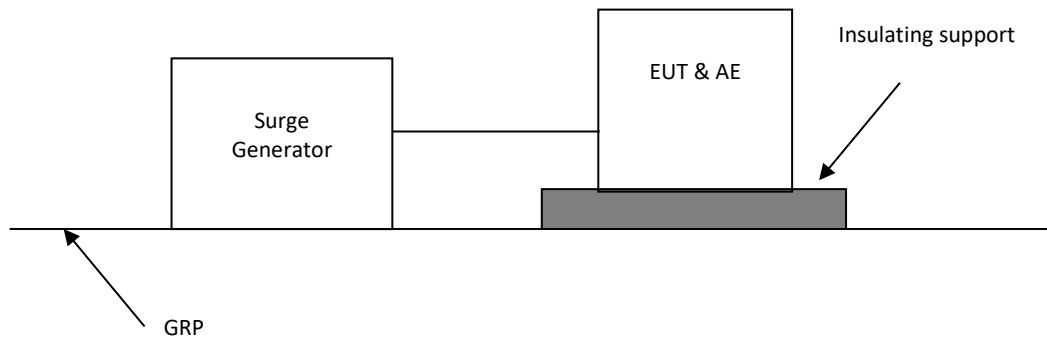

12.3 Test Setup and Test Procedure

Measurement was performed in shielded room.

Measurement and setting of EUT was applied according to IEC 61000-4-5 clause 7.

The test method and equipment was specified by IEC 61000-4-5 with modifications by EN 55014-2 clause 5.6.

12.4 Test Protocol

Test No.	Level [kV]	Polarity +/-	Angle	Line for test	Pass/Fail/NA
1	1	+ -	90° 270°	Input AC power ports (line to line)	Pass
2	2	+ -	90° 270°	Input AC power ports (line to earth)	Pass
3	1	+ -	90° 270°	Wired network ports (line-to-earth (unshielded))	NA
4	0.5	+ -	90° 270°	Wired network ports (shield-to-earth (shielded))	NA

Observation: All the functions were operated as normal during and after test.

Conclusion: The EUT met the requirements.

13. Injected Current

Test result: **PASS**

13.1 Severity Level and Performance Criterion

13.1.1 Test level

Frequency range 150kHz – 230MHz		
Level	Voltage level (e.m.f.)	
	U_0 [dB(μ V)]	U_0 (V)
1	120	1
2	130	3
3	140	10
X	Special	Special

Notes:

1. "X" is an open level.
2. The gray row is the selected test level.


13.1.2 Performance Criterion

Performance criterion: **A**

13.2 Block Diagram of Test Setup


13.2.1 Block Diagram for a.c./d.c input power line

☒ Block Diagram for a.c./d.c input power line

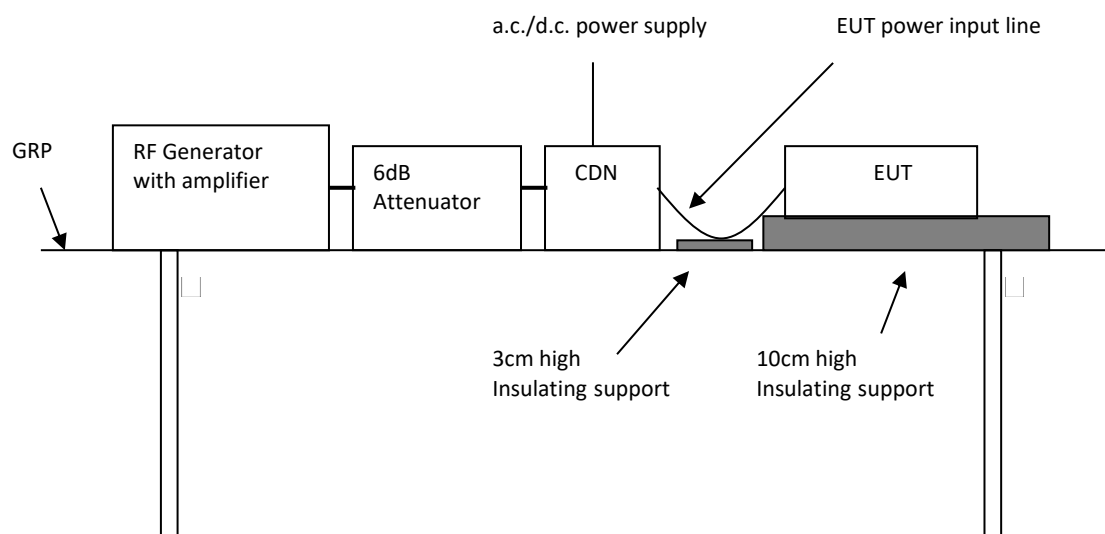


13.2.2 Block Diagram for output a.c./d.c. power line or signal/control lines

☐ Unshielded line

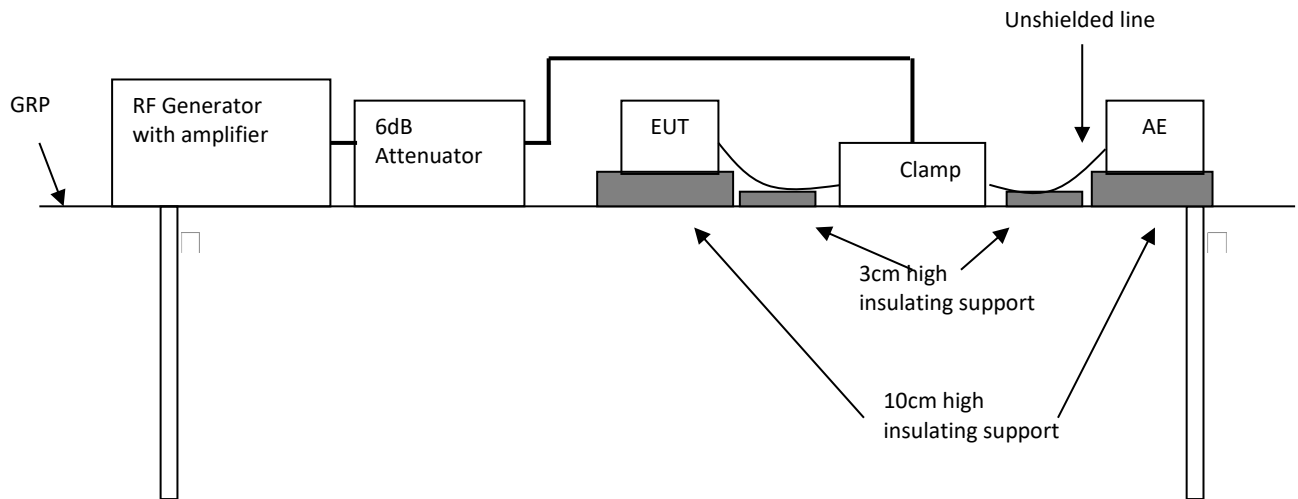

☐ Shielded line

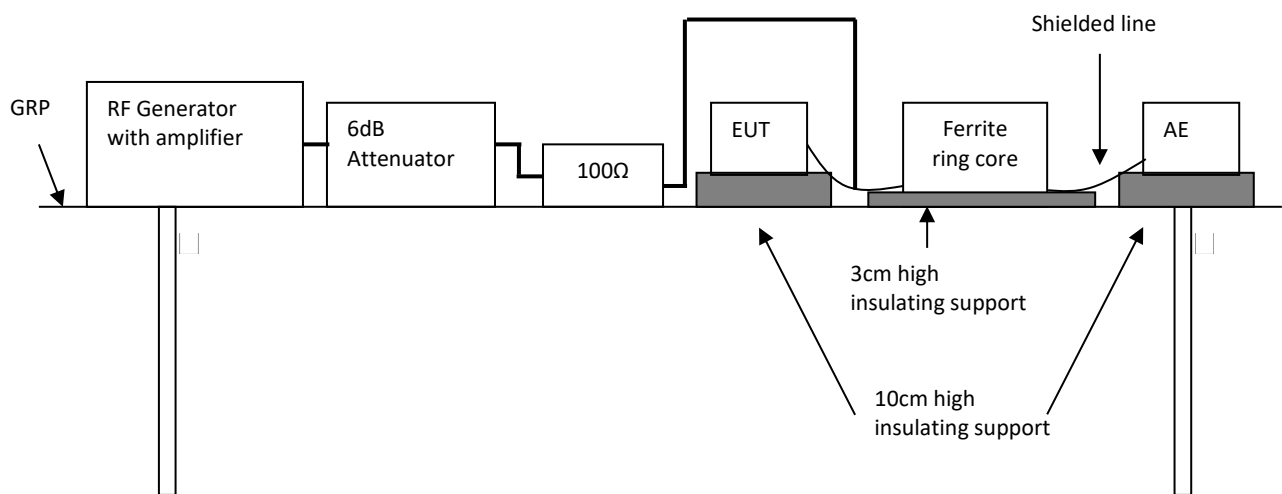

13.3 Test Setup and Test Procedure

Measurement was performed in shielded room.

Measurement and setting of EUT was applied according to IEC 61000-4-6 clause 7.

The test method and equipment was specified by IEC 61000-4-6 with additions and modifications by EN 55014-2 clause 5.3, 5.4.

13.4 Test Protocol

☒ EUT is not required for Radio frequency electromagnetic fields

Test No.	Frequency (MHz)	Level V (r.m.s.)	Modulation	Injected point	Pass/Fail/NA
1	0.15~230	3	1kHz, 80%, SW, AM, 1% step size	Input and output AC power ports	Pass
2	0.15~230	1	1kHz, 80%, SW, AM, 1% step size	Input and output DC power ports	NA
3	0.15~230	1	1kHz, 80%, SW, AM, 1% step size	Signal ports, control ports and wired network ports	NA

☐ For EUT test Radio frequency electromagnetic fields

Test No.	Frequency (MHz)	Level V (r.m.s.)	Modulation	Injected point	Pass/Fail/NA
1	0.15~80	3	1kHz, 80%, SW, AM, 1% step size	Input and output AC power ports	NA
2	0.15~80	1	1kHz, 80%, SW, AM, 1% step size	Input and output DC power ports	NA
3	0.15~80	1	1kHz, 80%, SW, AM, 1% step size	Signal ports, control ports and wired network ports	NA

Observation: All the functions were operated as normal during and after test.

Conclusion: The EUT met the requirements.

14. Voltage Dips

Test result: **PASS**

14.1 Severity Level and Performance Criterion

14.1.1 Test level

Test level % U _T	Voltage dip % U _T	Duration (in period)	
		50Hz	60Hz
0	100	0.5 cycle	0.5 cycle
40	60	10 cycles	12 cycles
70	30	25 cycles	30 cycles


Notes:

1. “*” for 0.5 period, the test shall be made in positive and negative polarity, i.e. starting at 0° and 180°, respectively.
2. “***” means “x” is an open duration. This duration can be given in the product specification. Utilities in Europe have measured dips and short interruptions of duration between ½ a period and 3000 periods, but duration less than 50 periods are most common.
3. If the EUT is tested for voltage dips of 100%, it is generally unnecessary to test for other levels for the same durations. However, for some cases (safeguard systems or electro-mechanical devices) it is not true. The product specification or product committee shall give an indication of the applicability of this note.
4. The gray rows are selected test level.

14.1.2 Performance Criterion

Performance criterion: **C**

14.2 Block diagram of test setup

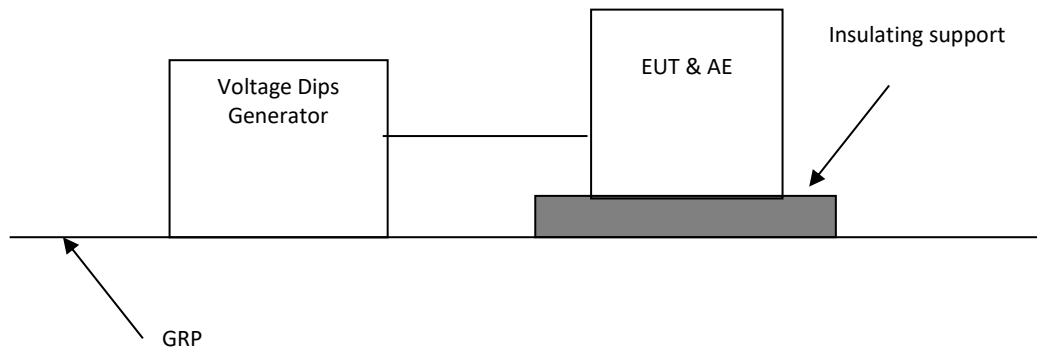

14.3 Test Setup and Test Procedure

Measurement was performed in shielded room.

Measurement and setting of EUT was applied according to IEC 61000-4-11 clause 7.

The test method and equipment was specified by IEC 61000-4-11 with additions and modifications by EN 55014-2 clause 5.7.

14.4 Test Protocol

Test no.	% U_T	Voltage dips % U_T	Duration (in periods)	Pass/Fail/NA
1	70	30%	25 cycles at 50Hz	Pass
			30 cycles at 60Hz	Pass
2	40	60%	10 cycles at 50Hz	Pass
			12 cycles at 60Hz	Pass
3	0	100%	0.5 cycle at 50Hz	Pass
			0.5 cycle at 60Hz	Pass

Observation: During test, the EUT worked unsteadily. Once the interference is removed, it recovered its normal mode at once.

Conclusion: The EUT met the requirements.

Appendix I: Photograph of equipment under test

Photo 1.

Description: Overall view for HC-8002ETH



Photo 2.

Description: Overall view for HC-8002EH, HC-8002ETH

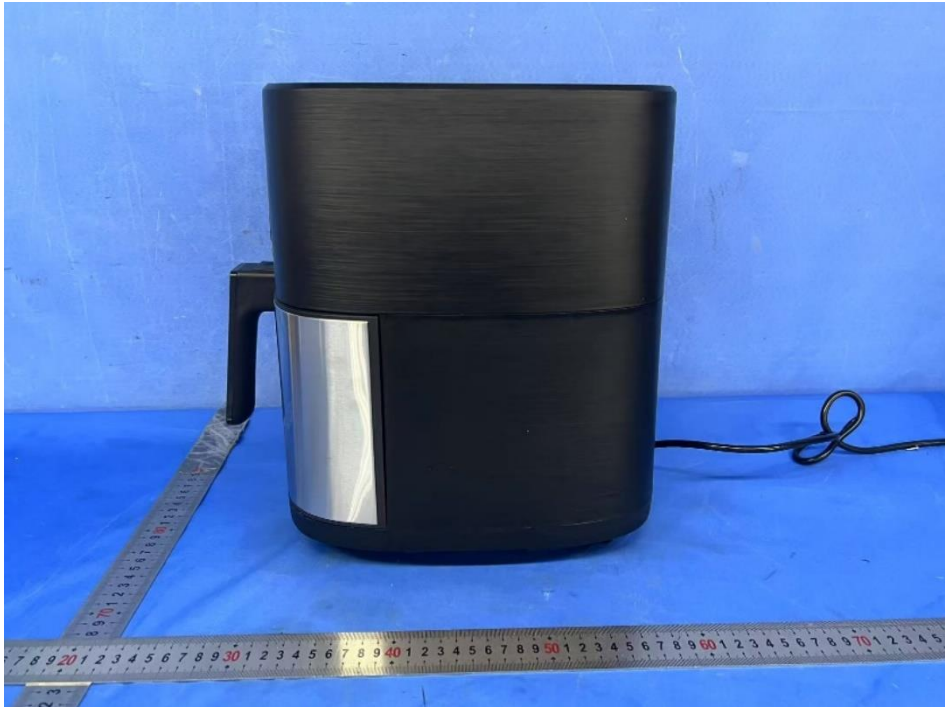


Photo 3.

Description: Overall view for HC-8002EH, HC-8002ETH

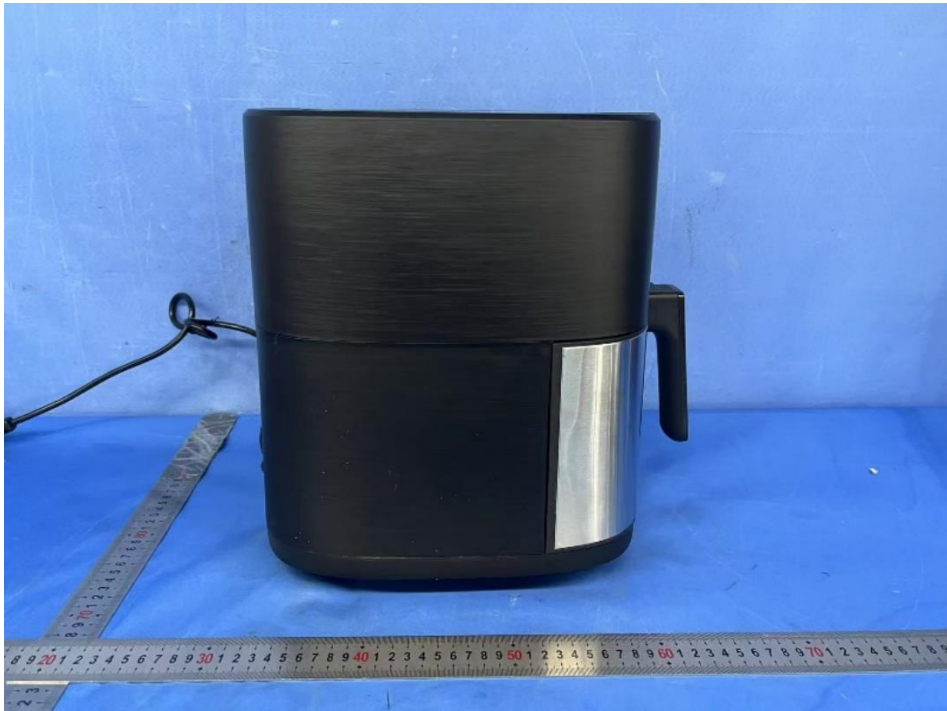


Photo 4.

Description: Overall view for HC-8002EH, HC-8002ETH



Photo 5.

Description: Overall view for HC-8002EH, HC-8002ETH

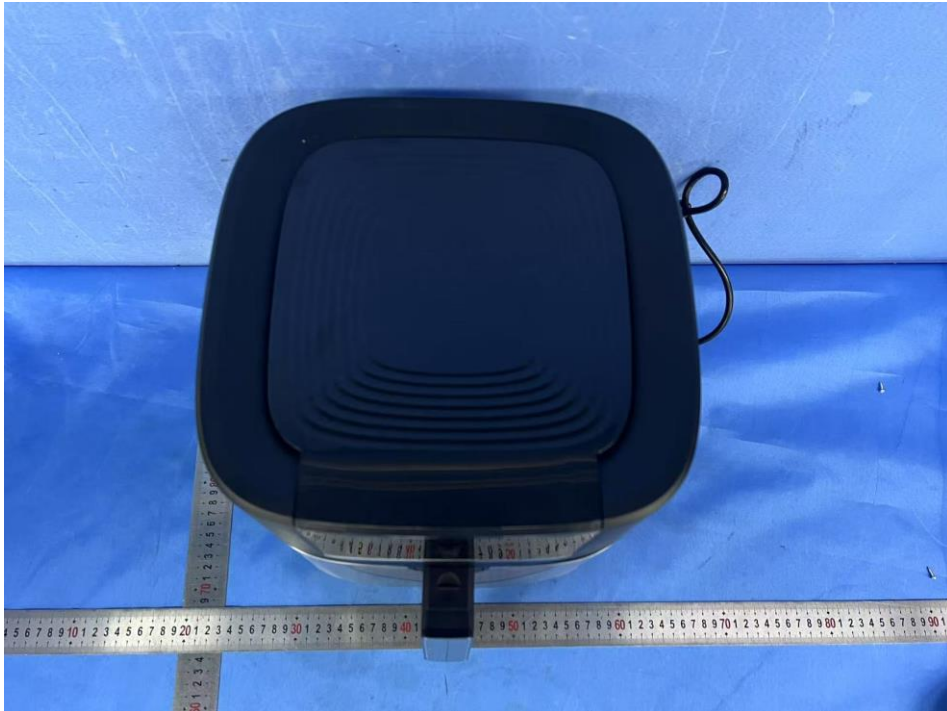


Photo 6.

Description: Overall view for HC-8002EH, HC-8002ETH



Photo 7.

Description: Power cord view for HC-8002EH



Photo 8.

Description: Internal view for HC-8002EH, HC-8002ETH

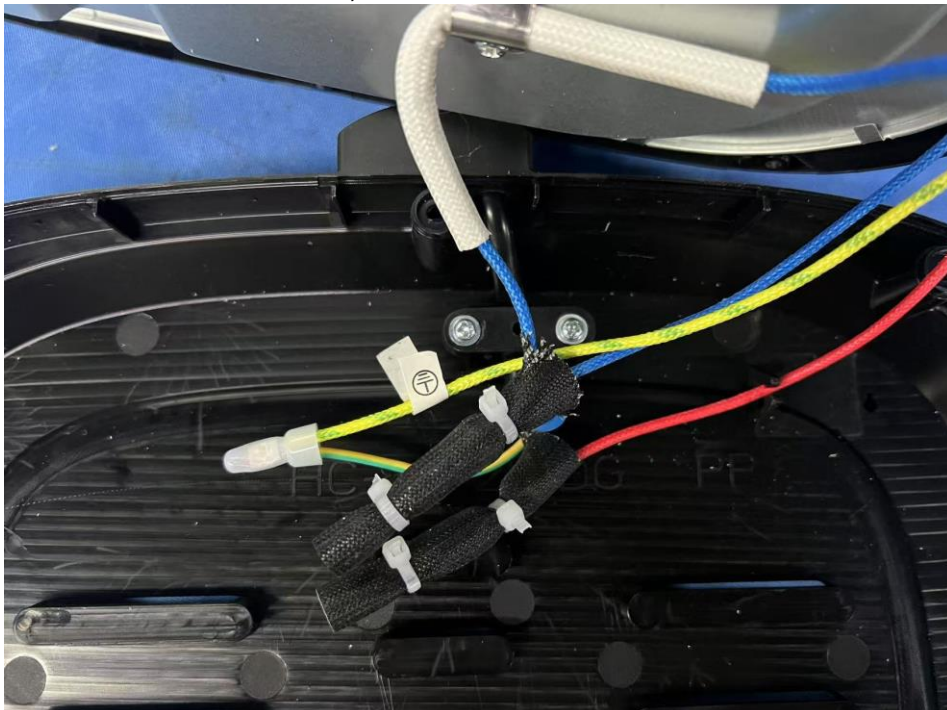


Photo 9.

Description: Internal view for HC-8002EH, HC-8002ETH

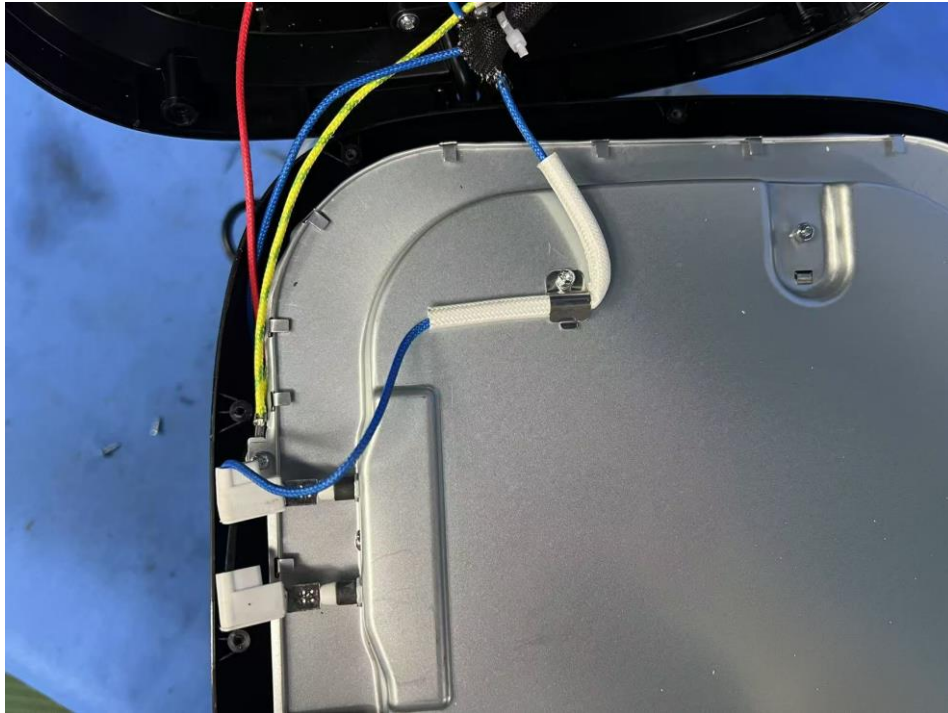


Photo 10.

Description: Internal for HC-8002ETH

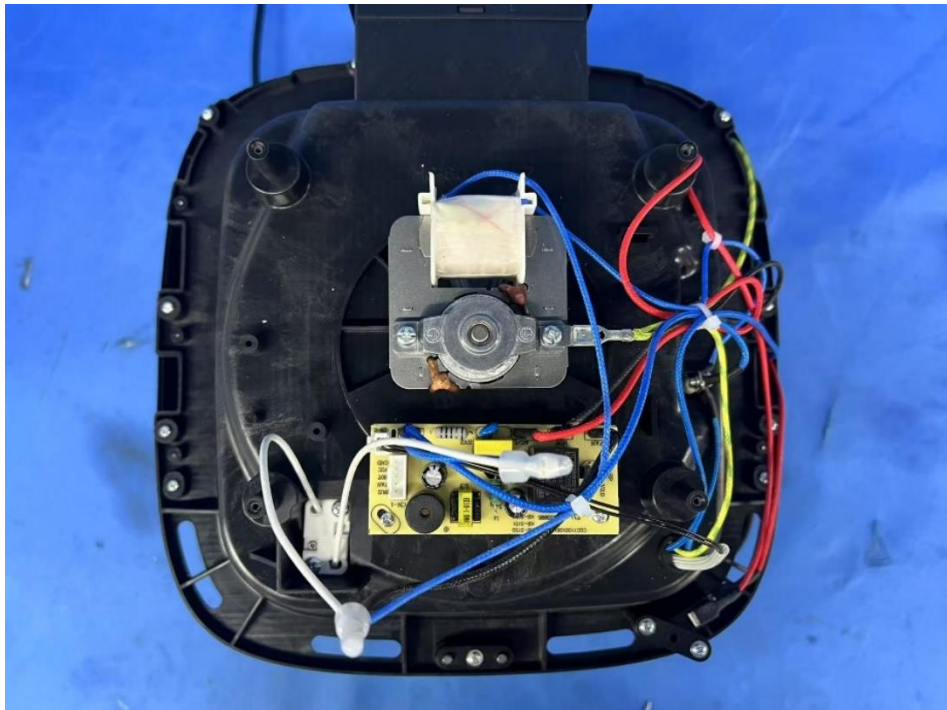


Photo 11.

Description: Internal view for HC-8002ETH



Photo 12.

Description: Internal view for HC-8002EH

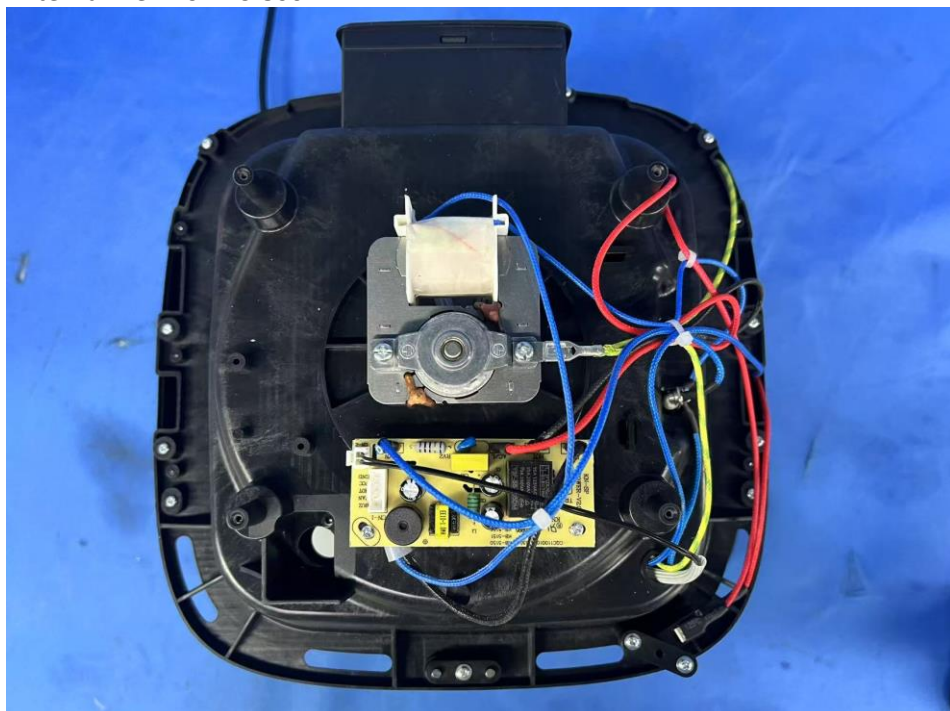


Photo 13.

Description: Internal view for HC-8002EH

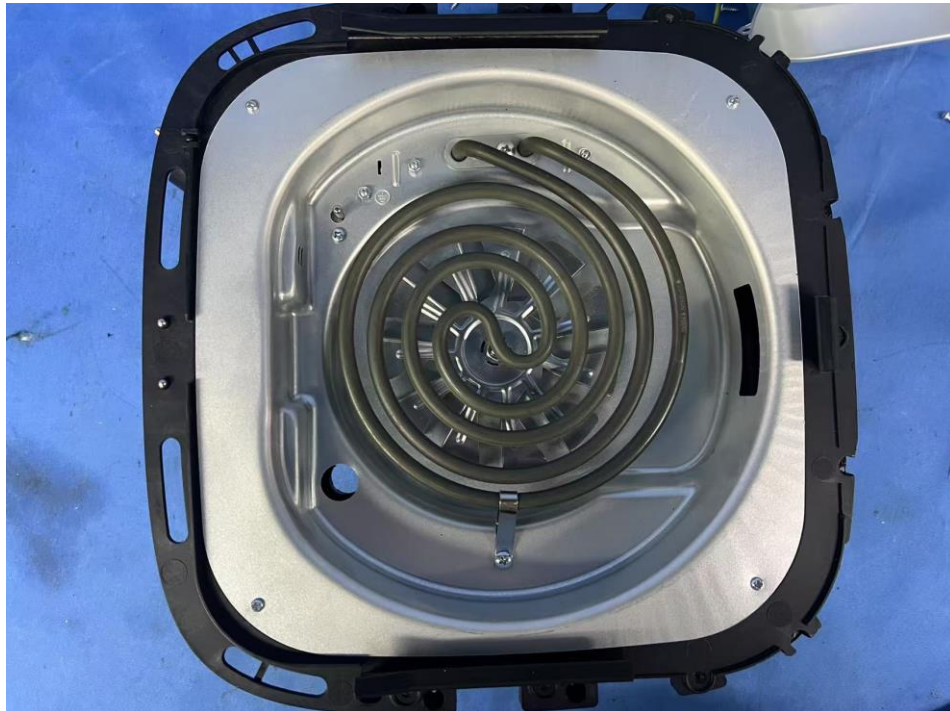


Photo 14.

Description: Internal view for HC-8002EH, HC-8002ETH



Photo 15.

Description: Ground connection view for all models

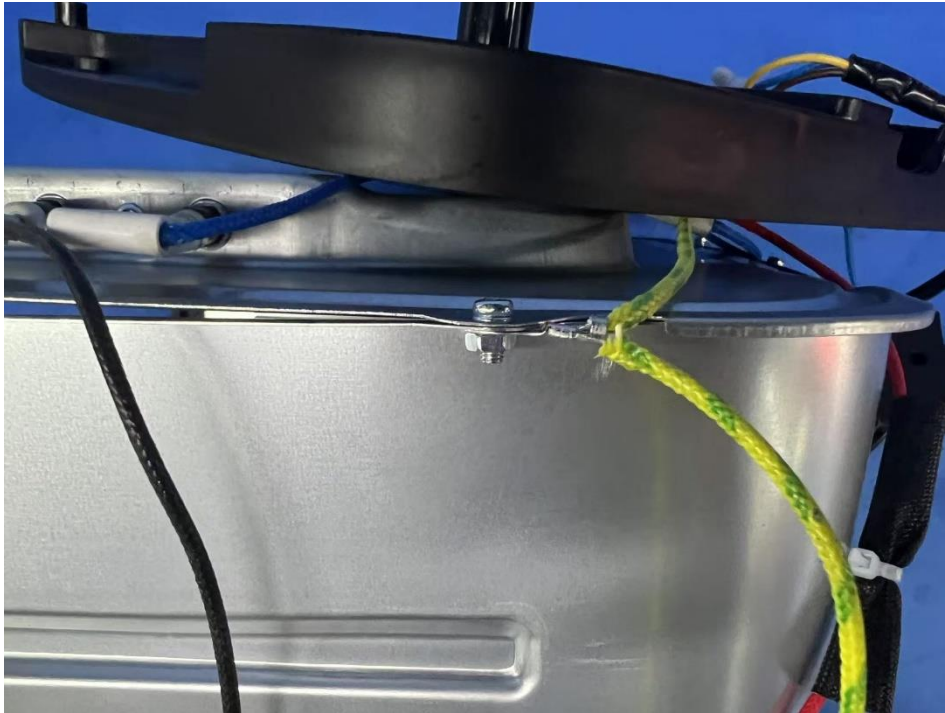


Photo 16.

Description: Control panel view for HC-8002EH, HC-8002ETH

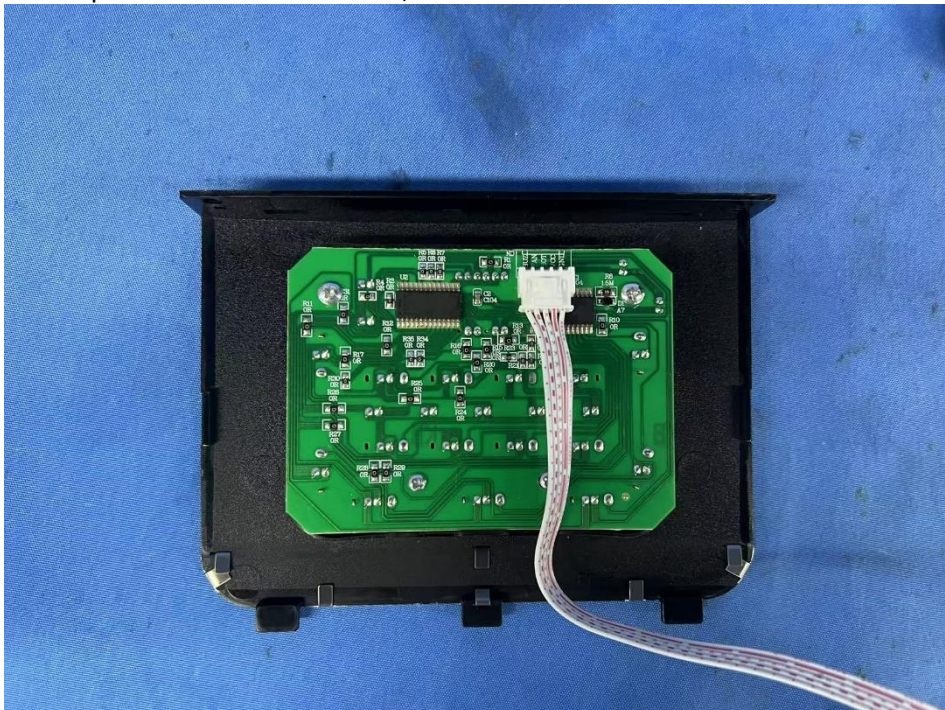


Photo 17.

Description: Control panel view for HC-8002EH, HC-8002ETH



Photo 18.

Description: Control panel PCB view for HC-8002EH, HC-8002ETH

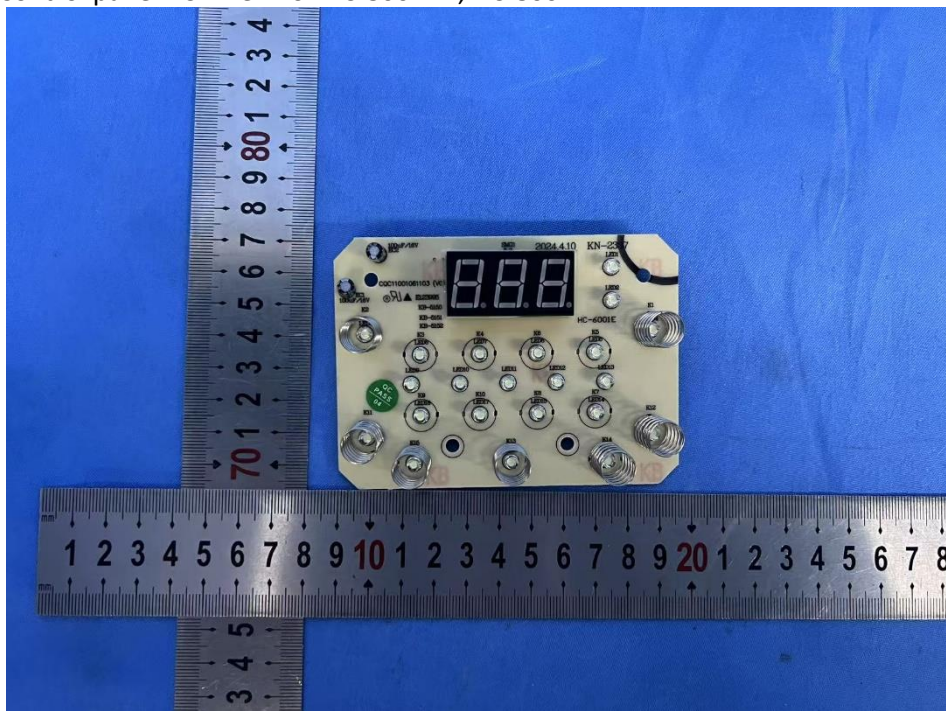


Photo 19.

Description: Control panel PCB view for HC-8002EH, HC-8002ETH

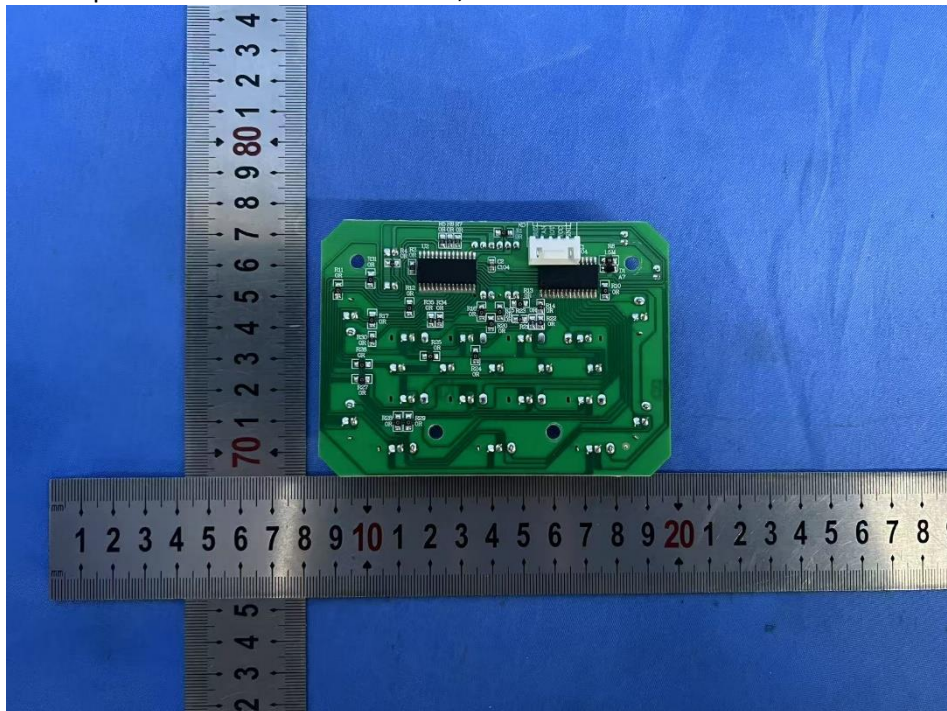


Photo 20.

Description: Power PCB view for HC-8002EH, HC-8002ETH

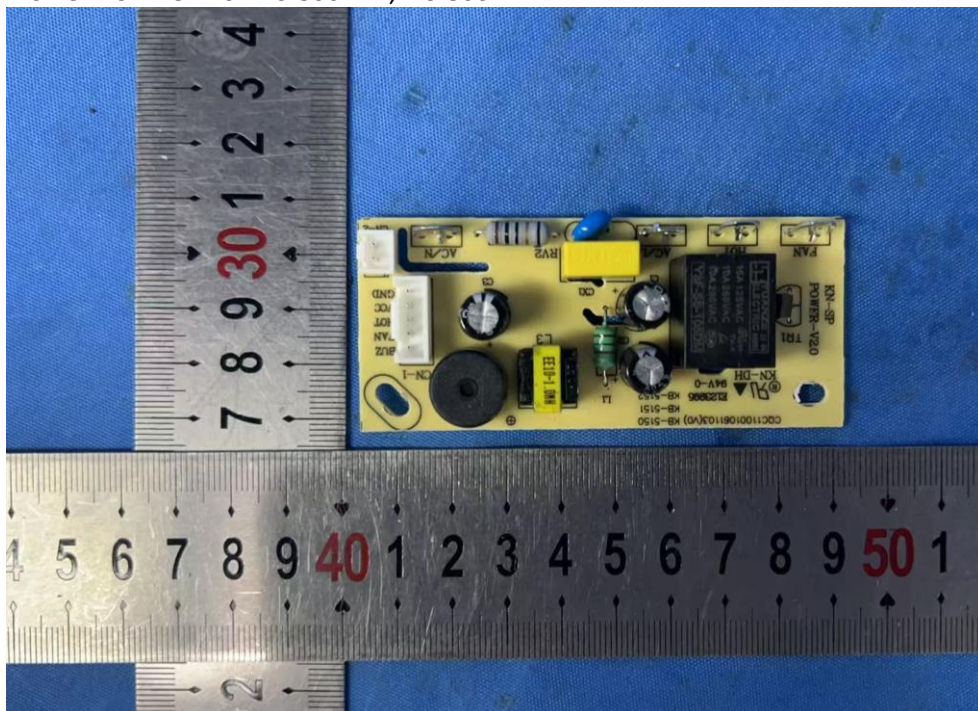


Photo 21.

Description: Power PCB view for HC-8002EH, HC-8002ETH

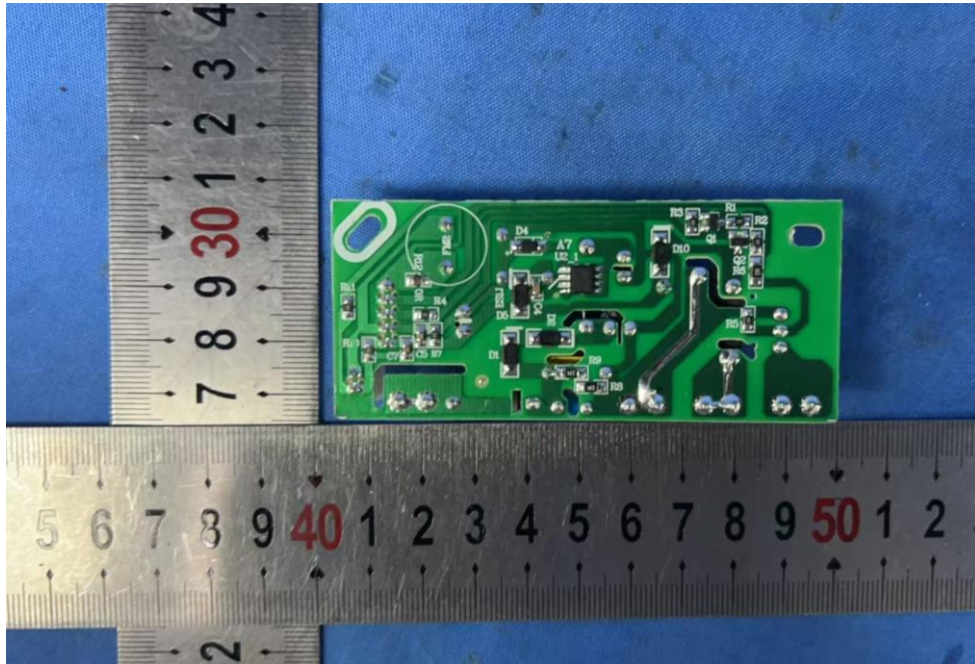


Photo 22.

Description: Heating element view for HC-8002EH, HC-8002ETH, HC-8003EH, HC-8003EAH, HC-8003ETH, HC-8003EATH, HC-8005EH, HC-8005EAH, HC-8005EATH, HC-8005ETH



Photo 23.

Description: Heating element view for all models



Photo 24.

Description: Fan motor view for HC-8002EH, HC-8002ETH, HC-8003EH, HC-8003EAH, HC-8003ETH, HC-8003EATH, HC-8005EH, HC-8005EAH, HC-8005EATH, HC-8005ETH

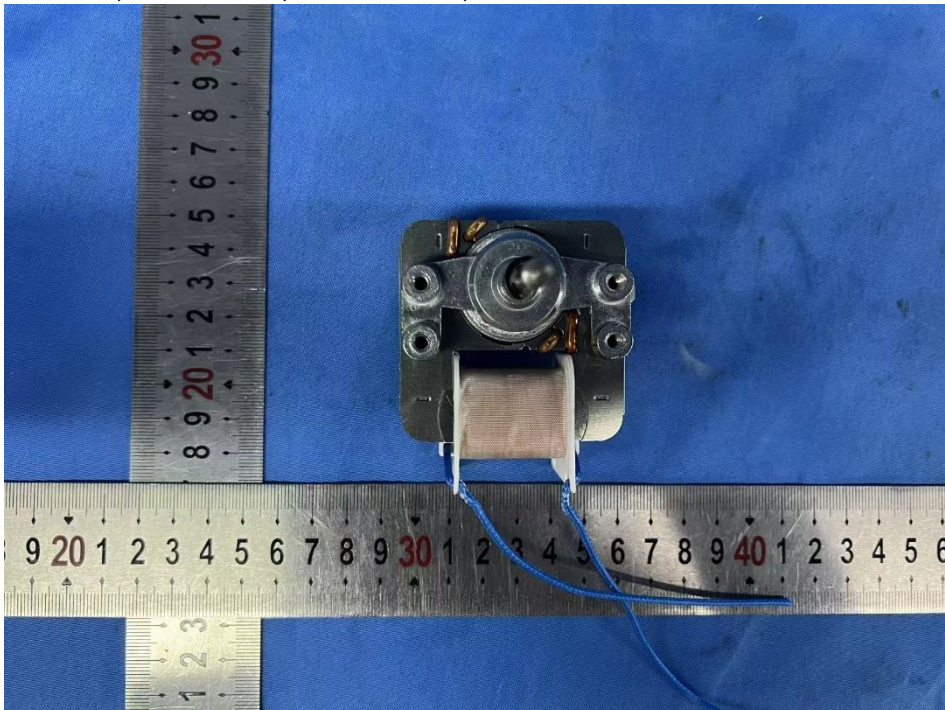


Photo 25.

Description: Fan motor view for HC-8002EH, HC-8002ETH, HC-8003EH, HC-8003EAH, HC-8003ETH, HC-8003EATH, HC-8005EH, HC-8005EAH, HC-8005EATH, HC-8005ETH

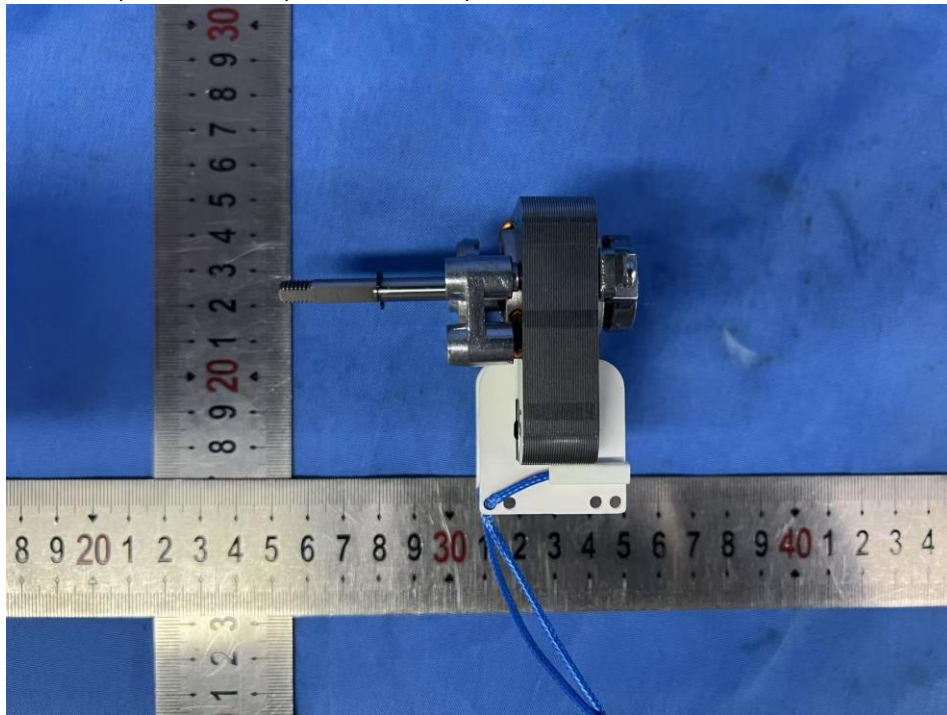


Photo 26.

Description: Fan motor view for HC-8002EH, HC-8002ETH, HC-8003EH, HC-8003EAH, HC-8003ETH, HC-8003EATH, HC-8005EH, HC-8005EAH, HC-8005EATH, HC-8005ETH

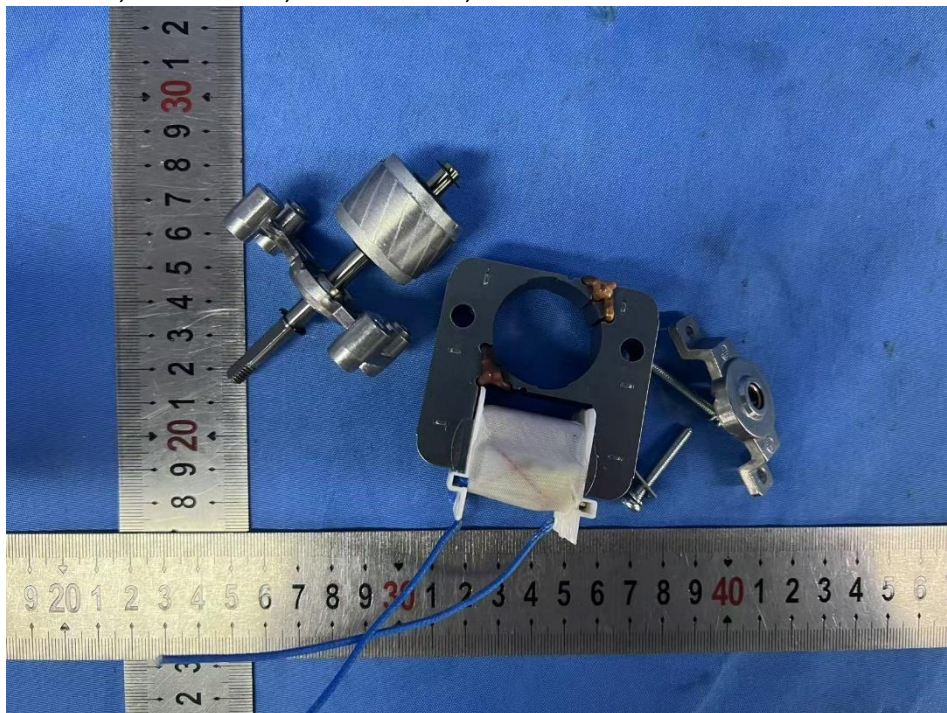


Photo 27.

Description: Fan motor view for HC-8002EH, HC-8002ETH, HC-8003EH, HC-8003EAH, HC-8003ETH, HC-8003EATH, HC-8005EH, HC-8005EAH, HC-8005EATH, HC-8005ETH



Photo 28.

Description: lamp support view for models with letter "T"

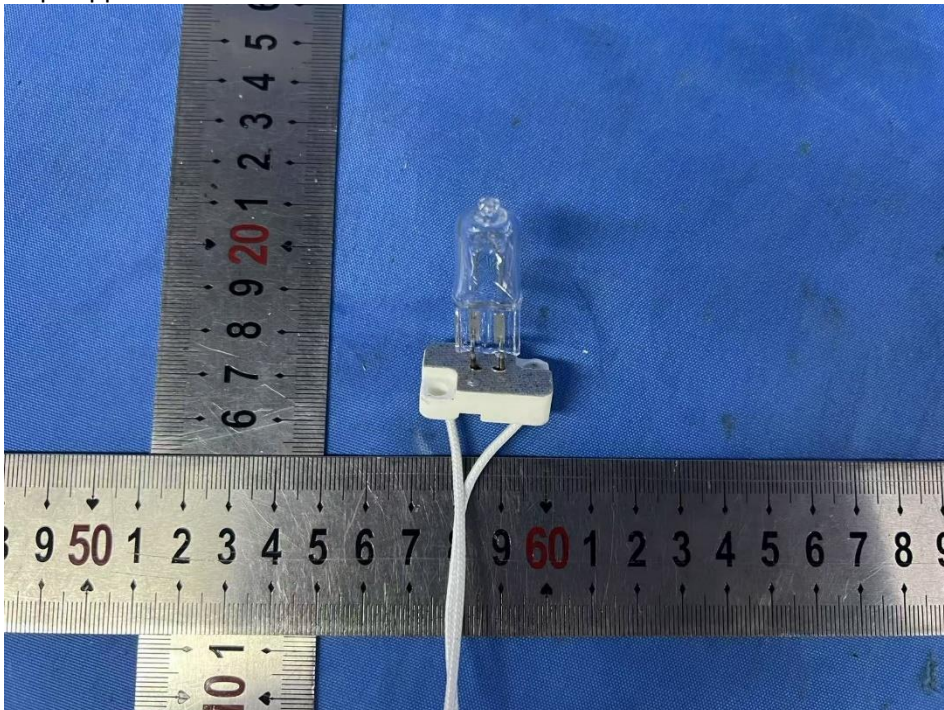


Photo 29.

Description: Overall view for HC-8003ETH, HC-8003EATH, HC-8005EATH, HC-8005ETH



Photo 30.

Description: Overall view for HC-8003EH, HC-8003EAH, HC-8003ETH, HC-8003EATH, HC-8005EH, HC-8005EAH, HC-8005EATH, HC-8005ETH

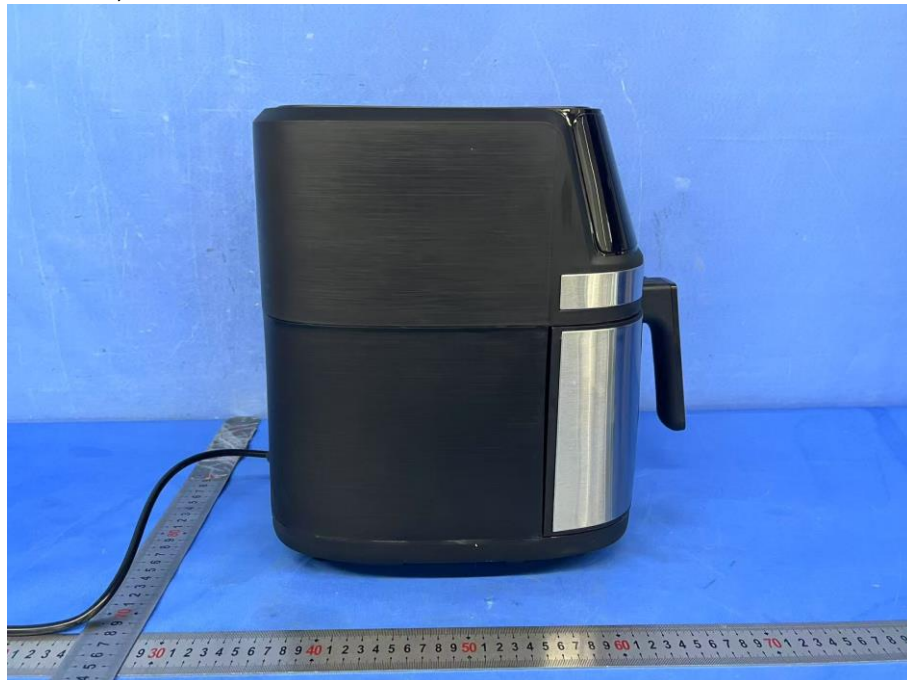


Photo 31.

Description: Overall view for HC-8003EH, HC-8003EAH, HC-8003ETH, HC-8003EATH, HC-8005EH, HC-8005EAH, HC-8005EATH, HC-8005ETH



Photo 32.

Description: Overall view for HC-8003EH, HC-8003EAH, HC-8003ETH, HC-8003EATH, HC-8005EH, HC-8005EAH, HC-8005EATH, HC-8005ETH

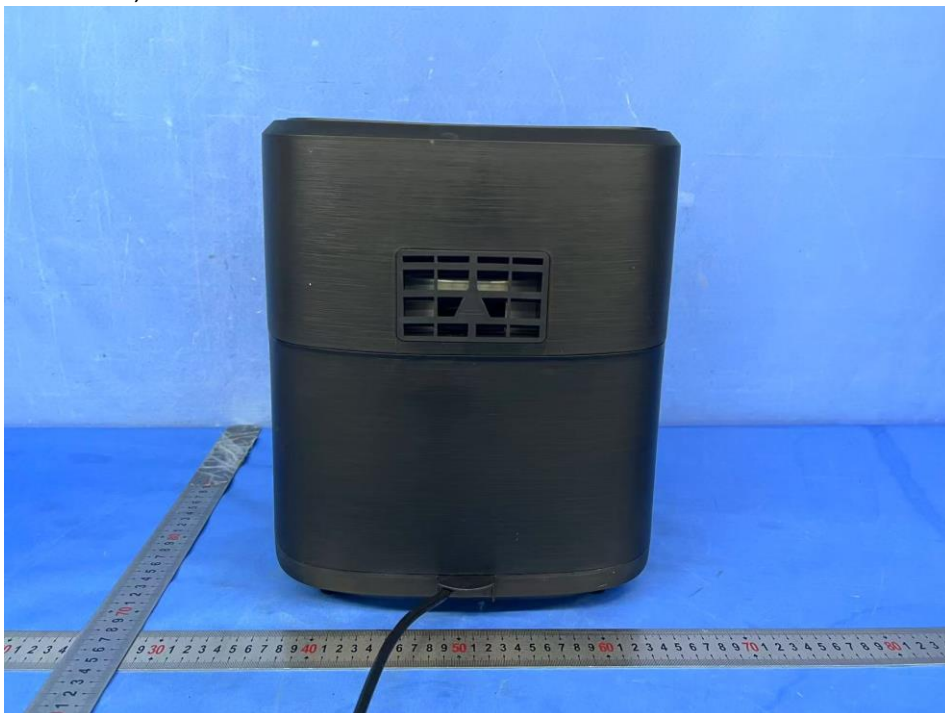


Photo 33.

Description: Overall view for HC-8003EH, HC-8003EAH, HC-8003ETH, HC-8003EATH, HC-8005EH, HC-8005EAH, HC-8005EATH, HC-8005ETH



Photo 34.

Description: Overall view for HC-8005EH, HC-8005EAH, HC-8005EATH, HC-8005ETH



Photo 35.

Description: Overall view for HC-8003EH, HC-8003EAH, HC-8003ETH, HC-8003EATH



Photo 36.

Description: Internal view for HC-8003EH, HC-8003EAH, HC-8003ETH, HC-8003EATH, HC-8005EH, HC-8005EAH, HC-8005EATH, HC-8005ETH

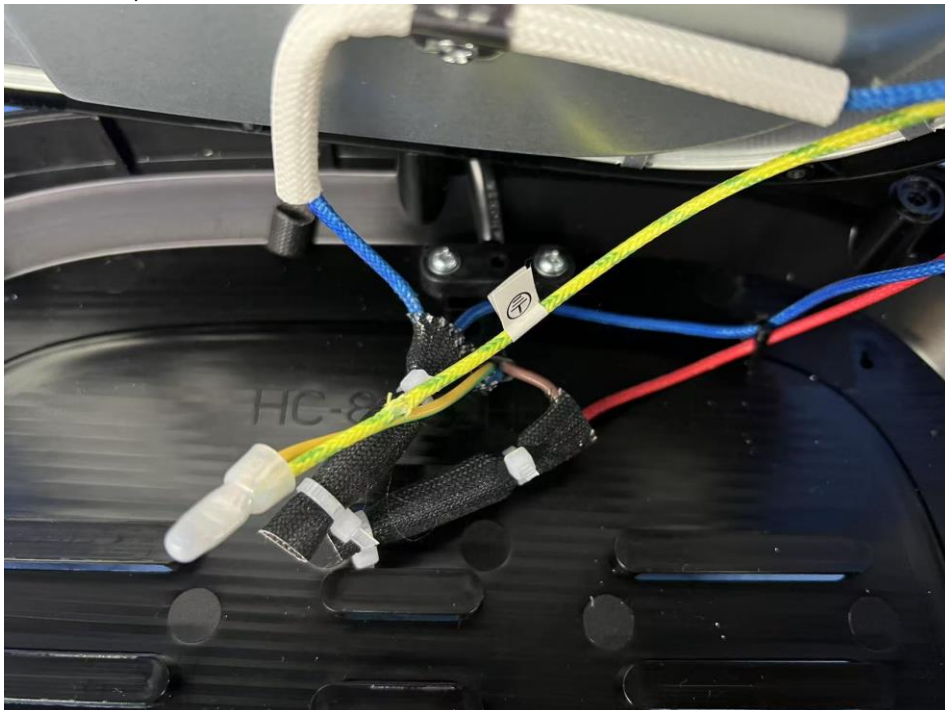


Photo 37.

Description: Internal view for HC-8003EH, HC-8003EAH, HC-8003ETH, HC-8003EATH, HC-8005EH, HC-8005EAH, HC-8005EATH, HC-8005ETH

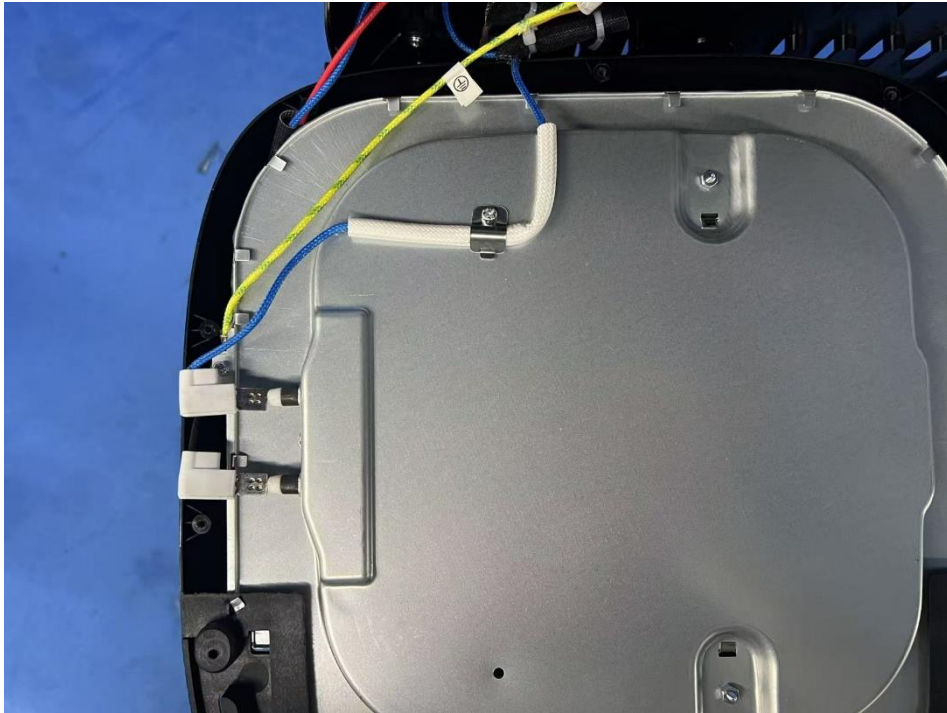


Photo 38.

Description: Internal view for HC-8003ETH, HC-8005ETH

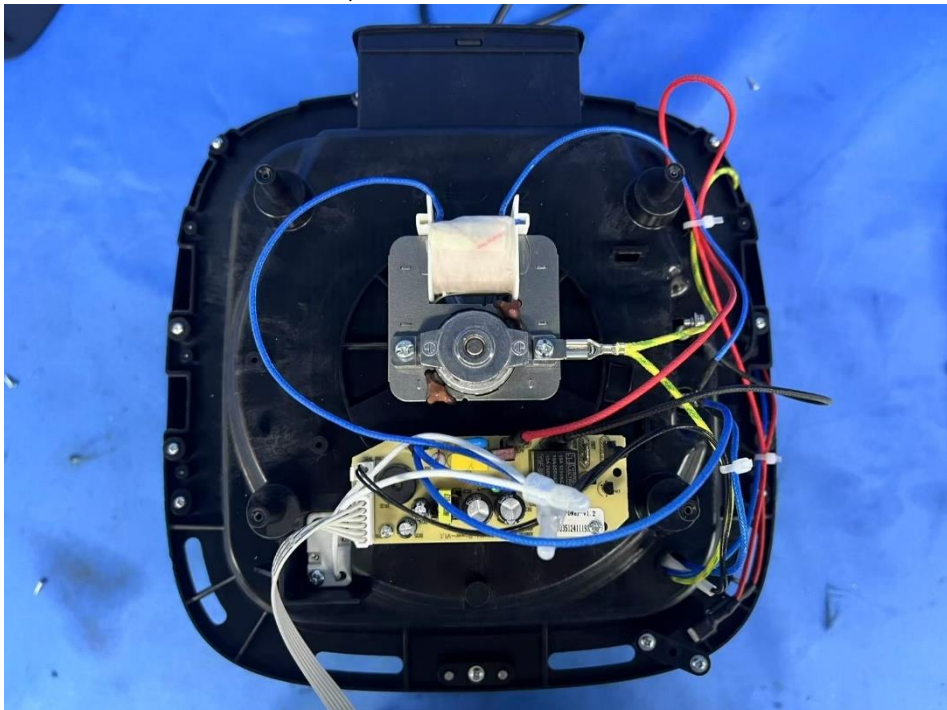


Photo 39.

Description: Internal view for HC-8003ETH, HC-8003EATH, HC-8005EATH, HC-8005ETH



Photo 40.

Description: Internal view for HC-8003EH, HC-8005EH

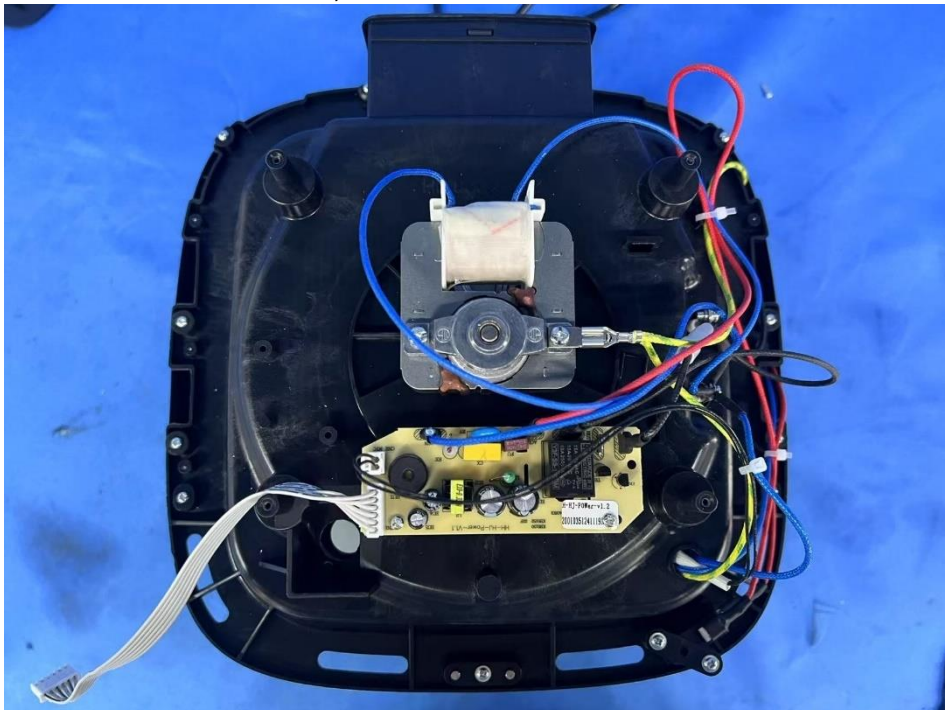


Photo 41.

Description: Internal view for HC-8003EH, HC-8003EAH, HC-8005EAH, HC-8005EH



Photo 42.

Description: Internal view for HC-8003EH, HC-8003EAH, HC-8003ETH, HC-8003EATH, HC-8005EH, HC-8005EAH, HC-8005EATH, HC-8005ETH

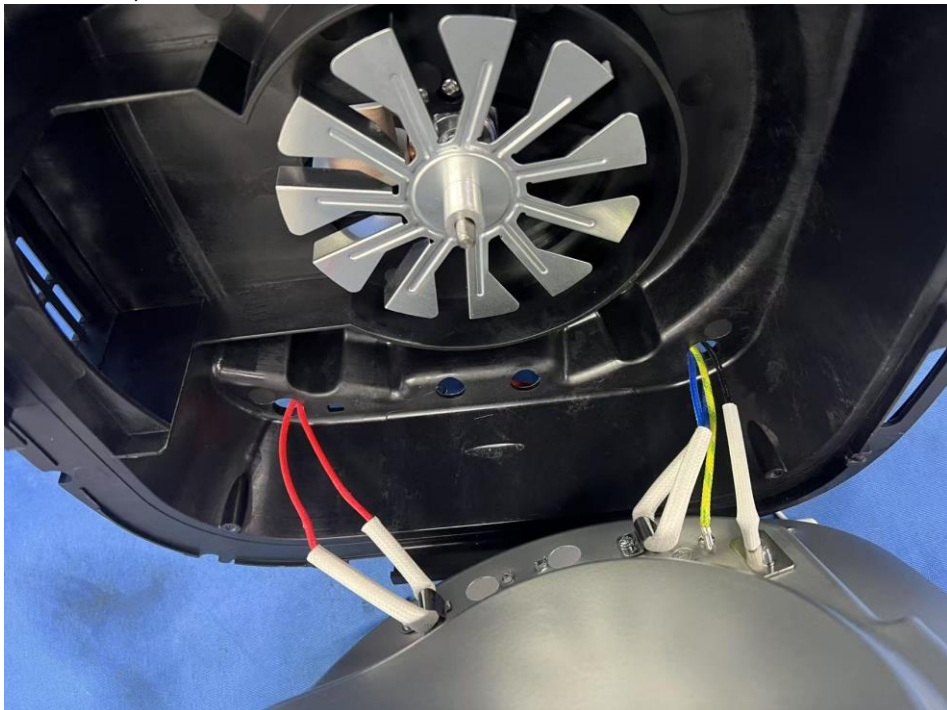


Photo 43.

Description: Interlock switch view for all models

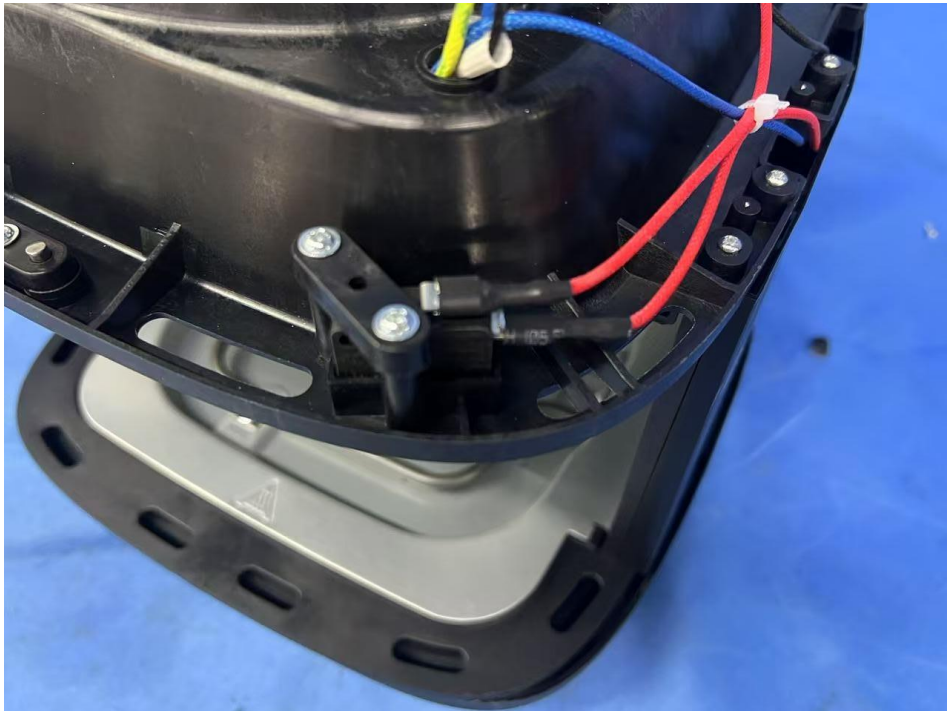


Photo 44.

Description: Power PCB view for HC-8003EH, HC-8003ETH, HC-8005EH, HC-8005ETH

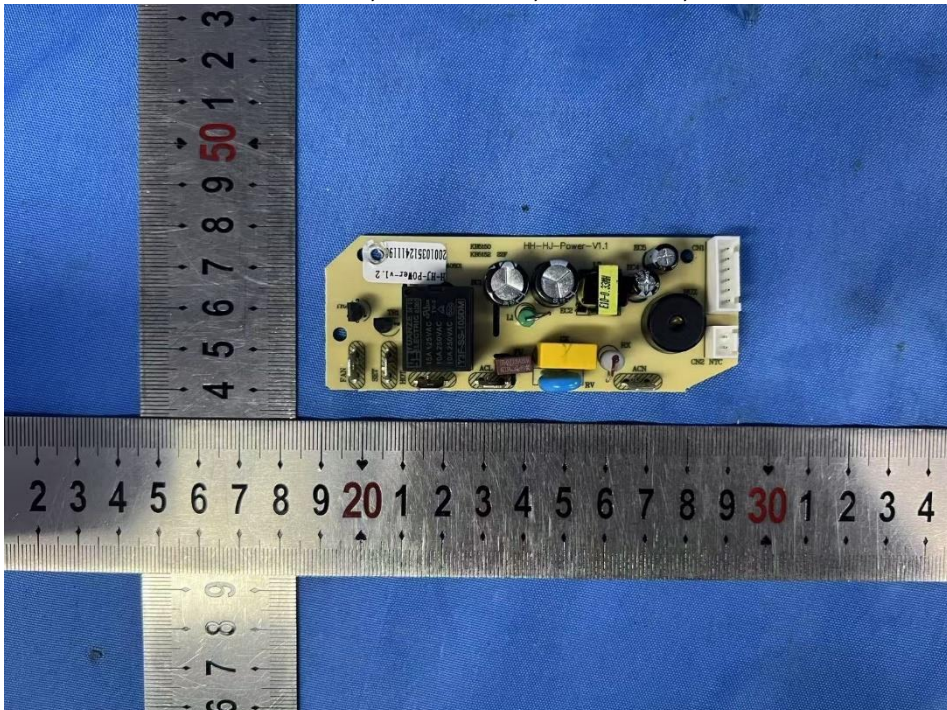


Photo 45.

Description: Power PCB view for HC-8003EH, HC-8003ETH, HC-8005EH, HC-8005ETH

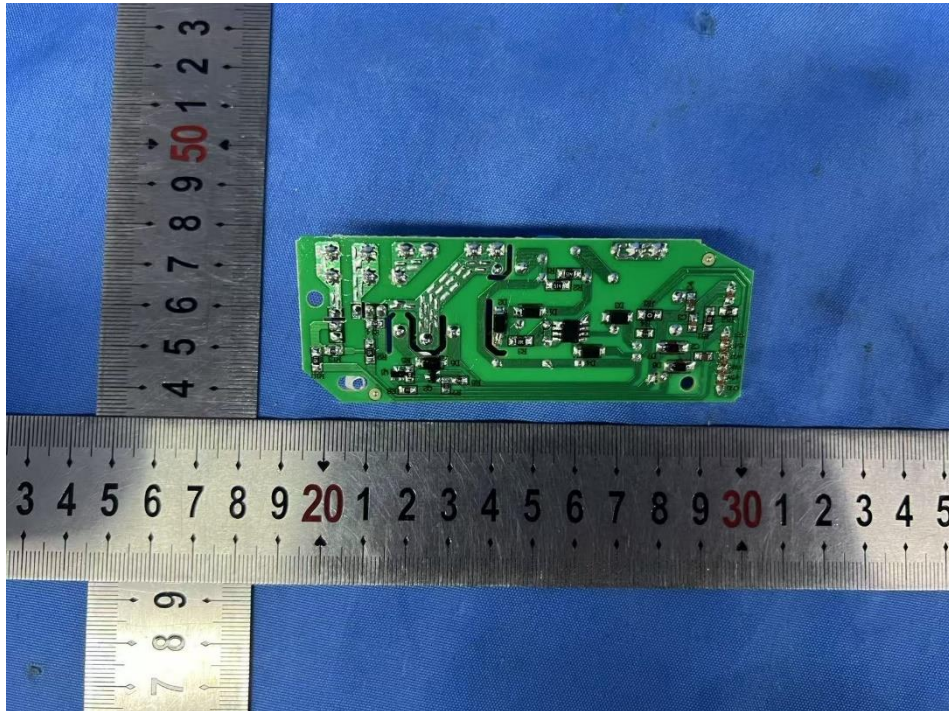


Photo 46.

Description: Control panel view for HC-8003EH, HC-8003ETH, HC-8005EH, HC-8005ETH

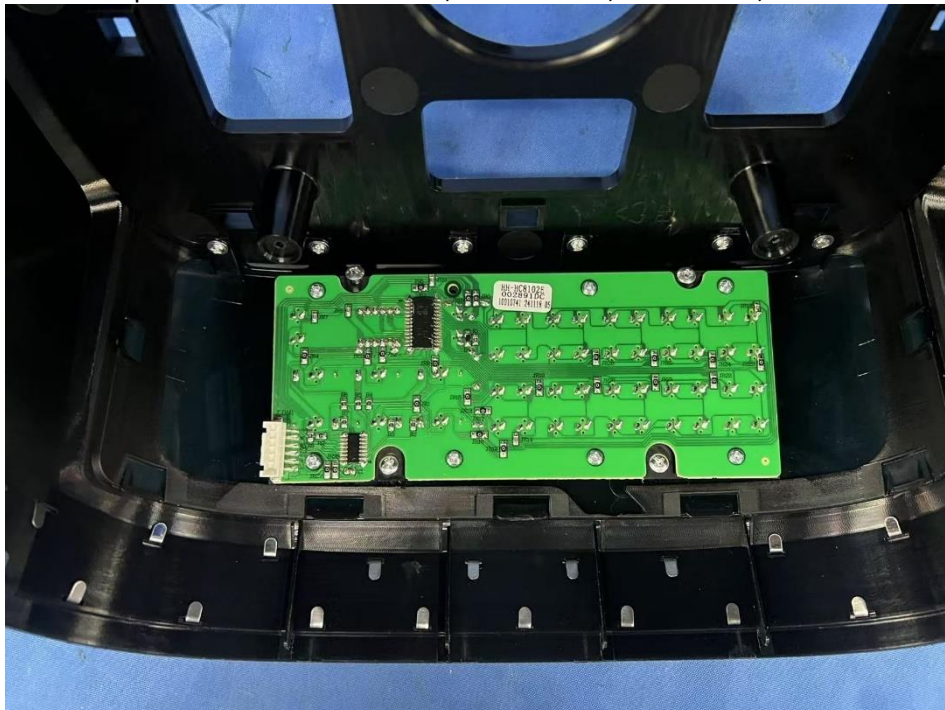


Photo 47.

Description: Control panel view for HC-8003EH, HC-8003ETH, HC-8005EH, HC-8005ETH



Photo 48.

Description: Control panel PCB view for HC-8003EH, HC-8003ETH, HC-8005EH, HC-8005ETH

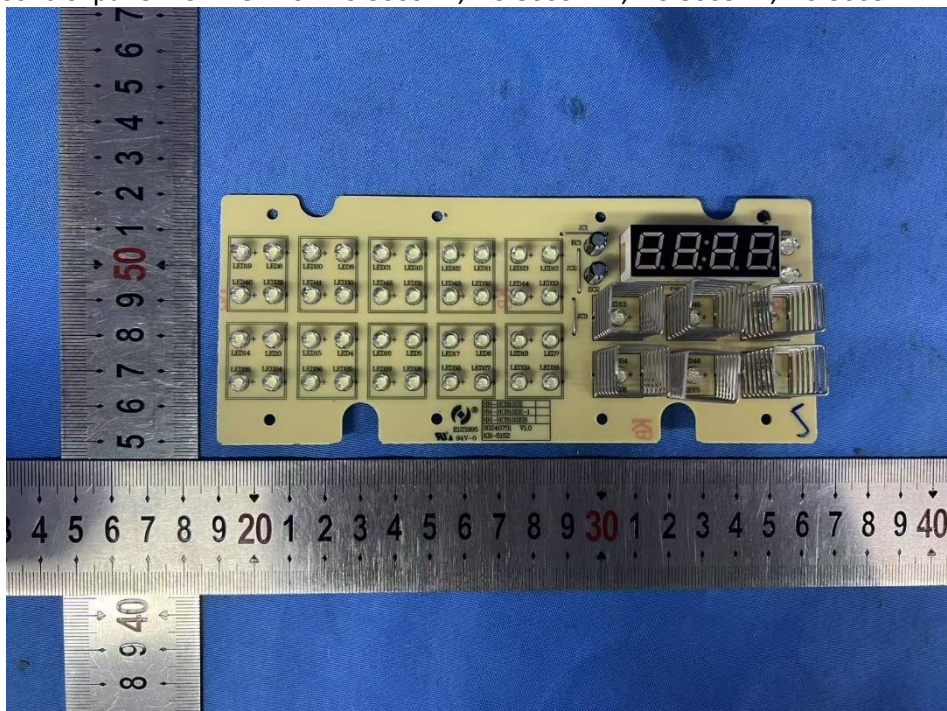


Photo 49.

Description: Control panel PCB view for HC-8003EH, HC-8003ETH, HC-8005EH, HC-8005ETH

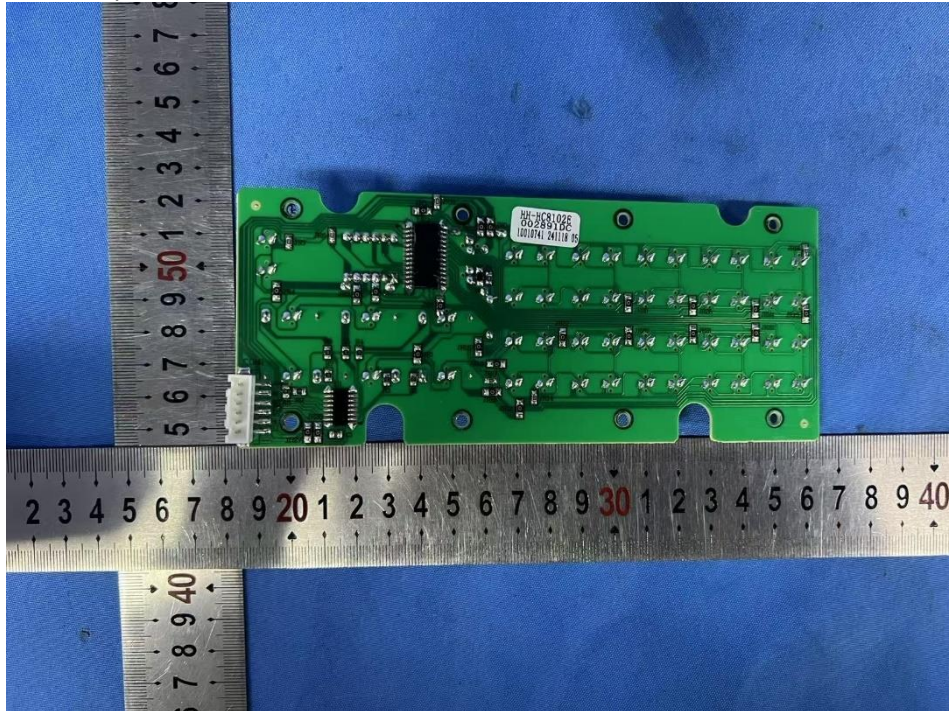


Photo 50.

Description: Internal view for HC-8003EATH, HC-8005EATH

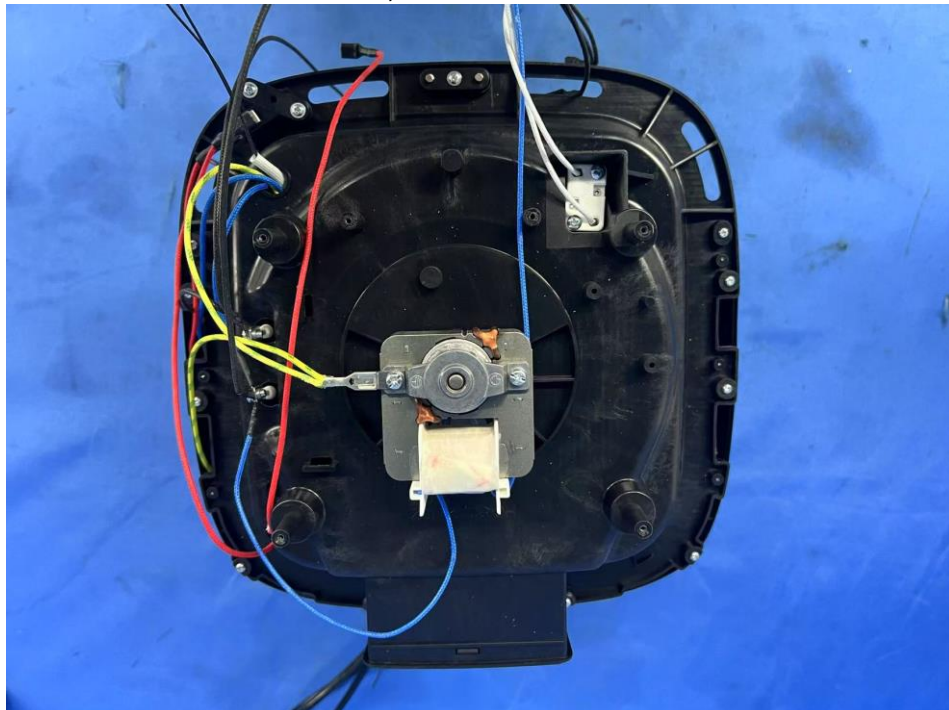


Photo 51.

Description: Internal view for HC-8003EAH, HC-8005EAH

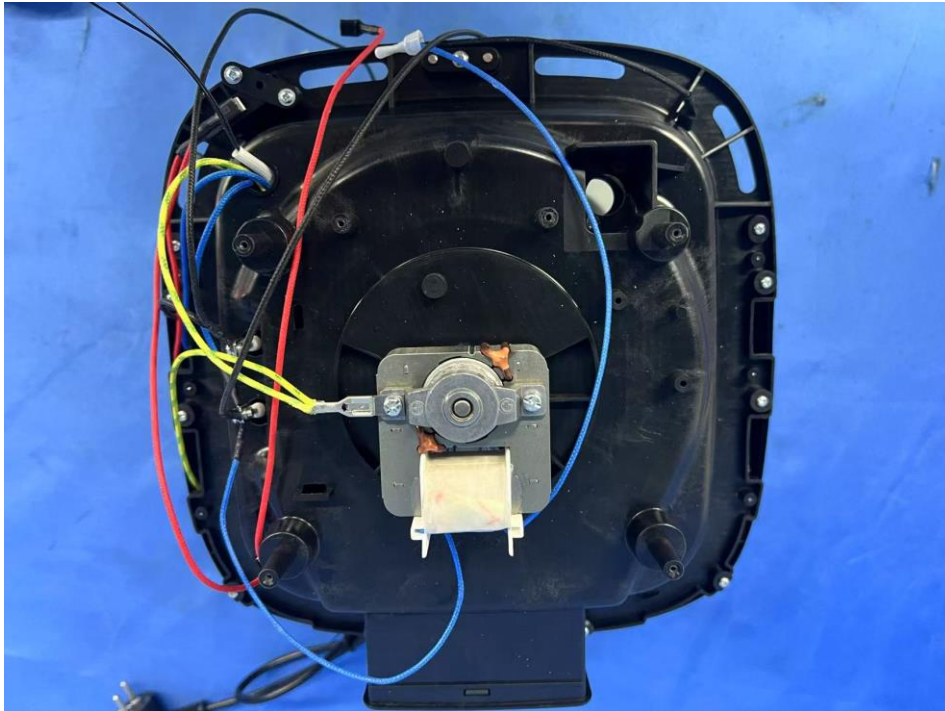


Photo 52.

Description: Control panel view for HC-8003EAH, HC-8003EATH, HC-8005EAH, HC-8005EATH

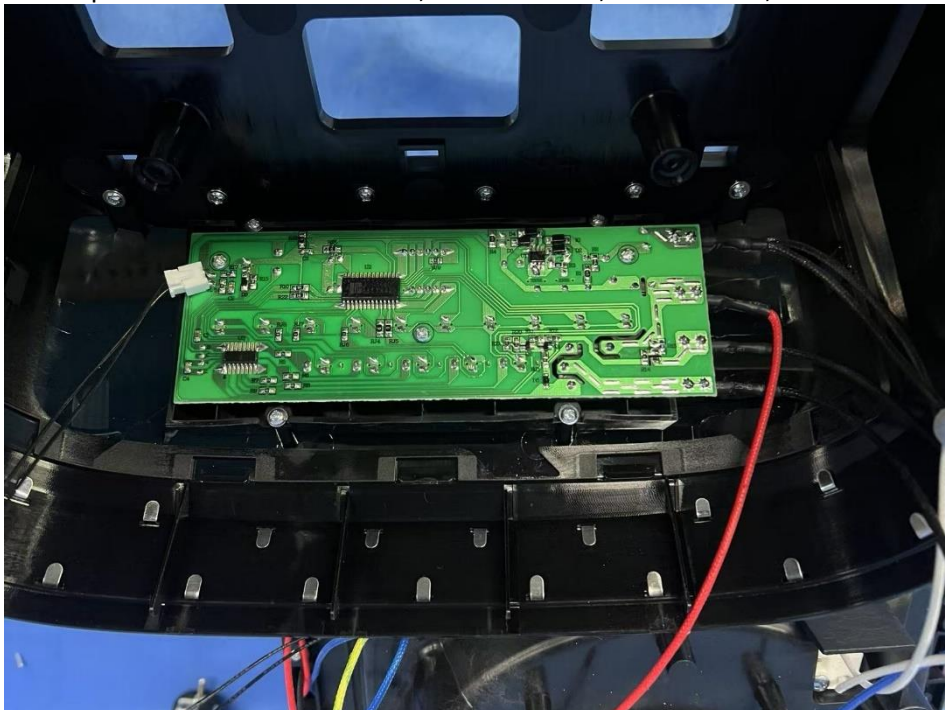


Photo 53.

Description: Control panel view for HC-8003EAH, HC-8003EATH, HC-8005EAH, HC-8005EATH

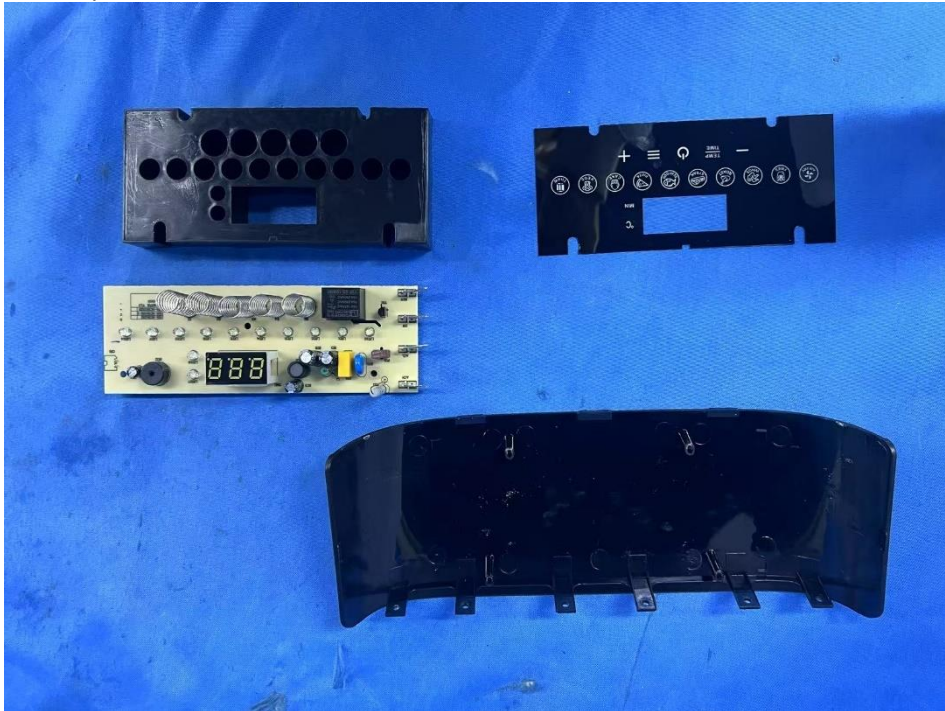


Photo 54.

Description: Control panel and Power PCB view for HC-8003EAH, HC-8003EATH, HC-8005EAH, HC-8005EATH

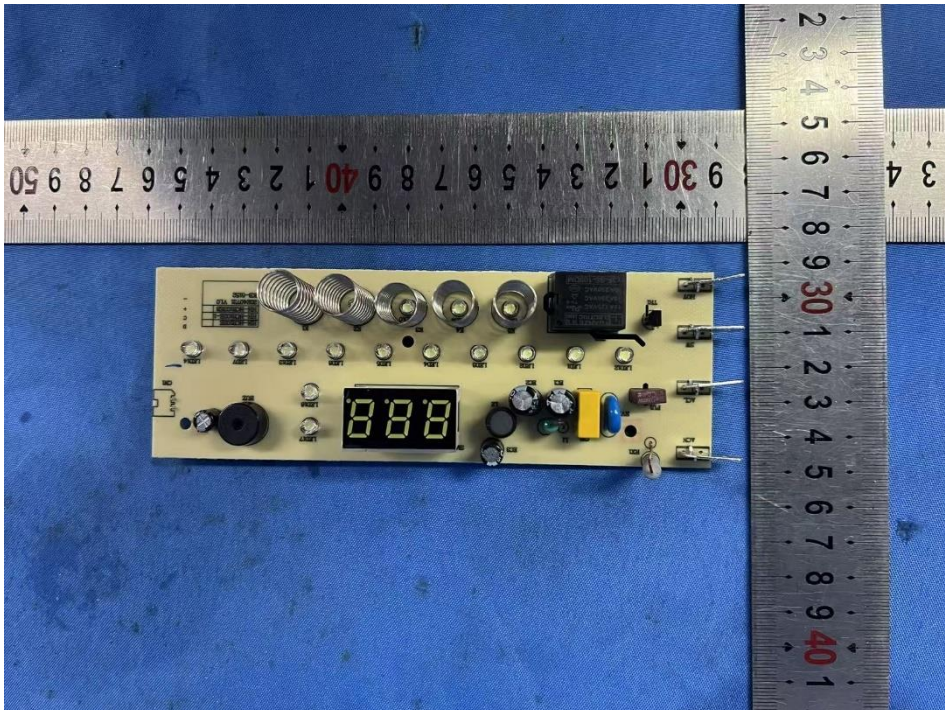


Photo 55.

Description: Control panel and Power PCB view for HC-8003EAH, HC-8003EATH, HC-8005EAH, HC-8005EATH

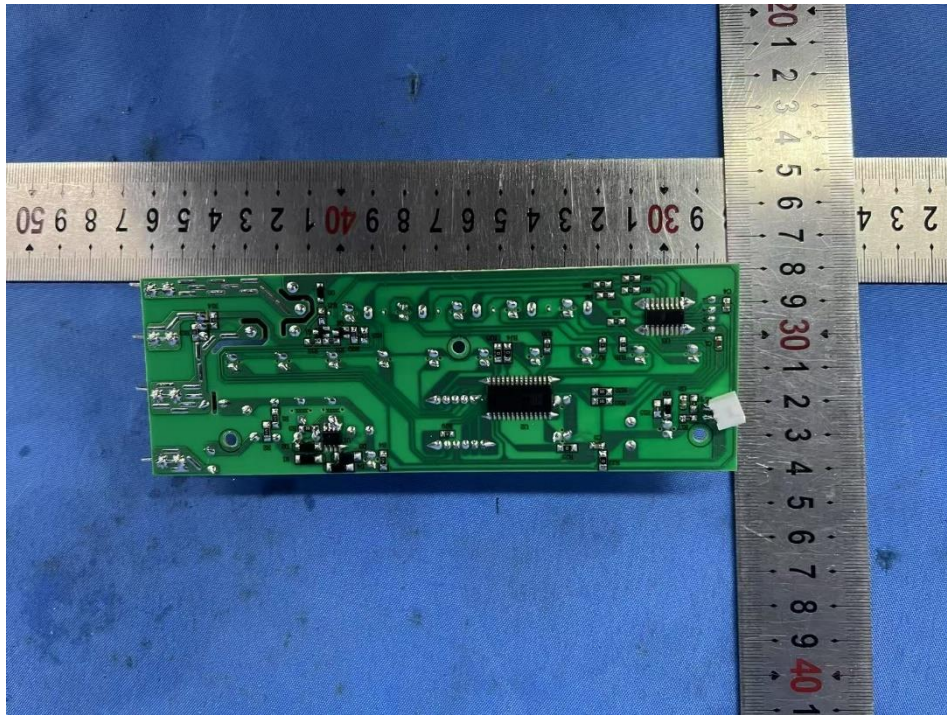


Photo 56.

Description: Overall view for HC-1101ETH, HC-1102ETH



Photo 57.

Description: Overall view for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH

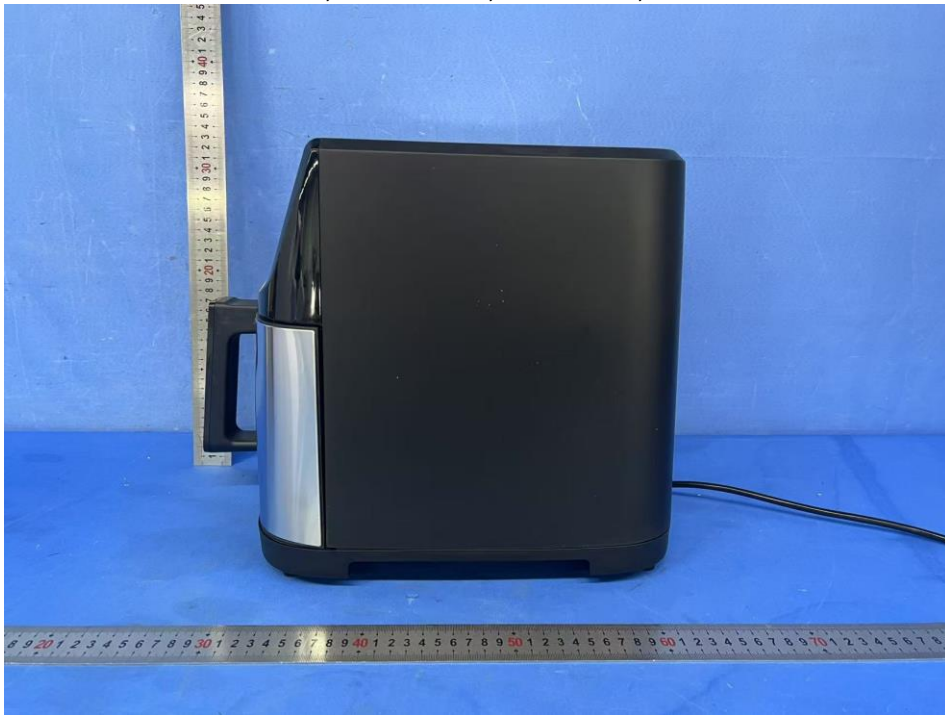


Photo 58.

Description: Overall view for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH

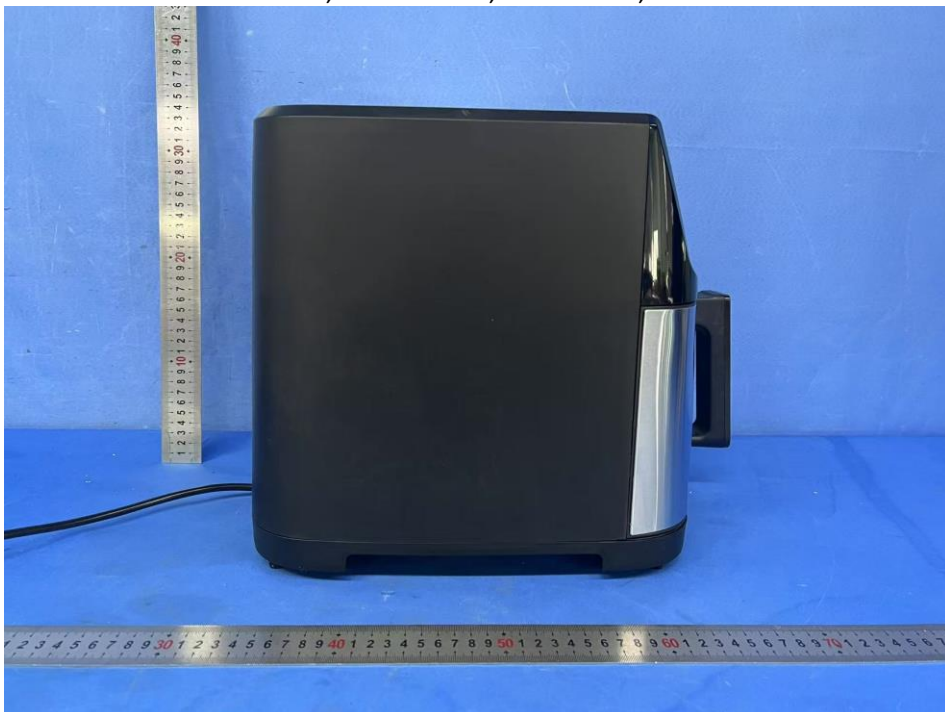


Photo 59.

Description: Overall view for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH



Photo 60.

Description: Overall view for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH



Photo 61.

Description: Overall view for HC-1101EH, HC-1101ETH

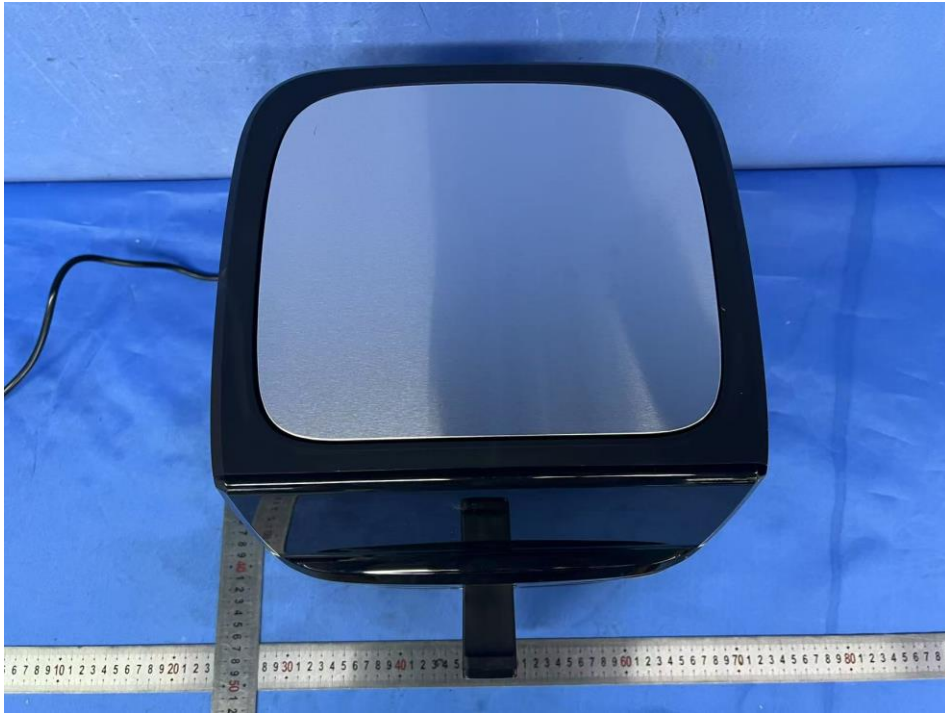


Photo 62.

Description: Overall view for HC-1102EH, HC-1102ETH

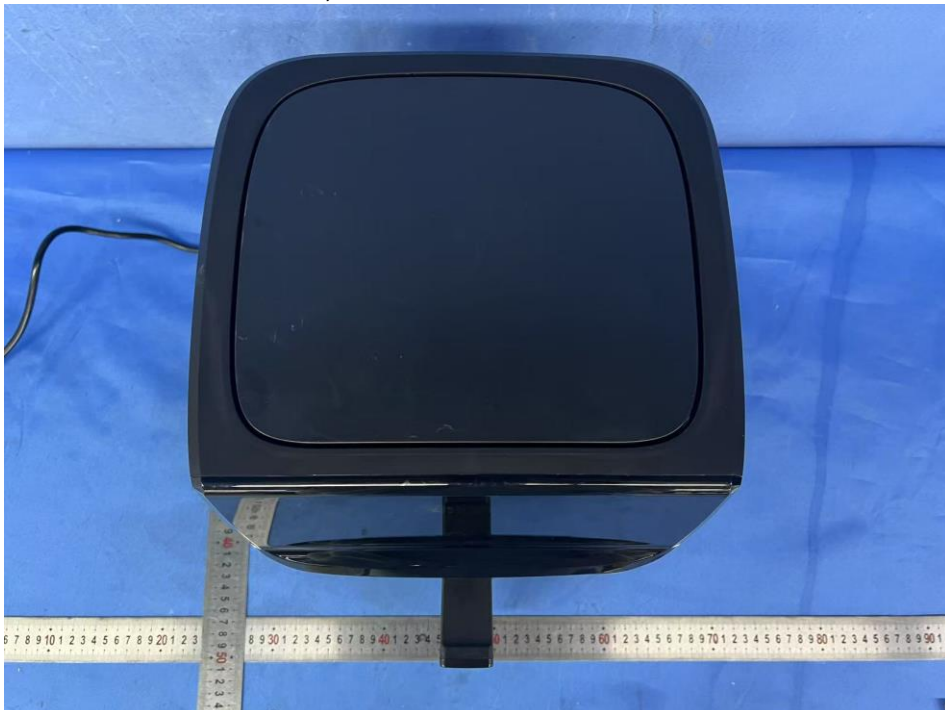


Photo 63.

Description: Overall view for HC-1101EH, HC-1102EH



Photo 64.

Description: Power cord view for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH



Photo 65.

Description: Internal view for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH



Photo 66.

Description: Internal view for HC-1101ETH, HC-1102ETH

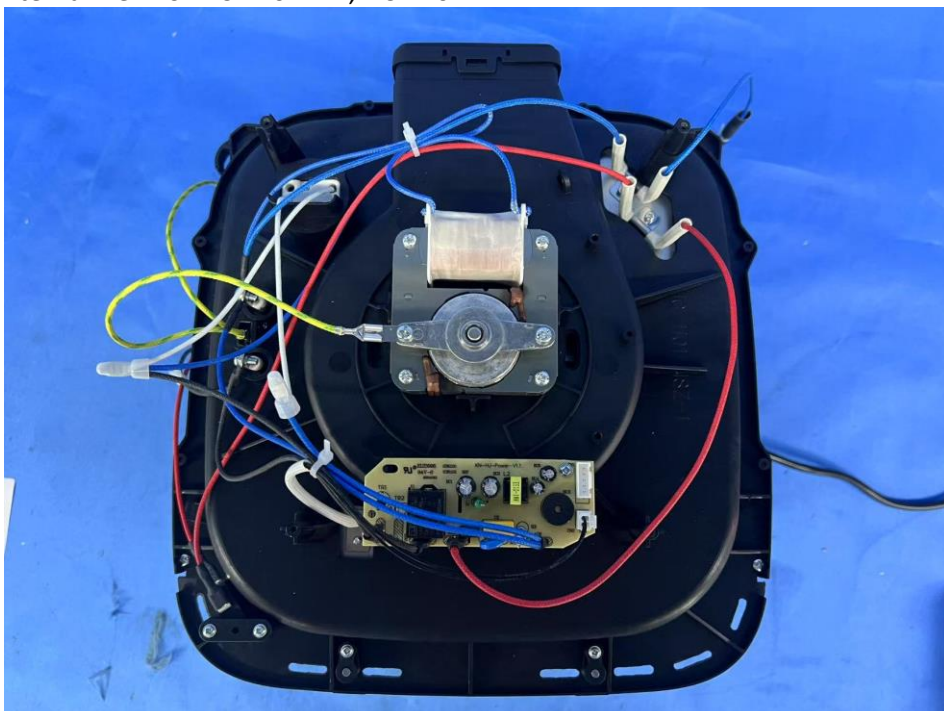


Photo 67.

Description: Internal view for HC-1101ETH, HC-1102ETH



Photo 68.

Description: Internal view for HC-1101EH, HC-1102EH

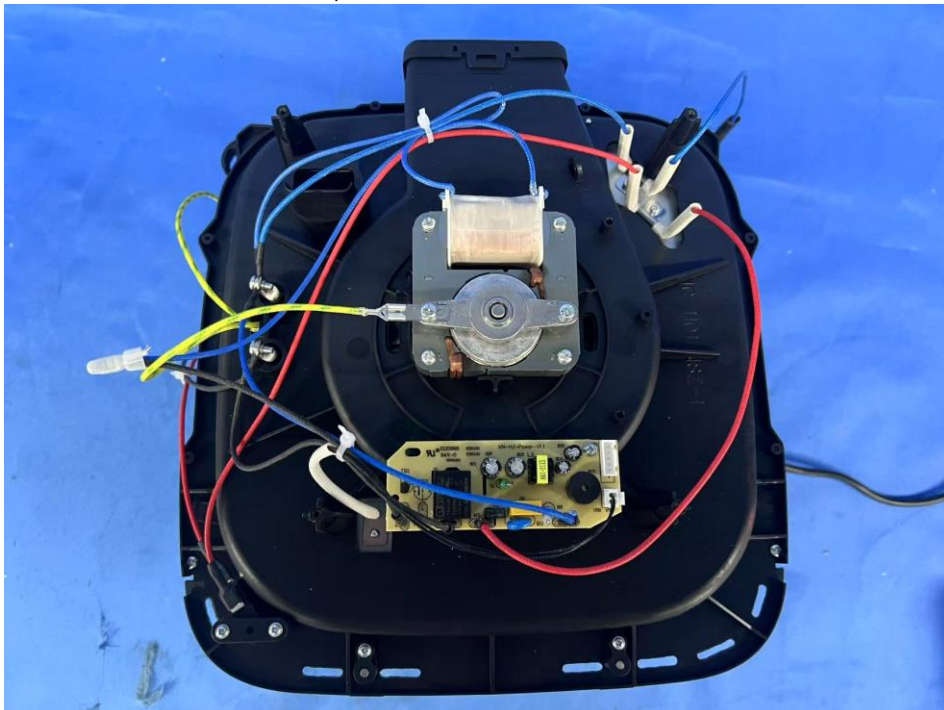


Photo 69.

Description: Internal view for HC-1101EH, HC-1102EH



Photo 70.

Description: Heating element view for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH



Photo 71.

Description: Internal view for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH

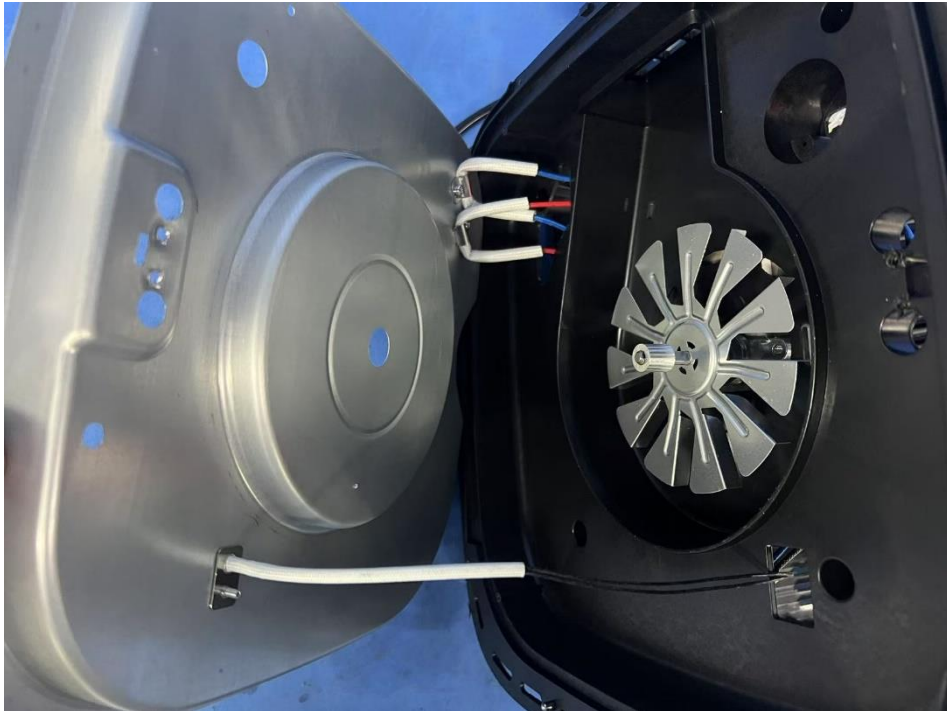


Photo 72.

Description: Control panel view for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH

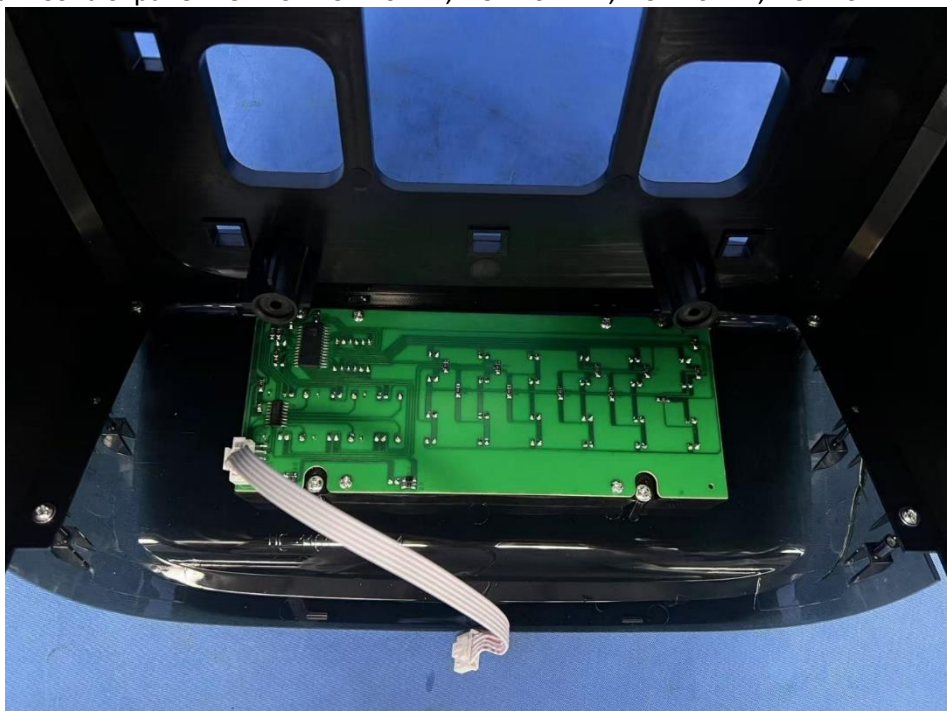


Photo 73.

Description: Control panel view for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH



Photo 74.

Description: Control panel PCB view for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH

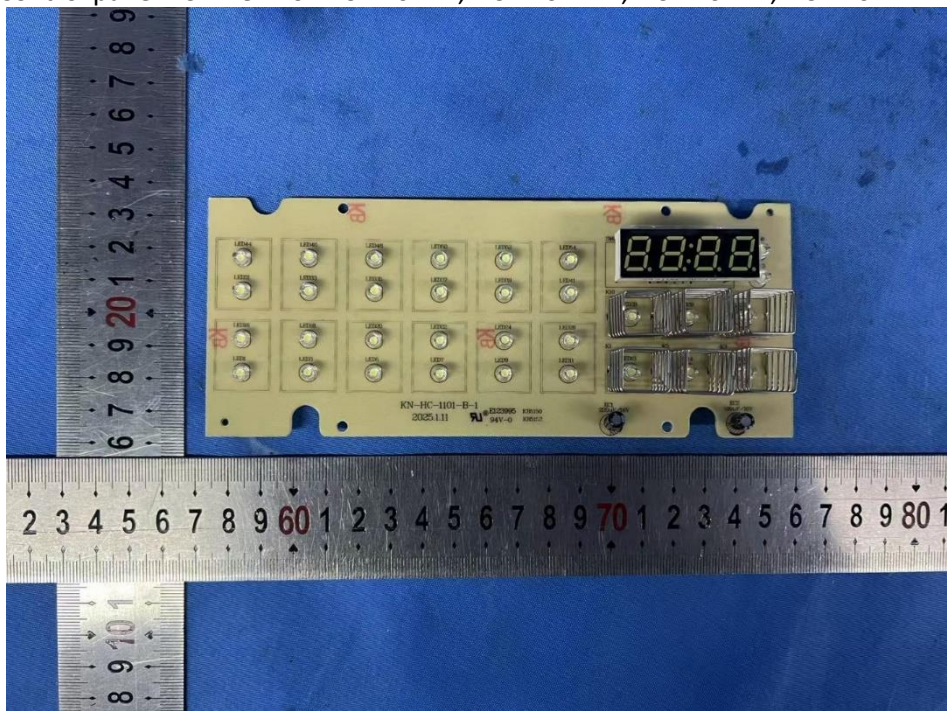


Photo 75.

Description: Control panel PCB view for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH

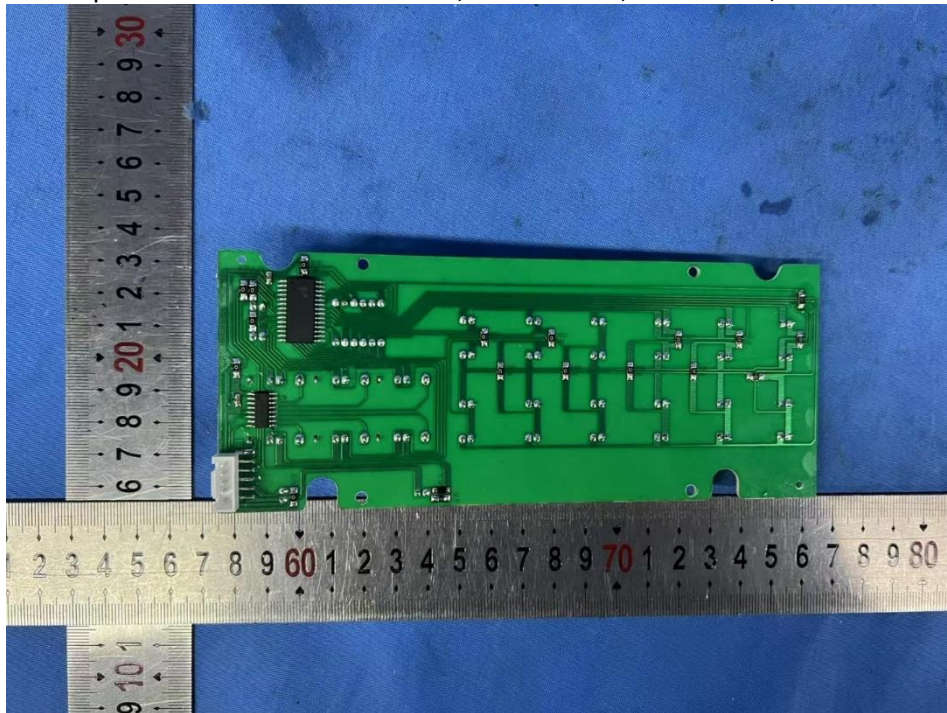


Photo 76.

Description: Power PCB view for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH

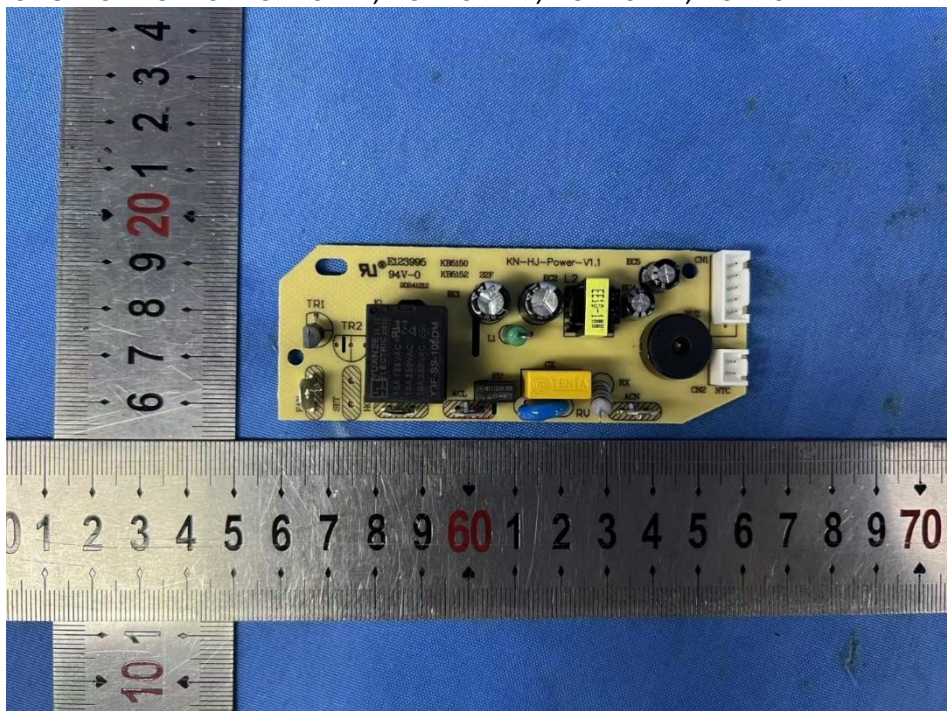


Photo 77.

Description: Power PCB view for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH

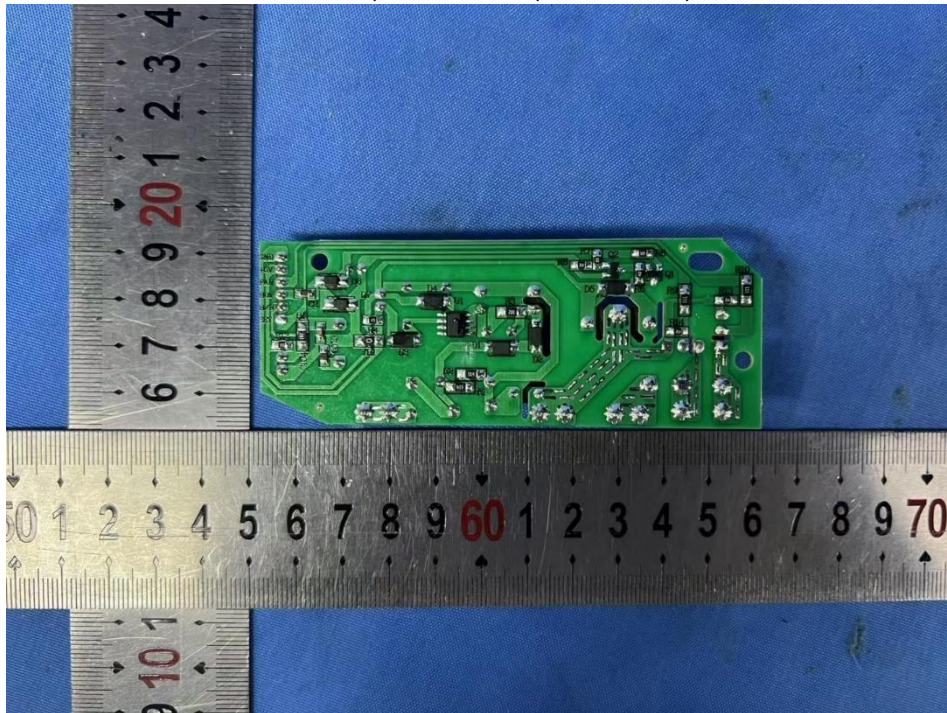


Photo 78.

Description: Fan motor view for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH

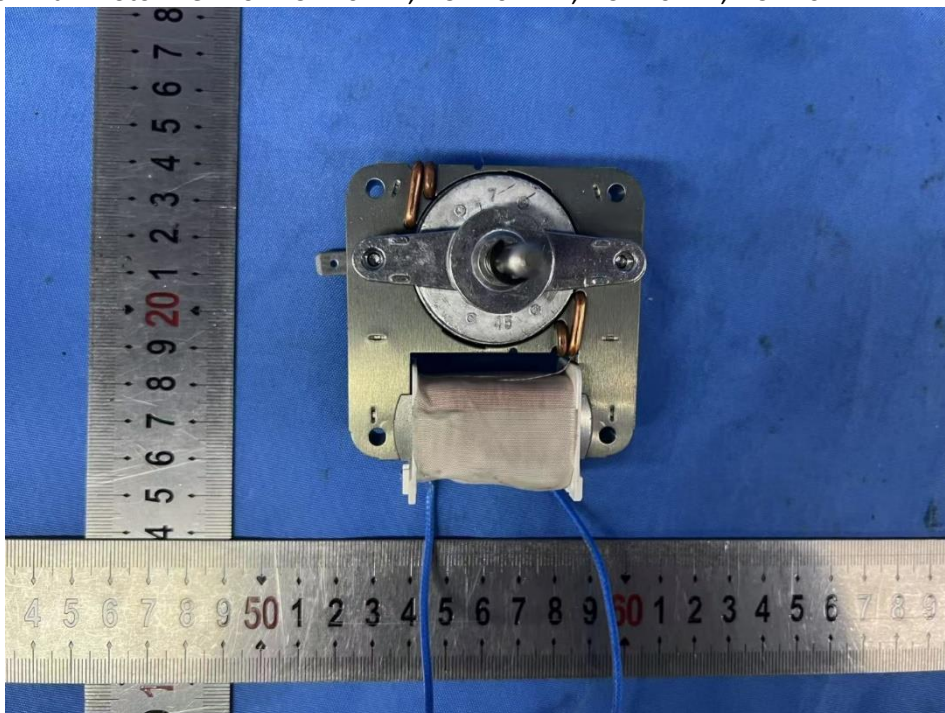


Photo 79.

Description: Fan motor view for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH

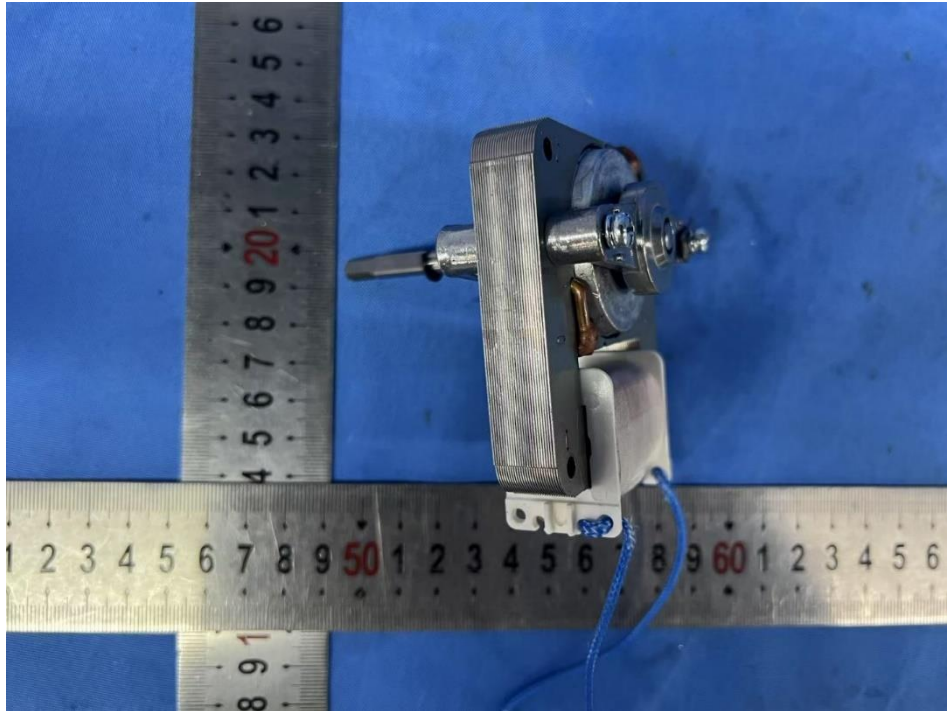


Photo 80.

Description: Fan motor view for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH

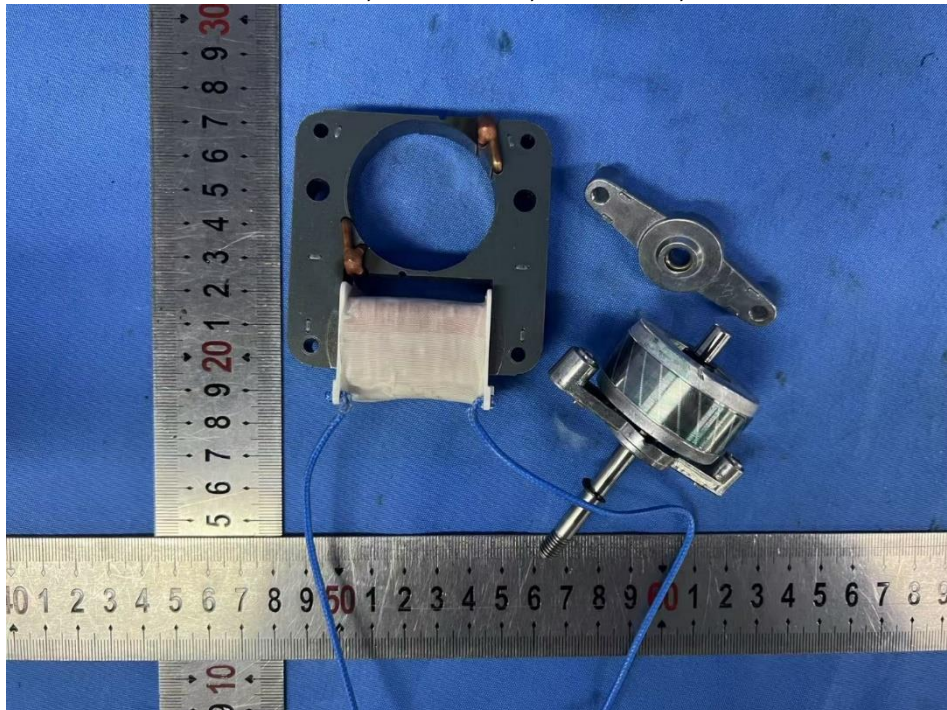


Photo 81.

Description: Fan motor view for HC-1101EH, HC-1101ETH, HC-1102EH, HC-1102ETH



Photo 82.

Description: Optional basket 1 to 4 view for HC-8003EH, HC-8003EAH, HC-8005EH, HC-8005EAH, HC-8002EH



Photo 83.

Description: Optional basket 1 to 2 view for HC-8003ETH, HC-8003EATH, HC-8005EATH, HC-8005ETH, HC-8002ETH



END of the report