

TUSEN

ZHEJIANG HAOZHENG POWER TECHNOLOGY CO.,LTD

ADD: NO.16, ROAD2, HUANGLONG INDUSTRY ZONE, HUSHAN TOWN,WUYI, ZHEJIANG, CHINA

TEL: 0579-87986698 0579-87986699

WEBSITE: WWW.CHINADONGCHUAN.COM

EMAIL:DONGCHUAN2013@163.COM / DONGCHUAN2015@YEAH.NET

CONTACT: FLORA WU TEL: (WHATSAPP/WECHAT): 0086 18858906832

2025-2026
CATALOG



TUSEN



PROFESSIONAL POWER TOOLS MANUFACTURER





COMPANY PROFILE

2025

Set Up Group

300+

of employees

ZHEJIANG HAOZHENG POWER TECHNOLOGY CO.,LTD is located in the Huanglong industry,Hushan Town,Wuyi, Zhejiang, China.

Our company are refine on producing the high quality Rotary hammer, Demolition hammer, Circular Saw, and etc. We have staff **more than 300**, our own research and development department, whom using New technology from Makita in Japan, devote to develop the product with delicate appearance, solid structure, long service life, simple, easy maintenance.

We strictly abide by the enterprise policy of "**build business with precision, win by quality and treat each other with sincerity**". In the future, we will focus on the development of markets along the "**Belt and Road**" and actively respond to the call of the country to promote Made-in-China products to all of the world, especially the Middle East. Rely on many years experience in the Power tools field, we have win the reputation in the world because of our best service competitive price and guaranteed quality.


We sincerely welcome you to contact us for information and we look forward to providing you with all your related needs in the near future!

PROFESSIONAL HAMMER & BREAKER



- It is suitable for concrete brick ,well and stone
- Quick access of chuck for quick change the chisel
- 2-Function:Chiseling,hammer function
- Professional road repairing/quarrying.Wall breaking and high strength chisel breaking operation

DEMOLITION HAMMER GREASE MACHINE

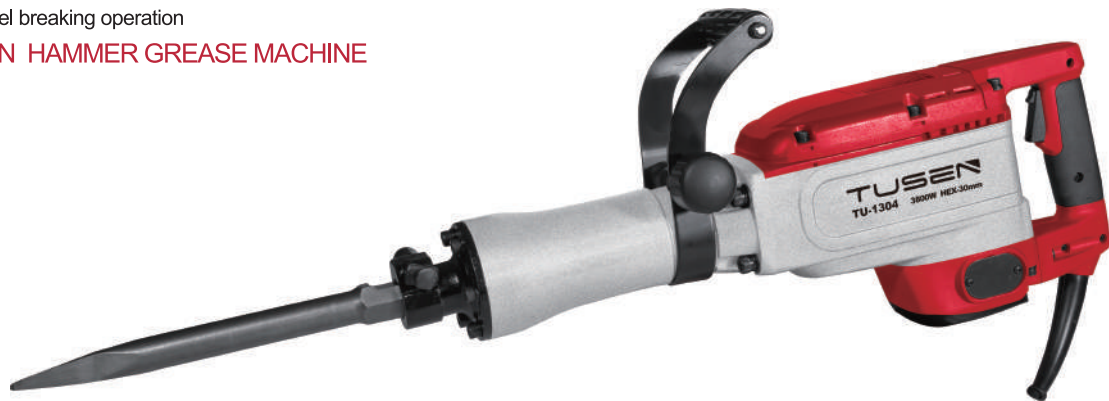

TU-1304		DEMOLITION HAMMER
RATED VOLTAGE:	220-240 V	
RATED FREQUENCY:	50/60 HZ	
RATED INPUT POWER:	2000 W	
IMPACT RATING:	3000 BMP	
IMPACT ENERGY:	68J	
NET WEIGHT:	15.5KG	
DRILL TYPE:	HEX(30MM)	



- Professional road repairing/quarrying.Wall breaking and high strength chisel breaking operation
- It is suitable for concrete brick ,well and stone
- Quick access of chuck for quick change the chisel
- 2-Function:Chiseling,hammer function

DEMOLITION HAMMER OIL MACHINE



TU-90		DEMOLITION HAMMER
RATED VOLTAGE:	220V-240V	
RATED FREQUENCY:	50/60HZ	
RATED INPUT POWER:	1800W	
IMPACT RATING:	2800BMP	
IMPACT ENERGY:	48J	
DRILL TYPE:	HEX(30MM)	
NET WEIGHT:	15.5KG	



- Professional road repairing/quarrying.Wall breaking and high strength chisel breaking operation
- It is suitable for concrete brick ,well and stone
- Quick access of chuck for quick change the chisel
- 2-Function:Chiseling,hammer function
- Grease machine

DEMOLITION HAMMER OIL MACHINE



TU-1300		DEMOLITION HAMMER
RATED VOLTAGE:	220-240 V	
RATED FREQUENCY:	50/60 HZ	
RATED INPUT POWER:	2200W	
IMPACT RATING:	3000BMP	
IMPACT ENERGY:	48J	
NET WEIGHT:	15.5KG	
DRILL TYPE:	HEX(30MM)	





- Professional road repairing/quarrying.Wall breaking and high strength chisel breaking operation
- It is suitable for concrete brick ,well and stone
- Quick access of chuck for quick change the chisel
- 2-Function:Chiseling,hammer function
- Grease machine



30mm
HEX



TU-65A

DEMOLITION HAMMER (Machine Oil)

RATED VOLTAGE:	220V-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	1800W
IMPACT RATING:	2800BPM
IMPACT ENERGY:	48J
NET WEIGHT:	15.5KG
DRILL TYPE:	HEX (30MM)



- Professional road repairing/quarrying.Wall breaking and high strength chisel breaking operation
- It is suitable for concrete brick ,well and stone
- Quick access of chuck for quick change the chisel
- 2-Function:Chiseling,hammer function
- Grease machine

DEMOLITION HAMMER



18mm
SDS-Max



TU-1252V

DEMOLITION HAMMER

RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	1700W
IMPACT RATING:	2900BMP
IMPACT ENERGY:	29J
NET WEIGHT:	11KG
DRILL TYPE:	SDS-MAX(18MM)



- Professional road repairing/quarrying.Wall breaking and high strength chisel breaking operation
- It is suitable for concrete brick ,well and stone
- Quick access of chuck for quick change the chisel
- 2-Function:Chiseling,hammer function
- Grease machine



18mm
SDS-Max



TU-SDS7022

DEMOLITION HAMMER

RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	1800W
IMPACT RATING:	3000BMP
IMPACT ENERGY:	48J
NET WEIGHT:	10.4KG
DRILL TYPE:	SDS-MAX(18MM)



- HEX system,Quick pick chuck holding system
- PROFESSION HAMMER & BREAKER
- High quality, big power, optimized design
- Easy to operate, easy to replace parts,
- comfortable to use, good performance
- Chisel angle adjusted by variable lock in 12 step
- Auto-stop carbon brush for extended motor life



TU-7011 DEMOLITION HAMMER

RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	1800W
IMPACT RATING:	3000BMP
IMPACT ENERGY:	48J
NET WEIGHT:	10.4KG
DRILL TYPE:	HEX(21MM)



- PROFESSION HAMMER & BREAKER
- High quality, big power, optimized design
- Easy to operate, easy to replace parts,
- comfortable to use, good performance
- 2-Function:Chiseling,hammer function
- Professional road repairing/quarrying.Wall breaking and high
- Strength chisel breaking operation



TU-GH6096 DEMOLITION HAMMER

RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	1800W
IMPACT RATING:	3000BMP
IMPACT ENERGY:	39J
NET WEIGHT:	11KG
DRILL TYPE:	SDS-MAX(18MM)



- PROFESSION HAMMER & BREAKER
- High quality, big power, optimized design
- Easy to operate, easy to replace parts,
- comfortable to use, good performance
- 2-Function:Chiseling,hammer function
- Professional road repairing/quarrying.Wall breaking and high strength chisel breaking operation



TU-1205 DEMOLITION HAMMER

RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	1800W
IMPACT RATING:	3000BMP
IMPACT ENERGY:	39J
NET WEIGHT:	11KG
DRILL TYPE:	HEX(21MM)



- PROFESSION HAMMER & BREAKER
- High quality, big power, optimized design
- Easy to operate, easy to replace parts,
- comfortable to use, good performance
- 2-Function:Chiseling,hammer function
- Professional road repairing/quarrying.Wall breaking and high strength chisel breaking operation



TU-1202 DEMOLITION HAMMER

RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	1700W
IMPACT RATING:	2900BMP
IMPACT ENERGY:	36J
WEIGHT:	9KGS
DRILL TYPE:	HEX(21MM)



- HEX system,Quick pick chuck holding system
- PROFESSION HAMMER & BREAKER
- High quality, big power, optimized design
- Easy to operate, easy to replace parts,
- comfortable to use, good performance
- Chisel angle adjusted by variable lock in 12 step
- Auto-stop carbon brush for extended motor life



TU-1028D DEMOLITION HAMMER	
RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	1700W
IMPACT RATING:	2900BMP
IMPACT ENERGY:	36J
NET WEIGHT:	9KG
DRILL TYPE:	HEX(21MM)



- PROFESSION HAMMER & BREAKER
- High quality, big power, optimized design
- Easy to operate, easy to replace parts,
- comfortable to use, good performance
- 2-Function:Chiseling,hammer function
- Professional road repairing/quarrying.Wall breaking and high
- Strength chisel breaking operation



TU-508A DEMOLITION HAMMER	
RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	1500W
IMPACT RATING:	2600BMP
IMPACT ENERGY:	16J
WEIGHT:	6.2KGS
DRILL TYPE:	SDS-MAX (18MM)




- Unique double shock-absorbing handle for comfortable
- 2-Function:Chiseling,hammer function
- Professional road repairing/quarrying.Wall breaking and high
- strength chisel breaking operation
- The net-work structure design of dustproof can dust prevention effectively
- Optimized design of gear transmission ,strong road resistance and low noise
- Unique double shock-absorbing handle for comfortable



TU-0866 DEMOLITION HAMMER	
RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	1500W
IMPACT RATING:	2600BMP
IMPACT ENERGY:	16J
WEIGHT:	6.5KGS
DRILL TYPE:	SDS-MAX (18MM)



- PROFESSION HAMMER & BREAKER
- High quality, big power, optimized design
- Easy to operate, easy to replace parts,
- comfortable to use, good performance
- 2-Function:Chiseling,hammer function
- Professional road repairing/quarrying.Wall breaking and high
- Strength chisel breaking operation



TU-GH518 DEMOLITION HAMMER	
RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	1500W
IMPACT RATING:	2600BMP
IMPACT ENERGY:	16J
WEIGHT:	6KGS
DRILL TYPE:	HEX(17MM)



- Unique double shock-absorbing handle for comfortable
- 2-Function:Chiseling,hammer function
- Professional road repairing/quarrying.Wall breaking and high strength chisel breaking operation
- The net-work structure design of dustproof can dust prevention effectively
- Optimized design of gear transmission ,strong road resistance and low noise
- Unique double shock-absorbing handle for comfortable



TU-0867 DEMOLITION HAMMER

RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	1500W
IMPACT RATING:	2600BMP
IMPACT ENERGY:	16J
WEIGHT:	6.5KGS
DRILL TYPE:	HEX(17MM)



- Unique double shock-absorbing handle for comfortable
- 2-Function:Chiseling,hammer function
- Professional road repairing/quarrying.Wall breaking and high strength chisel breaking operation
- The net-work structure design of dustproof can dust prevention effectively
- Optimized design of gear transmission ,strong road resistance and low noise
- Unique double shock-absorbing handle for comfortable



TU-0386D DEMOLITION HAMMER

RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	1500W
IMPACT RATING:	2600BMP
IMPACT ENERGY:	16J
WEIGHT:	6.5KGS
DRILL TYPE:	HEX(17MM)



- Unique double shock-absorbing handle for comfortable
- 2-Function:Chiseling,hammer function
- Professional road repairing/quarrying.Wall breaking and high strength chisel breaking operation
- The net-work structure design of dustproof can dust prevention effectively
- Optimized design of gear transmission ,strong road resistance and low noise
- Unique double shock-absorbing handle for comfortable



TU-0386T DEMOLITION HAMMER

RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	1500W
IMPACT RATING:	2600BMP
IMPACT ENERGY:	16J
WEIGHT:	6.5KGS
DRILL TYPE:	HEX(17MM)



- PROFESSION HAMMER & BREAKER
- High quality, big power, optimized design
- Easy to operate, easy to replace parts, comfortable to use, good performance
- 2-Function:Chiseling,hammer function
- Professional road repairing/quarrying.Wall breaking and high strength chisel breaking operation



TU-1365A DEMOLITION HAMMER

RATED VOLTAGE:	220V-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	1500W
IMPACT RATING:	2600BMP
IMPACT ENERGY:	16J
NET WEIGHT:	6KG
DRILL TYPE:	HEX(17MM)



- Unique double shock-absorbing handle for comfortable
- 2-Function:Chiseling,hammer function
- Professional road repairing/quarrying.Wall breaking and high strength chisel breaking operation
- The net-work structure design of dustproof can dust prevention effectively
- Optimized design of gear transmission ,strong road resistance and low noise
- Unique double shock-absorbing handle for comfortable



TU -T0608 DEMOLITION HAMMER

RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	1500W
IMPACT RATING:	2500BMP
IMPACT ENERGY:	14J
WEIGHT:	6KGS
DRILL TYPE:	HEX(17MM)



- Unique double shock-absorbing handle for comfortable
- 2-Function:Chiseling,hammer function
- Professional road repairing/quarrying.Wall breaking and high strength chisel breaking operation
- The net-work structure design of dustproof can dust prevention effectively
- Optimized design of gear transmission ,strong road resistance and low noise
- Unique double shock-absorbing handle for comfortable



TU-0811 DEMOLITION HAMMER

RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	1400W
IMPACT RATING:	3000BMP
IMPACT ENERGY:	14J
WEIGHT:	5.8KGS
DRILL TYPE:	HEX(17MM)



ROTARY HAMMER 3 FUNCTIONS
WITH SPECIAL FAST CHUCK



TU-5126 ROTARY HAMMER

RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	900W
IMPACT RATING:	4900BMP
NO LOAD SPEED:	1500R/MIN
IMPACT ENERGY:	4J
DRILL TYPE:	SDS-PLUS (14MM)





- Efficient and precise cutting from multiple angles
- Smooth cut surface without burrs
- Copper motor with strong power
- Strong heat dissipation, long-lasting operation without burning the machine



LS-8355A CUT-OFF MACHINE

RATED VOLTAGE:	220V-240V	NO-LOAD SPEED:	1300R/MIN
RATED FREQUENCY:	50/60HZ	BOX SIZE:	60X36X42CM
RATED POWER:	4000W	QTY/CTN:	1 PC
BLADE SIZE:	355MM	G.W/N.W:	21.5/20KG

- Efficient and precise cutting from multiple angles
- Smooth cut surface without burrs
- Copper motor with strong power
- Strong heat dissipation, long-lasting operation without burning the machine



LS-8355B CUT-OFF MACHINE

RATED VOLTAGE:	220V-240V	NO-LOAD SPEED:	1300R/MIN
RATED FREQUENCY:	50/60HZ	BOX SIZE:	60X36X43CM
RATED POWER:	3500W	QTY/CTN:	1 PC
BLADE SIZE:	355MM	G.W/N.W:	20.5/19KG

- 30MM Hex shank
- Safety clutch device
- Two mode settings-rotary drilling&hammer
- 360-degree auxiliary handle for improved drilling control
- Chiselling angle adjustable by variable lock in 12-step
- Anti-Vibration system, Ergonomic handle with soft grip
- Adjustable speed function for different working requirements

GREASE MACHINE



TU-1056 DEMOLITION HAMMER

VOLTAGE:	220~240V 50/60HZ
POWER:	2200W
STROKES PER MINUTE:	1300BPM
IMPACT ENERGY:	66J
TOOL HOLDER:	GREASE
LUBRICATION:	HEX 30MM, TWO FUNCTION
CYLINDER:	Φ 60MM
WEIGHT:	29KG



- 30mm Hex Shank.two function
- Anti-Vibration system, ergonomic anti-vibration main handle
- Anti-vibration mechanism
- Metal housing and gear box for higher performance and reliability

GREASE MACHINE



TU-T358 DEMOLITION HAMMER

VOLTAGE:	220~240V 50/60HZ
POWER:	1700W
STROKES PER MINUTE:	1650BPM
IMPACT ENERGY:	55J
TOOL HOLDER:	HEX 30MM
LUBRICATION:	GREASE
CYLINDER:	Φ 58MM
WEIGHT:	18 KG



- 30mm Hex Shank.two function
- Anti-Vibration system, ergonomic anti-vibration main handle
- Anti-vibration mechanism
- Metal housing and gear box for higher performance and reliability

GREASE MACHINE



TU-306 JACK HAMMER

VOLTAGE	220~240V 50/60HZ
POWER	2200W
STROKES PER MINUTE	1300BPM
IMPACT ENERGY	75J
TOOL HOLDER	HEX 30MM, TWO FUNCTION
LUBRICATION:	GREASE
CYLINDER	Φ 65MM
WEIGHT	29KG



- SDS plus system
- Safety clutch device
- Function switch with four function:drilling,hammer drilling,chiselling adjustment
- 360-degree auxiliary handle for improved drilling control
- Chiselling angle adjustable by variable lock in 12-step
- Anti-Vibration system, ergonomic anti-vibration main handle
- Max concrete Φ 50MM



TU-1057 ROTARY HAMMER

VOLTAGE:	220~240V 50/60HZ
POWER:	1500W
IMPACT RATE:	4400/MIN
NO LOAD SPEED:	960R/MIN
IMPACT ENERGY:	7J
TOOL HOLDER:	SDS PLUS
CYLINDER:	Φ 25MM
WEIGHT:	5KG



- SDS Max system
- safety clutch device
- Two mode settings-rotary drilling&hammer
- 360-degree auxiliary handle for improved drilling control
- Chiselling angle adjustable by variable lock in 12-step
- Anti-Vibration system, Ergonomic handle with soft grip
- Adjustable speed function for different working requirements



TU-511SDS ROTARY HAMMER

VOLTAGE:	220~240V
RATED FREQUENCY:	50/60HZ
POWER:	1500W
IMPACT RATING:	3800BMP
IMPACT ENERGY:	9J
WEIGH:	7.00KG
DRILL TYPE:	SDS (18MM)



- SDS Max system
- Safety clutch device
- Two mode settings-rotary drilling&hammer
- 360-degree auxiliary handle for improved drilling control
- Chiselling angle adjustable by variable lock in 12-step
- Anti-Vibration system, Ergonomic handle with soft grip
- Adjustable speed function for different working requirements
- Max concrete Φ 50MM



TU-T342 ROTARY HAMMER

VOLTAGE :	220~240V/120V 50/60HZ
POWER:	1500W
STROKES PER MINUTE:	1200-3100BPM
NO LOAD SPEED:	120-320RPM
IMPACT ENERGY:	5~15J
TOOL HOLDER:	SDS MAX
CYLINDER:	Φ 37MM
WEIGHT:	9 KG



- SDS Plus system
- Safety clutch device
- Two mode settings-rotary drilling&hammer
- 360-degree auxiliary handle for improved drilling control
- Chiselling angle adjustable by variable lock in 12-step
- Anti-Vibration system, Ergonomic handle with soft grip
- Adjustable speed function for different working requirements



TU-T350 ROTARY HAMMER

VOLTAGE:	220~240V 50/60HZ
POWER:	1500W
IMPACT RATE:	4300R/MIN
NO LOAD SPEED:	485R/MIN
IMPACT ENERGY:	2-9J
TOOL HOLDER:	SDS (18MM)
CYLINDER:	Φ 30MM
WEIGHT:	7KG




- Soft start
- Lock-on Switch
- SDS Max 18mm
- Industrial Rubber Cased Handle for Better Grip
- Constant power function ensure more efficiency
- Metal housing and gear box for higher performance and reliability
- 360 horizontal and up to 180 vertical adjustable additional handle for flexible operation
- Anti-Vibration system, Ergonomic handle with soft grip



TU-348 ROTARY HAMMER


VOLTAGE:	220~240V/120V 50/60HZ
POWER:	1500W
STROKES PER MINUTE:	1200-3100BPM
NO LOAD SPEED:	120-320RPM
IMPACT ENERGY:	5~15J
TOOL HOLDER:	SDS MAX
CYLINDER:	Φ 37MM
MAX CONCRETE:	Φ 50MM
WEIGHT:	9KG



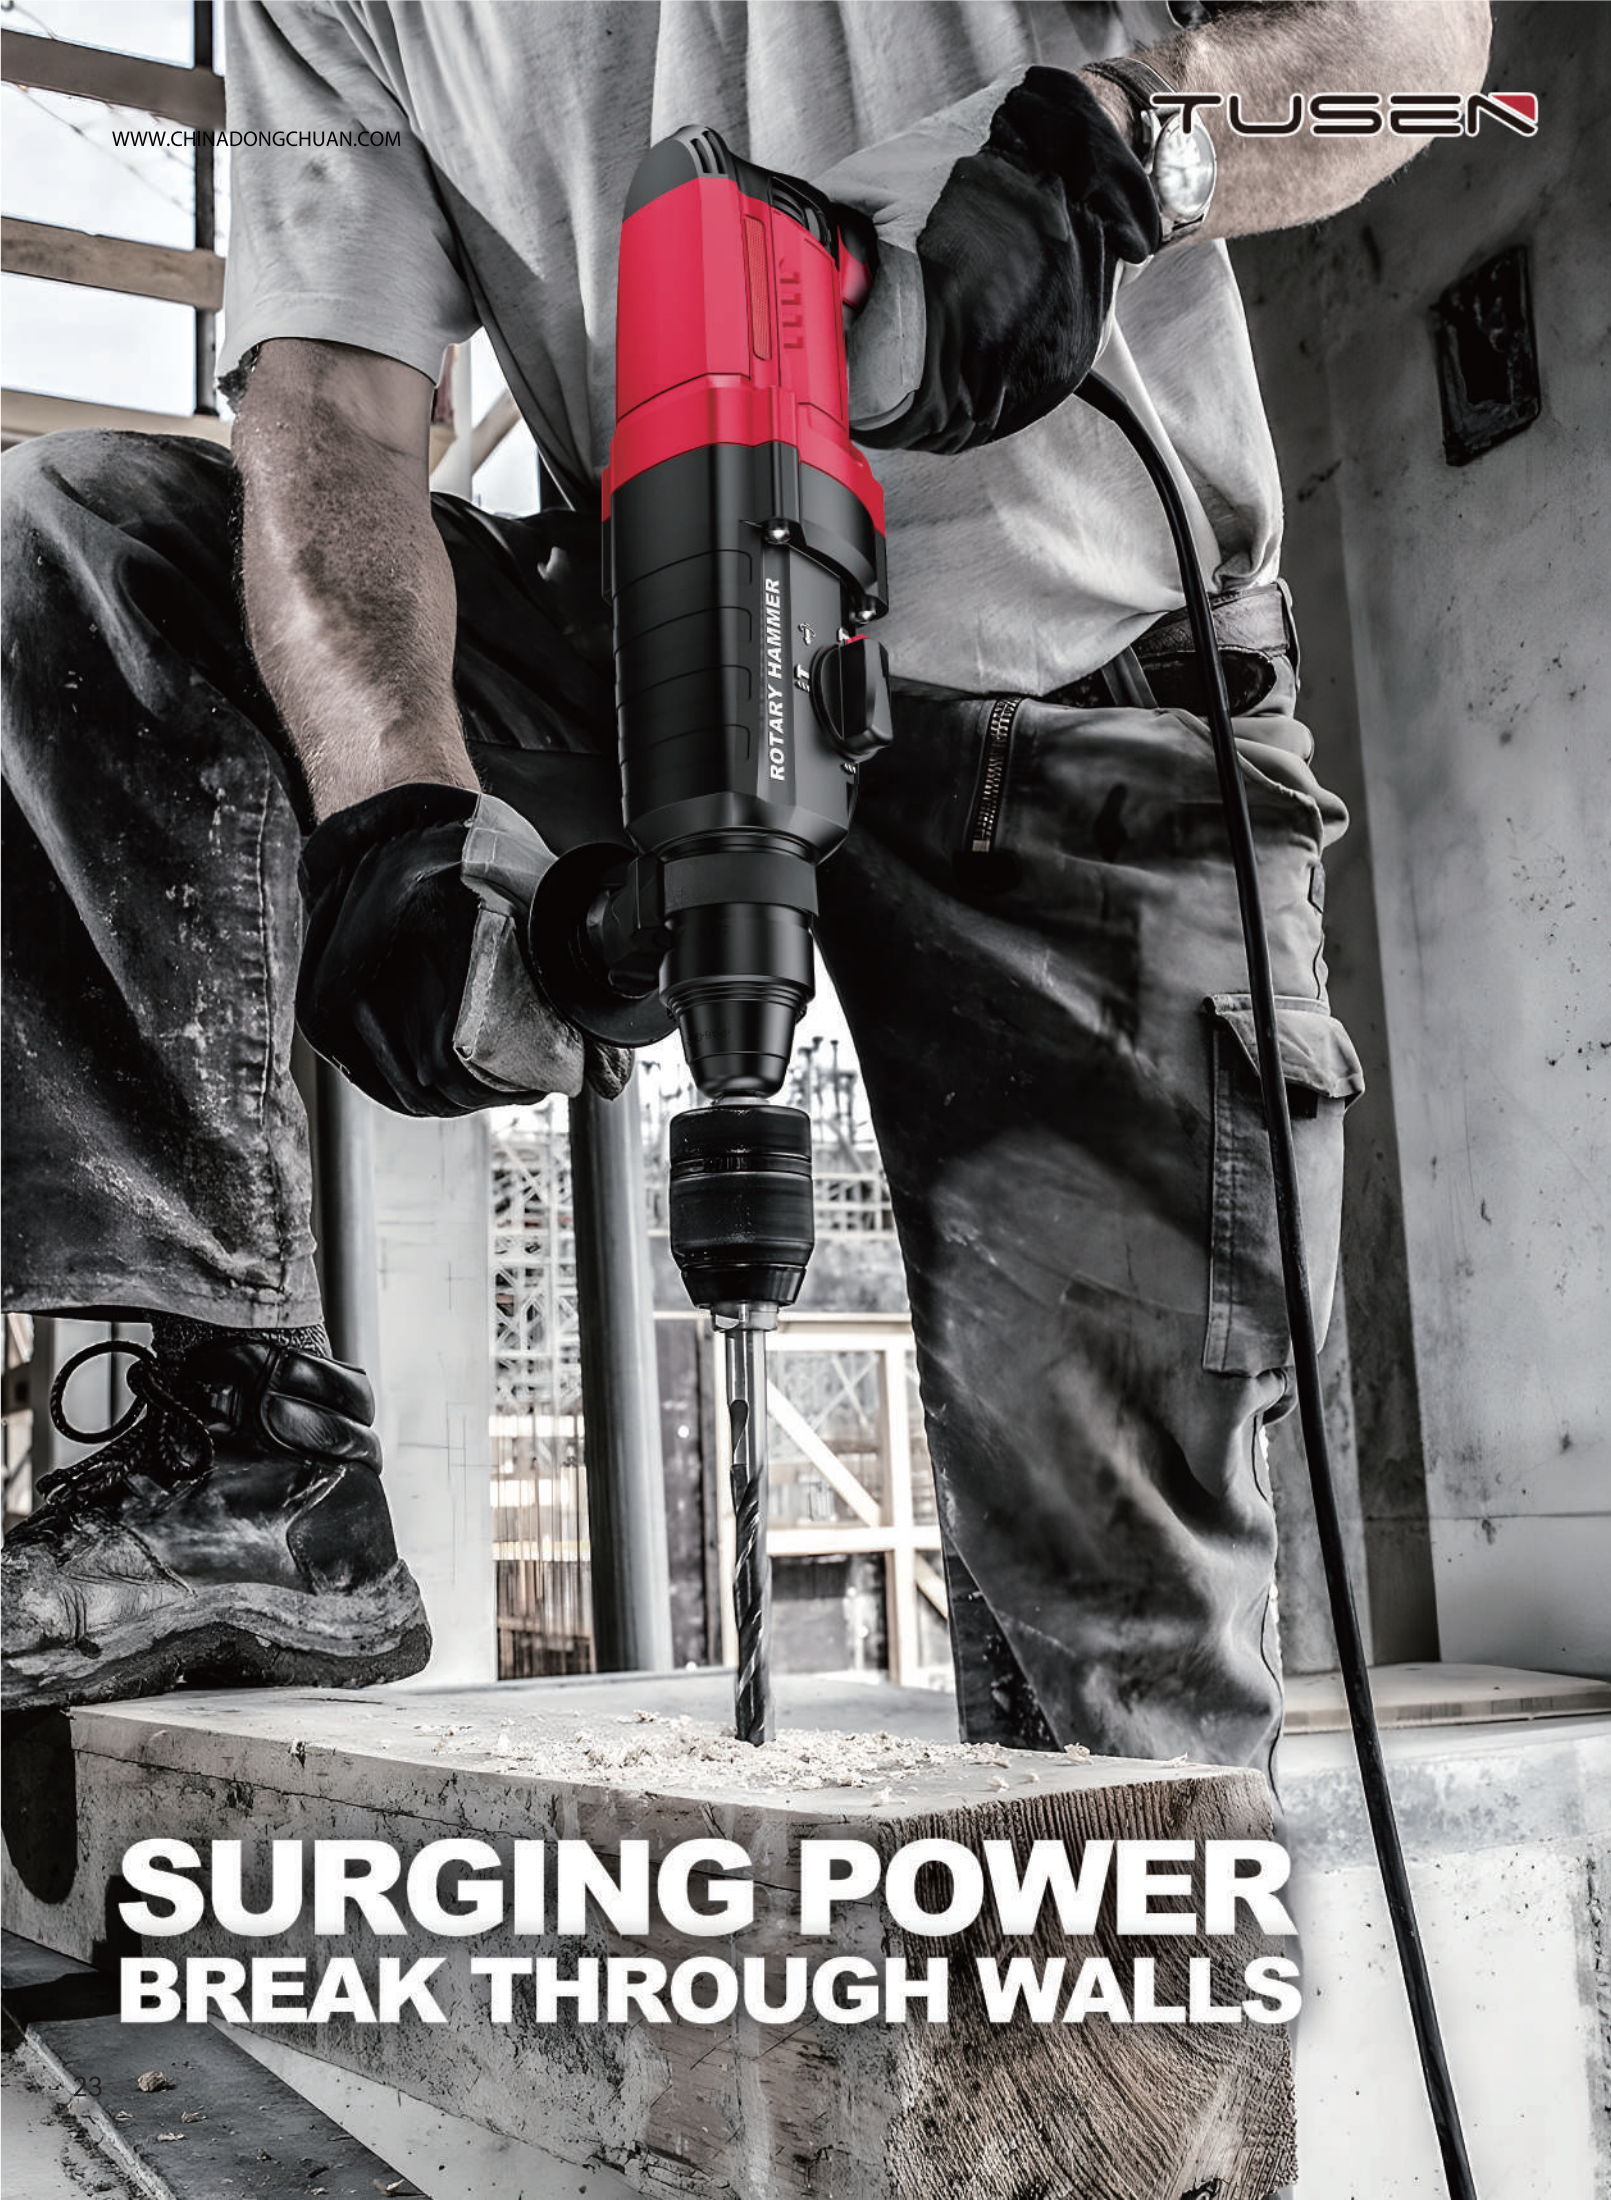

SURGING POWER BREAK THROUGH WALLS

- SDS plus system
- Safety clutch device
- Function switch with four function:drilling,hammer drilling,chiselling adjustment
- 360-degree auxiliary handle for improved drilling control
- Chiselling angle adjustable by variable lock in 12-step
- Anti-Vibration system, ergonomic anti-vibration main handle

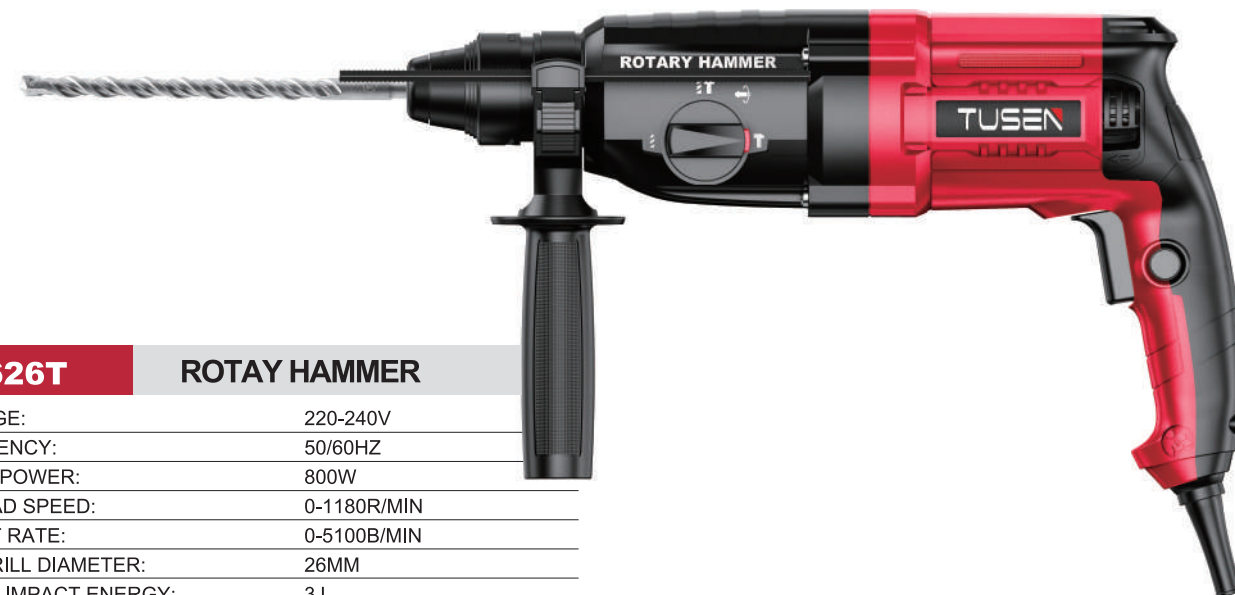**TU-626T****ROTAY HAMMER**

VOLTAGE:	220-240V
FREQUENCY:	50/60HZ
RATED POWER:	800W
NO-LOAD SPEED:	0-1180R/MIN
IMPACT RATE:	0-5100B/MIN
MAX DRILL DIAMETER:	26MM
SINGLE IMPACT ENERGY:	3J
PCS/CTN:	4PCS
G.W/N.W:	22/21KG
MEAS:	49X42.5X32CM



- SDS plus system
- Safety clutch device
- Function switch with four function:drilling,hammer drilling,chiselling adjustment
- 360-degree auxiliary handle for improved drilling control
- Chiselling angle adjustable by variable lock in 12-step
- Anti-Vibration system, ergonomic anti-vibration main handle

**TU-626A****ROTAY HAMMER**

VOLTAGE:	220-240V
FREQUENCY:	50/60HZ
RATED POWER:	800W
NO-LOAD SPEED:	0-1150R/MIN
IMPACT RATE:	0-5100B/MIN
MAX DRILL DIAMETER:	26MM
SINGLE IMPACT ENERGY:	3J
PCS/CTN:	4PCS
G.W/N.W:	21KG/20KG
MEAS:	49X43.5X30CM





- Hurricane-grade power, one blow and you're clean
- Lightweight design, no hand fatigue for long time use
- Powerful and not noisy, quiet and more comfortable
- The wind power is freely adjustable, blowing more flexible
- Meet different cleaning needs, weak wind does not raise dust, strong wind can clean up stubborn debris
- Resistant to falls and builds, not afraid of wind and rain



TU-336A ELECTRIC BLOWER

RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
WIND VOUME:	0-2.5M3/MIN
RATED INPUT POWER:	600W
NO LOAD SPEED:	0-18000R/MIN
PCS/CTN:	5PCS
G.W/N.W:	13/12KG
MEAS:	57.5X28.5X40CM



- Hurricane-grade power, one blow and you're clean
- Lightweight design, no hand fatigue for long time use
- Powerful and not noisy, quiet and more comfortable
- The wind power is freely adjustable, blowing more flexible
- Meet different cleaning needs, weak wind does not raise dust, strong wind can clean up stubborn debris
- Resistant to falls and builds, not afraid of wind and rain



TU-049A ELECTRIC BLOWER

RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
WIND VOUME:	0- 2.8M3/MIN
RATED INPUT POWER:	710W
NO LOAD SPEED:	0-24000R/MIN
PCS/CTN:	6PCS
G.W/N.W:	13/12KG
MEAS:	59X32X40CM





- High-performance motor equipped with a high-power copper-core motor
- Stable output optimised heat dissipation structure, no speed reduction for long time operation
- Ergonomic design non-slip handle + low vibration structure to reduce fatigue
- Multi-protection equipped with guards + safety locks
- Industrial-grade body high-strength engineering plastics + metal gear box
- Overload protection automatic power-off mechanism

**TU-1257D****POLISHER**

VOLTAGE:	220-240V
FREQUENCY:	50/60HZ
RATED POWER:	900W
NO-LOAD SPEED:	3000BMP
PRODUCT WIDTH:	5"
ORBIT DIAMETER:	15MM
THREAD SIZE:	M8
WEIGHT:	2.7KGS
QTY/CTN:	6PCS

- High-performance motor equipped with a high-power copper-core motor
- Stable output optimised heat dissipation structure, no speed reduction for long time operation
- Ergonomic design non-slip handle + low vibration structure to reduce fatigue
- Multi-protection equipped with guards + safety locks
- Industrial-grade body high-strength engineering plastics + metal gear box
- Overload protection automatic power-off mechanism

**TU-8180CX****ANGLE GRINDER**

RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	2000W
NO-LOAD SPEED:	8400RPM/650RPM
DIAMETER:	180MM(7")
DISC DIAMETER:	180/230MM
SPINDLE:	M14
WEIGHT:	4.1KGS
QTY/CTN:	3PCS

- High-performance motor equipped with a high-power copper-core motor
- Stable output optimised heat dissipation structure, no speed reduction for long time operation
- Ergonomic design non-slip handle + low vibration structure to reduce fatigue
- Multi-protection equipped with guards + safety locks
- Industrial-grade body high-strength engineering plastics + metal gear box
- Overload protection automatic power-off mechanism



TU-257D	ANGLE GRINDER
VOLTAGE:	220-240V
FREQUENCY:	50/60HZ
RATED POWER:	3000W
NO-LOAD SPEED:	8500R/MIN
MAX DISC DIAMETER:	235MM(9")
PCS/CTN:	2PCS
G.W/N.W:	15.5/14.5KG
MEAS:	56.5X33.5X18.5CM



- High-performance motor equipped with a high-power copper-core motor
- Stable output optimised heat dissipation structure, no speed reduction for long time operation
- Ergonomic design non-slip handle + low vibration structure to reduce fatigue
- Multi-protection equipped with guards + safety locks
- Industrial-grade body high-strength engineering plastics + metal gear box
- Overload protection automatic power-off mechanism



TU-335D	ANGLE GRINDER
RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	780W
NO-LOAD SPEED:	10500R/MIN
MAX DISC DIAMETER:	115MM(4.5")
PCS/CTN:	10PCS
G.W/N.W:	20.3/19.3KG
MEAS:	62.5X35X20CM



- High-performance motor equipped with a high-power copper-core motor
- Stable output optimised heat dissipation structure, no speed reduction for long time operation
- Ergonomic design non-slip handle + low vibration structure to reduce fatigue
- Multi-protection equipped with guards + safety locks
- Industrial-grade body high-strength engineering plastics + metal gear box
- Overload protection automatic power-off mechanism



TU-606D	ANGLE GRINDER
VOLTAGE:	220-240V
FREQUENCY:	50/60HZ
RATED POWER:	850W
NO-LOAD SPEED:	11000R/MIN
MAX DISC DIAMETER:	115MM(4.5")
PCS/CTN:	10PCS
G.W/N.W:	22/21KG
MEAS:	62.5X33.5X20CM



- High-performance motor equipped with a high-power copper-core motor
- Stable output optimised heat dissipation structure, no speed reduction for long time operation
- Ergonomic design non-slip handle + low vibration structure to reduce fatigue
- Multi-protection equipped with guards + safety locks
- Industrial-grade body high-strength engineering plastics + metal gear box
- Overload protection automatic power-off mechanism



TU-175D	ANGLE GRINDER
RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
RATED INPUT POWER:	780W
NO-LOAD SPEED:	10500R/MIN
MAX DISC DIAMETER:	115MM(4.5")
PCS/CTN:	10PCS
G.W/N.W:	20.3/19.3KG
MEAS:	62.5X35X20CM



- Easily handles hard materials such as concrete, brick walls, and metal with a 60% increase in efficiency
- Freely switch between normal drilling and impact drilling to meet the needs of wood, tile, rebar and other operations
- Low vibration and low noise, no fatigue for long time operation
- Overheating automatic power off, motor life longer
- Ergonomic and comfortable to hold
- Save time and efficiency with quick drill change



TU-027G	ELECTRIC DRILL
RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
MAX DRILL DIAMETER:	STEEL 13MM
	WOOD 35MM
RATED INPUT POWER:	810W
NO LOAD SPEED:	0-1400R/MIN
PCS/CTN:	10PCS
G.W/N.W:	21.76/20.76KG
MEAS:	40X29X55CM

- Easily handles hard materials such as concrete, brick walls, and metal with a 60% increase in efficiency
- Freely switch between normal drilling and impact drilling to meet the needs of wood, tile, rebar and other operations
- Low vibration and low noise, no fatigue for long time operation
- Overheating automatic power off, motor life longer
- Ergonomic and comfortable to hold
- Save time and efficiency with quick drill change



TU-302G	IMPACT DRILL
RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
MAX DRILL DIAMETER:	METAL 13MM
	WOOD 35MM
RATED INPUT POWER:	710W
NO LOAD SPEED:	0~2800R/MIN
PCS/CTN:	10PCS
G.W/N.W:	21/20KG
MEAS:	40X29X55CM

- Easily handles hard materials such as concrete, brick walls, and metal with a 60% increase in efficiency
- Freely switch between normal drilling and impact drilling to meet the needs of wood, tile, rebar and other operations
- Low vibration and low noise, no fatigue for long time operation
- Overheating automatic power off, motor life longer
- Ergonomic and comfortable to hold
- Save time and efficiency with quick drill change



TU-1045G	ELECTRIC DRILL
RATED VOLTAGE	220-240V
RATED FREQUENCY	50/60HZ
MAX DRILL DIAMETER	STEEL 10MM
	WOOD 25MM
RATED INPUT POWER	450W
NO LOAD SPEED	0~3300R/MIN
PCS/CTN:	10PCS
G.W/N.W:	16.78/15.78KG
MEAS:	37.5X26.5X50CM

- Easily handles hard materials such as concrete, brick walls, and metal with a 60% increase in efficiency
- Freely switch between normal drilling and impact drilling to meet the needs of wood, tile, rebar and other operations
- Low vibration and low noise, no fatigue for long time operation
- Overheating automatic power off, motor life longer
- Ergonomic and comfortable to hold
- Save time and efficiency with quick drill change



TU-6350G	IMPACT DRILL
RATED VOLTAGE:	220-240V
RATED FREQUENCY:	50/60HZ
MAX DRILL DIAMETER:	METAL 13MM
	WOOD 35MM
RATED INPUT POWER:	810W
NO LOAD SPEED:	0~2800R/MIN
PCS/CTN:	10PCS
G.W/N.W:	21/20KG
MEAS:	40X29X55CM



- SDS plus system
- Function switch with four function:Hammer and Rotate; Hammer Only; Rotate Only,chiselling adjustment
- 360-degree auxiliary handle for improved drilling control
- Chiselling angle adjustable by variable lock in 12-step
- Anti-Vibration system, ergonomic anti-vibration main handle
- Variable speed trigger for accurate hole starting
- LED job light with after-glow feature illuminates work area
- Ergonomic soft rubber grip design for vibration absorption and comfortable operation
- One-touch sliding SDS-PLUS chuck for easy bit installation and removal



TU-GE6117 CORDLESS ROTARY HAMMER

VOLTAGE:	18V DC
IMPACT RATE:	0-4700/MIN
NO LOAD SPEED:	0-1350R/MIN
IMPACT ENERGY:	2J
TOOL HOLDER:	SDS PLUS
LUBRICATION:	GREASE
CYLINDER:	Φ19 MM
WEIGHT:	2KG
DRILLING CAPACITY IN CONCRETE:	22MM
DRILLING CAPACITY IN STEEL:	13MM
DRILLING CAPACITY IN WOOD:	28MM
MOTOR TYPE:	BRUSHLESS
MOTOR SIZE:	48X20
POWER SOURCE:	CORDLESS
REVERSIBLE:	YES



- SDS plus system
- Function switch with four function:Hammer and Rotate; Hammer Only; Rotate Only,chiselling adjustment
- 360-degree auxiliary handle for improved drilling control
- Chiselling angle adjustable by variable lock in 12-step
- Anti-Vibration system, ergonomic anti-vibration main handle
- Variable speed trigger for accurate hole starting
- LED job light with after-glow feature illuminates work area
- Ergonomic soft rubber grip design for vibration absorption and comfortable operation
- One-touch sliding SDS-PLUS chuck for easy bit installation and removal



TU-GE6119 CORDLESS ROTARY HAMMER

VOLTAGE:	18V DC
IMPACT RATE:	0-4700/MIN
NO LOAD SPEED:	0-1350R/MIN
IMPACT ENERGY:	2J
TOOL HOLDER:	SDS PLUS
LUBRICATION:	GREASE
CYLINDER:	Φ19 MM
WEIGHT:	2KG
DRILLING CAPACITY IN CONCRETE:	22MM
DRILLING CAPACITY IN STEEL:	13MM
DRILLING CAPACITY IN WOOD:	28MM
MOTOR TYPE:	BRUSHLESS
MOTOR SIZE:	48X30
POWER SOURCE:	CORDLESS
REVERSIBLE:	YES



- SDS plus system
- Two function:Hammer and Rotate; Rotate Only
- 360-degree auxiliary handle for improved drilling control
- Anti-Vibration system, ergonomic anti-vibration main handle
- Variable speed trigger for accurate hole starting
- LED job light with after-glow feature illuminates work area
- Ergonomic soft rubber grip design for vibration absorption and comfortable operation
- One-touch sliding SDS-PLUS chuck for easy bit installation and removal



TU-GE6115 CORDLESS ROTARY HAMMER

VOLTAGE:	18V DC
IMPACT RATE:	0-4500/MIN
NO LOAD SPEED:	0-810R/MIN
IMPACT ENERGY:	1.5J
TOOL HOLDER:	SDS PLUS
LUBRICATION:	GREASE
CYLINDER:	Φ 19MM
WEIGHT:	1.5KG
DRILLING CAPACITY IN CONCRETE:	13MM
DRILLING CAPACITY IN STEEL:	8MM
DRILLING CAPACITY IN WOOD:	18MM
MOTOR TYPE:	BRUSHLESS
MOTOR SIZE:	48X15
POWER SOURCE:	CORDLESS
REVERSIBLE:	YES



- SDS plus system
- Function switch with four function:Hammer and Rotate; Hammer Only; Rotate Only,chiselling adjustment
- 360-degree auxiliary handle for improved drilling control
- Chiselling angle adjustable by variable lock in 12-step
- Anti-Vibration system, ergonomic anti-vibration main handle
- Variable speed with reverse function trigger switch for increased control when drilling
- LED job light with after-glow feature illuminates work area
- Ergonomic soft rubber grip design for vibration absorption and comfortable operation
- One-touch sliding SDS-PLUS chuck for easy bit installation and removal

TU-GE6359 CORDLESS ROTARY HAMMER

VOLTAGE:	18V DC
IMPACT RATE:	0-4800/MIN
NO LOAD SPEED:	0-1080R/MIN
IMPACT ENERGY:	3.5J
TOOL HOLDER:	SDS PLUS
LUBRICATION:	GREASE
CYLINDER:	Φ22 MM
WEIGHT:	2.6KG
DRILLING CAPACITY IN CONCRETE:	28MM
DRILLING CAPACITY IN STEEL :	13MM
DRILLING CAPACITY IN WOOD :	30MM
MOTOR TYPE:	BRUSHLESS
MOTOR SIZE:	48X25
POWER SOURCE:	CORDLESS
REVERSIBLE:	YES



- SDS plus system
- Kick back electronic
- Mechanical safety clutch device
- Function switch with four function:Hammer and Rotate; Hammer Only; Rotate Only,chiselling adjustment
- 360-degree auxiliary handle for improved drilling control
- Chiselling angle adjustable by variable lock in 12-step
- Constant speed function ensure more efficiency
- Anti-Vibration system, ergonomic anti-vibration main handle
- Variable speed with reverse function trigger switch for increased control when drilling
- LED job light with after-glow feature illuminates work area
- Ergonomic soft rubber grip design for vibration absorption and comfortable operation
- One-touch sliding SDS-PLUS chuck for easy bit installation and removal
- Auto-stop function: record and store drilling time to easily and consistently drill multiple holes with the same depth
- Mode select:s:rate speed at 70% or full speed

TU-GE6519 CORDLESS ROTARY HAMMER

VOLTAGE:	18V DC
IMPACT RATE:	0-5500/MIN
NO LOAD SPEED:	0-1200R/MIN
IMPACT ENERGY:	5J
TOOL HOLDER:	SDS PLUS
LUBRICATION:	GREASE
CYLINDER:	Φ 25MM
WEIGHT:	3.5KG
DRILLING CAPACITY IN CONCRETE:	28MM
DRILLING CAPACITY IN STEEL :	13MM
DRILLING CAPACITY IN WOOD :	40MM
MOTOR TYPE:	BRUSHLESS
POWER SOURCE:	CORDLESS
REVERSIBLE:	YES



- SDS MAX system
- Soft start
- Kick back electronic
- Constant power function ensure more efficiency
- Function switch with two function:Hammer and Rotate; Rotate Only
- 360-degree auxiliary handle for improved drilling control
- Chiselling angle adjustable by variable lock in 12-step
- Anti-Vibration system, ergonomic anti-vibration main handle
- Electronic speed control switch for accurate hole starting
- Ergonomic soft rubber grip design for vibration absorption and comfortable operation
- Auto-stop function: record and store drilling time to easily and consistently drill multiple holes with the same depth
- Mode select:s:rate speed at 70% or full speed

TU-GE7157 CORDLESS ROTARY HAMMER

VOLTAGE:	20V DC
IMPACT RATE:	1400-2800/MIN
NO LOAD SPEED:	250-500R/MIN
IMPACT ENERGY:	9J
CYLINDER:	Φ 40MM
TOOL HOLDER:	SDS MAX
LUBRICATION:	GREASE
WEIGHT:	6.8KG
DRILLING CAPACITY IN CONCRETE:	40MM
DRILLING CAPACITY IN STEEL :	28MM
DRILLING CAPACITY IN WOOD :	18MM
MOTOR TYPE:	BRUSHLESS
POWER SOURCE:	CORDLESS



- Soft start
- SDS MAX System
- Mechanical safety clutch device
- Two mode settings-rotary drilling&hammer
- Hall switch,lock on function for hammering
- Industrial Rubber Cased Handle for Better Grip
- Chiselling angle adjustable by variable lock in 12-step
- Constant power function ensure more efficiency
- Electronic speed control switch for for different working requirements
- Metal housing and gear box for higher performance and reliability
- 360 horizontal adjustable additional handle for flexible operation
- Anti-Vibration system, Ergonomic handle with soft grip

TU-T3507 TWO FUNCTION ROTARY HAMMER

VOLTAGE:	220~240V/120V 50/60HZ
POWER:	1200W
STROKES PER MINUTE:	1420-2840BPM
NO LOAD SPEED:	2250-450RPM
IMPACT ENERGY:	9J
TOOL HOLDER:	SDS MAX
LUBRICATION:	GREASE
CYLINDER:	Φ 30MM
ROTOR:	41.2*45MM
STATOR:	72*45MM
WEIGHT:	7.7KG,
	3M VDE CABLE 1.0MM2
MAX CONCRETE:	Φ 40MM
OIL POT*1, 1*WRENCH,1SETS*CARBON BRUSHES,SDS MAX 18*350MM; 25*350 1PC POINT;	

