

COMMERCIAL KITCHEN APPLIANCES

NATIONAL FREE SERVICE HOTLINE

400-006-0543

**SHANDONG EDDYSEN
COMMERCIAL CATERING EQUIPMENT CO.,LTD.**

Add: The East Industry Park, Xingfu Town, Boxing Country, Shandong Province, China

Tel: +86 543-2583777 2582777 8566777 8566888 2880348

Fax: +86 543-2880187

<http://www.eddysen.com/> E-mail: benny@eddysen.com

EDDYSEN
COMMERCIAL CATERING EQUIPMENT

COMPANY PROFILE

Shandong Eddysen Commercial Catering Equipment Co., Ltd., is the premier manufacturer and supplier of the commercial kitchen equipment, established in April, 2006, is located in China "Commercial Kitchen Capital", Xingfutown, Shandong province. It only takes 2 hour's drive from Qingdao airport or Qingdao sea-port to our Factory. As a leading manufacturer, we constantly focus and invest heavily in research & industrial design, by applying the advanced intelligent equipment like AccurPress from Canada, MADA from Japan, Salvagnini from Italy, and Taiwan. Laifu CNC turret punching and bending, which make sure the stable and reliable production quality control and process technics. Our full-range & high-quality products cover kitchen refrigeration, chest freezer, beverage cooler, display cooker, food steamer cabinet, commercial disinfection cabinet, banquet warming cart etc. Our factory has passed ISO 9001-2008 International Quality Management System Certification, ISO 14001 Environmental Management System Certification and GB/T18001 Occupational Health and Safety Management Certification.

With nearly 20 years' experience of manufacturing commercial kitchen equipment, and over 10 years OEM/ODM/PRIVATE LABEL experiences for oversea markets. With 80,000m² Factory Area, 200,000 units/year production capacity, reliable quality and fast delivery. Eddysen is currently a family-owned group companies, with headquarter and production base in Shandong, subsidiaries including Hangzhou Eddysen Commercial Catering Equipment Corp, and Shandong Aibai Electric Appliance Co., Ltd. and etc. Eddysen is dedicated to supporting our esteemed customers with qualified products and services as well as the competitive cost. We are your first-choice supplier that are more committed to quality, stability, and loyalty!



2023 Global strategy, focus on the future

The wholly-owned subsidiary -Hangzhou Eddysen Commercial Catering Equipment Co., Ltd established. A brand-new operational headquarters emerged. Leveraging the natural cross-border e-commerce environment of Hangzhou, Eddysen aim globally, entering a new era of expansion.



2022 The wholly-owned subsidiary -Hangzhou Eddysen Commercial Catering Equipment Co., Ltd established.

The market demand is constantly increasing, factory has a tight production schedule, and higher production pressure, however, there is a shortage of labor. To solve this problem, the company introduced the ABB intelligent industrial robot lines.



2021 The wholly-owned subsidiary -Shandong Aiber Import & Export Co., Ltd. Established

The wholly-owned subsidiary -Shandong Aiber Import & Export Co., Ltd. Established, better serve the global markets.

2019 The 3rd expansion of factory area, new modern plant is put into use

Built the brand new modern plant that integrates large-sale production and warehousing.



2016 Introduced Salvagnini, invested heavily on R&D

Keep investing heavily on R&D, and introduced intelligent equipment like AccurPress from Canada, MADA from Japan, Salvagnini from Italy.



2014 Advanced production facility introduced

The market demand is constantly increasing, factory has a tight production schedule, and higher production pressure, however, there is a shortage of labor. To solve this problem, the company introduced the ABB intelligent industrial robot lines.



2013 The 2nd expansion of factory area

Stable higher quality and competitive prices have allowed us to continuously expand our market share, resulting in product demand exceeding supply. The company has decided to expand our factory for the second time.



2009 The 1st expansion of factory area

The company's products are in short supply due to good product quality and commercial reputation. The company decided to expand factory. This is the first factory expansion and has laid a solid foundation for the development of future enterprises.



2006 Eddysen Established

The first generation of YIDEXIN Manufacturing Base established.



COMPETITIVE STRENGTH

Honorary Qualifications





Salvagnini flexible bending center



Fully automatic laser cutting machine



Automatic welding robot



Fully automatic CNC punching machine

1 Steamed Cabinet Series

- 04 EBI-DRS Benley Economic Steamer Cabinet
- 05 EBA-DRS Benley Automatic Steamer Cabinet
- 06 EBI-DRS Benley Intelligent Steamer Cabinet
- 07 EB-CNGS Benley Gas Steamer Cabinet
- 08 EFP-DRS Deluxe Fingerprint Resistant Steamer Cabinet
- 09 EAB-DRS Engineering Automatic Steamer Cabinet
- 10 EDI-DRS Deluxe Intelligent Steamer Cabinet
- 11 EML-DRS Electric Multi-layer Steamer Cabinet
- 12 EFP-CNGS Fingerprint Resistant Gas Steamer Cabinet
- 13 EML-CNGS layer Gas Steamer Cabinet (CNG)
- 14 E-DMS MINI Steamer Cabinet
- 15 EGA-DRS Visual glass door intelligent steaming car
- 16 E-DSR Trolley-type Large Steam Room
- 17 DSR Trolley-type Large Steam Room

2 Sterilizer Cabinet Series

- 18 XRTPA Flat-Door A Sterilizer Cabinet
- 19 XRTPB Flat-Door B (Glass Door)
- 20 XRTPC Flat-Door C (All use 304)
- 21 XRTP-720 Three temperature disinfection cabinet
- 22 XRTPFA Fingerprint Resistant-A
- 23 XRTPFB Fingerprint Resistant-B
- 24 XRTPFC Fingerprint Resistant-C
- 25 XRTPFD Fingerprint Resistant-D
- 26 XRTPFE Fingerprint Resistant-E
- 27 XRTPMA MELAMINE -A
- 28 XRTPMB MELAMINE -B
- 29 XZTP-MB MELAMINE -C (With ozone)
- 30 XRTPEA Engineering -A
- 31 XRTPEB Engineering -B
- 32 XRTPEC Engineering -C
- 33 XRTP 720CA Cart type disinfection cabinet
- 34 XRTP-VK Knife and vegetable holder disinfection cabinet
- 35 XRTPW Workbench disinfection Cabinet

3 Banquet Cart Series

- 36 E450/E900BCM Upright Foaming Mechanical Style Banquet Cart
- 37 E450/E900BC Upright Foaming Intelligent Style Banquet Cart
- 38 E600 4D Glass Visual Style Banquet Cart
- 39 E528-BCG Double Glass Doors (Up&Bottom) Banquet Cart
- 40 E450/E900-BCG Glass Banquet Cart
- 41 E450/E900-BCGT Glass Banquet Trolley
- 42 E900-BCM02/12 Mini Banquet Cart
- 43 E250-BCW02/11 Electric Banquet Cart-C
- 44 E300-BCW01/11 Horizontal Banquet Cart-A
- 45 E234-BCW02/11 Horizontal Banquet Cart-B

4 Refrigerator Series

- 46 ECUR E Serie Workbench Refrigerator (Air Cooling)
- 47 EDUR E Serie Workbench Refrigerator (Direct Cooling)
- 48 QDUR Q Serie Workbench Refrigerator (Direct Cooling)
- 49 XSDUR S Serie Workbench Refrigerator (Direct Cooling)
- 50 ECUF E Serie Workbench Freezer (Air Cooling)
- 51 EDUF E Serie Workbench Freezer (Direct Cooling)
- 52 QDUF Q Serie Workbench Freezer (Direct cooling)
- 53 XSDUF S Serie Workbench Freezer (Direct cooling)
- 54 ECUR EDTR FAN COOLING E SERIE SALAD TABLE FRIDGE
- 55 XSDUF S SERIE STATIC COOLING SALAD TABLE FRIDGE
- 56 EDTR E Serie Display Fridge (Direct Cooling)
- 57 ECTRE Serie Display Fridge (Air Cooling)
- 58 QDTR Q Serie Display Fridge (Direct Cooling)
- 59 XSDTR S Serie Display Fridge (Direct Cooling)
- 60 EDTR E Serie Upright Refrigerator (Direct Cooling)
- 61 ECTR E Serie Upright Refrigerator Air Cooling
- 62 QDTR Q Serie Upright Refrigerator Direct Cooling
- 63 XSDTR S Serie Upright Refrigerator Direct Cooling
- 64 EDTF E Serie Upright Freezer (Direct Cooling)
- 65 ECTF E Serie Upright Fridge Freezer Air-cooling
- 66 QDTRF Q Serie Upright Freezer Direct Cooling
- 67 XSDTRF S Serie Upright Freezer Direct Cooling
- 68 ECTRF E Serie Upright Fridge Dual Temp. Air Cooling
- 69 EDTRF E Serie Upright Fridge Dual Temp. Direct Cooling
- 70 QDTRF Q Serie Upright Fridge Dual Temp. (Direct Cooling)
- 71 XSDTRF S Serie Upright Fridge Dual Temp. (Direct Cooling)
- 72 EDUF E Serie Combi-refrigeration Fridge (Static Cooling)
- 73 BEC BLASTER CHILLER

●EBJ-DRS Benley Economic Steamer Cabinet

The Steamer Cabinet adopts the popular design concept of kitchen utensils to make the machine easy and fast to operate. The machine is made of high quality plates, which has a smooth& beautiful appearance, sanitation, cleanliness, energy saving and safety.

Key Features

1. Overall foaming, thickness of insulation layer is 3cm, excellent thermal insulation effect.
2. AUTOFILL function, anti-dry-burning
3. SUS304 electric heating pipe, pure copper vapor cap
4. New multiple airbags, embedded silicone door seal, securely sealed
5. Six bolt large hinge, more sturdy and durable
6. There are supporting ribs on both sides of the cabinet, which are durable and do not deform.
7. Highly Efficient and energy-saving, easy to operate

Applications

It can be used for steaming rice, dim sum, sea food, steamed bread, corn, potatoes, fish and other foods, and can also be used as high-temperature steam sterilization for meals and tea sets.

It is widely used in mining areas, factories, schools/Universities, institutions, troops, hotels, restaurants, hotels, individuals and etc. It is an ideal and convenient multi-functional kitchen equipment.



Benley Economic Steamer Cabinet			Technical Parameter								
Model	Trays	Cabinet Size(mm)	Rated Power	Rated Voltage	Capacity	Water Input Pressure	Circuit Breaker	Steam Inlet	Tray Size(mm)	Vapor Pressure	Net Weight
EBJ-DRS-4	4	695*615*815	9kW	3~380v or 2~220v	4KG/Tray	≤4kPa	Y-shaped connection method	DN 20mm	400*600*50	≤0.02mPa	27kg
EBJ-DRS-6	6	695*615*985									30kg
EBJ-DRS-8	8	695*615*1155									34kg
EBJ-DRS-10	10	695*615*1325									39kg
EBJ-DRS-12	12	695*615*1495	12kW	46kg							
EBJ-DRS-12V (Vertical type)	12	495*815*1495	12kW	44kg							
EBJ-DRS-20	20	1390*615*1355	12kW*2	57kg							
EBJ-DRS-24	24	1390*615*1525	12kW*2	78kg							
EBJ-DRS-24V (Vertical type)	24	1000*815*1525	12kW*2	84kg							
EBJ-DRS-30V (Vertical type)	30	1000*815*1800	15kW*2	120kg							
EBJ-DRS-36V (Vertical type)	36	1580*815*1525	12kW*3	145kg							
EBJ-DRS-45V (Vertical type)	45	1580*815*1800	15kW*3	164kg							
EBJ-DRS-48	48	1420*1025*1590	12kW*4	187kg							

●EBA-DRS Benley Automatic Steamer Cabinet

The Steamer Cabinet adopts the popular design concept of kitchen utensils to make the machine easy and fast to operate. The machine is made of high-quality plates, which has a smooth& beautiful appearance, sanitation, cleanliness, energy saving and safety.

Key Features

1. Overall foaming, thickness of insulation layer is 3cm, excellent thermal insulation effect.
2. AUTOFILL function, equipped with water-shortage then power-off protection function., anti-dry-burning, and is safer and more reliable to use.
3. SUS304 electric heating pipe, pure copper vapor cap
4. New multiple airbags, embedded silicone door seal, securely sealed
5. Six bolt large hinge, more sturdy and durable
6. There are supporting ribs on both sides of the cabinet, which are durable and do not deform.
7. The rotating bidirectional timer & temperature controller function allows for free adjustment of temperature and time, making it more practical and worry free.
8. You can easily switch between Manual Mode and Automatic Mode freely, and there is always one that you like.
9. Highly Efficient and energy-saving, easy to operate

Applications

It can be used for steaming rice, dim sum, sea food, steamed bread, corn, potatoes, fish and other foods, and can also be used as high-temperature steam sterilization for meals and tea sets.

It is widely used in mining areas, factories, schools / Universities, institutions, troops, hotels, restaurants, hotels, individuals and etc. It is an ideal and convenient multi-functional kitchen equipment.



Benley Automatic Steamer Cabinet			Technical Parameter								
Model	Trays	Cabinet Size(mm)	Rated Power	Rated Voltage	Capacity	Water Input Pressure	Circuit Breaker	Steam Inlet	Tray Size(mm)	Vapor Pressure	Net Weight
EBA-DRS-6	6	695*615*1185	9kW	3~380v or 2~220v	4KG/Tray	≤4kPa	Y-shaped connection method	DN 20mm	400*600*50	≤0.02mPa	36kg
EBA-DRS-8	8	695*615*1355									43kg
EBA-DRS-10	10	695*615*1525									47kg
EBA-DRS-12	12	695*615*1695	12kW	52kg							
EBA-DRS-12V (Vertical type)	12	495*815*1695	12kW	52kg							
EBA-DRS-24	24	1390*615*1695	12kW*2	96kg							
EBA-DRS-24V (Vertical type)	24	990*815*1695	12kW*2	84kg							

●EBI-DRS

Benley Intelligent Steamer Cabinet

The Steamer Cabinet adopts the popular design concept of kitchen utensils to make the machine easy and fast to operate. The machine is made of high-quality plates, which has a smooth & beautiful appearance, sanitation, cleanliness, energy saving and safety.

Key Features

1. Overall foaming, thickness of insulation layer is 3cm, excellent thermal insulation effect.
2. AUTOFILL function, equipped with water-shortage then power-off protection function, anti-dry-burning, and is safer and more reliable to use.
3. SUS304 electric heating pipe, pure copper vapor cap
4. New multiple airbags, embedded silicone door seal, securely sealed
5. Six bolt large hinge, more sturdy and durable
6. There are supporting ribs on both sides of the cabinet, which are durable and do not deform.
7. Intelligent control touch screen, timer & temperature controller function allows for free adjustment of temperature and time, making it more practical and worry free.
8. Highly Efficient and energy-saving, easy to operate

Applications

It can be used for steaming rice, dim sum, sea food, steamed bread, corn, potatoes, fish and other foods, and can also be used as high-temperature steam sterilization for meals and tea sets. It is widely used in mining areas, factories, schools/Universities, institutions, troops, hotels, restaurants, hotels, individuals and etc. It is an ideal and convenient multi-functional kitchen equipment.



●EB-CNGS

Benley Gas Steamer Cabinet (CNG)

The Steamer Cabinet adopts the popular design concept of kitchen utensils to make the machine easy and fast to operate. The machine is made of high-quality plates, which has a smooth & beautiful appearance, sanitation, cleanliness, energy saving and safety.

Key Features

1. Overall foaming, thickness of insulation layer is 3cm, excellent thermal insulation effect.
2. AUTOFILL function, anti-dry-burning
3. New multiple airbags, embedded silicone door seal, securely sealed
4. Six bolt large hinge, more sturdy and durable
5. There are supporting ribs on both sides of the cabinet, which are durable and do not deform.
6. Rotary electronic ignition system, pull-out ignition device.
7. Equipped with a flameout then gas cut-off protection device for safer operation.
8. The water tank adopts a detachable and replaceable design for easy maintenance.
9. Brake silent wheels, pure copper vapor cap
10. Highly Efficient and energy-saving, easy to operate.

Applications

It can be used for steaming rice, dim sum, sea food, steamed bread, corn, potatoes, fish and other foods, and can also be used as high-temperature steam sterilization for meals and tea sets. It is widely used in mining areas, factories, schools/Universities, institutions, troops, hotels, restaurants, hotels, individuals and etc. It is an ideal and convenient multi-functional kitchen equipment.



Benley Intelligent Steamer Cabinet											Technical Parameter	
Model	Trays	Cabinet Size(mm)	Rated Power	Rated Voltage	Capacity	Water Input Pressure	Circuit Breaker	Steam Inlet	Tray Size(mm)	Vapor Pressure	Net Weight	
EBI-DRS-6	6	695*615*1185	9kW	3~380v or 2~220v	4KG/Tray	≤4kPa	Y-shaped connection method	DN 20mm	400*600*50	≤0.02mPa	36kg	
EBI-DRS-8	8	695*615*1355									43kg	
EBI-DRS-10	10	695*615*1525									47kg	
EBI-DRS-12	12	695*615*1695	12kW	3~380v	4KG/Tray	≤4kPa	Y-shaped connection method	DN 20mm	400*600*50	≤0.02mPa	52kg	
EBI-DRS-12V (Vertical type)	12	495*815*1695									52kg	
EBI-DRS-24	24	1390*615*1695									96kg	
EBI-DRS-24V (Vertical type)	24	990*815*1695									84kg	

Benley Gas Steamer Cabinet (CNG)											Technical Parameter	
Model	Trays	Cabinet Size(mm)	Number of air inlets	Gas Consumption	Fire bar nozzle caliber (mm)	Capacity	Water Input Pressure	Gas Input Pressure	Tray Size (mm)	Gas Type	Net Weight	
EB-CNGS-6	6	695*660*1245	1	1.1m ³ /hour	1.03	4KG/Tray	≤4kPa	Natural gas input pressure 2000Pa	400*600*50	Liquid gas/ Natural Gas	36kg	
EB-CNGS-8	8	695*660*1415	1	1.1m ³ /hour	1.03						43kg	
EB-CNGS-10	10	695*660*1585	1	1.1m ³ /hour	1.03						47kg	
EB-CNGS-12	12	695*660*1755	1	1.1m ³ /hour	1.03						52kg	
EB-CNGS-24	12	1400*660*1755	2	2.2m ³ /hour	1.03	4KG/Tray	≤4kPa	Natural gas input pressure 2000Pa	400*600*50	Liquid gas/ Natural Gas	96kg	
EB-CNGS-24V (Vertical type)	24	1000*860*1755	2	2.2m ³ /hour	0.95						84kg	
EB-CNGS-36V (Vertical type)	24	1580*860*1755	3	3.3m ³ /hour	0.95						145kg	

● EFP-DRS Deluxe Fingerprint Resistant Steamer Cabinet

The Steamer Cabinet adopts the popular design concept of kitchen utensils to make the machine easy and fast to operate. The machine is made of high-quality plates, which has a smooth& beautiful appearance, sanitation, cleanliness, energy saving and safety.

Key Features

1. Overall foaming, thickness of insulation layer is 3cm, excellent thermal insulation effect.
2. AUTOFILL function, anti-dry-burning
3. SUS304 electric heating pipe, pure copper vapor cap
4. New multiple airbags, embedded silicone door seal, securely sealed
5. Six bolt large hinge, more sturdy and durable
6. There are supporting ribs on both sides of the cabinet, which are durable and do not deform.
7. Made of high-quality fingerprint resistant stainless steel, beautiful and practical, clean and hygienic, convenient for daily maintenance.
8. Highly Efficient and energy-saving, easy to operate

Applications

It can be used for steaming rice, dim sum, sea food, steamed bread, corn, potatoes, fish and other foods, and can also be used as high-temperature steam sterilization for meals and tea sets.

It is widely used in mining areas, factories, schools/Universities, institutions, troops, hotels, restaurants, hotels, individuals and etc. It is an ideal and convenient multi-functional kitchen equipment.



● EAB-DRS Engineering Automatic Steamer Cabinet

The Steamer Cabinet adopts the popular design concept of kitchen utensils to make the machine easy and fast to operate. The machine is made of high-quality plates, which has a smooth& beautiful appearance, sanitation, cleanliness, energy saving and safety.

Key Features

1. Overall foaming, thickness of insulation layer is 3.5cm, excellent thermal insulation effect.
2. AUTOFILL function, equipped with water-shortage then power-off protection function,, anti-dry-burning, and is safer and more reliable to use.
3. SUS304 electric heating pipe, pure copper vapor cap
4. New multiple airbags, embedded silicone door seal, securely sealed
5. Six bolt large hinge, more sturdy and durable
6. There are supporting ribs on both sides of the cabinet, which are durable and do not deform.
7. The rotating bidirectional timer & temperature controller function allows for free adjustment of temperature and time, making it more practical and worry free.
8. Highly Efficient and energy-saving, easy to operate

Applications

It can be used for steaming rice, dim sum, sea food, steamed bread, corn, potatoes, fish and other foods, and can also be used as high-temperature steam sterilization for meals and tea sets.

It is widely used in mining areas, factories, schools /Universities, institutions, troops, hotels, restaurants, hotels, individuals and etc. It is an ideal and convenient multi-functional kitchen equipment.



Deluxe Fingerprint Resistant Steamer Cabinet											Technical Parameter	
Model	Trays	Cabinet Size(mm)	Rated Power	Rated Voltage	Capacity	Water Input Pressure	Circuit Breaker	Steam Inlet	Tray Size(mm)	Vapor Pressure	Net Weight	
EFP-DRS-4	4	695*615*835	9kW	3~380v or 2~220v	4KG/Tray	≤4kPa	Y-shaped connection method	DN 20mm	400*600*50	≤0.02mPa	27.5kg	
EFP-DRS-6	6	695*615*1005									31kg	
EFP-DRS-8	8	695*615*1175									36kg	
EFP-DRS-10	10	695*615*1345	12kW	3~380v/ 220v	4KG/Tray	≤4kPa	Y-shaped connection method	DN 20mm	400*600*50	≤0.02mPa	39kg	
EFP-DRS-12	12	695*615*1515									43kg	
EFP-DRS-24	24	1390*615*1545									82kg	
EFP-DRS-24V (Vertical type)	24	1000*815*1525	12kW	3~380v/ 220v	4KG/Tray	≤4kPa	Y-shaped connection method	DN 20mm	400*600*50	≤0.02mPa	84kg	
EFP-DRS-36V (Vertical type)	36	1580*815*1525	12kW*2								145kg	

Engineering Automatic Steamer Cabinet											Technical Parameter	
Model	Trays	Cabinet Size(mm)	Rated Power	Rated Voltage	Capacity	Water Input Pressure	Circuit Breaker	Steam Inlet	Tray Size(mm)	Vapor Pressure	Net Weight	
EAB-DRS-6	6	705*590*1235	9kW	3~380v or 2~220v	4KG/Tray	≤4kPa	Y-shaped connection method	DN 20mm	400*600*50	≤0.02mPa	51kg	
EAB-DRS-8	8	705*590*1405									57kg	
EAB-DRS-10	10	705*590*1575									62kg	
EAB-DRS-12	12	705*590*1745	12kW	3~380v	4KG/Tray	≤4kPa	Y-shaped connection method	DN 20mm	400*600*50	≤0.02mPa	67kg	
EAB-DRS-24	24	1400*590*1745	12kW*2								123kg	
EAB-DRS-24V (Vertical type)	24	1000*850*1405	12kW	3~380v	4KG/Tray	≤4kPa	Y-shaped connection method	DN 20mm	400*600*50	≤0.02mPa	125kg	

● EDI-DRS

Deluxe Intelligent Steamer Cabinet

The Steamer Cabinet adopts the popular design concept of kitchen utensils to make the machine easy and fast to operate. The machine is made of high-quality plates, which has a smooth& beautiful appearance, sanitation, cleanliness, energy saving and safety.

Key Features

1. Overall foaming, thickness of insulation layer is 3.5cm, excellent thermal insulation effect.
2. AUTOFILL function, equipped with water-shortage then power-off protection function,, anti-dry-burning, and is safer and more reliable to use.
3. SUS304 electric heating pipe, pure copper vapor cap
4. New multiple airbags, embedded silicone door seal, securely sealed
5. Six bolt large hinge, more sturdy and durable
6. There are supporting ribs on both sides of the cabinet, which are durable and do not deform.
7. Intelligent control touch screen, timer & temperature controller function allows for free adjustment of temperature and time, making it more practical and worry free.
8. Highly Efficient and energy-saving, easy to operate

Applications

It can be used for steaming rice, dim sum, sea food, steamed bread, corn, potatoes, fish and other foods, and can also be used as high-temperature steam sterilization for meals and tea sets.

It is widely used in mining areas, factories, schools /Universities, institutions, troops, hotels, restaurants, hotels, individuals and etc. It is an ideal and convenient multi-functional kitchen equipment.



● EML-DRS

Electric Multi-layer Steamer Cabinet

The Steamer Cabinet adopts the popular design concept of kitchen utensils to make the machine easy and fast to operate. The machine is made of high-quality plates, which has a smooth& beautiful appearance, sanitation, cleanliness, energy saving and safety.

Key Features

1. Overall foaming, thickness of insulation layer is 3cm, excellent thermal insulation effect.
2. AUTOFILL function, anti-dry-burning
3. SUS304 electric heating pipe, pure copper vapor cap
4. New multiple airbags, embedded silicone door seal, securely sealed
5. Six bolt large hinge, more sturdy and durable
6. There are supporting ribs on both sides of the cabinet, which are durable and do not deform.
7. Layered steam cabinets with steam valve switches and back plate outlet caps for each section.
8. Highly Efficient and energy-saving, easy to operate

Applications

It can be used for steaming rice, dim sum, sea food, steamed bread, corn, potatoes, fish and other foods, and can also be used as high-temperature steam sterilization for meals and tea sets.

It is widely used in mining areas, factories, schools/Universities, institutions, troops, hotels, restaurants, hotels, individuals and etc. It is an ideal and convenient multi-functional kitchen equipment.



Deluxe Intelligent Steamer Cabinet

Technical Parameter

Model	Trays	Cabinet Size(mm)	Rated Power	Rated Voltage	Capacity	Water Input Pressure	Circuit Breaker	Steam Inlet	Tray Size(mm)	Vapor Pressure	Net Weight
EDI-DRS-6	6	720*640*1150	9kW	3~380v	4KG/Tray	≤4kPa	Y-shaped connection method	DN 20mm	400*600*50	≤0.02mPa	51kg
EDI-DRS-8	8	720*640*1330		or							57kg
EDI-DRS-10	10	720*640*1490	2~220v	62kg							
EDI-DRS-12	12	720*640*1730	12kW	3~380v							67kg
EDI-DRS-24	24	1430*640*1730									123kg
EDI-DRS-24V (Vertical type)	24	1000*850*145	12kW*2								125kg

Electric Multi-layer Steamer Cabinet

Technical Parameter

Model	Trays	Cabinet Size(mm)	Rated Power	Rated Voltage	Capacity	Water Input Pressure	Circuit Breaker	Steam Inlet	Tray Size(mm)	Vapor Pressure	Net Weight
EML-DRS-6	6	715*660*1430	9kW	3~380v or 2~220v	4KG/Tray	≤4kPa	Y-shaped connection method	DN 20mm	400*600*50	≤0.02mPa	44kg
EML-DRS-9	9	715*660*1795	12kW	3~380v							79kg

●EFP-CNGS

Fingerprint Resistant Gas Steamer Cabinet (CNG)

The Steamer Cabinet adopts the popular design concept of kitchen utensils to make the machine easy and fast to operate. The machine is made of high-quality plates, which has a smooth& beautiful appearance, sanitation, cleanliness, energy saving and safety.

Key Features

1. Overall foaming, thickness of insulation layer is 3cm, excellent thermal insulation effect.
2. AUTOFILL function, anti-dry-burning
3. New multiple airbags, embedded silicone door seal, securely sealed
4. Six bolt large hinge, more sturdy and durable
5. There are supporting ribs on both sides of the cabinet, which are durable and do not deform.
6. Rotary electronic ignition system, pull-out ignition device.
7. Equipped with a flameout then gas cut-off protection device for safer operation.
8. The water tank adopts a detachable and replaceable design for easy maintenance.
9. Brake silent wheels, pure copper vapor cap
10. Highly Efficient and energy-saving, easy to operate.

Applications

It can be used for steaming rice, dim sum, sea food, steamed bread, corn, potatoes, fish and other foods, and can also be used as high-temperature steam sterilization for meals and tea sets.

It is widely used in mining areas, factories, schools /Universities, institutions, troops, hotels, restaurants, hotels, individuals and etc. It is an ideal and convenient multi-functional kitchen



●EML-CNGS

layer Gas Steamer Cabinet (CNG)

The Steamer Cabinet adopts the popular design concept of kitchen utensils to make the machine easy and fast to operate. The machine is made of high-quality plates, which has a smooth& beautiful appearance, sanitation, cleanliness, energy saving and safety.

Key Features

1. Overall foaming, thickness of insulation layer is 3cm, excellent thermal insulation effect.
2. AUTOFILL function, anti-dry-burning
3. New multiple airbags, embedded silicone door seal, securely sealed
4. Six bolt large hinge, more sturdy and durable
5. There are supporting ribs on both sides of the cabinet, which are durable and do not deform.
6. Rotary electronic ignition system, pull-out ignition device.
7. Equipped with a flameout then gas cut-off protection device for safer operation.
8. Layered steam cabinets with steam valve switches and back plate outlet caps for each section.
9. Brake silent wheels, pure copper vapor cap
10. Highly Efficient and energy-saving, easy to operate.

Applications

It can be used for steaming rice, dim sum, sea food, steamed bread, corn, potatoes, fish and other foods, and can also be used as high-temperature steam sterilization for meals and tea sets.

It is widely used in mining areas, factories, schools /Universities, institutions, troops, hotels, restaurants, hotels, individuals and etc. It is an ideal and convenient multi-functional kitchen



Fingerprint Resistant Gas Steamer Cabinet (CNG)											Technical Parameter	
Model	Trays	Cabinet Size(mm)	Number of air inlets	Gas Consumption	Fire bar nozzle caliber (mm)	Capacity	Water Input Pressure	Gas Input Pressure	Tray Size (mm)	Gas Type	Net Weight	
EFP-CNGS-6	6	695*660*1245	1	1.1m ³ /hour	1.03	4KG/Tray	≤4kPa	Natural gas input pressure 2000Pa	400*600*50	Liquid gas/ Natural Gas	52kg	
EFP-CNGS-8	8	695*660*1415	1	1.1m ³ /hour	1.03						58kg	
EFP-CNGS-10	10	695*660*1585	1	1.1m ³ /hour	1.03						62kg	
EFP-CNGS-12	12	695*660*1755	1	1.1m ³ /hour	1.03						66kg	
EFP-CNGS-24	24	1400*660*1755	2	2.2m ³ /hour	1.03						123kg	
EFP-CNGS-24V (Vertical type)	24	1000*860*1755	2	2.2m ³ /hour	0.95						111kg	
EFP-CNGS-36V (Vertical type)	36	1580*860*1755	3	3.3m ³ /hour	0.95	128kg						

layer Gas Steamer Cabinet (CNG)											Technical Parameter	
Model	Trays	Cabinet Size(mm)	Number of air inlets	Gas Consumption	Fire bar nozzle caliber (mm)	Capacity	Water Input Pressure	Gas Input Pressure	Tray Size (mm)	Gas Type	Net Weight	
EML-CNGS-6S (SS Door)	6	715*660*1245	1	1.1m ³ /hour	1.03	4KG/Tray	≤4kPa	Natural gas input pressure 2000Pa	400*600*50	Liquid gas/ Natural Gas	65kg	
EML-CNGS-6G (Glass Door)	6	715*660*1245									86kg	
EML-CNGS-9S (SS Door)	9	715*660*1795									100kg	
EML-CNGS-9G (Glass Door)	9	715*660*1795									131kg	

●E-DMS
MINI Steamer Cabinet



The Steamer Cabinet adopts the popular design concept of kitchen utensils to make the machine easy and fast to operate. The machine is made of high-quality stainless steel, which has a smooth& beautiful appearance, sanitation, cleanliness, energy saving and safety.

Key Features

1. Overall foaming, thickness of insulation layer is 4.5cm, excellent thermal insulation effect.
2. SUS304 electric heating pipe, pure copper vapor cap
3. New multiple airbags, embedded silicone door seal, securely sealed
4. Six bolt large hinge, more sturdy and durable
5. There are supporting ribs on both sides of the cabinet, which are durable and do not deform.
6. Small size, convenient installation.
7. Highly Efficient and energy-saving, easy to operate

Applications

It can be used for steaming rice, dim sum, sea food, steamed bread, corn, potatoes, fish and other foods, and can also be used as high-temperature steam sterilization for meals and tea sets. It is the perfect solution for families, micro high-end canteens, private clubs, high-end yachts, RVs, etc. It is an ideal and convenient multi-functional kitchen equipment.

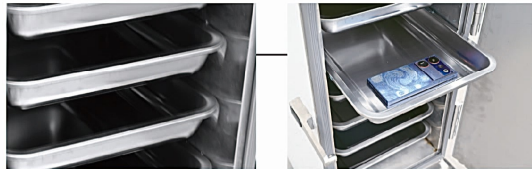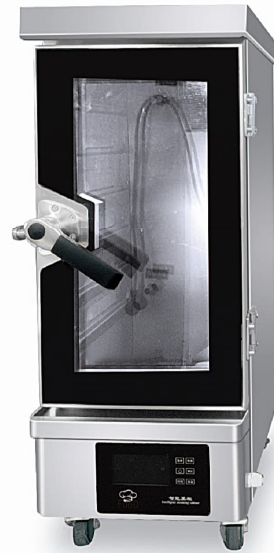

MINI Steamer Cabinet		Technical Parameter								
Model	Trays	Cabinet Size(mm)	Rated Power	Rated Voltage	Capacity	Water Input Pressure	Tray Size	Plate material	Insulation layer thickness	Net Weight
EBA-DMS-4	4 Trays	380*560*785	2kW	2~220v	2KG/Tray	Manual Water-filling	300*400*50mm	SUS201	3cm	23.9kg
EBA-DMS-6	6 Trays	380*560*995	3kW	2~220v	2KG/Tray	Manual Water-filling	300*400*50mm	SUS201	3cm	28.6kg

●EGA-DRS
Visual glass door intelligent steaming car



This steaming car adopts the modern and popular design concept of kitchen utensils, and the machine operation is simple and convenient. This machine is made of high-quality stainless steel plate material and a visible glass door, with a smooth and beautiful appearance, user-friendly design, easy cleaning and hygiene, energy-saving and safety.

Key Features

- Fully intelligent design, computer version control
- Insulation layer material: rubber sponge, thickness 1cm
- Self suction water inlet device with high thermal efficiency
- Aluminum injection electric heating tube
- New type of safety multi airbag embedded silicone door seal, securely sealed
- Stainless steel doors are more sturdy and durable than chains
- Humanized design, versatile adjustable legs, can be fixed by lowering the supporting feet, and can be moved by retracting the supporting feet
- Unique heating plate design, efficient, durable, and easy to maintain

Applications

This rice steamer can be used to steam rice, seafood, Mantou Dim sum, soup, corn, potatoes, fish and other foods, as well as high-temperature steam sterilization of meals and tea sets. It is the perfect solution for families, micro high-end canteens, private clubs, high-end yachts and motorhomes, and is an ideal and convenient multi-functional kitchen equipment.

Visual glass door intelligent steaming car		Technical Parameter								
Model	Cabinet Size(mm)	Rated Power	Rated Voltage	Capacity	Water Input Pressure	Tray Size	Plate material	Insulation layer thickness	Net Weight	
EGA-DRS	655*560*610	3kW	2~220v	1.5KG/Tray	Self suction water inlet	350*250*50mm	SUS201	1cm	43.5kg	

●E-DSR

Trolley-type Large Steam Room



Trolley-type Large Steam Room

The trolley-type large steam room is made of high-quality stainless steel, which has a smooth& beautiful appearance, sanitation, cleanliness, energy saving and safety. A steaming room can be equipped with two to more steaming carts, each time two carts are steamed, which can be pushed out and then replace with new steaming cart, greatly saving time. It is very suitable for large commercial kitchens and large banquets.

Key Features

1. The overall foaming, foaming layer thickness 5.5cm, 6cm. energy saving and environmental protection
2. Automatic water, pressure relief valve, water shortage protection, automatic power off
3. New multi-air bag, embedded silicone door seal, secure seal
4. Energy-saving stainless steel heating tube, pure copper vapor cap
5. The use of high-quality imported electronic originals, more safe and reliable, more convenient to use
6. Temperature display, fault display alarm
7. A variety of mode selection, intelligent touch, one-click operation
8. Portable cart, separable tray rack, food delivery is cheap
9. Stamping forming stainless steel steamer, support bar durable
10. Highly efficiency and energy saving, easy to operate

Applications

It can be used for steaming rice, dim sum, sea food, steamed bread, corn, potatoes, fish and other foods, and can also be used as high-temperature steam sterilization for meals and tea sets. It is widely used in mining areas, factories, schools/Universities, institutions, troops, hotels, restaurants, hotels, individuals and etc. It is an ideal and convenient multi-functional kitchens.

Benley Automatic Steamer Cabinet											Technical Parameter	
Model	Trays	Cabinet Size(mm)	Rated Power	Rated Voltage	Capacity	Water Input Pressure	Circuit Breaker	Steam Inlet	Tray Size(mm)	Vapor Pressure	Net Weight	
DSR-24	24	1170*1075*1825	24kW	3~380V/	4KG/Tray	≤4kPa		DN 20mm	400*600*50	≤0.02mPa	43kg	
DSR-30	30	1170*1075*2080	30kW	50Hz							52kg	

●DSR

Trolley-type Large Steam Room



Trolley-type Large Steam Room

The trolley-type large steam room is made of high-quality stainless steel, which has a smooth& beautiful appearance, sanitation, cleanliness, energy saving and safety. A steaming room can be equipped with two to more steaming carts, each time two carts are steamed, which can be pushed out and then replace with new steaming cart, greatly saving time. It is very suitable for large commercial kitchens and large banquets.

Key Features

1. The overall foaming, foaming layer thickness 5.5cm, 6cm. energy saving and environmental protection
2. Automatic water, pressure relief valve, water shortage protection, automatic power off
3. New multi-air bag, embedded silicone door seal, secure seal
4. Energy-saving stainless steel heating tube, pure copper vapor cap
5. The use of high-quality imported electronic originals, more safe and reliable, more convenient to use
6. Temperature display, fault display alarm
7. A variety of mode selection, intelligent touch, one-click operation
8. Portable cart, separable tray rack, food delivery is cheap
9. Stamping forming stainless steel steamer, support bar durable
10. Highly efficiency and energy saving, easy to operate

Applications

It can be used for steaming rice, dim sum, sea food, steamed bread, corn, potatoes, fish and other foods, and can also be used as high-temperature steam sterilization for meals and tea sets. It is widely used in mining areas, factories, schools/Universities, institutions, troops, hotels, restaurants, hotels, individuals and etc. It is an ideal and convenient multi-functional kitchens.

Benley Automatic Steamer Cabinet											Technical Parameter	
Model	Trays	Cabinet Size(mm)	Rated Power	Rated Voltage	Capacity	Water Input Pressure	Circuit Breaker	Steam Inlet	Tray Size(mm)	Vapor Pressure	Net Weight	
DSR-48	48	1790*1075*1825	24kW*2	3~380V/	4KG/Tray	≤4kPa	Y-shaped connection method	DN 20mm	400*600*50	≤0.02mPa	47kg	
DSR-60	60	1790*1075*2080	30kW*2	50Hz							96kg	

●XRTPA Flat-Door A Sterilizer Cabinet

This flat-door sterilizer cabinet is made of high quality SUS201 and Tempered glass, Single door or double doors are all available according to your demand, the built-in grille Multilayer adjustable. Through the cycle of high temperature, it penetrates the cell membrane of microorganisms, destroys the DNA structure of various bacteria, parasites, and other pathogenic organisms, destroys their nucleic acid molecular bonds, and causes bacteria to immediately die or unable to reproduce, thus achieving the effect of disinfection and sterilization. Destroy and alter the DNA (deoxyribonucleic acid) structure of microorganisms to achieve the goal of sterilization, and effectively kill the intestine Pathogenic bacteria, pathogenic yeast and suppurative coccus and other bacteria.

FEATURES

1. Far infrared electric heating tube, heating temperature exceed 125°C;
2. High temperature hot air circulates 360 degrees to sterilize invisibly, achieving complete sterilization and worry free health;
3. Internationalized design, made entirely of stainless steel;
4. Stereoscopic high-temperature hot air circulation, directly reaching every corner of the cabinet, disinfecting tableware with brightness and dry;
5. High quality stainless steel layers, easy to store and clean;
6. Large disinfection and cleaning storage space, which can simultaneously accommodate different dining utensils such as plates, bowls and other tableware for disinfection;
7. Exterior and interior are all made of stainless steel structure, durable, anti-corrosion and long-service-life.
8. The cabinet is tall and has a large storage capacity, with all cabinets made of stainless steel.
9. Customization is available

APPLICATIONS

Suitable for disinfection in industries such as hotels, restaurants, factories and mines, enterprises and institutions, large fast-food factories, food supply centers, food factories, and healthcare, etc.
Unique hot air heating cycle system, automatic temperature control system to ensure uniform and constant temperature, efficient and thorough disinfection and drying



●XRTPB Flat-Door B (Glass Door)


This flat-door sterilizer cabinet is made of high quality SUS201 and Tempered glass, Single door or double doors are all available according to your demand, the built-in grille Multilayer adjustable. Through the cycle of high temperature, it penetrates the cell membrane of microorganisms, destroys the DNA structure of various bacteria, parasites, and other pathogenic organisms, destroys their nucleic acid molecular bonds, and causes bacteria to immediately die or unable to reproduce, thus achieving the effect of disinfection and sterilization. Destroy and alter the DNA (deoxyribonucleic acid) structure of microorganisms to achieve the goal of sterilization, and effectively kill the intestine Pathogenic bacteria, pathogenic yeast and suppurative coccus and other bacteria.

FEATURES

1. Far infrared electric heating tube, heating temperature exceed 125°C;
2. High temperature hot air circulates 360 degrees to sterilize invisibly, achieving complete sterilization and worry free health;
3. Internationalized design, made entirely of stainless steel;
4. Stereoscopic high-temperature hot air circulation, directly reaching every corner of the cabinet, disinfecting tableware with brightness and dry;
5. High quality stainless steel layers, easy to store and clean;
6. Large disinfection and cleaning storage space, which can simultaneously accommodate different dining utensils such as plates, bowls and other tableware for disinfection;
7. Exterior and interior are all made of stainless steel structure, durable, anti-corrosion and long-service-life.
8. The cabinet is tall and has a large storage capacity, with all cabinets made of stainless steel.
9. Customization is available

APPLICATIONS

Suitable for disinfection in industries such as hotels, restaurants, factories and mines, enterprises and institutions, large fast-food factories, food supply centers, food factories, and healthcare, etc.
Unique hot air heating cycle system, automatic temperature control system to ensure uniform and constant temperature, efficient and thorough disinfection and drying



Flat-Door A Sterilizer Cabinet		Technical Parameter									
Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Sterilization Temp.	Layers	Caster Height	Insulation Thickness	Capacity (L)	Net Weight
XRTP-348JA14	645*645*1960	560*395*260	220V	2.2KW	50 ~ 125°C	125°C	4	12cm	3cm	348L	63KG
XRTP-740JA28	1305*645*1960	560*395*260	220V	4.4KW	50 ~ 125°C	125°C	8	12cm	3cm	740L	110KG

Flat-Door B Sterilizer Cabinet		Technical Parameter									
Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Sterilization Temp.	Layers	Caster Height	Insulation Thickness	Capacity (L)	Net Weight
XRTP-348JB14	645*645*1960	560*395*260	220V	2.2KW	50 ~ 125°C	125°C	4	12cm	3cm	348L	70KG
XRTP-740JB28	1305*645*1960	560*395*260	220V	4.4KW	50 ~ 125°C	125°C	8	12cm	3cm	740L	119KG

●XRTPC Flat-Door C(All use 304stainless steel material)

This flat-door sterilizer cabinet is made of high quality SUS201 and Tempered glass, Single door or double doors are all available according to your demand, the built-in grille Multilayer adjustable. Through the cycle of high temperature, it penetrates the cell membrane of microorganisms, destroys the DNA structure of various bacteria, parasites, and other pathogenic organisms, destroys their nucleic acid molecular bonds, and causes bacteria to immediately die or unable to reproduce, thus achieving the effect of disinfection and sterilization. Destroy and alter the DNA (deoxyribonucleic acid) structure of microorganisms to achieve the goal of sterilization, and effectively kill the intestine Pathogenic bacteria, pathogenic yeast and suppurative coccus and other bacteria.

FEATURES

1. Far infrared electric heating tube, heating temperature exceed 125°C;
2. High temperature hot air circulates 360 degrees to sterilize invisibly, achieving complete sterilization and worry free health;
3. Internationalized design, made entirely of stainless steel;
4. Stereoscopic high-temperature hot air circulation, directly reaching every corner of the cabinet, disinfecting tableware with brightness and dry;
5. High quality stainless steel layers, easy to store and clean;
6. Large disinfection and cleaning storage space, which can simultaneously accommodate different dining utensils such as plates, bowls and other tableware for disinfection;
7. Exterior and interior are all made of stainless steel structure, durable, anti-corrosion and long-service-life.
8. The cabinet is tall and has a large storage capacity, with all cabinets made of stainless steel.
9. Customization is available

APPLICATIONS

Suitable for disinfection in industries such as hotels, restaurants, factories and mines, enterprises and institutions, large fast-food factories, food supply centers, food factories, and healthcare, etc.
Unique hot air heating cycle system, automatic temperature control system to ensure uniform and constant temperature, efficient and thorough disinfection and drying



●XRTP-720 Three temperature disinfection cabinet

This flat-door sterilizer cabinet is made of high quality SUS201 and Tempered glass, Single door or double doors are all available according to your demand, the built-in grille Multilayer adjustable. Through the cycle of high temperature, it penetrates the cell membrane of microorganisms, destroys the DNA structure of various bacteria, parasites, and other pathogenic organisms, destroys their nucleic acid molecular bonds, and causes bacteria to immediately die or unable to reproduce, thus achieving the effect of disinfection and sterilization. Destroy and alter the DNA (deoxyribonucleic acid) structure of microorganisms to achieve the goal of sterilization, and effectively kill the intestine Pathogenic bacteria, pathogenic yeast and suppurative coccus and other bacteria.

FEATURES

1. Far infrared electric heating tube, heating temperature exceed 125°C;
2. High temperature hot air circulates 360 degrees to sterilize invisibly, achieving complete sterilization and worry free health;
3. Internationalized design, made entirely of stainless steel;
4. Stereoscopic high-temperature hot air circulation, directly reaching every corner of the cabinet, disinfecting tableware with brightness and dry;
5. High quality stainless steel layers, easy to store and clean;
6. Large disinfection and cleaning storage space, which can simultaneously accommodate different dining utensils such as plates, bowls and other tableware for disinfection;
7. Exterior and interior are all made of stainless steel structure, durable, anti-corrosion and long-service-life.
8. The cabinet is tall and has a large storage capacity, with all cabinets made of stainless steel.
9. Customization is available

APPLICATIONS

Suitable for disinfection in industries such as hotels, restaurants, factories and mines, enterprises and institutions, large fast-food factories, food supply centers, food factories, and healthcare, etc.
Unique hot air heating cycle system, automatic temperature control system to ensure uniform and constant temperature, efficient and thorough disinfection and drying



Flat-Door C(All use 304stainless steel material)		Technical Parameter									
Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Sterilization Temp.	Layers	Caster Height	Insulation Thickness	Capacity (L)	Net Weight
XRTP-348JC14	645*645*1960	560*395*260	220V	2.2KW	50 ~ 125°C	125°C	4	12cm	3cm	348L	63KG
XRTP-740JC28	1305*645*1960	560*395*260	220V	4.4KW	50 ~ 125°C	125°C	8	12cm	3cm	740L	110KG

Three temperature disinfection cabinet							Technical Parameter				
Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Sterilization Temp.	Layers	Caster Height	Insulation Thickness	Capacity (L)	Net Weight
XRTP-720JD210-3	1310*660*1960	560*395*260=6	220V	4.4KW	30 ~ 120°C	120°C	10	12cm	3cm	720L	142KG
		560X395X110=2				80°C					
		560X395X60=2				60°C					

●XRTPFA Fingerprint Resistant-A

This fingerprint serie sterilizer cabinet is made of high quality SUS201 and Tempered glass, Single door or double doors are all available according to your demand, the built-in grille Multilayer adjustable. Through the cycle of high temperature, it penetrates the cell membrane of microorganisms, destroys the DNA structure of various bacteria, parasites, and other pathogenic organisms, destroys their nucleic acid molecular bonds, and causes bacteria to immediately die or unable to reproduce, thus achieving the effect of disinfection and sterilization. Destroy and alter the DNA (deoxyribonucleic acid) structure of microorganisms to achieve the goal of sterilization.

FEATURES

1. Far infrared electric heating tube, heating temperature exceed 125C;
2. High temperature hot air circulates 360 degrees to sterilize invisibly, achieving complete sterilization and worry free health;
3. Internationalized design, door is made of fingerprint SUS201, and body is made of SUS201 stainless steel;
4. Stereoscopic high-temperature hot air circulation, directly reaching every corner of the cabinet, disinfecting tableware with brightness and dry;
5. High quality stainless steel layers, easy to store and clean;
6. Large disinfection and cleaning storage space, which can simultaneously accommodate different dining utensils such as plates, bowls and other tableware for disinfection;
7. Exterior and interior are all made of stainless steel structure, durable, anti-corrosion and long-service-life.
8. The cabinet is tall and has a large storage capacity, with all cabinets made of stainless steel.
9. Customization is available

APPLICATIONS

Suitable for disinfection in industries such as hotels, restaurants, factories and mines, enterprises and institutions, large fast-food factories, food supply centers, food factories, and healthcare, etc.
Unique hot air heating cycle system, automatic temperature control system to ensure uniform and constant temperature, efficient and thorough disinfection and drying



●XRTPFB Fingerprint Resistant-B


This fingerprint serie sterilizer cabinet is made of high quality SUS201 and Tempered glass, Single door or double doors are all available according to your demand, the built-in grille Multilayer adjustable. Through the cycle of high temperature, it penetrates the cell membrane of microorganisms, destroys the DNA structure of various bacteria, parasites, and other pathogenic organisms, destroys their nucleic acid molecular bonds, and causes bacteria to immediately die or unable to reproduce, thus achieving the effect of disinfection and sterilization. Destroy and alter the DNA (deoxyribonucleic acid) structure of microorganisms to achieve the goal of sterilization.

FEATURES

1. Far infrared electric heating tube, heating temperature exceed 125C;
2. High temperature hot air circulates 360 degrees to sterilize invisibly, achieving complete sterilization and worry free health;
3. Internationalized design, door is made of fingerprint SUS201, and body is made of SUS201 stainless steel;
4. Stereoscopic high-temperature hot air circulation, directly reaching every corner of the cabinet, disinfecting tableware with brightness and dry;
5. High quality stainless steel layers, easy to store and clean;
6. Large disinfection and cleaning storage space, which can simultaneously accommodate different dining utensils such as plates, bowls and other tableware for disinfection;
7. Exterior and interior are all made of stainless steel structure, durable, anti-corrosion and long-service-life.
8. The cabinet is tall and has a large storage capacity, with all cabinets made of stainless steel.
9. Customization is available

APPLICATIONS

Suitable for disinfection in industries such as hotels, restaurants, factories and mines, enterprises and institutions, large fast-food factories, food supply centers, food factories, and healthcare, etc.
Unique hot air heating cycle system, automatic temperature control system to ensure uniform and constant temperature, efficient and thorough disinfection and drying



Fingerprint Resistant-A		Technical Parameter									
Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp Range	Sterilization Temp.	Layers	Caster Height	Insulation Thickness	Capacity (L)	Net Weight
XRTP-348FA14	645*645*1960	560*395*260	220V	2.2KW	50 ~ 125°C	125°C	4	12cm	3cm	348L	63KG
XRTP-740FA28	1305*645*1960	560*395*260	220V	4.4KW	50 ~ 125°C	125°C	8	12cm	3cm	740L	110KG

Fingerprint Resistant-B		Technical Parameter									
Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp Range	Sterilization Temp.	Layers	Caster Height	Insulation Thickness	Capacity (L)	Net Weight
XRTP-348FB14	645*645*1960	560*395*260	220V	2.2KW	50 ~ 125°C	125°C	4	12cm	3cm	348L	63KG
XRTP-740FB28	1305*645*1960	560*395*260	220V	4.4KW	50 ~ 125°C	125°C	8	12cm	3cm	740L	110KG

●XRTPFC Fingerprint Resistant-C

This fingerprint serie sterilizer cabinet is made of high quality SUS201 and Tempered glass, Single door or double doors are all available according to your demand, the built-in grille Multilayer adjustable. Through the cycle of high temperature, it penetrates the cell membrane of microorganisms, destroys the DNA structure of various bacteria, parasites, and other pathogenic organisms, destroys their nucleic acid molecular bonds, and causes bacteria to immediately die or unable to reproduce, thus achieving the effect of disinfection and sterilization. Destroy and alter the DNA (deoxyribonucleic acid) structure of microorganisms to achieve the goal of sterilization.

FEATURES

1. Far infrared electric heating tube, heating temperature exceed 125C;
2. High temperature hot air circulates 360 degrees to sterilize invisibly, achieving complete sterilization and worry free health;
3. Internationalized design, door is made of fingerprint SUS201, and body is made of SUS201 stainless steel;
4. Stereoscopic high-temperature hot air circulation, directly reaching every corner of the cabinet, disinfecting tableware with brightness and dry;
5. High quality stainless steel layers, easy to store and clean;
6. Large disinfection and cleaning storage space, which can simultaneously accommodate different dining utensils such as plates, bowls and other tableware for disinfection;
7. Exterior and interior are all made of stainless steel structure, durable, anti-corrosion and long-service-life.
8. The cabinet is tall and has a large storage capacity, with all cabinets made of stainless steel.
9. Customization is available

APPLICATIONS

Suitable for disinfection in industries such as hotels, restaurants, factories and mines, enterprises and institutions, large fast-food factories, food supply centers, food factories, and healthcare, etc.
Unique hot air heating cycle system, automatic temperature control system to ensure uniform and constant temperature, efficient and thorough disinfection and drying



Fingerprint Resistant-C

Technical Parameter

Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Sterilization Temp.	Layers	Caster Height	Insulation Thickness	Capacity (L)	Net Weight
XRTP-348FC14	645*645*1960	Chopstick stand: 560*395*60	220V	2.2KW	50 ~ 125°C	120°C	5	12cm	3cm	348L	67KG
		Bowl stand: 560*395*260									
		Plate stand: 560*395*110 *3									
XRTP-740FC28	1305*645*1960	Chopstick stand: 560*395*60	220V	4.4KW	50 ~ 125°C	120°C	10	12cm	3cm	740L	115KG
		Bowl stand: 560*395*260									
		Plate stand: 560*395*110 *3									

●XRTPFD Fingerprint Resistant-D(Black handle glass door)

This fingerprint serie sterilizer cabinet is made of high quality SUS201 and Tempered glass, Single door or double doors are all available according to your demand, the built-in grille Multilayer adjustable. Through the cycle of high temperature, it penetrates the cell membrane of microorganisms, destroys the DNA structure of various bacteria, parasites, and other pathogenic organisms, destroys their nucleic acid molecular bonds, and causes bacteria to immediately die or unable to reproduce, thus achieving the effect of disinfection and sterilization. Destroy and alter the DNA (deoxyribonucleic acid) structure of microorganisms to achieve the goal of sterilization.

FEATURES

1. Far infrared electric heating tube, heating temperature exceed 125C;
2. High temperature hot air circulates 360 degrees to sterilize invisibly, achieving complete sterilization and worry free health;
3. Internationalized design, door is made of fingerprint SUS201, and body is made of SUS201 stainless steel;
4. Stereoscopic high-temperature hot air circulation, directly reaching every corner of the cabinet, disinfecting tableware with brightness and dry;
5. High quality stainless steel layers, easy to store and clean;
6. Large disinfection and cleaning storage space, which can simultaneously accommodate different dining utensils such as plates, bowls and other tableware for disinfection;
7. Exterior and interior are all made of stainless steel structure, durable, anti-corrosion and long-service-life.
8. The cabinet is tall and has a large storage capacity, with all cabinets made of stainless steel.
9. Customization is available

APPLICATIONS

Suitable for disinfection in industries such as hotels, restaurants, factories and mines, enterprises and institutions, large fast-food factories, food supply centers, food factories, and healthcare, etc.
Unique hot air heating cycle system, automatic temperature control system to ensure uniform and constant temperature, efficient and thorough disinfection and drying



Fingerprint Resistant-D(Black handle glass door)

Technical Parameter

Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Sterilization Temp.	Layers	Caster Height	Insulation Thickness	Capacity (L)	Net Weight
XRTP-348FD14	645*645*1960	560*395*260	220V	2.2KW	50 ~ 125°C	120°C	4	12cm	3cm	348L	75KG
XRTP-740FD28	1305*645*1960	560*395*260	220V	4.4KW	50 ~ 125°C	120°C	8	12cm	3cm	740L	123KG

●XRTPFE Fingerprint Resistant-E



This Melamine serie sterilizer cabinet is made of high quality SUS201 and Tempered glass (if you choose the glass door), Single door or double doors are all available according to your demand, the built-in grille Multilayer adjustable. The product features a choice of dual disinfection modes through ultraviolet irradiation and high temperature. To achieve bacteria, viruses and other microorganisms in the DNA structure of elimination, destruction of disease Bacteria reproduction ability to achieve sterilization effect; It can be used to disinfect the surface of objects, and effectively kill the intestine Pathogenic bacteria, pathogenic yeast and suppurative coccus and other bacteria.

FEATURES

1. Far infrared electric heating tube, heating temperature reach 60C, with UV LED sterilization-effectively remove germs and bacteria.
2. High temperature +UV+OZONE, achieving complete sterilization and worry free health;
3. Internationalized design;
4. Especially suitable for disinfection of tableware made of melamine materials;
5. High quality stainless steel layers, easy to store and clean;
6. Large disinfection and cleaning storage space, which can simultaneously accommodate different dining utensils such as plates, bowls and other tableware for disinfection;
7. Exterior and interior are all made of stainless steel structure, durable, anti-corrosion and long-service-life.
8. The cabinet is tall and has a large storage capacity, with all cabinets made of stainless steel.
9. Customization is available

APPLICATIONS

Suitable for disinfection in industries such as hotels, restaurants, factories and mines, enterprises and institutions, large fast-food factories, food supply centers, food factories, and healthcare, etc.
It is for disinfection of tableware made of melamine materials. And can also satisfy medical needs institutions to clothing, documents, laboratory slips, slippers, goggles, isolation clothing, protection. Clothing and other instruments and articles in a full range of non-gap disinfection.



●XRTPMA MELAMINE -A





This Melamine serie sterilizer cabinet is made of high quality SUS201 and Tempered glass (if you choose the glass door), Single door or double doors are all available according to your demand, the built-in grille Multilayer adjustable. The product features a choice of dual disinfection modes through ultraviolet irradiation and high temperature. To achieve bacteria, viruses and other microorganisms in the DNA structure of elimination, destruction of disease Bacteria reproduction ability to achieve sterilization effect; It can be used to disinfect the surface of objects, and effectively kill the intestine Pathogenic bacteria, pathogenic yeast and suppurative coccus and other bacteria.

FEATURES

1. Far infrared electric heating tube, heating temperature reach 60C, with UV LED sterilization-effectively remove germs and bacteria.
2. High temperature +UV+OZONE, achieving complete sterilization and worry free health;
3. Internationalized design;
4. Especially suitable for disinfection of tableware made of melamine materials;
5. High quality stainless steel layers, easy to store and clean;
6. Large disinfection and cleaning storage space, which can simultaneously accommodate different dining utensils such as plates, bowls and other tableware for disinfection;
7. Exterior and interior are all made of stainless steel structure, durable, anti-corrosion and long-service-life.
8. The cabinet is tall and has a large storage capacity, with all cabinets made of stainless steel.
9. Customization is available

APPLICATIONS

Suitable for disinfection in industries such as hotels, restaurants, factories and mines, enterprises and institutions, large fast-food factories, food supply centers, food factories, and healthcare, etc.
It is for disinfection of tableware made of melamine materials. And can also satisfy medical needs institutions to clothing, documents, laboratory slips, slippers, goggles, isolation clothing, protection. Clothing and other instruments and articles in a full range of non-gap disinfection.



Fingerprint Resistant-E

Technical Parameter

Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Sterilization Temp.	Layers	Caster Height	Insulation Thickness	Capacity (L)	Net Weight
XRTP-348FE14	700*710*1910	560*395*260	220V	2.2KW	50 ~ 125°C	120°C	4	12cm	3cm	348L	/
XRTP-740FE28	1365*710*1910	560*395*260	220V	4.4KW	50 ~ 125°C	120°C	8	12cm	3cm	740L	168KG

MELAMINE -A

Technical Parameter

Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Sterilization Temp.	Layers	Caster Height	Insulation Thickness	Capacity (L)	Net Weight
XRTP-370MA15	565*600*1960	485*390*50	220V	2.2KW	35~60°C	60°C	5	12cm	3cm	370L	49KG
XRTP-690MA210	1155*600*1960	525*390*50	220V	4.4KW	35~60°C	60°C	10	12cm	3cm	690L	87KG

●XRTPMB MELAMINE -B



This Melamine serie sterilizer cabinet is made of high quality SUS201 and Tempered glass (if you choose the glass door), Single door or double doors are all available according to your demand, the built-in grille Multilayer adjustable. The product features a choice of dual disinfection modes through ultraviolet irradiation and high temperature. To achieve bacteria, viruses and other microorganisms in the DNA structure of elimination, destruction of disease Bacteria reproduction ability to achieve sterilization effect; It can be used to disinfect the surface of objects, and effectively kill the intestine Pathogenic bacteria, pathogenic yeast and suppurative coccus and other bacteria.

FEATURES

1. Far infrared electric heating tube, heating temperature reach 60C, with UV LED sterilization-effectively remove germs and bacteria.
2. High temperature +UV+OZONE, achieving complete sterilization and worry free health;
3. Internationalized design;
4. Especially suitable for disinfection of tableware made of melamine materials;
5. High quality stainless steel layers, easy to store and clean;
6. Large disinfection and cleaning storage space, which can simultaneously accommodate different dining utensils such as plates, bowls and other tableware for disinfection;
7. Exterior and interior are all made of stainless steel structure, durable, anti-corrosion and long-service-life.
8. The cabinet is tall and has a large storage capacity, with all cabinets made of stainless steel.
9. Customization is available

APPLICATIONS

Suitable for disinfection in industries such as hotels, restaurants, factories and mines, enterprises and institutions, large fast-food factories, food supply centers, food factories, and healthcare, etc.

It is for disinfection of tableware made of melamine materials. And can also satisfy medical needs institutions to clothing, documents, laboratory slips, slippers, goggles, isolation clothing, protection. Clothing and other instruments and articles in a full range of non-gap disinfection.



●XRTPMB MELAMINE -C(With ozone)



This Melamine serie sterilizer cabinet is made of high quality SUS201 and Tempered glass (if you choose the glass door), Single door or double doors are all available according to your demand, the built-in grille Multilayer adjustable. The product features a choice of dual disinfection modes through ultraviolet irradiation and high temperature. To achieve bacteria, viruses and other microorganisms in the DNA structure of elimination, destruction of disease Bacteria reproduction ability to achieve sterilization effect; It can be used to disinfect the surface of objects, and effectively kill the intestine Pathogenic bacteria, pathogenic yeast and suppurative coccus and other bacteria.

FEATURES

1. Far infrared electric heating tube, heating temperature reach 60C, with UV LED sterilization-effectively remove germs and bacteria.
2. High temperature +UV+OZONE, achieving complete sterilization and worry free health;
3. Internationalized design;
4. Especially suitable for disinfection of tableware made of melamine materials;
5. High quality stainless steel layers, easy to store and clean;
6. Large disinfection and cleaning storage space, which can simultaneously accommodate different dining utensils such as plates, bowls and other tableware for disinfection;
7. Exterior and interior are all made of stainless steel structure, durable, anti-corrosion and long-service-life.
8. The cabinet is tall and has a large storage capacity, with all cabinets made of stainless steel.
9. Customization is available

APPLICATIONS

Suitable for disinfection in industries such as hotels, restaurants, factories and mines, enterprises and institutions, large fast-food factories, food supply centers, food factories, and healthcare, etc.

It is for disinfection of tableware made of melamine materials. And can also satisfy medical needs Institutions to clothing, documents, laboratory slips, slippers, goggles, isolation clothing, protection. Clothing and other instruments and articles in a full range of non-gap disinfection.



MELAMINE -B		Technical Parameter								
Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Sterilization Temp.	Layers	Caster Height	Capacity (L)	Net Weight
XRTP-370MB15	565*600*1960	485*390*50	220V	2.2KW	35~60°C	60°C	5	12cm	370L	76KG
XRTP-690MB210	1155*600*1960	525*390*50	220V	4.4KW	35~60°C	60°C	10	12cm	690L	124KG

MELAMINE -C		Technical Parameter								
Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Sterilization Temp.	Layers	Caster Height	Capacity (L)	Net Weight
XZTP-690MB210	1190*590*1830	550*400*120	220V	4.4KW	35~60°C	60°C 臭氧浓度 >10PPMPM	10	12cm	690L	91KG

●XRTPEA Engineering -A

This Engineering serie sterilizer cabinet is made of high quality SUS201 and Tempered glass (if you choose the glass door), Single door or double doors are all available according to your demand, the built-in grille Multilayer adjustable. Through the cycle of high temperature, it penetrates the cell membrane of microorganisms, destroys the DNA structure of various bacteria, parasites, and other pathogenic organisms, destroys their nucleic acid molecular bonds, and causes bacteria to immediately die or unable to reproduce, thus achieving the effect of disinfection and sterilization. Destroy and alter the DNA (deoxyribonucleic acid) structure of microorganisms to achieve the goal of sterilization.

FEATURES

1. Far infrared electric heating tube, heating temperature exceed 150C, 2-star disinfection.
2. High temperature hot air circulates 360 degrees to sterilize invisibly, achieving complete sterilization and worry free health;
3. Internationalized design,
4. Stereoscopic high-temperature hot air circulation, directly reaching every corner of the cabinet, disinfecting tableware with brightness and dry;
5. High quality stainless steel layers, easy to store and clean;
6. Large disinfection and cleaning storage space, which can simultaneously accommodate different dining utensils such as plates, bowls and other tableware for disinfection;
7. Exterior and interior are all made of stainless steel structure, durable, anti-corrosion and long-service-life.
8. The cabinet is tall and has a large storage capacity, with all cabinets made of stainless steel.
9. Customization is available

APPLICATIONS

Suitable for disinfection in industries such as hotels, restaurants, factories and mines, enterprises and institutions, large fast-food factories, food supply centers, food factories, and healthcare, etc.
Unique hot air heating cycle system, automatic temperature control system to ensure uniform and constant temperature, efficient and thorough disinfection and drying



Engineering -A		Technical Parameter								
Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Sterilization Temp.	Layers	Caster Height	Capacity (L)	Net Weight
X RTP-337EA14	645*660*1960	560*395*260	220V	2.2KW	50~150°C	150°C	4	12cm	337L	84KG
X RTP-720EA28	1310*660*1960	560*395*260	220V	4.4KW	50~150°C	150°C	8	12cm	720L	142KG

●XRTPEB Engineering -B


This Engineering serie sterilizer cabinet is made of high quality SUS201 and Tempered glass (if you choose the glass door), Single door or double doors are all available according to your demand, the built-in grille Multilayer adjustable. Through the cycle of high temperature, it penetrates the cell membrane of microorganisms, destroys the DNA structure of various bacteria, parasites, and other pathogenic organisms, destroys their nucleic acid molecular bonds, and causes bacteria to immediately die or unable to reproduce, thus achieving the effect of disinfection and sterilization. Destroy and alter the DNA (deoxyribonucleic acid) structure of microorganisms to achieve the goal of sterilization.

FEATURES

1. Far infrared electric heating tube, heating temperature exceed 150C, 2-star disinfection.
2. High temperature hot air circulates 360 degrees to sterilize invisibly, achieving complete sterilization and worry free health;
3. Internationalized design,
4. Stereoscopic high-temperature hot air circulation, directly reaching every corner of the cabinet, disinfecting tableware with brightness and dry;
5. High quality stainless steel layers, easy to store and clean;
6. Large disinfection and cleaning storage space, which can simultaneously accommodate different dining utensils such as plates, bowls and other tableware for disinfection;
7. Exterior and interior are all made of stainless steel structure, durable, anti-corrosion and long-service-life.
8. The cabinet is tall and has a large storage capacity, with all cabinets made of stainless steel.
9. Customization is available

APPLICATIONS

Suitable for disinfection in industries such as hotels, restaurants, factories and mines, enterprises and institutions, large fast-food factories, food supply centers, food factories, and healthcare, etc.
Unique hot air heating cycle system, automatic temperature control system to ensure uniform and constant temperature, efficient and thorough disinfection and drying



Engineering -B		Technical Parameter									
Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Sterilization Temp.	Layers	Caster Height	Insulation Thickness	Capacity (L)	Net Weight
X RTP-337EB14	645*660*2005	560*395*260 *3	220V	2.2KW	50~150°C	150°C	5	12cm	3cm	337L	88KG
		560X395X110 *1									
		560X395X60 *1									
X RTP-720EB28	1310*660*2005	560*395*260 *6	220V	4.4KW	50~150°C	150°C	10	12cm	3cm	720L	148KG
		560X395X110 *2									
		560X395X60 *2									

●XRTPEC Engineer-C All 304 Stainless steels Material


This Engineering serie sterilizer cabinet is made of high quality SUS201 and Tempered glass (if you choose the glass door), Single door or double doors are all available according to your demand, the built-in grille Multilayer adjustable. Through the cycle of high temperature, it penetrates the cell membrane of microorganisms, destroys the DNA structure of various bacteria, parasites, and other pathogenic organisms, destroys their nucleic acid molecular bonds, and causes bacteria to immediately die or unable to reproduce, thus achieving the effect of disinfection and sterilization. Destroy and alter the DNA (deoxyribonucleic acid) structure of microorganisms to achieve the goal of sterilization.

FEATURES

1. Far infrared electric heating tube, heating temperature exceed 150C, 2-star disinfection.
2. High temperature hot air circulates 360 degrees to sterilize invisibly, achieving complete sterilization and worry free health.
3. Internationalized design.
4. Stereoscopic high-temperature hot air circulation, directly reaching every corner of the cabinet, disinfecting tableware with brightness and dry.
5. High quality stainless steel layers, easy to store and clean;
6. Large disinfection and cleaning storage space, which can simultaneously accommodate different dining utensils such as plates, bowls and other tableware for disinfection;
7. Exterior and interior are all made of stainless steel structure, durable, anti-corrosion and long-service-life.
8. The cabinet is tall and has a large storage capacity, with all cabinets made of stainless steel.
9. Customization is available

APPLICATIONS

Suitable for disinfection in industries such as hotels, restaurants, factories and mines, enterprises and institutions, large fast-food factories, food supply centers, food factories, and healthcare, etc.
Unique hot air heating cycle system, automatic temperature control system to ensure uniform and constant temperature, efficient and thorough disinfection and drying



●XRTP-720CA Cart type disinfection cabinet


This Engineering serie sterilizer cabinet is made of high quality SUS201 and Tempered glass (if you choose the glass door), Single door or double doors are all available according to your demand, the built-in grille Multilayer adjustable. Through the cycle of high temperature, it penetrates the cell membrane of microorganisms, destroys the DNA structure of various bacteria, parasites, and other pathogenic organisms, destroys their nucleic acid molecular bonds, and causes bacteria to immediately die or unable to reproduce, thus achieving the effect of disinfection and sterilization. Destroy and alter the DNA (deoxyribonucleic acid) structure of microorganisms to achieve the goal of sterilization.

FEATURES

1. Far infrared electric heating tube, heating temperature exceed 150C, 2-star disinfection.
2. High temperature hot air circulates 360 degrees to sterilize invisibly, achieving complete sterilization and worry free health.
3. Internationalized design.
4. Stereoscopic high-temperature hot air circulation, directly reaching every corner of the cabinet, disinfecting tableware with brightness and dry.
5. High quality stainless steel layers, easy to store and clean;
6. Large disinfection and cleaning storage space, which can simultaneously accommodate different dining utensils such as plates, bowls and other tableware for disinfection;
7. Exterior and interior are all made of stainless steel structure, durable, anti-corrosion and long-service-life.
8. The cabinet is tall and has a large storage capacity, with all cabinets made of stainless steel.
9. Customization is available

APPLICATIONS

Suitable for disinfection in industries such as hotels, restaurants, factories and mines, enterprises and institutions, large fast-food factories, food supply centers, food factories, and healthcare, etc.
Unique hot air heating cycle system, automatic temperature control system to ensure uniform and constant temperature, efficient and thorough disinfection and drying



Engineer-C All 304 Stainless steels Material										Technical Parameter	
Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Sterilization Temp.	Layers	Caster Height	Insulation thickness	Capacity (L)	Net Weight
XRTP-337EC14	645*660*1960	560*395*260	220V	2.2KW	50~150°C	150°C	4	12cm	3cm	337L	84KG
XRTP-720EC28	1310*660*1960	560*395*260	220V	4.4KW	50~150°C	150°C	8	12cm	3cm	720L	142KG


Engineer-C All 304 Stainless steels Material										Technical Parameter	
Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Sterilization Temp.	Layers	Caster Height	Insulation thickness	Capacity (L)	Net Weight
XRTP-720CA14	670*825*2050	460X505X260	220V	2.2KW	50~150°C	150°C	4	12cm	5.5cm	337L	87KG
XRTP-720CA28	1290*825*2050	460X505X260	220V	4.4KW	50~150°C	150°C	8	12cm	5.5cm	720L	210KG

●XRTP-VK Knife and vegetable holder disinfection cabinet

This Engineering serie sterilizer cabinet is made of high quality SUS201 and Tempered glass (if you choose the glass door), Single door or double doors are all available according to your demand, the built-in grille Multilayer adjustable. Through the cycle of high temperature, it penetrates the cell membrane of microorganisms, destroys the DNA structure of various bacteria, parasites, and other pathogenic organisms, destroys their nucleic acid molecular bonds, and causes bacteria to immediately die or unable to reproduce, thus achieving the effect of disinfection and sterilization. Destroy and alter the DNA (deoxyribonucleic acid) structure of microorganisms to achieve the goal of sterilization.


- FEATURES**
1. Far infrared electric heating tube, heating temperature exceed 150C, 2-star disinfection.
 2. High temperature hot air circulates 360 degrees to sterilize invisibly, achieving complete sterilization and worry free health;
 3. Internationalized design.
 4. Stereoscopic high-temperature hot air circulation, directly reaching every corner of the cabinet, disinfecting tableware with brightness and dry;
 5. High quality stainless steel layers, easy to store and clean;
 6. Large disinfection and cleaning storage space, which can simultaneously accommodate different dining utensils such as plates, bowls and other tableware for disinfection;
 7. Exterior and interior are all made of stainless steel structure, durable, anti-corrosion and long-service-life.
 8. The cabinet is tall and has a large storage capacity, with all cabinets made of stainless steel.
 9. Customization is available

APPLICATIONS
Suitable for disinfection in industries such as hotels, restaurants, factories and mines, enterprises and institutions, large fast-food factories, food supply centers, food factories, and healthcare, etc...
Unique hot air heating cycle system, automatic temperature control system to ensure uniform and constant temperature, efficient and thorough disinfection and drying



Knife and vegetable holder disinfection cabinet		Technical Parameter									
Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Sterilization Temp.	Layers	Caster Height	Insulation Thickness	Capacity (L)	Net Weight
XRTP-720VK23	680*725*1550	610X345X78 *2	220V	0.3KW	10~60°C	60°C	3	10cm	3cm	720L	78.5KG
		(20 knight ports)									
		610X480X300 *1 (chopping board)									

●XRTPW Workbench disinfection Cabinet



This Engineering serie sterilizer cabinet is made of high quality SUS201 and Tempered glass (if you choose the glass door), Single door or double doors are all available according to your demand, the built-in grille Multilayer adjustable. Through the cycle of high temperature, it penetrates the cell membrane of microorganisms, destroys the DNA structure of various bacteria, parasites, and other pathogenic organisms, destroys their nucleic acid molecular bonds, and causes bacteria to immediately die or unable to reproduce, thus achieving the effect of disinfection and sterilization. Destroy and alter the DNA (deoxyribonucleic acid) structure of microorganisms to achieve the goal of sterilization.

- FEATURES**
1. Far infrared electric heating tube, heating temperature exceed 150C, 2-star disinfection.
 2. High temperature hot air circulates 360 degrees to sterilize invisibly, achieving complete sterilization and worry free health;
 3. Internationalized design.
 4. Stereoscopic high-temperature hot air circulation, directly reaching every corner of the cabinet, disinfecting tableware with brightness and dry;
 5. High quality stainless steel layers, easy to store and clean;
 6. Large disinfection and cleaning storage space, which can simultaneously accommodate different dining utensils such as plates, bowls and other tableware for disinfection;
 7. Exterior and interior are all made of stainless steel structure, durable, anti-corrosion and long-service-life.
 8. The cabinet is tall and has a large storage capacity, with all cabinets made of stainless steel.
 9. Customization is available

APPLICATIONS
Suitable for disinfection in industries such as hotels, restaurants, factories and mines, enterprises and institutions, large fast-food factories, food supply centers, food factories, and healthcare, etc...
Unique hot air heating cycle system, automatic temperature control system to ensure uniform and constant temperature, efficient and thorough disinfection and drying

Workbench disinfection Cabinet		Technical Parameter									
Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Sterilization Temp.	Layers	Caster Height	Insulation Thickness	Capacity (L)	Net Weight
XRTP-245W22	1205*650*860	970*400*20	220V	2.2KW	50~150°C	150°C	2	12cm	3cm	245L	80KG



●E450/E900BCM Upright Foaming Macheanical Style Banquet Cart

A banquet cart is a great way to ensure service runs smoothly as it holds food at a ready-to-serve temperature. This banquet trolley is designed to handle your most challenging events. This commercial banquet cart retains your food's natural moisture so it's always full of flavour. Plus its heavy-duty construction, dense thermal insulation along with lockable castors means you can place the banquet cart wherever you want, and easily remove it at the end of service for cleaning.

- FEATURES**
- Fully insulated banquet cart designed for the storage and transportation of a wide variety of precooked meals.
 - Built-in handles for easy mobility
 - Stainless steel construction throughout for ease of cleaning.
 - Adjustable anti-tilt tray slides
 - Circulation fans for even temperature and fast warm-up
 - There are water area at the air outlet to maintain a balanced and stable temperature and humidity inside the cabinet, ensuring that the food always maintains its fresh taste when just out of the pot.
 - 4CM thick insulation for energy efficiency
 - Recessed push/pull handles on both sides, allows easy maneuvering.
 - One-piece welded base with perimeter bumper provides solid foundation to support heavy loads.
 - Heavy duty 15.5cm swivel and braked castors for easy positioning
 - Adjustable thermostat and heat indicator light.
 - To provide a uniform heat source at a temperature range of 10°C - 80°C

- BENEFITS**
- Gentle heat provides for extended delivery and holding times without overcooking or drying foods out
 - Combines heavy duty construction with high efficiency to make this a work horse in the kitchen
 - Fits plates, trays, food pans and more for flexible service options and greater unit variety
 - Digital display monitors the temperature to ensure food is held at safe and precise temperatures

APPLICATIONS
This banquet cart has a wide range of uses: Food processing plants, restaurants, canteens, schools, hotels, and large-catering service for business meeting and ceremony parties and etc.



Upright Foaming Macheanical Style Banquet Cart			Technical Parameter					
Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Layers	Capacity (L)	Net Weight
E450-BCM01/11 1 door	730*900*1880	535*635*12	220V	2.2KW	10~80°C	11	450L	125KG
E900-BCM02/11 2 doors	1410*900*1880	535*635*12	220V	4.4KW	10~80°C	22	900L	203KG

●E450/E900BC Upright Foaming Intelligent Style Banquet Cart

A banquet cart is a great way to ensure service runs smoothly as it holds food at a ready-to-serve temperature. This banquet trolley is designed to handle your most challenging events. This commercial banquet cart retains your food's natural moisture so it's always full of flavour. Plus its heavy-duty construction, dense thermal insulation along with lockable castors means you can place the banquet cart wherever you want, and easily remove it at the end of service for cleaning.

- FEATURES**
- Fully insulated banquet cart designed for the storage and transportation of a wide variety of precooked meals.
 - Built-in handles for easy mobility
 - Stainless steel construction throughout for ease of cleaning.
 - Adjustable anti-tilt tray slides
 - Circulation fans for even temperature and fast warm-up
 - 4CM thick insulation for energy efficiency
 - Recessed push/pull handles on both sides, allows easy maneuvering.
 - One-piece welded base with perimeter bumper provides solid foundation to support heavy loads.
 - Heavy duty non-making 19.5cm swivel and braked castors for easy positioning
 - Microcomputer control, adjustable thermostat and heat indicator light.
 - To provide a uniform heat source at a temperature range of 10°C - 80°C

- BENEFITS**
- Gentle heat provides for extended delivery and holding times without overcooking or drying foods out
 - Combines heavy duty construction with high efficiency to make this a work horse in the kitchen
 - Fits plates, trays, food pans and more for flexible service options and greater unit variety
 - Digital display monitors the temperature to ensure food is held at safe and precise temperatures

APPLICATIONS
This banquet cart has a wide range of uses: Food processing plants, restaurants, canteens, schools, hotels, and large-catering service for business meeting and ceremony parties and etc.



Upright Foaming Intelligent Style Banquet Cart			Technical Parameter					
Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Layers	Capacity (L)	Net Weight
E450-BCI01/11 1 door	730*900*1880	535*635*12	220V	2.2KW	10~80°C	11	450L	122KG
E900-BCI02/11 2 doors	1410*900*1880	535*635*12	220V	4.4KW	10~80°C	22	900L	204KG

●E600

4D Glass Visual Style Banquet Cart



A banquet cart is a great way to ensure service runs smoothly as it holds food at a ready-to-serve temperature. This banquet trolley is designed to handle your most challenging events. This commercial banquet cart retains your food's natural moisture so it's always full of flavour. Plus its heavy-duty construction, dense thermal insulation along with lockable castors means you can place the banquet cart wherever you want, and easily remove it at the end of service for cleaning.

FEATURES

- Fully insulated banquet cart designed for the storage and transportation of a wide variety of precooked meals and cakes.
- Built-in handles for easy mobility
- Three sides with single layer tempered glass and hollow glass door. Four sided glass, beautiful and visible food
- Adjustable anti-tilt tray slides
- Circulation fans for even temperature and fast warm-up
- One-piece welded base with perimeter bumper provides solid foundation to support heavy loads.
- Heavy duty non-making 19.5cm swivel and braked castors for easy positioning
- Adjustable thermostat and heat indicator light.
- To provide a uniform heat source at a temperature range of 30°C - 80°C

BENEFITS

- Gentle heat provides for extended delivery and holding times without overcooking or drying foods out
- Combines heavy duty construction with high efficiency to make this a work horse in the kitchen
- Fits plates, trays, food pans and more for flexible service options and greater unit variety
- Digital display monitors the temperature to ensure food is held at safe and precise temperatures

APPLICATIONS

This banquet cart has a wide range of uses: Food processing plants, restaurants, canteens, schools, hotels, and large-catering service for business meeting and ceremony parties and etc.



●E528-BCG

Double Glass Doors (Up&Bottom) Banquet Cart



A banquet cart is a great way to ensure service runs smoothly as it holds food at a ready-to-serve temperature. This banquet trolley is designed to handle your most challenging events. This commercial banquet cart retains your food's natural moisture so it's always full of flavour. Plus its heavy-duty construction, dense thermal insulation along with lockable castors means you can place the banquet cart wherever you want, and easily remove it at the end of service for cleaning.

FEATURES

- Fully insulated banquet cart designed for the storage and transportation of a wide variety of precooked meals and cakes.
- Built-in handles for easy mobility
- Double single layer tempered glass doors, beautiful and visible food
- Adjustable anti-tilt tray slides
- Circulation fans for even temperature and fast warm-up
- One-piece welded base with perimeter bumper provides solid foundation to support heavy loads.
- Heavy duty non-making 19.5cm swivel and braked castors for easy positioning
- Adjustable thermostat and heat indicator light.
- To provide a uniform heat source at a temperature range of 10°C - 80°C

BENEFITS

- Gentle heat provides for extended delivery and holding times without overcooking or drying foods out
- Combines heavy duty construction with high efficiency to make this a work horse in the kitchen
- Fits plates, trays, food pans and more for flexible service options and greater unit variety
- Digital display monitors the temperature to ensure food is held at safe and precise temperatures

APPLICATIONS

This banquet cart has a wide range of uses: Food processing plants, restaurants, canteens, schools, hotels, and large-catering service for business meeting and ceremony parties and etc.



4D Glass Visual Style Banquet Cart

Technical Parameter

Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Layers	Capacity (L)	Net Weight
E600-BC4D02/10	860*830*1900	535*635*12	220V	2.5KW	30~80°C	10	600L	57.5KG

Double Glass Doors (Up&Bottom) Banquet Cart

Technical Parameter

Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Layers	Capacity (L)	Net Weight
E528-BCG02/10	730*930*1880	535*635*12	220V	1.8KW	10~80°C	10	528L	42KG

● **E450/E900-BCG**
Glass Banquet Cart



A banquet cart is a great way to ensure service runs smoothly as it holds food at a ready-to-serve temperature. This banquet trolley is designed to handle your most challenging events. This commercial banquet cart retains your food's natural moisture so it's always full of flavour. Plus its heavy-duty construction, dense thermal insulation along with lockable castors means you can place the banquet cart wherever you want, and easily remove it at the end of service for cleaning.

FEATURES

- Fully insulated banquet cart designed for the storage and transportation of a wide variety of precooked meals and cakes.
- 4cm thickness of Aluminum silicate insulation layer, energy efficiency
- Single layer tempered glass doors, beautiful and visible food
- Adjustable anti-tilt tray slides
- Circulation fans for even temperature and fast warm-up
- One-piece welded base with perimeter bumper provides solid foundation to support heavy loads.
- Heavy duty non-making 19.5cm swivel and braked castors for easy positioning
- Adjustable thermostat and heat indicator light.
- To provide a uniform heat source at a temperature range of 10°C - 80°C

BENEFITS

- Gentle heat provides for extended delivery and holding times without overcooking or drying foods out
- Combines heavy duty construction with high efficiency to make this a work horse in the kitchen
- Fits plates, trays, food pans and more for flexible service options and greater unit variety
- Digital display monitors the temperature to ensure food is held at safe and precise temperatures

APPLICATIONS

This banquet cart has a wide range of uses: Food processing plants, restaurants, canteens, schools, hotels, and large-catering service for business meeting and ceremony parties and etc.

● **E450/E900-BCGT**
Glass Banquet Trolley



A banquet cart is a great way to ensure service runs smoothly as it holds food at a ready-to-serve temperature. This banquet trolley is designed to handle your most challenging events. This commercial banquet cart retains your food's natural moisture so it's always full of flavour. Plus its heavy-duty construction, dense thermal insulation along with lockable castors means you can place the banquet cart wherever you want, and easily remove it at the end of service for cleaning.

FEATURES

- Fully insulated banquet cart designed for the storage and transportation of a wide variety of precooked meals and cakes.
- Built-in handles for easy mobility
- Double single layer tempered glass doors, beautiful and visible food
- Adjustable anti-tilt tray slides
- Circulation fans for even temperature and fast warm-up
- One-piece welded base with perimeter bumper provides solid foundation to support heavy loads.
- Heavy duty non-making 19.5cm swivel and braked castors for easy positioning
- Adjustable thermostat and heat indicator light.
- To provide a uniform heat source at a temperature range of 10°C - 80°C

BENEFITS

- Gentle heat provides for extended delivery and holding times without overcooking or drying foods out
- Combines heavy duty construction with high efficiency to make this a work horse in the kitchen
- Fits plates, trays, food pans and more for flexible service options and greater unit variety
- Digital display monitors the temperature to ensure food is held at safe and precise temperatures

APPLICATIONS

This banquet cart has a wide range of uses: Food processing plants, restaurants, canteens, schools, hotels, and large-catering service for business meeting and ceremony parties and etc.



Glass Banquet Cart		Technical Parameter						
Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Layers	Capacity (L)	Net Weight
E450-BCG01/11	730*930*1850mm	535X635X12mm	220V	2.2KW	10~80°C	11	450L	126.5KG
E900-BCG02/11	1410*930*1850mm	535X635X12mm	220V	4.4KW	10~80°C	22	900L	213KG

Glass Banquet Trolley		Technical Parameter						
Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Layers	Capacity (L)	Net Weight
E450-BCGT01/11 1 door	750*920*1935	535X635X12	220V	2.2KW	10~80°C	11	450	99KG
		Trolley Size: 600*700*1672						
E900-BCGT02/11 2 doors	1510*920*1935	535X635X12 *2	220V	4.4KW	10~80°C	22	900	171KG
		Trolley Size: 600*700*1672 *2						

● **E900-BCM02/12**
Mini Banquet Cart



This MINI banquet cart is suitable for small banquets or household use. This banquet cart can maintain the natural moisture of food, making it always full of flavor, and store pre-made food for late returning families or small banquets. The casters can be locked, allowing you to place the banquet dining car anywhere you want and easily push it away for cleaning at the end.

FEATURES

- Fully insulated banquet cart designed for the storage and transportation of a wide variety of precooked meals.
- Built-in handles for easy mobility
- Stainless steel throughout construction for ease of cleaning, 3cm thickness of Cyclopentane foaming, energy efficiency.
- Adjustable anti-tilt tray slides
- Circulation fans for even temperature and fast warm-up
- 3CM thick insulation for energy efficiency
- Recessed push/pull handles on both sides, allows easy maneuvering.
- One-piece welded base with perimeter bumper provides solid foundation to support heavy loads.
- Heavy duty 10cm swivel and braked castors for easy positioning
- Adjustable thermostat and heat indicator light.
- To provide a uniform heat source at a temperature range of 30°C - 80°C

BENEFITS

- Gentle heat with wet provides for extended delivery and holding times without overcooking or drying foods out
- Combines heavy duty construction with high efficiency to make this a work horse in the kitchen
- Fits plates, trays, food pans and more for flexible service options and greater unit variety
- Digital display monitors the temperature to ensure food is held at safe and precise temperatures

APPLICATIONS

This banquet cart has a wide range of uses: Food processing plants, restaurants, canteens, schools, hotels, and Small or large-catering service for business meeting and ceremony parties and etc.



Mini Banquet Cart

Technical Parameter

Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Layers	Capacity (L)	Net Weight
E900-BCM02/12	1110*675*1000mm	790*400*20mm	220V	1.3KW	30-80°C	4	233L	67.5KG

● **E250-BCW02/11**
Electric Banquet Cart-C



A banquet cart is a great way to ensure service runs smoothly as it holds food at a ready-to-serve temperature. This banquet trolley is designed to handle your most challenging events. This commercial banquet cart retains your food's natural moisture so it's always full of flavour. Plus its heavy-duty construction, dense thermal insulation along with lockable castors means you can place the banquet cart wherever you want, and easily remove it at the end of service for cleaning.

FEATURES

- Fully insulated banquet cart designed for the storage and transportation of a wide variety of precooked meals.
- Built-in handles for easy mobility
- Three sides of Stainless steel + hollow glass door construction for ease of cleaning, 12cm thickness of Cyclopentane foaming, energy efficiency.
- Adjustable anti-tilt tray slides
- Circulation fans for even temperature and fast warm-up
- Automatic reset cut-out switch to prevent overheating
- 5CM thick insulation for energy efficiency
- Recessed push/pull handles on both sides, allows easy maneuvering.
- One-piece welded base with perimeter bumper provides solid foundation to support heavy loads.
- Heavy duty non-making 19.5cm swivel and braked castors for easy positioning
- Adjustable thermostat and heat indicator light.
- To provide a uniform heat source at a temperature range of 30°C - 80°C

BENEFITS

- Gentle heat provides for extended delivery and holding times without overcooking or drying foods out
- Combines heavy duty construction with high efficiency to make this a work horse in the kitchen
- Fits plates, trays, food pans and more for flexible service options and greater unit variety
- Digital display monitors the temperature to ensure food is held at safe and precise temperatures

APPLICATIONS

This banquet cart has a wide range of uses: Food processing plants, restaurants, canteens, schools, hotels, and large-catering service for business meeting and ceremony parties and etc.



Electric Banquet Cart-C

Technical Parameter

Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Layers	Capacity (L)	Net Weight
E250-BCW02/11	1050*730*1200mm	640X560X20mm	220V	1.3KW	30-80°C	4	250L	168.5KG

●E300-BCW01/11 Horizontal Banquet Cart-A



A banquet cart is a great way to ensure service runs smoothly as it holds food at a ready-to-serve temperature. This banquet trolley is designed to handle your most challenging events. This commercial banquet cart retains your food's natural moisture so it's always full of flavour. Plus its heavy-duty construction, dense thermal insulation along with lockable castors means you can place the banquet cart wherever you want, and easily remove it at the end of service for cleaning.

FEATURES

- Fully insulated banquet cart designed for the storage and transportation of a wide variety of precooked meals.
- Built-in handles for easy mobility
- Three sides of Stainless steel + hollow glass door construction for ease of cleaning, 12cm thickness of Cyclopentane foaming, energy efficiency.
- Adjustable anti-tilt tray slides
- Circulation fans for even temperature and fast warm-up
- 3CM thick insulation for energy efficiency
- Recessed push/pull handles on both sides, allows easy maneuvering.
- One-piece welded base with perimeter bumper provides solid foundation to support heavy loads.
- Heavy duty non-making 10cm swivel and braked castors for easy positioning
- Adjustable thermostat and heat indicator light.
- To provide a uniform heat source at a temperature range of 30°C - 80°C.

BENEFITS

- Gentle heat provides for extended delivery and holding times without overcooking or drying foods out
- Combines heavy duty construction with high efficiency to make this a work-horse in the kitchen
- Fits plates, trays, food pans and more for flexible service options and greater unit variety
- Digital display monitors the temperature to ensure food is held at safe and precise temperatures

APPLICATIONS

This banquet cart has a wide range of uses: Food processing plants, restaurants, canteens, schools, hotels, and large-catering service for business meeting and ceremony parties and etc.



●E234-BCW02/11 Horizontal Banquet Cart-B



A banquet cart is a great way to ensure service runs smoothly as it holds food at a ready-to-serve temperature. This banquet trolley is designed to handle your most challenging events. This commercial banquet cart retains your food's natural moisture so it's always full of flavour. Plus its heavy-duty construction, dense thermal insulation along with lockable castors means you can place the banquet cart wherever you want, and easily remove it at the end of service for cleaning.

FEATURES

- Fully insulated banquet cart designed for the storage and transportation of a wide variety of precooked meals.
- Built-in handles for easy mobility
- Three sides of Stainless steel + hollow glass door construction for ease of cleaning, 12cm thickness of Cyclopentane foaming, energy efficiency.
- Adjustable anti-tilt tray slides
- Circulation fans for even temperature and fast warm-up
- Automatic reset cut-out switch to prevent overheating
- 3CM thick insulation for energy efficiency
- Recessed push/pull handles on both sides, allows easy maneuvering.
- One-piece welded base with perimeter bumper provides solid foundation to support heavy loads.
- Heavy duty non-making 10cm swivel and braked castors for easy positioning
- Adjustable thermostat and heat indicator light.
- To provide a uniform heat source at a temperature range of 30°C - 80°C

BENEFITS

- Gentle heat provides for extended delivery and holding times without overcooking or drying foods out
- Combines heavy duty construction with high efficiency to make this a work-horse in the kitchen
- Fits plates, trays, food pans and more for flexible service options and greater unit variety
- Digital display monitors the temperature to ensure food is held at safe and precise temperatures

APPLICATIONS

This banquet cart has a wide range of uses: Food processing plants, restaurants, canteens, schools, hotels, and large-catering service for business meeting and ceremony parties and etc.



Horizontal Banquet Cart-A

Technical Parameter

Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Layers	Capacity (L)	Net Weight
E300-BCW01/11	970*705*910mm	560X530X20mm	220V	1.2KW	30~80°C	4	300L	65KG

Horizontal Banquet Cart-B

Technical Parameter

Model	Dimension (mm)	Shelf Size(mm)	Voltage	Power	Temp. Range	Layers	Capacity (L)	Net Weight
E234-BCW02/11	1055*745*1065mm	845X465X20mm	220V	2.2KW	10~80°C	4	234L	82.5KG

● ECUR E Serie Workbench Refrigerator (Air Cooling)

PRODUCT THREE VIEWS



FEATURES

- High quality stainless steel 201. Luxury appearance, eco-friendly design
- Complete Structure Interior & Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 6CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao/Embraco.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- Ventilated, automatic defrosting and evaporation of condensation water
- High standard refrigerant: R290a
- With CE certificate
- Ventilated, automatic defrosting and evaporation of condensation water
- Heavy duty adjustable legs/casters
- PCB Control digital operation
- Customization is available

APPLICATIONS

Suitable for commercial channels such as supermarkets, cold drink shops, freezers, hotels and restaurants, specializing in storing ice cream, beverages, dairy products, frozen foods, food materials, etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.

● EDUR E Serie Workbench Refrigerator (Direct Cooling)

PRODUCT THREE VIEWS



FEATURES

- High quality stainless steel 201, Luxury appearance, eco-friendly design
- Complete Structure Interior & Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 6CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao/Embraco.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- Auto defrost system will defrost as needed. Improve energy efficiency and extend the service life of refrigeration systems.
- With CE certificate
- Heavy duty adjustable legs/casters
- PCB Control digital operation
- Customization is available

APPLICATIONS

Suitable for commercial channels such as supermarkets, cold drink shops, freezers, hotels and restaurants, specializing in storing ice cream, beverages, dairy products, frozen foods, food materials, etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.

E Serie Workbench Refrigerator (Air Cooling)			Technical Parameter					
	Model	Dimension (mm)	Rated Voltage	Power	Temperature	Refrigerant	Capacity	Net weight
1.8m	ECUR18-2 (800)	1800*800*800	110v(220v)/50-60Hz	240W	2-8°C	R404A/R290	445L	74KG
	ECUR18-2 (700)	1800*700*800					375L	70KG
	ECUR18-2 (600)	1800*600*800					305L	65KG
1.5m	ECUR15-2 (800)	1500*800*800					345L	70KG
	ECUR15-2 (700)	1500*700*800					290L	66KG
	ECUR15-2 (600)	1500*600*800					235L	62KG
1.2m	ECUR12-2 (800)	1200*800*800					240L	62KG
	ECUR12-2 (700)	1200*700*800					200L	60KG
	ECUR12-2 (600)	1200*600*800					160L	58KG

E Serie Workbench Refrigerator (Direct Cooling)			Technical Parameter						
	Model	Dimension (mm)	Current	Rated Voltage	Power	Temperature	Refrigerant	Capacity	Net weight
1.8m	EDUR18-2 (800)	1800*800*800	1.5A	110v(220v)/50-60Hz	240W	2-8°C	R290	520L	74KG
	EDUR18-2 (700)	1800*700*800						460L	70KG
	EDUR18-2 (600)	1800*600*800						325L	65KG
1.5m	EDUR15-2 (800)	1500*800*800						360L	70KG
	EDUR15-2 (700)	1500*700*800						305L	66KG
	EDUR15-2 (600)	1500*600*800						250L	62KG
1.2m	EDUR12-2 (800)	1200*800*800						270L	62KG
	EDUR12-2 (700)	1200*700*800						225L	60KG
	EDUR12-2 (600)	1200*600*800						183L	58KG

● QDUR Q Serie Workbench Refrigerator (Direct Cooling)

PRODUCT THREE VIEWS



FEATURES

- High quality stainless steel 201, Luxury appearance, eco-friendly design
- Complete Structure Interior & Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 5CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao/Embraco.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Heavy duty adjustable legs/Casters
- PCB Control digital operation
- Customization is available

APPLICATIONS

Suitable for commercial channels such as supermarkets, cold drink shops, freezers, hotels and restaurants, specializing in storing ice cream, beverages, dairy products, frozen foods, food materials, etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.

● XSDUR S Serie Workbench Refrigerator (Direct Cooling)

PRODUCT THREE VIEWS



FEATURES

- High quality stainless steel 201, Luxury appearance, eco-friendly design
- Complete Structure Interior & Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 5CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao/Embraco.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Heavy duty adjustable legs/Casters
- PCB Control digital operation
- Customization is available

APPLICATIONS

Suitable for commercial channels such as supermarkets, cold drink shops, freezers, hotels and restaurants, specializing in storing ice cream, beverages, dairy products, frozen foods, food materials, etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.

Q Serie Workbench Refrigerator (Direct Cooling)		Technical Parameter							
	Model	Dimension (mm)	Current	Rated Voltage	Power	Temperature	Refrigerant	Capacity	Net weight
1.8m	QDUR18-2(800)	1800*800*800	1.5A	220V/50Hz	165W	2~8°C	R290	480L	64kg
	QDUR18-2(700)	1800*700*800						440L	62kg
	QDUR18-2(600)	1800*600*800						305L	58kg
1.5m	QDUR15-2(800)	1500*800*800	1.5A	220V/50Hz	165W	2~8°C	R290	380L	58kg
	QDUR15-2(700)	1500*700*800						300L	54kg
	QDUR15-2(600)	1500*600*800						245L	51kg
1.2m	QDUR12-2(800)	1200*800*800	1.5A	220V/50Hz	165W	2~8°C	R290	255L	50kg
	QDUR12-2(700)	1200*700*800						215L	47kg
	QDUR12-2(600)	1200*600*800						175L	43kg

S Serie Workbench Refrigerator (Direct Cooling)		Technical Parameter							
	Model	Dimension (mm)	Current	Rated Voltage	Power	Temperature	Refrigerant	Capacity	Net weight
1.8m	XSDUR18-2(800)	1800*800*800	1.5A	220V/50Hz	165W	2~8°C	R290	480L	64kg
	XSDUR18-2(700)	1800*700*800						440L	62kg
	XSDUR18-2(600)	1800*600*800						305L	58kg
1.5m	XSDUR15-2(800)	1500*800*800	1.5A	220V/50Hz	165W	2~8°C	R290	380L	58kg
	XSDUR15-2(700)	1500*700*800						300L	54kg
	XSDUR15-2(600)	1500*600*800						245L	51kg
1.2m	XSDUR12-2(800)	1200*800*800	1.5A	220V/50Hz	165W	2~8°C	R290	255L	50kg
	XSDUR12-2(700)	1200*700*800						215L	47kg
	XSDUR12-2(600)	1200*600*800						175L	43kg

● ECUF E Serie Workbench Freezer (Air Cooling)

PRODUCT THREE VIEWS



FEATURES

- High quality stainless steel 201. Luxury appearance, eco-friendly design
- Complete Structure Interior & Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 6CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality famous compressor Embraco/Wanbao.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Ventilated, automatic defrosting and evaporation of condensation water
- Heavy duty adjustable legs/casters
- PCB Control digital operation
- Customization is available

APPLICATIONS

Suitable for commercial channels such as supermarkets, Chain stores, cold drink shops, freezers, hotels and restaurants, specializing in storing ice cream, frozen foods, seafoods, and all kinds of food materials that need to be frozen etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.

E Serie Workbench Freezer (Air Cooling)			Technical Parameter					
Model	Dimension (mm)	Rated Voltage	Power	Temperature	Refrigerant	Capacity	Net weight	
1.8m	ECUF18-2 (800)	220V/50Hz	185W	0~-18°C	R290	520L	74KG	
	ECUF18-2 (700)					460L	70KG	
	ECUF18-2 (600)					325L	65KG	
1.5m	ECUF15-2 (800)					360L	70KG	
	ECUF15-2 (700)					305L	66KG	
	ECUF15-2 (600)					250L	62KG	
1.2m	ECUF12-2 (800)					270L	62KG	
	ECUF12-2 (700)					225L	60KG	
	ECUF12-2 (600)					183L	58KG	

● EDUF E Serie Workbench Freezer (Direct Cooling)

PRODUCT THREE VIEWS



FEATURES

- High quality stainless steel 201, Luxury appearance, eco-friendly design
- Complete Structure Interior & Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 6CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Heavy duty adjustable legs/casters
- PCB Control digital operation
- Customization is available

APPLICATIONS

Suitable for commercial channels such as supermarkets, Chain stores, cold drink shops, freezers, hotels and restaurants, specializing in storing ice cream, frozen foods, seafoods, and all kinds of food materials that need to be frozen etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.

E Serie Workbench Freezer (Direct Cooling)			Technical Parameter					
Model	Dimension (mm)	Current	Rated Voltage	Power	Temperature	Refrigerant	Capacity	Net weight
1.8m	EDUF18-2 (800)	1.5A	220v/50Hz	185W	0~-18°C	R290	520L	74KG
	EDUF18-2 (700)						460L	70KG
	EDUF18-2 (600)						325L	65KG
1.5m	EDUF15-2 (800)						360L	70KG
	EDUF15-2 (700)						305L	66KG
	EDUF15-2 (600)						250L	62KG
1.2m	EDUF12-2 (800)						270L	62KG
	EDUF12-2 (700)						225L	60KG
	EDUF12-2 (600)						183L	58KG

● QDUF Q Serie Workbench Freezer (Direct cooling)

PRODUCT THREE VIEWS



FEATURES

- High quality stainless steel 201, Luxury appearance, eco-friendly design
- Complete Structure Interior & Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 5CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Heavy duty adjustable legs/casters
- PCB Control digital operation
- Customization is available

APPLICATIONS

Suitable for commercial channels such as supermarkets, Chain stores, cold drink shops, freezers, hotels and restaurants, specializing in storing ice cream, frozen foods, seafoods, and all kinds of food materials that need to be frozen etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.

● XSDUF S Serie Workbench Freezer (Direct cooling)

PRODUCT THREE VIEWS



FEATURES

- High quality stainless steel 201, Luxury appearance, eco-friendly design
- Complete Structure Interior & Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 5CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Heavy duty adjustable legs/casters
- PCB Control digital operation
- Customization is available

APPLICATIONS

Suitable for commercial channels such as supermarkets, Chain stores, cold drink shops, freezers, hotels and restaurants, specializing in storing ice cream, frozen foods, seafoods, and all kinds of food materials that need to be frozen etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.

Q Serie Workbench Freezer (Direct cooling)			Technical Parameter						
	Model	Dimension (mm)	Current	Rated Voltage	Power	Temperature	Refrigerant	Capacity	Net weight
1.8m	QDUF18-2(800)	1800*800*800	1.5A	220v/50Hz	185W	0--18°C	R290	480L	64kg
	QDUF18-2(700)	1800*700*800						440L	62kg
	QDUF18-2(600)	1800*600*800						305L	58kg
	QDUF15-2(800)	1500*800*800						380L	58kg
1.5m	QDUF15-2(700)	1500*700*800	1.5A	220v/50Hz	185W	0--18°C	R290	300L	54kg
	QDUF15-2(600)	1500*600*800						245L	51kg
	QDUF12-2(800)	1200*800*800						255L	50kg
1.2m	QDUF12-2(700)	1200*700*800	1.5A	220v/50Hz	185W	0--18°C	R290	215L	47kg
	QDUF12-2(600)	1200*600*800						175L	43kg

S Serie Workbench Freezer (Direct cooling)			Technical Parameter						
	Model	Dimension (mm)	Current	Rated Voltage	Power	Temperature	Refrigerant	Capacity	Net weight
1.8m	XSDUF18-2(800)	1800*800*800	1.5A	220V/50Hz	185W	0--18°C	R290	480L	64kg
	XSDUF18-2(700)	1800*700*800						440L	62kg
	XSDUF18-2(600)	1800*600*800						305L	58kg
	XSDUF15-2(800)	1500*800*800						380L	58kg
1.5m	XSDUF15-2(700)	1500*700*800	1.5A	220V/50Hz	185W	0--18°C	R290	300L	54kg
	XSDUF15-2(600)	1500*600*800						245L	51kg
	XSDUF12-2(800)	1200*800*800						255L	50kg
1.2m	XSDUF12-2(700)	1200*700*800	1.5A	220V/50Hz	185W	0--18°C	R290	215L	47kg
	XSDUF12-2(600)	1200*600*800						175L	43kg

● **ECUR**
FAN COOLING E SERIE SALAD TABLE FRIDGE



● **XSDUF**
S SERIE STATIC COOLING SALAD TABLE FRIDGE



FAN COOLING E SERIE SALAD TABLE FRIDGE										Technical Parameter										
	1.8M			1.5M			1.2M				1.8M			1.5M			1.2M			
Model	ECUR18-2S (800)	ECUR18-2S (700)	ECUR18-2S (600)	ECUR15-2S (800)	ECUR15-2S (700)	ECUR15-2S (600)	ECUR12-2S (800)	ECUR12-2S (700)	ECUR12-2S (600)		XSDUR18-2S(800)	XSDUR18-2S(700)	XSDUR18-2S(600)	XSDUR15-2S (800)	XSDUR15-2S (700)	XSDUR15-2S (600)	XSDUR12-2S (800)	XSDUR12-2S (700)	XSDUR12-2S (600)	
Dimension (mm)	1800*800*1050	1800*700*1050	1800*600*1050	1500*800*1050	1500*700*1050	1500*600*1050	1200*800*1050	1200*700*1050	1200*600*1050		1800*800*1050	1800*700*1050	1800*600*1050	1500*800*1050	1500*700*1050	1500*600*1050	1200*800*1050	1200*700*1050	1200*600*1050	
Temperature	2~8°C	2~8°C	2~8°C	2~8°C	2~8°C	2~8°C	2~8°C	2~8°C	2~8°C		2~8°C	2~8°C	2~8°C	2~8°C	2~8°C	2~8°C	2~8°C	2~8°C	2~8°C	
Current	1.5A	1.5A	1.5A	1.5A	1.5A	1.5A	1.5A	1.5A	1.5A		1.5A	1.5A	1.5A	1.5A	1.5A	1.5A	1.5A	1.5A	1.5A	
Rated Voltage	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz		220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	
Refrigerant	R290	R290	R290	R290	R290	R290	R290	R290	R290		R290	R290	R290	R290	R290	R290	R290	R290	R290	
Power	240W	240W	240W	240W	240W	240W	240W	240W	240W		165W	165W	165W	165W	165W	165W	165W	165W	165W	
Capacity	445L	375L	305L	345L	290L	235L	240L	200L	160L		480L	375L	305L	345L	290L	235L	240L	200L	160L	
Caster Height	10CM	10CM	10CM	10CM	10CM	10CM	10CM	10CM	10CM		10CM	10CM	10CM	10CM	10CM	10CM	10CM	10CM	10CM	
Compressor Brand	Wanbao	Wanbao	Wanbao	Wanbao	Wanbao	Wanbao	Wanbao	Wanbao	Wanbao		Wanbao	Wanbao	Wanbao	Wanbao	Wanbao	Wanbao	Wanbao	Wanbao	Wanbao	
Compressor Qty	1	1	1	1	1	1	1	1	1		1	1	1	1	1	1	1	1	1	
Cooling Mode	Fan cooling	Fan cooling	Fan cooling	Fan cooling	Fan cooling	Fan cooling	Fan cooling	Fan cooling	Fan cooling		Static cooling	Static cooling	Static cooling	Static cooling	Static cooling	Static cooling	Static cooling	Static cooling	Static cooling	
Thickness of insulating	6CM	6CM	6CM	6CM	6CM	6CM	6CM	6CM	6CM		6CM	6CM	6CM	6CM	6CM	6CM	6CM	6CM	6CM	
Main Material	SUS201	SUS201	SUS201	SUS201	SUS201	SUS201	SUS201	SUS201	SUS201		SUS201	SUS201	SUS201	SUS201	SUS201	SUS201	SUS201	SUS201	SUS201	
Net Weight	74KG	70KG	65KG	70KG	66KG	62KG	62KG	60KG	58KG		74KG	70KG	65KG	70KG	66KG	62KG	62KG	60KG	58KG	

S SERIE STATIC COOLING SALAD TABLE FRIDGE										Technical Parameter										
	1.8M			1.5M			1.2M				1.8M			1.5M			1.2M			
Model	XSDUR18-2S(800)	XSDUR18-2S(700)	XSDUR18-2S(600)	XSDUR15-2S (800)	XSDUR15-2S (700)	XSDUR15-2S (600)	XSDUR12-2S (800)	XSDUR12-2S (700)	XSDUR12-2S (600)		XSDUR18-2S(800)	XSDUR18-2S(700)	XSDUR18-2S(600)	XSDUR15-2S (800)	XSDUR15-2S (700)	XSDUR15-2S (600)	XSDUR12-2S (800)	XSDUR12-2S (700)	XSDUR12-2S (600)	
Dimension (mm)	1800*800*1050	1800*700*1050	1800*600*1050	1500*800*1050	1500*700*1050	1500*600*1050	1200*800*1050	1200*700*1050	1200*600*1050		1800*800*1050	1800*700*1050	1800*600*1050	1500*800*1050	1500*700*1050	1500*600*1050	1200*800*1050	1200*700*1050	1200*600*1050	
Temperature	2~8°C	2~8°C	2~8°C	2~8°C	2~8°C	2~8°C	2~8°C	2~8°C	2~8°C		2~8°C	2~8°C	2~8°C	2~8°C	2~8°C	2~8°C	2~8°C	2~8°C	2~8°C	
Current	1.5A	1.5A	1.5A	1.5A	1.5A	1.5A	1.5A	1.5A	1.5A		1.5A	1.5A	1.5A	1.5A	1.5A	1.5A	1.5A	1.5A	1.5A	
Rated Voltage	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz		220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	220v/50-60Hz	
Refrigerant	R290	R290	R290	R290	R290	R290	R290	R290	R290		R290	R290	R290	R290	R290	R290	R290	R290	R290	
Power	165W	165W	165W	165W	165W	165W	165W	165W	165W		165W	165W	165W	165W	165W	165W	165W	165W	165W	
Capacity	480L	375L	305L	345L	290L	235L	240L	200L	160L		480L	375L	305L	345L	290L	235L	240L	200L	160L	
Caster Height	10CM	10CM	10CM	10CM	10CM	10CM	10CM	10CM	10CM		10CM	10CM	10CM	10CM	10CM	10CM	10CM	10CM	10CM	
Compressor Brand	Wanbao	Wanbao	Wanbao	Wanbao	Wanbao	Wanbao	Wanbao	Wanbao	Wanbao		Wanbao	Wanbao	Wanbao	Wanbao	Wanbao	Wanbao	Wanbao	Wanbao	Wanbao	
Compressor Qty	1	1	1	1	1	1	1	1	1		1	1	1	1	1	1	1	1	1	
Cooling Mode	Static cooling	Static cooling	Static cooling	Static cooling	Static cooling	Static cooling	Static cooling	Static cooling	Static cooling		Static cooling	Static cooling	Static cooling	Static cooling	Static cooling	Static cooling	Static cooling	Static cooling	Static cooling	
Thickness of insulating	6CM	6CM	6CM	6CM	6CM	6CM	6CM	6CM	6CM		6CM	6CM	6CM	6CM	6CM	6CM	6CM	6CM	6CM	
Main Material	SUS201	SUS201	SUS201	SUS201	SUS201	SUS201	SUS201	SUS201	SUS201		SUS201	SUS201	SUS201	SUS201	SUS201	SUS201	SUS201	SUS201	SUS201	
Net Weight	74KG	70KG	65KG	70KG	66KG	62KG	62KG	60KG	58KG		74KG	70KG	65KG	70KG	66KG	62KG	62KG	60KG	58KG	

●EDTR E Serie Display Fridge (Direct Cooling)

FEATURES


- High quality stainless steel 201 and two-layer hollow glass door. Luxury appearance, eco-friendly design
- Complete Structure Interior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 6CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao/Embraco.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Heavy duty adjustable legs/casters
- PCB Control digital operation
- Customization is available

APPLICATION

Suitable for commercial channels such as supermarkets, cold drink shops, Chain store, hotels and restaurants, specializing in store vegetables, fruits, cakes, Dim sum, drinks, dairy products, alcohols/wines, icecreams, meet, seafood and all kinds of food materials that need to be refrigerated and frozen etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.



PRODUCT THREE VIEWS

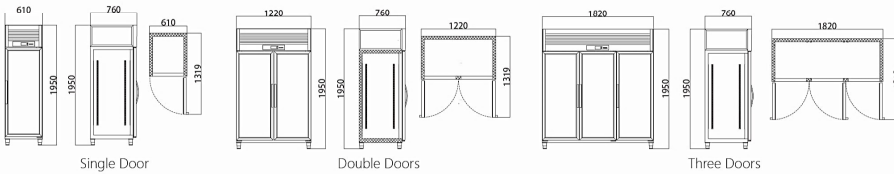

E Serie Display Fridge (Direct Cooling)		Technical Parameter									
Model	Dimension (mm)	Current	Rated Voltage	Power	Temperature	Refrigerant	Capacity	Net weight			
Single Door	EDTR24-1G	2.6A	220v/50Hz	140W	2~8°C	R290	380L	72kg			
	EDTF24-1G			180W	0~-10°C		380L	72kg			
Double Doors	EDTR24-2G			145W	2~8°C		380L	123kg			
	EDTF24-2G			210W	0~-10°C		380L	123kg			
Double Doors Up & Bottom	EDTR48-2G			280W	2~8°C		870L	123kg			
	EDTF48-2G			300W	0~-10°C		870L	123kg			
Left & Right	EDTR72-3G			400W	2~8°C		1370L	175kg			
	EDTF72-3G			400W	0~-10°C		1370L	175kg			
Three Doors	EDTR48-4G			280W	2~8°C		870L	120kg			
	EDTF48-4G			375W	0~-10°C		870L	120kg			
Four Doors	EDTR72-6G			280W	2~8°C		1340L	153kg			
	EDTF72-6G			460W	0~-10°C		1340L	153kg			
Six Doors											

●ECTR E Serie Display Fridge (Air Cooling)

FEATURES


- High quality stainless steel 201 and two-layer hollow glass door. Luxury appearance, eco-friendly design
- Complete Structure Interior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 6CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao/Embraco.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Ventilated, automatic defrosting and evaporation of condensation water
- Heavy duty adjustable legs/casters
- PCB Control digital operation
- Customization is available

APPLICATION

Suitable for commercial channels such as supermarkets, cold drink shops, Chain store, hotels and restaurants, specializing in store vegetables, fruits, cakes, Dim sum, drinks, dairy products, alcohols/wines, icecreams, meet, seafood and all kinds of food materials that need to be refrigerated and frozen etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.



PRODUCT THREE VIEWS

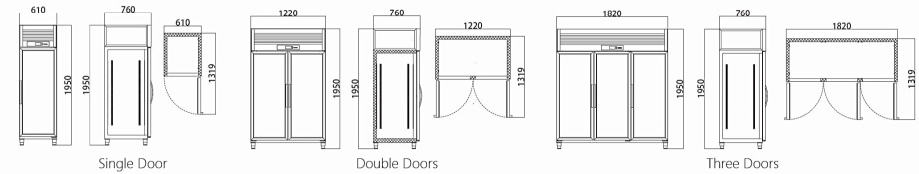

E Serie Display Fridge (Air Cooling)		Technical Parameter									
Model	Dimension (mm)	Current	Rated Voltage	Power	Temperature	Refrigerant	Capacity	Net weight			
Single Door	EDTR24-1G	2.6A	220v/50Hz	140W	2~8°C	R290	380L	72kg			
	EDTF24-1G			180W	0~-10°C		380L	72kg			
Double Doors	EDTR24-2G			145W	2~8°C		380L	123kg			
	EDTF24-2G			210W	0~-10°C		380L	123kg			
Double Doors Up & Bottom	EDTR48-2G			280W	2~8°C		870L	123kg			
	EDTF48-2G			300W	0~-10°C		870L	123kg			
Left & Right	EDTR72-3G			400W	2~8°C		1370L	175kg			
	EDTF72-3G			400W	0~-10°C		1370L	175kg			
Three Doors	EDTR48-4G			280W	2~8°C		870L	120kg			
	EDTF48-4G			375W	0~-10°C		870L	120kg			
Four Doors	EDTR72-6G			280W	2~8°C		1340L	153kg			
	EDTF72-6G			460W	0~-10°C		1340L	153kg			
Six Doors											

● QDTR Q Serie Display Fridge (Direct Cooling)

FEATURES


- High quality stainless steel 201 and two-layer hollow glass door. Luxury appearance, eco-friendly design
- Complete Structure Interior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 5CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao/Embraco.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Heavy duty adjustable legs/casters
- PCB Control digital operation
- Customization is available

APPLICATION

Suitable for commercial channels such as supermarkets, cold drink shops, Chain store, hotels and restaurants, specializing in store vegetables, fruits, cakes, Dim sum, drinks, dairy products, alcohols/wines, icecreams, meet, seafood and all kinds of food materials that need to be refrigerated and frozen etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.



PRODUCT THREE VIEWS

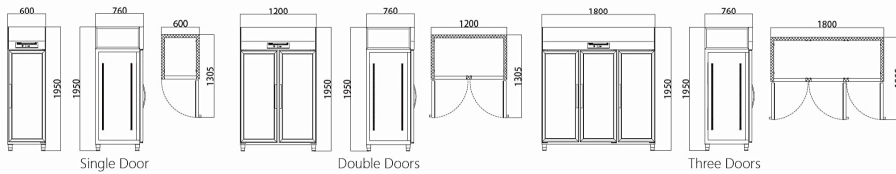

Q Serie Display Fridge (Direct Cooling)		Technical Parameter						
Model	Dimension (mm)	Current	Rated Voltage	Power	Temperature	Refrigerant	Capacity	Net weight
Single Door	QDTR24-1G	2.6A	220v/50Hz	140W	2~-8°C	R290	370L	67kg
	QDTR24-1G			180W	0~-10°C		370L	67kg
Double Doors	QTR24-2G			145W	2~-8°C		370L	67kg
	QTF24-2G			180W	0~-10°C		370L	67kg
Double Doors	QTR48-2G			280W	2~-8°C		810L	100kg
	QTR48-2G			300W	0~-10°C		810L	100kg
Left & Right	QTR72-3G			400W	2~-8°C		1280L	150kg
	QTR72-3G			400W	0~-10°C		1280L	150kg
Three Doors	QTF72-3G			280W	2~-8°C		810L	100kg
	QTR48-4G			375W	0~-10°C		810L	100kg
Four Doors	QTR72-6G			280W	2~-8°C		1240L	128kg
	QTF72-6G			460W	0~-10°C		1240L	128kg

● XSDTR S Serie Display Fridge (Direct Cooling)

FEATURES


- High quality stainless steel 201 and two-layer hollow glass door. Luxury appearance, eco-friendly design
- Complete Structure Interior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 5CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao/Embraco.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Heavy duty adjustable legs/casters
- PCB Control digital operation
- Customization is available

APPLICATION

Suitable for commercial channels such as supermarkets, cold drink shops, Chain store, hotels and restaurants, specializing in store vegetables, fruits, cakes, Dim sum, drinks, dairy products, alcohols/wines, icecreams, meet, seafood and all kinds of food materials that need to be refrigerated and frozen etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.



PRODUCT THREE VIEWS

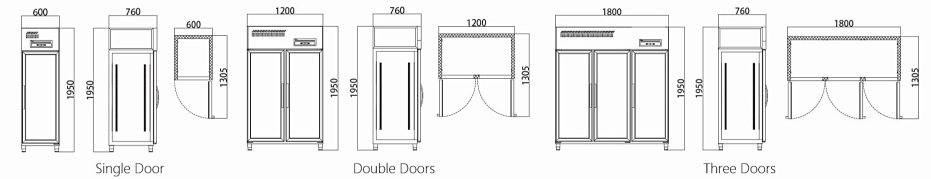

S Serie Display Fridge (Direct Cooling)		Technical Parameter						
Model	Dimension (mm)	Current	Rated Voltage	Power	Temperature	Refrigerant	Capacity	Net weight
Single Door	XSDTR24-1G	2.6A	220v/50Hz	380W	2~-8°C	R290	400L	78kg
	XSDTR24-1G			380W	0~-10°C		400L	78kg
Double Doors	XSDTR24-2G			380W	2~-8°C		385L	78kg
	XSDTR24-2G			380W	0~-10°C		385L	78kg
Double Doors	XSDTR48-2G			870W	2~-8°C		900L	110kg
	XSDTR48-2G			870W	0~-10°C		900L	110kg
Left & Right	XSDTR72-3G			1370W	2~-8°C		1300L	151kg
	XSDTR72-3G			1370W	0~-10°C		1300L	151.8kg
Three Doors	XSDTR72-3G			870W	2~-8°C		900L	104kg
	XSDTR48-4G			870W	0~-10°C		900L	104kg
Four Doors	XSDTR72-6G			1340W	2~-8°C		1502L	134kg
	XSDTR72-6G			1340W	0~-10°C		1502L	134kg

●EDTR

E Serie Upright Refrigerator (Direct Cooling)

FEATURES


- High quality stainless steel 201, Luxury appearance, eco-friendly design
- Complete Structure Interior& Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 6CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao/Embraco.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools.PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Heavy duty adjustable legs/casters
- PCB Control digital operation
- Customization is available

Applications:

Suitable for commercial channels such as supermarkets, cold drink shops, Chain store, hotels and restaurants, specializing in store vegetables, fruits, cakes, Dim sum, drinks, dairy products, alcohols/wines, and all kinds of food materials that need to be refrigerated. etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.



PRODUCT THREE VIEWS

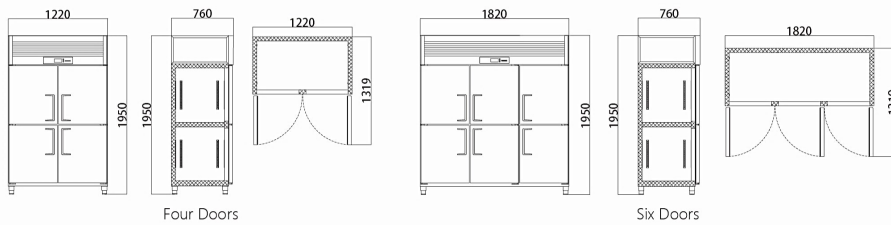

E Serie Upright Refrigerator (Direct Cooling)			Technical Parameter						
Model	Dimension (mm)	Power	Current	Rated Voltage	Temperature	Refrigerant	Capacity	Net weight	
Single Door	EDTR24-1	610*760*1950	215W	2.6A	220v/50Hz	2~8°C	R290	500L	72kg
Double Doors Left & Right	EDTR48-2	1220*760*1950	530W					910L	123kg
Double Doors Up & Bottom	EDTR24-2	610*760*1950	215W					500L	72kg
Three Doors	EDTR72-3	1880*760*1950	400W					1370L	175kg
Four Doors	EDTR48-4	1220*760*1950	500W					910L	118kg
Six Doors	EDTR72-6	1820*760*1950	530W					1370L	153kg

●ECTR

E Serie Upright Refrigerator Air Cooling

FEATURES


- High quality stainless steel 201. Luxury appearance, eco-friendly design
- Complete Structure Interior& Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 6CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao/Embraco.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools.PVC.
- Shelf and shelf support are designed to accommodate
- Ventilated, automatic defrosting and evaporation of condensation water
- High standard refrigerant: R290a
- With CE certificate
- Ventilated, automatic defrosting and evaporation of condensation water
- Heavy duty adjustable legs/casters
- PCB Control digital operation
- Customization is available

Applications:

Suitable for commercial channels such as supermarkets, cold drink shops, Chain store, hotels and restaurants, specializing in store vegetables, fruits, cakes, Dim sum, drinks, dairy products, alcohols/wines, and all kinds of food materials that need to be refrigerated. etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.



PRODUCT THREE VIEWS

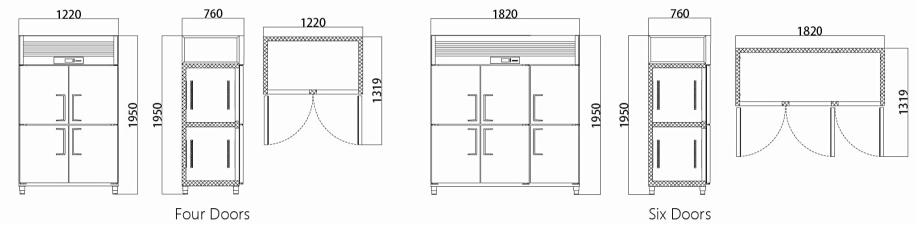

E Serie Upright Refrigerator Air Cooling			Technical Parameter						
Model	Dimension (mm)	Power	Current	Rated Voltage	Temperature	Refrigerant	Capacity	Net weight	
Single Door	ECTR24-1	610*760*1950mm	310W	2.6A	220v/50Hz	2~8°C	R290	425L	73KG
Double Doors Left & Right	ECTR48-2	1220*760*1950mm	350W					945L	125KG
Double Doors Up & Bottom	ECTR24-2	610*760*1950mm	310W					425L	73KG
Three Doors	ECTR72-3	1820*760*1950mm	310W					425L	178KG
Four Doors	ECTR48-4	1220*760*1950mm	350W					945L	125KG
Six Doors	ECTR72-6	1820*760*1950mm	700W					1455L	185KG

●QDTR

Q Serie Upright Refrigerator Direct Cooling

FEATURES


- High quality stainless steel 201, Luxury appearance, eco-friendly design
- Complete Structure Interior& Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 5CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao/Embraco.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Heavy duty adjustable legs/Casters
- PCB Control digital operation
- Customization is available

Applications:

Suitable for commercial channels such as supermarkets, cold drink shops, Chain store, hotels and restaurants, specializing in store vegetables, fruits, cakes, Dim sum, drinks, dairy products, alcohols/wines, and all kinds of food materials that need to be refrigerated. etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.



PRODUCT THREE VIEWS

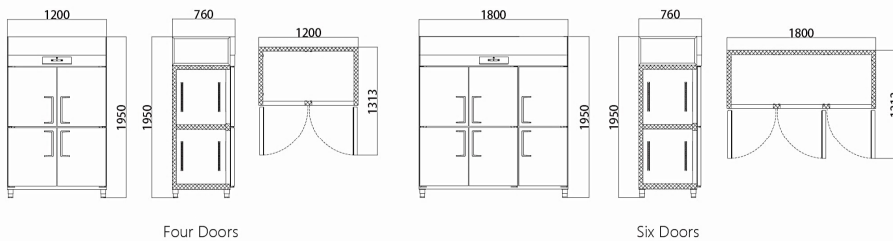

Four Doors

Six Doors

Q Serie Upright Refrigerator Direct Cooling			Technical Parameter						
Model	Dimension (mm)	Power	Current	Rated Voltage	Temperature	Refrigerant	Capacity	Net weight	
Double Doors Up & Bottom	QDTR24-2	610*700*1950	180W	2.6A	220V/50Hz	2--8°C	R290	370L	64kg
Four Doors	QDTR48-4	1200*700*1950	375W					850L	100KG
Six Doors	QDTR72-6	1800*700*1950	415W					1280L	128KG

●XSDTR

S Serie Upright Refrigerator Direct Cooling

FEATURES


- High quality stainless steel 201, Luxury appearance, eco-friendly design
- Complete Structure Interior& Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 5CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao/Embraco.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Heavy duty adjustable legs/Casters
- PCB Control digital operation
- Customization is available

Applications:

Suitable for commercial channels such as supermarkets, cold drink shops, Chain store, hotels and restaurants, specializing in store vegetables, fruits, cakes, Dim sum, drinks, dairy products, alcohols/wines, and all kinds of food materials that need to be refrigerated. etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.



PRODUCT THREE VIEWS

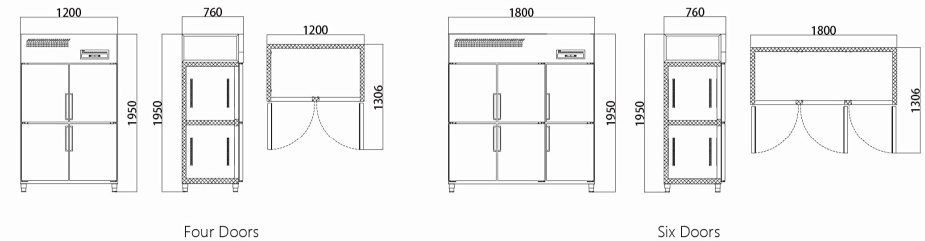

Four Doors

Six Doors

S Serie Upright Refrigerator Direct Cooling			Technical Parameter						
Model	Dimension (mm)	Power	Current	Rated Voltage	Temperature	Refrigerant	Capacity	Net weight	
Double Doors Up & Bottom	XSDTR24-2	610*760*1950	145W	2.6A	220V/50Hz	2--8°C	R290	385L	70KG
Four Doors	XSDTR48-4	1200*760*1950	375W					900L	123KG
Six Doors	XSDTR72-6	1800*760*1950	415W					1300L	173KG

●EDTF E Serie Upright Freezer (Direct Cooling)

FEATURES


- High quality stainless steel 201, Luxury appearance, eco-friendly design
- Complete Structure Interior& Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 6CM thickness for better energy efficiency
- Digital thermostat Italian Famous brand Dixell, high quality famous compressor Embraco/Wanbao.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Heavy duty adjustable legs/casters
- PCB Control digital operation
- Customization is available

Applications:

Suitable for commercial channels such as supermarkets, chain stores, cold drink shops, freezers, hotels, restaurants, etc., specializing in storing icecream, meat, seafood, and various ingredients that need to be frozen and preserved, etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.



PRODUCT THREE VIEWS

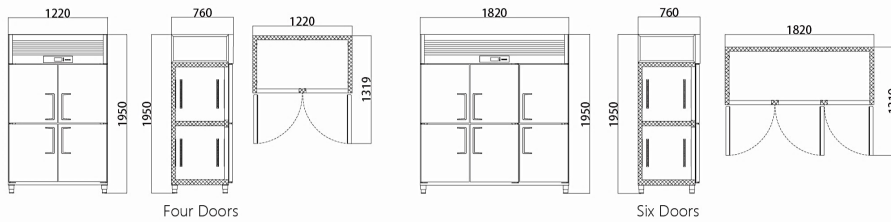

●ECTF E Sesie Upright Fridge Freezer Air-cooling

FEATURES


- High quality stainless steel 201, Luxury appearance, eco-friendly design
- Complete Structure Interior& Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 6CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality famous compressor Embraco/Wanbao.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Ventilated, automatic defrosting and evaporation of condensation water
- Heavy duty adjustable legs/casters
- PCB Control digital operation
- Customization is available

Applications:

Suitable for commercial channels such as supermarkets, chain stores, cold drink shops, freezers, hotels, restaurants, etc., specializing in storing icecream, meat, seafood, and various ingredients that need to be frozen and preserved, etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.



PRODUCT THREE VIEWS

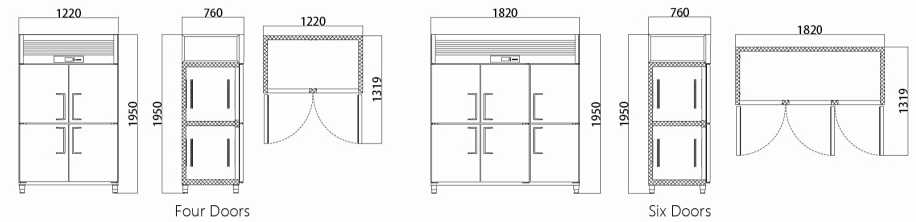

E Serie Upright Freezer (Direct Cooling)		Technical Parameter								
Model	Dimension (mm)	Power	Temperature	Rated Voltage	Refrigerant	Capacity	Net weight			
Single Door	EDTF24-1	610*760*1950	140W	0~-18°C	220v/50-60Hz	R404A/R290	500L	72kg		
Double Doors Left & Right	EDTF48-2	1220*760*1950	280W	0~-18°C			910L	123kg		
Three Doors	EDTF72-3	1820*760*1950	400W	0~-18°C			1370L	175kg		
Double Doors Up & Bottom	EDTF24-2	610*760*1950	140W	0~-18°C			500L	71kg		
Four Doors	EDTF48-4	1220*760*1950	375W	0~-18°C			910L	118kg		
Six Doors	EDTF72-6	1820*760*1950	415W	0~-18°C			1370L	153kg		

E Sesie Upright Fridge Freezer Air-cooling		Technical Parameter								
Model	Dimension (mm)	Power	Temperature	Rated Voltage	Refrigerant	Capacity	Net weight			
Single Door	ECTF24-1	610*760*1950	600W	0~-18°C	220v/50-60Hz	R404A/R290	425L	72kg		
Double Doors Left & Right	ECTF48-2	1220*760*1950	875W				945L	123kg		
Three Doors	ECTF72-3	1820*760*1950	500W				1455L	175kg		
Double Doors Up & Bottom	ECTF24-2	610*760*1950	300W				425L	72kg		
Four Doors	ECTF48-4	1220*760*1950	700W				945L	118kg		
Six Doors	ECTF72-6	1820*760*1950	900W				1455L	153kg		

●QDTF Q Serie Upright Freezer Direct Cooling

FEATURES


- High quality stainless steel 201, Luxury appearance, eco-friendly design
- Complete Structure Interior& Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 5CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Heavy duty adjustable legs/casters
- PCB Control digital operation
- Customization is available

Applications:

Suitable for commercial channels such as supermarkets, chain stores, cold drink shops, freezers, hotels, restaurants, etc., specializing in storing icecream, meat, seafood, and various ingredients that need to be frozen and preserved, etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.



PRODUCT THREE VIEWS

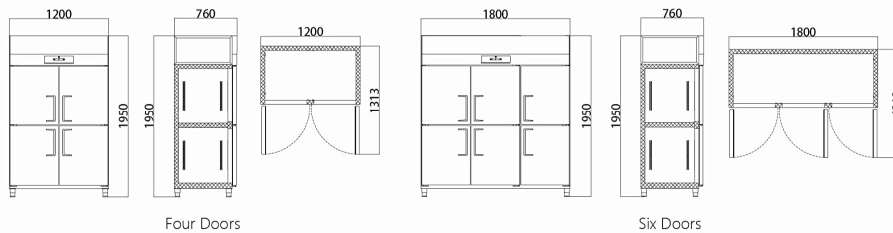

Q Serie Upright Freezer Direct Cooling		Technical Parameter						
Model	Dimension (mm)	Power	Temperature	Rated Voltage	Refrigerant	Capacity	Net weight	
Double Doors Up & Bottom	QDTF24-2	600*700*1950	180W	0~-18°C	220v/50Hz	R290	370L	64KG
Four Doors	QDTF48-4	1200*700*1950	375W				850L	100KG
Six Doors	QDTF72-6	1800*700*1950	415W				1280L	128KG

●XSDTF S Serie Upright Freezer Direct Cooling

FEATURES


- High quality stainless steel 201, Luxury appearance, eco-friendly design
- Complete Structure Interior& Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 5CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Heavy duty adjustable legs/Casters
- PCB Control digital operation
- Customization is available

Applications:

Suitable for commercial channels such as supermarkets, chain stores, cold drink shops, freezers, hotels, restaurants, etc., specializing in storing icecream, meat, seafood, and various ingredients that need to be frozen and preserved, etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.



PRODUCT THREE VIEWS

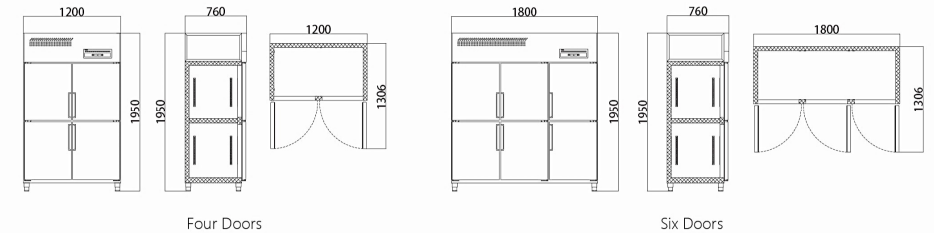

S Serie Upright Freezer Direct Cooling		Technical Parameter						
Model	Dimension (mm)	Power	Temperature	Rated Voltage	Refrigerant	Capacity	Net weight	
Double Doors Up & Bottom	XSDTF24-2	610*760*1950	180W	0~-18°C	220v/50Hz	R290a	385L	78KG
Four Doors	XSDTF48-4	1200*760*1950	375W				900L	104KG
Six Doors	XSDTF72-6	1800*760*1950	415W				1300L	134KG

● ECTRF

E Serie Upright Fridge Dual Temp. Air Cooling

FEATURES

- High quality stainless steel 201; Luxury appearance, eco-friendly design
- Complete Structure Interior& Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 6CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality famous compressor Wanbao/Embraco.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Ventilated, automatic defrosting and evaporation of condensation water
- Heavy duty adjustable legs/casters
- PCB Control digital operation, dual temperature control
- Customization is available

Applications:

Suitable for commercial channels such as supermarkets, chain stores, cold drink shops, freezers, hotels and restaurants and etc., specializing in storing ice cream, beverages, dairy products, frozen foods, food materials, and all kinds of items that need to be refrigerated and frozen and etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.



● EDTRF

E Serie Upright Fridge Dual Temp. Direct Cooling

FEATURES


- High quality stainless steel 201
- Luxury appearance, eco-friendly design
- Complete Structure Interior& Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 6CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality famous compressor Wanbao/Embraco.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Heavy duty adjustable legs/casters
- PCB Control digital operation, dual temperature control
- Customization is available

Applications:

Suitable for commercial channels such as supermarkets, chain stores, cold drink shops, freezers, hotels and restaurants and etc., specializing in storing ice cream, beverages, dairy products, frozen foods, food materials, and all kinds of items that need to be refrigerated and frozen and etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.



PRODUCT THREE VIEWS

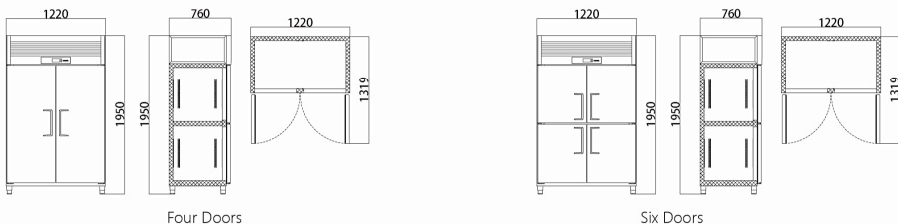


E Serie Upright Fridge Dual Temp. Air Cooling

Technical Parameter

Model	Dimension (mm)	Power	Temperature	Rated Voltage	Refrigerant	Capacity	Net weight	
Double Doors/ Left&Right	ECTRF48-2	1220*760*1950	570W	2~-8°C/0~-18°C	220V/50Hz	R290a	860L	128KG
Four Doors	ECTRF48-4	1220*760*1950	700W				860L	125KG

PRODUCT THREE VIEWS

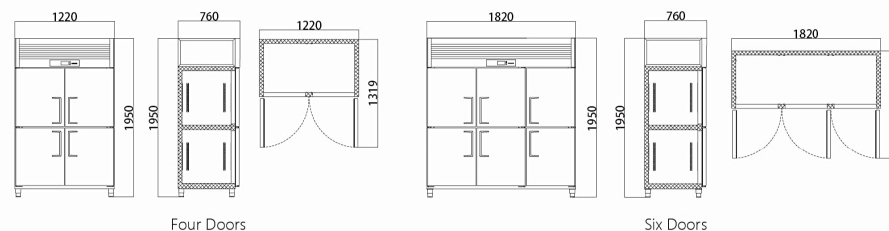

E Serie Upright Fridge Dual Temp. Direct Cooling

Technical Parameter

Model	Dimension (mm)	Power	Rated Voltage	Temperature	Refrigerant	Capacity	Net weight	
Double Doors/ Left&Right	EDTRF48-2	1220*760*1950	280W	220V/50Hz	2~-8°C/0~-18°C	R290a	870L	123KG
Double Doors Up & Bottom	EDTRF24-2	610*760*1950	180W				400L	73KG
Three Doors	EDTRF72-3	1820*760*1950	400W	220V/50Hz	2~-8°C/0~-18°C	R290a	1400L	175KG
Four Doors	EDTRF48-4	1220*760*1950	375W				910L	118KG
Six Doors	EDTRF72-6	1820*760*1950	415W				1370L	153KG

●QDTRF Q Serie Upright Fridge Dual Temp. (Direct Cooling)

FEATURES

- High quality stainless steel 201, Luxury appearance, eco-friendly design
- Complete Structure Interior& Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 5CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao/Embraco.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Heavy duty adjustable legs/Casters
- PCB Control digital operation, dual temperature control
- Customization is available

Applications:

Suitable for commercial channels such as supermarkets, chain stores, cold drink shops, freezers, hotels and restaurants and etc., specializing in storing ice cream, beverages, dairy products, frozen foods, food materials, and all kinds of items that need to be refrigerated and frozen and etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.



●XSDTRF S Serie Upright Fridge Dual Temp. (Direct Cooling)

FEATURES


- High quality stainless steel 201, Luxury appearance, eco-friendly design
- Complete Structure Interior& Exterior in Stainless Steel with rounded internal edges for easy sanitation;
- Overall high-density foam/cyclopentane, insulation 5CM thickness for better energy efficiency.
- Digital thermostat Italian Famous brand Dixell, high quality compressor Wanbao/Embraco.
- Self-closing door by means of Spring-Loaded Hinges ensures fast recovery and energy saving.
- Magnetic gasket with high quality neoprene rubber can be replaced without any tools PVC.
- Shelf and shelf support are designed to accommodate
- High standard refrigerant: R290a
- With CE certificate
- Heavy duty adjustable legs/Casters
- PCB Control digital operation, dual temperature control
- Customization is available

Applications:


Suitable for commercial channels such as supermarkets, chain stores, cold drink shops, freezers, hotels and restaurants and etc., specializing in storing ice cream, beverages, dairy products, frozen foods, food materials, and all kinds of items that need to be refrigerated and frozen and etc. This product has strong professionalism, not only meets professional storage temperature requirements, but also beautify your kitchen, which can effectively promote the sales of operators.



PRODUCT THREE VIEWS

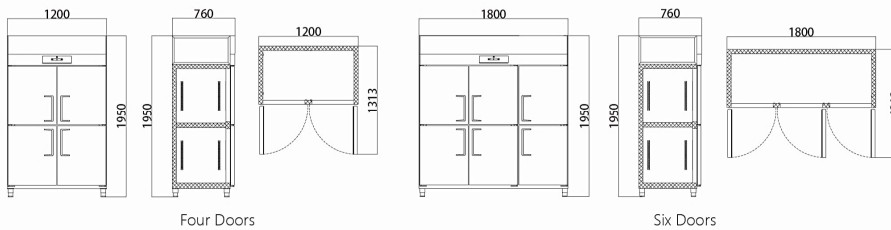

PRODUCT THREE VIEWS

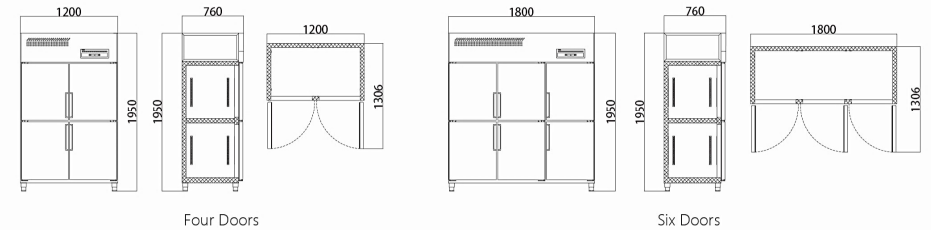

Q Serie Upright Fridge Dual Temp. (Direct Cooling)			Technical Parameter					
Model	Dimension (mm)	Power	Rated Voltage	Temperature	Refrigerant	Capacity	Net weight	
Double Doors Up & Bottom	QDTRF24-2	610*700*1950	180W	220V/50Hz	2~-8°C/0~-18°C	R290a	370L	67KG
Four Doors	QDTRF48-4	1200*700*1950	375W				850L	100KG
Six Doors	QDTRF72-6	1800*700*1950	415W				1280L	128KG

S Serie Upright Fridge Dual Temp. (Direct Cooling)			Technical Parameter					
Model	Dimension (mm)	Power	Rated Voltage	Temperature	Refrigerant	Capacity	Net weight	
Double Doors Up & Bottom	XSDTRF24-2	610*760*1950	180W	220V/50Hz	2~-8°C/0~-18°C	R290a	400L	78KG
Four Doors	XSDTRF48-4	1200*760*1950	375W				900L	104KG
Six Doors	XSDTRF72-6	1800*760*1950	415W				1300L	134KG

●EDUF
E Serie Combi-refrigeration Fridge (Static Cooling)



●BEC
BLASTER CHILLER



FAN COOLING E SERIE SALAD TABLE FRIDGE		Technical Parameter
	1.8M	1.5M
Model	EDUF18-2C (800)	EDUF15-2C (800)
Whole Dimension (mm)	1800*800*2100	1500*800*2100
Dimension of Glass Door Cooler /mm	1680*400*500	1380*400*500
Dimension of Workbench Freezer/mm	1800*800*800	1500*800*800
Capacity of Refrigerator (Upper)	250L	205L
Capacity of Freezer (Bottom)	520L	360L
Temperature of Refrigerator	2~-8°C	2~-8°C
Temperature of Freezer	0~-18°C	0~-18°C
Current	1.5A	1.5A
Rated Voltage	220V/50Hz	220V/50Hz
Refrigerant	R290	R290
Caster Height	10CM	10CM
Compressor Brand	Wanbao	Wanbao
Compressor Qty	2	2
Cooling Mode	Static Cooling	Static Cooling
Thickness of insulating	6CM	6CM
Main Material	201 Stainless steels	201 Stainless steels

S Serie Upright Fridge Dual Temp. (Direct Cooling)						Technical Parameter
Model	Dimension (mm)	Power	Temperature	Capacity	Cooling mode	Net weight
EBC-5	810*750*990	1300W	8~-42°C	100L	Fan cooling	150KG
EBC-8	810*750*1200	1500W	8~-42°C	150L	Fan cooling	160KG
EBC-10	810*750*1340	1700W	8~-42°C	185L	Fan cooling	180KG
EBC-12	810*750*1480	1700W	8~-42°C	190L	Fan cooling	190KG