

DTF 白墨烫画粉

DTF powder



Partical sizes	100-160um medium fine
Partical sizes	200-250um super fine
Melt point	110° C-150° C
Time	8 -10 S
Pressure	1-3kg/cm ²

Features: Excellent flexibility, good feel, adhesion, water resistance, high and low temperature resistance, oil resistance, aging resistance. According to different application process, we can provide hot melt adhesive of flow edge, scraping, paint spraying, extrusion grade, injection grade and blow plastic grade, which can meet the needs of low temperature bonding between 60°C and 140°C.

DTF 油墨 / PET 薄膜油墨

DTF Ink / PET film Ink



烫画墨水厂家直销

Suitable for use in: Piezo electric head.EPSON.

Net Content: 1000ML


Storage requirements: 10-25°C , shall be stored it in a dry and cool area, avoid direct sun exposure

Shelf life :365 days

- o Keep out of reach of children and do not drink.
- o Please store the ink in temperatures 10C to 25°C
- o For best results, use up the ink within 12 months
- o Shake the bottles gently before using it.

DTF 打印机

DTF printer

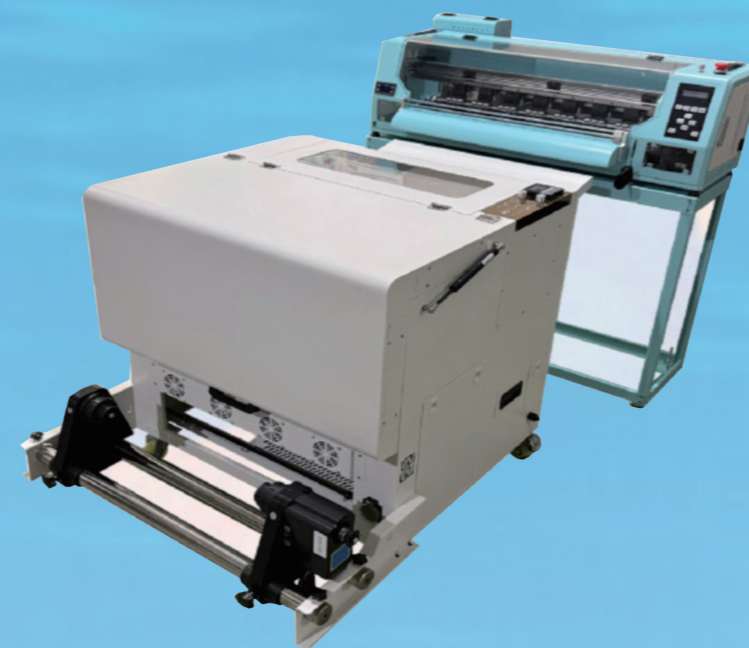

操作简单

EASY TO USE




高效生产

EFFICIENT PRODUCTION



智能打印

SMART PRINTING



高性能板

High performance board



自动收卷

Automatic winding



精度高

HIGH PRECISION



24 小时连续工作

24 HOURS CONTINUOUS WORK



伺服电机

Servo motor

设备参数及规格

Equipment parameters and specifications

打印宽度 Print width	≤600mm
喷头型号 Nozzle type	XP600/i1600
打印精度 Printing accuracy	720x1080dpi 3.5m ² /h 720x900dpi 6m ² /h 720x1200dpi 4m ² /h 720x1440dpi 1.8m ² /h
加热方式 Heating method	前置加热 Front arc heating
操作系统 Operating system	XP/Win7/Win8/Win10/Win11
收卷功能 Reel function	自动感应收卷 Automatic winding
机器主板 board card	汉森板卡 Hansen board
打印接口 Print interface	千兆网口 Gigabit network port
平台吸风调节 Suction regulation	有 (自动启停) shapeless
工作环境 Working environment	15-30°C
相对湿度 Relative humidity	40-60%
清洗方式 Cleaning method	自动 Auto
机器尺寸 Clean machine size	L108cm*W56cm*H120cm 63kg
包装尺寸 Package size	L115cm*W61cm*H50cm 80kg

Hoson Mainboard original Epson print-head Suitable for printing beginners, The machine is more stable and practical DIY personalized customization, Used in a variety of cotton polyester different fabrics, easy to make, easy to Vi, individual can open a factory.

Machine standard white ink cycle, stirring system, platform pre-heating The ink jet is more smooth without plugging, and the nozzle life is longer.

采用汉森板卡做基础配置高性价比 2 头设计满足前期创业需求, 机器更稳定实用 DIY 个性定制, 应用于各种棉涤不同面料, 易作, 易维, 个人可开厂。机器标配白墨循环、搅拌系统, 平台前置加热喷墨更流畅不堵头, 喷头寿命更长。

Mini12" DTF PRINTER



参数 parameters

喷头型号和数量 Type and quantity of nozzle	XP600/i1600 2pcs
打印宽度 Printing width	330mm/12"
排版软件 RIP Software	MainTop, RIIN, Photoprint (Optional)
温度湿度 Temperature Humidity	温度: 20-30°C Temperature: 20-30°C 湿度: 45-65% Humidity: 45-65%
机器尺寸重量 Machine Dimension Net Weight	350*740*370mm 34kg
包装尺寸重量 Package Dimension Gross Weight	400*810*455mm 50kg
打印速度 Print speed	EPSi1600 6Pass 6m ² /H; 8Pass 4m ² /H EPS XP600 6Pass 4m ² /H; 8Pass 2m ² /H

Feature:

Hoson Main board original Epson print-head Suitable for printing beginners, online shop owners, workshop home makers and clothing designer, it just need small space 1*2 meter only. A3 printer has a max printing width 33cm (13 inch) smooth white ink circulation system. Equipped with electric lifting lever. Platform pre-heating.

A3 迷你双头白墨烫画打印机

产品特点: 采用汉森板卡和爱普生喷头。定位于创业初期或个人爱好者, 适合淘宝小店主或者服装公司版房设计师实用, 占地面积小。A3 规格, 最大打印幅面 33cm, 机器标配前置加热, 白墨循环系统, 电动压纸杆。

公司简介

Company Profile

安徽高瓴金属科技有限公司是一家专注于 DTF 烫画打印膜的生产型企业以及 DTF 一站式解决方案的供应商，公司拥有行业内先进的涂布分切设备，检测设备和经验型人才。

公司主要产品有 DTF 烫画打印膜，墨水，热熔粉等 DTF 相关材料。产品主要应用于服装数码印刷，新能源及家电。公司系列产品以先进的制造工艺、过硬的质量和性能，取得了广大客户的认可，并与国内外行业内各知名企业建立了良好的合作关系。

Anhui Go-wins (WATOW HTM) Metal Technology Co., Ltd. is a production-oriented enterprise focusing on DTF film and supplying with one-stop of DTF solution service. The company has advanced coating and cutting equipment, testing equipment and experiential talents in the industry.

The main products of the company are DTF printing film, DTF ink, powder etc., The products are mainly used in garment digital printing industry, new energy. The company's series of products with advanced manufacturing technology, excellent quality and performance, has been recognized by the majority of customers, and established a good relationship of cooperation with domestic and foreign well-known enterprises in the industries.



DTF 烫画膜

DTF heat transfer film




Specification:

Width	30/60cm
Length	100m
Thickness	75um

DTF 打印纸

DTF Printing paper

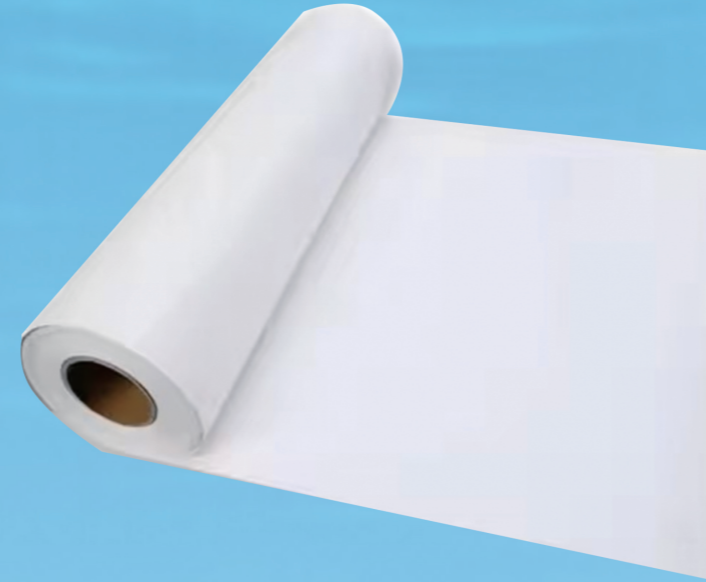

Specification:

Width	60cm
Length	100m
Weight	75g/m ²

DTF 胶片和纸张的使用

The Usage of DTF film and paper

- 1.The ink absorbing coating layer is the printing side and winds outside of the roll.
- 2.Handle with care, paying attention to the scratch-resistant ink blotting coating;
- 3.After printing, it can be dried for 40-90 seconds (adjust the temperature according to the performance of hot melt powder);
- 4.Store in a dry place and keep away from moisture;

In general, transfer press temperature is 145-160 degrees/6-8 seconds/ according to different mesh of hot melt powder and the fabric to adjust the most suitable temperature zone, which can easily achieve full time tear. (It is recommended that different fabrics use different hot melt powder and pressing temperature. The best temperature is 10 degree higher than Lipid melting temperature of hot melt powder.



安徽高瓴金属科技有限公司

Anhui Go-wins (WATOW HTM) Metal Technology Co., Ltd.

芜湖华诺高温材料贸易有限公司

Wuhu Watow High Temperature Materials Co.,Ltd

DTF manufacturer

One stop of DTF printing solution

E-mail: allenhsu@watow-htm.com | www.watow-htm.com

FACTORY ADD: No.59 of Zhufeng East Road, Nansam park of Economic&Technological Development Zone, Ningguo, Anhui, China.