

EASY CRIMPING
EASY WIN



ISO9001

WENZHOU HEWLEE TOOLS CO., LTD

TEL:+86-577-65597652
E-MAIL: sales@hewlee.com
WEBSITE:Http://www.hewlee.com

ADD:
NO.33 BADA ROAD, LINYANG DISTRICT, NANBIN STREET,
RUIAN CITY, ZHEJIANG PROVINCE, 325200, CHINA

HEWLEE

HARMONIOUS DEVELOPMENT FOR THE FUTURE

ABOUT US

QUALIFICATIONS







COMPANY PROFILE

Wenzhou HEWLEE Tools Co., Ltd. is a factory established in 2014, dedicated to the R&D and manufacturing of professional electro-hydraulic tools.

We specialize in battery-operated pipe pressing tools, our flagship product for plumbing and HVAC connection systems. Our full product portfolio also covers hydraulic crimping tools, cable cutters, nut splitters, electric tube expanders and plug-in hydraulic tools.

Europe and North America are our key target markets. Our tools are also well received in the Middle East, Southeast Asia and many other overseas markets. We design products to meet local industry standards and heavy-duty job-site requirements, offering stable quality, technical support and customized solutions for global partners.

Guided by our core belief: Quality is life, reputation is the pillar, we keep innovating to make HEWLEE a preferred brand for pipe pressing tools worldwide.

HEWLEE TOOLS — YOUR RELIABLE PARTNER!



OUR STORY

Wenzhou Hewlee Tools Co., Ltd.

2010
Develop battery hydraulic tools.

2014
Ruian Hydraulic Tools Factory was established.

2016
"HEWLEE" brand was recognized as "China marketp rotection brand".

2017
HEWLEE moved to a new factory.and entered the period of rapid development and regularization of enterprise development.

2019
Draft the industry standard of "battery powered hydraylic crimping tool"

2021
HEWLEE started to export hydraulic tools to Spain, Italy, the United Kingdom, Thailand and Malaysia.

2024
Become an emerging brand on Amazon

2026
Expand global footprint, targeting Europe and US markets

CONTENTS

Battery Hydraulic Pipe Pessing Tool ---- 01-08

Battery Powered Axial Press Tool ---- 09

Cordless Tubing Cutter ---- 10

Cordless Tube Expanding Tool ---- 11-12

Manual Tool ---- 13-14

Battery Powered Crimping Tool ---- 15-24

Battery Powered Cable Cutting Tool ---- 25-31

Battery Powered Nut Spliter Tool ---- 32

Electric Powered Crimping Tool ---- 33-35

Electric Powered Cable Cutting Tool ---- 36-39

Electric Powered Pressing Tool ---- 40-42

Press Jaws ---- 43-50

BATTERY HYDRAULIC PIPE PRESSING TOOL



HL-25P
BATTERY POWERED PRESS TOOL

NEW

2 YEARS
20000 CYCLES
HL-25P
BATTERY POWERED PRESS TOOL



INSTALLATION GUIDE


Select the matching jaw


Insert the Jaw


Fully insert the attachment to operate


Align tool contour with pipe fitting

HL-25P
BATTERY HYDRAULIC PIPE PESSING TOOL

3-5S
PER CYCLE TIME

350° Rotatable Head | 3 US Copper Tube Molds | 24KN Powerful Force | 3-5S Rapid Pressing | 2500mAh Battery Set | 6 Safety Designs






Copper pipe


Stainless steel pipe


Pex pipe


Multi-layer composite pipe

Technical data			
Output Force:	24KN	Voltage/capacity:	18V/2.5Ah
Stroke:	40mm	Charging time:	Approx.50 mins
Clamping range:	16-25mm[1/2"- 1"] for steel pipe,copper pipe	Charging voltage:	AC 100V~240V;50~60Hz
	16-32mm PEX&Multi-layer pipe	Package:	Plastic box
Cycle time:	3-5s(depands on diameter of pipe)	Weight incl. battery:	2.4kgs

Accessories			
Crimping dies:	VUS 1/2",VUS 3/4",VUS 1"		
Battery:	2pcs	Sealing ring of cylinder:	1set
Charger:	1pc	Sealing ring of safety valve:	1set

HEWLEE
EASY CRIMPING EASY WIN

BATTERY HYDRAULIC PIPE PESSING TOOL

HL-25BLM
BATTERY HYDRAULIC PIPE PESSING TOOL

NEW


- Brushless motor with longer motor life and more Run-time
- In case of halfway errors during pipe pressing, the piston can be manually reset using the reset button
- OLED display shows battery percentage,press cycles, fault code,maintenance note
- The power safety feature ensures the motor stops automatically

PECULIARITY

350° Rotatable Head | 3 US Copper Tube Molds | 24KN Powerful Force | 3-5S Rapid pressing | 2500mAh Battery Set | 6 Safety Designs


Copper tubes


Pex-Pipe


Straight through stainless steel pipe


Tee stainless steel pipe









Technical data			
Output Force:	24KN	Voltage/capacity:	18V/2.5Ah
Stroke:	40mm	Charging time:	Approx.50 mins
Clamping range:	16-25mm[1/2"- 1"] for steel pipe,copper pipe	Charging voltage:	AC 100V~240V;50~60Hz
	16-32mm PEX&Multi-layer pipe	Package:	Plastic box
Cycle time:	3-5s(depands on diameter of pipe)	Weight incl. battery:	2.3kgs

Accessories			
Crimping dies:	VUS 1/2",VUS 3/4",VUS 1"		
Battery:	2pcs	Sealing ring of cylinder:	1set
Charger:	1pc	Sealing ring of safety valve:	1set

HZT-25

BATTERY HYDRAULIC PIPE PESSING TOOL

- Ergonomic designed with 40cm length and 2.58kgs light weight,comfortable operation
- The spare parts are made of high quality aviation aluminum
- Only 3-5S to finish one cycle press
- The tool includes two 18V, 2.5Ah Li-ion and one charger
- It is actuated by motor and controlled by MCU, with two stage hydraulic system











Before installation



Pressure tube



After installation

Technical data			
Output Force:	32KN	Voltage/capacity:	18V/2.5Ah
Stroke:	40mm	Charging time:	Approx.50 mins
Clamping range:	16-25mm[1/2"- 1"] for steel pipe,copper pipe	Charging voltage:	AC 100V~240V;50~60Hz
	16-32mm PEX&Multi-layer pipe	Package:	Plastic box
Cycle time:	3-5s(depands on diameter of pipe)	Weight incl. battery:	2.9kgs

Accessories			
Crimping dies:	VUS 1/2",VUS 3/4",VUS 1"		
Battery:	2pcs	Sealing ring of cylinder:	1set
Charger:	1pc	Sealing ring of safety valve:	1set

HZT-50

BATTERY HYDRAULIC PIPE PESSING TOOL

- Cylinder is made of high quality aviation aluminum
- Aerometal ram with matching press jaws,suit for thick pipe connections
- New design conform to ergonomics and optimized position of centre of gravity
- 180°swivelling barrel,easy access to connections
- OLED Display shows battery percentage,pressing times,fault code, maintenance note





Copper tube



Multilayer composite tube



PEX pipe



Stainless steel pipe









Technical data			
Output Force:	32KN	Voltage/capacity:	18V/4.0Ah
Stroke:	40mm	Charging time:	Approx.80 mins
Clamping range:	16-54mm[1/2"- 2"] for steel pipe,copper pipe	Charging voltage:	AC 100V~240V;50~60Hz
	16-63mm PEX&Multi-layer pipe	Package:	Plastic box
Cycle time:	4-6s(depands on diameter of pipe)	Weight incl. battery:	3.8kgs

Accessories			
Crimping dies:	VUS 1/2",VUS 3/4",VUS 1",VUS 1-1/4",VUS 1-1/2",VUS 2"		
Battery:	2pcs	Sealing ring of cylinder:	1set
Charger:	1pc	Sealing ring of safety valve:	1set

HL-1550B
BATTERY HYDRAULIC PIPE CRIMPING TOOL

- The two-stage hydraulic system enables rapid advancement in the absence of pressure, and accelerates after pressure contact, significantly reducing operational time
- Featuring automatic reset, it depressurizes automatically after completing the pipe pressing, with the piston rapidly retracting to the initial position
- Faults trigger a red LED display and an audible signal
- Powered by a robust high-capacity 18Vlithium battery,it provides a low battery warning when power is insufficient



PECULIARITY

Forged Steel Plier Head | Strong Crimping | Long-lasting Battery Life | Safe and Durable


Copper tube


Multilayer composite tube


PEX pipe


Stainless steel pipe





Technical data			
Output Force:	32KN	Voltage/capacity:	18V/5.0Ah
Stroke:	40mm	Charging time:	Approx.90 mins
Clamping range:	VUS 1/2"-VUS 2" for steel pipe,copper pipe	Charging voltage:	AC 100V~240V;50~60Hz
Cycle time:	3-6s(depands on diameter of pipe)	Package:	Plastic box
Cycles/charger:	350cycles(DN20stainless steel)	Weight incl. battery:	4.6kgs

Accessories			
Crimping dies:	VUS 1/2",VUS 3/4",VUS 1",VUS 1-1/4",VUS 1-1/2",VUS 2"		
Battery:	2pcs	Sealing ring of cylinder:	1set
Charger:	1pc	Sealing ring of safety valve:	1set

HL-7842
ELECTRIC CAR AIR CONDITIONING PRESSURE PIPE TOOL

- Slip, expand, shear in one 3-in-1 pipe tool.
- Alloy steel precision casting sliding die, ratchet transmission, durable and reliable
- Manual pipe expansion tool: high-strength aluminum alloy precision forged handle, light and durable


The integrated manufacturing processis made of aluminum alloy


Precise availability


Locking design


Non-slip handle



Technical data			
Output Force:	35KN	Voltage/capacity:	18V/5.0Ah
Stroke:	15mm	Charging time:	Approx.90 mins
Clamping range:	3/8,1/2,5/8,3/4,7/8,1 1-1/8,1-1/4,1-3/8,1-1/2,1-5/8	Charging voltage:	AC 100V~240V;50~60Hz
Clamping time:	6~12seconds/time	Package:	Plastic box
Cycles/charger:	140cycles(DN20stainless steel)	Weight incl. battery:	4.6kgs

Accessories			
Battery:	2pcs	Sealing ring of cylinder:	1set
Charger:	1pc	Sealing ring of safety valve:	1set

HL-1240H

BATTERY POWERED AXIAL PRESS TOOL

HL-1240H is the newest addition to the mini axial press tool, it is efficient and reliable way to connect PEXwith fittings, it is powered by Li-ion, actuated by motor and controlled by MCU. With two stage hydraulic system.

THE RIGHT TOOL FOR YOUR NEEDS

Circuit board diagnostics
Alart you when the battery is low or the tool is too hot or cold

OLED display
- Easy reading on
- Battery percentage
- Crimping cycles
- Fault code
- Maintenance note

350° swivelling barrel
Easy access to connections

Two stage hydraulic
Hydraulic Ram Output provides more force for reliable connection

Ergonomic design
With light weight and in-line grip, easily work overhead and in tight spaces.

Service interval: 10000 cycles





Technical data			
Output Force:	24KN	Cycle time:	Approx. 2.5-5S
Stroke:	40mm	Voltage/capacity:	18V/2.5Ah
Connecting range:	16-32mm PEX pipe	Charging time:	Approx.50 mins
	16-25mm Multi-layer pipe	Charging voltage:	AC 100V~240V;50~60Hz
	16x2.2, 20x2.8, 25x3.5, 32x4.4mm	Package:	Plastic box

Accessories			
Battery:	2pcs	Sealing ring of cylinder:	1set
Charger:	1pc	Sealing ring of safety valve:	1set

HL-1228

CORDLESS TUBING CUTTER

For Stainless steel pipe, Copper pipeand uncoated carbon steel pipefrom Φ12-28mm

- The light weight tool is only 1.3KGS,easy for one handed operation.
- Convenience and fast,4S cut off p20 Stainless steel pipe.
- Without burr and iron dust,clean after cutting.
- Auto-adjust dia from 12mm to 28mm.
- Build in LED light, to find the cutting position precisely.
- Easy to do pipe line maintenance in narrow space.



Visual window







Technical data	
Cutting range:	Φ12-28mm
Cutting thickness:	within 0.8-1.5mm
Voltage/capacity:	12V/2.0Ah
Charging time:	Approx.40 mins
Charging voltage:	AC 100V~240V;50~60Hz
Cycle time:	4s(Φ20mm Stainless steel pipel)
Cyles/charger:	150cyles(Φ20mm Stainless steel pipel
Weight incl. battery:	1.3kgs
Tool Size:	270x110x370mm



CORDLESS TUBE EXPANDING TOOL

HEWLEE
EASY CRIMPING EASY WIN

HL-1632

CORDLESS TUBE EXPANDING TOOL

Quick & Easy Connections for PEX-a material

- Faster to connect PEX ring to PEX-a pipe
- Compact and portable,weight 2.45KGS with battery,easy for one handed operation
- Faults trigger a red LED display and an audible signal

Expanding heads

16x1.8/2.2
20x1.9/2.0
25x2.3

Cycles of expansions

4-6cycles
6-8cycles
8-12cycles



Suit for various projects


Heat pump system


Interior Triple supply system


Water heater engineering


Pre-embedded circulating water


Outdoor central water heater


Prestorage radiator waterway

Auto-rotatingheadmakes uniformexpansion



Suit for various projects

American standard


1" 3/4" 5/8" 1/2" 3/8"

European standard


Φ32x2.9/4.4mm Φ25x2.3mm Φ20x1.9/2.0mm Φ16x1.8/2.2mm





OLED DISPLAY

(Crimping time, Electricity QTY,Maintenance reminding and fault code)

Technical data	
Max expanding dia. and wall thickness range:	≤25X3.5mm,≤32X2.9mm
Tool Size:	190x75x260mm
Voltage/capacity:	18V/2.0Ah
Charging time:	Approx.40 mins
Charging voltage:	AC 100V~240V;50~60Hz
Weight incl. battery:	1.92kgs
Standard expanding heads:	16x1.8/2.2mm,20x1.9/2.0mm,25x2.3mm

HL-1960B
PEX EXPANDER TOOL

- Expander handle made of high-strength aluminum alloy with precision forging,light and handy.







Technical data	
Configuration:	Cutting knife*1，Grease*1
Expanding range:	Φ16-32mm
Metric system:	Φ16、Φ20x1.9/2.0、Φ25x2.3、Φ32x2.9mm
Imperial system:	3/8"、1/2"、5/8"、3/4"、1"
Gross weight:	2.8kgs

HL-1632SD
MANUAL AXIAL PRESS TOOL

- Sliding connections for PEX and Multi-layer composite pipe
- Connecting jaws made of alloy steel with precision casting, ratchet drive makes durable and reliable
- Connecting jaws built-in anti-attrition bushing makes easy sliding
- Expander handle made of high-strength aluminum alloy with precision forging,light and handy



Technical data	
Configuration:	Cutting knife*2，Grease*1
Stroke:	45mm
Expanding range:	Φ16-32mm
Pipe expanding die:	Φ16x2.2、Φ20x2.8、Φ25x3.5、Φ32x4.4mm
Pipe expansion type:	GB pure plastic, GB aluminum plastic, EU pure plastic, EU aluminum plastic
Gross weight:	8.0kgs



BATTERY CRIMPING TOOL

HEWLEE
EASY CRIMPING EASY WIN

HL-300B
BATTERY POWERED CRIMPING T L

- 350° flip-top latch crimping head, working atany site
- Pistol type tool body design for better balance and easy handing
- Double Piston pump and powerful motor ensure quick crimp
- Automatically fully retract ram and stop motor when complete crimp
- Manually retract ram in case of need
- Li-ion battery with high capacity and require short charging time
- A temperature sensor makes the tool stop working automatically when the temperture over 60° under long time working










INCLUDES

12 DIE SETS

SI	BS	A	B
10mm²	8AWG	6.69mm	5.8mm
16mm²	6AWG	7.74mm	6.7mm
25mm²	4AWG	9.46mm	8.2mm
35mm²	2AWG	10.6mm	9.2mm
50mm²	1/0AWG	12.5mm	10.8mm
70mm²	2/0AWG	14.8mm	12.8mm
95mm²	4/0AWG	17.0mm	14.8mm
120mm²	250MCM	19.4mm	16.8mm
150mm²	300MCM	21.7mm	18.8mm
185mm²	400MCM	24.0mm	20.8mm
240mm²	500MCM	26.3mm	22.8mm
300mm²	600MCM	29.3mm	25.4mm



8AWG	10mm²
6AWG	16mm²
4AWG	25mm²
2AWG	35mm²
1/0AWG	50mm²
2/0AWG	70mm²
4/0AWG	95mm²
250MCM	120mm²
300MCM	150mm²
400MCM	185mm²
500MCM	240mm²
600MCM	300mm²

Technical data			
Output Force:	60KN	Voltage/capacity:	18V/5.0Ah
Stroke:	17mm	Charging time:	Approx.90 mins
Max crimping:	Cu 300mm²/Al 240mm²	Charging voltage:	AC 100V~240V;50~60Hz
Cycle time:	2.5~5s (CU 150 mm²)	Package:	Plastic box
Cycles/charger:	Approx. 300 cycles (CU 150 mm²)	Weight incl. battery:	4.6kgs

Accessories			
Crimping dies:	10,16,25,35,50,70,95,120,150,185,240,300mm²		
Battery:	2 pcs	Sealing ring of cylinder:	1set
Charger:	1pc	Sealing ring of safety valve:	1set

HL-400B
BATTERY POWERED CRIMPING TOOL

The new addition HL-400B Series give another option for a fast and reliable way to crimp operation. The tool comes standar dwith two 18V, 5.0Ah Li-ion batteries and one charger, motor drives, Micro-computer control system, OLED display and double valve hydraulic system, it can achieve over180 cycles per charge



OLED DISPLAY

(Crimping time, Electricity QTY,Maintenance reminding and fault code)



Characteristics

- OLED Data Display to show crimping time,Electricity Quantity, maintenance reminding and fault code.
- Air Cooling Heat dissipation System to extend using life.
- Crimping head rotates 350°
- Two stage hydraulic system with fast feed and power control
- Quick motor stop guarantees highest safety for the operator
- Automatic retraction when crimp is completed
- Electronic control and monitor of crimping operation
- Ergonomic design and optimized position of centre of gravity

Technical data							
Output Force:	120KN			Voltage/capacity:	18V/5.0Ah		
Stroke:	42mm			Charging time:	Approx.90 mins		
Max crimping:	Cu 400mm²/Al 300mm²			Charging voltage:	AC 100V~240V;50~60Hz		
Cycle time:	5~8s (CU 150 mm²)			Package:	Plastic box		
Cycles/charger:	Approx. 180 cycles (CU 150 mm²)			Weight incl. battery:	7.1kgs		
Crimping dies:	16,25,35,50,70,95,120,150,185,240,300,400mm²						
Battery:	2 pcs	Charger:	1pc	Sealing ring of cylinder:	1set	Sealing ring of safety valve:	1set

7-15S
PER CYCLE TIME







HL-630B
BATTERY POWERED CRIMPING TOO

- H type latch head,with light weight,high strength 350°rotary crimping head ,working at any site
- OLED display shows battery percentage, working time,maintenance reminding,errors info etc
- Good design coolingsystem can effectively prevent motor overheating
- The dies are made of high strength alloy steel,after heattreatment,itis durable and beautiful

Technical data			
Output Force:	200KN	Voltage/capacity:	18V/5.0Ah
Stroke:	63mm	Charging time:	Approx.90 mins
Max crimping:	Cu 630mm²/Al 500mm²	Charging voltage:	AC 100V~240V;50~60Hz
Cycle time:	7-15s (depend on the dia of cable)	Package:	Plastic box
Cycles/charger:	Approx. 130 cycles (CU 150 mm²)	Weight incl. battery:	8.9kgs

Accessories			
Crimping dies:	25,35,50,70,95,120,150,185,240,300,400,500,630mm²		
Battery:	2pcs	Sealing ring of cylinder:	1set
Charger:	1pc	Sealing ring of safety valve:	1set

HL-60UNV

BATTERY MULTI-FUNCTIONAL TOOL

For operations requiring varied application, the HEWLEE offers a multi-functional tool, crimping, cutting and punching in one single tool.The tool comes standard with two 18V, 5.0Ah Li-ion batteries and one charger, motor drives, Micro-computer control system, OLED display and two stage hydraulic system with fast feed and power control.



Technical data	
Output Force:	60kN
Stroke:	42mm
Cutting/Charge:	70 cycles
Cutting range:	Φ40mm[Cu/Al and armoured cable]
Crimping/Charge:	160 cycles
Crimping range:	16-300mm
Punching/Charge:	100 cycles
Punching range:	Φ22.5-Φ61.5mm
Crimping cycle:	3-5s (Cu150mm)
Cutting Cycle:	3.8s (Cu150mm)
Punching Cycle:	6.2s [p61.5mm on 3mm thickness metal plate)
Voltage/capacity:	18V 5.0Ah
Charging time:	Approx.90 mins
Package:	plastic box

Accessories	
Crimping dies:	10,16,25,35,50,70,95,120,150,185,240,300mm²
Punches&die (Type D)	22.5,28.3,34.6,43.2,49.6,61.5mm
Blade:	1set
Adapter for crimping:	1pc
Adapter for punching:	1pc
3/4",16UN Draw stud:	1pc
7/16".20UN Draw stud:	1pc
Spacer:	1pc
Battery:	2pcs
Charger:	1pc
Sealing ring of cylinder:	1set
Sealing ring of safety valve:	1set

ADAPTER AND DIES FOR HL-60UNV

Adapter	Application: Crimping
	Cu compression cable lugs and compression joints 16-300mm² Al compression cable lugs and compression joints 10-240mm²

Blade	Application: Cutting
	Φ40mm Cu/Al cable

Adapter	Application: Punching
	Round punches: Φ22.5-61.5mm in the 3.5mm mild steel

HZT-300

BATTERY POWERED CRIMPING TOOL

The HEWLEE HZT series with latest technology, updated structure and extended lifetime. It is slim and smart,really a good choice with in-line grip.

350°Swivelling head

Flip-top latch crimping head, Easy crimping

Ergonomic design

With light weight and in-line grip, easily work overhead and in tight spaces.

OLED display

- Easy reading on
- Battery percentage
- Crimping cycles
- Fault code
- Maintenance note



APPLICABLE SCOPE

Wide crimping range/Easy die change
Convenient crimping


DT series


GC series


SC series


GT series


C45 series


Copper Cable Lug

Technical data			
Output Force:	60KN	Voltage/capacity:	18V/2.0Ah
Stroke:	17mm	Charging time:	Approx.40 mins
Max crimping:	Cu 300mm²/Al 240mm²	Charging voltage:	AC 100V~240V;50~60Hz
Cycle time:	2.5~4s (depend on the dia of cable)	Package:	Plastic box
Ambient temperature:	-10-40℃	Weight incl. battery:	3.7kgs

Accessories			
Crimping dies:	10,16,25,35,50,70,95,120,150,185,240,300mm²		
Battery:	2pcs	Sealing ring of cylinder:	1set
Charger:	1pc	Sealing ring of safety valve:	1set

HZT-300C

BATTERY POWERED CRIMPING & CUTTING TOOL

42Kn Powerful Output
TWO-IN-ONE
Applicability more extensive

- Quality guaranteed
  Core parts are general utilization and standardization
- Ergonomic design
  With light body
- OLED display shows battery percentage,working cycles, fault code,maintenance note



Technical data	
Output Force:	42KN
Stroke:	25mm
Rated power:	270W
Max. crimping range:	CU 300 mm²
Max. cutting range:	Φ30mm Cu/Al cable (it is not suitable for cutting fine strand and extra fine cables)
Battery:	18V 2.0Ah Li-ion
Charging voltage:	AC100-240V 50-60Hz
Charging time:	Approx.40mins
Weight:	2.58kgs(tool without battery)
Package size:	545x150x435mm

Accessories	
Crimping dies:	10,16,25,35,50,70,95,120,150,185,240,300mm²
Crimping head:	1pc
Cutting head:	1pc
Battery:	2pcs
Charger:	1pc
Sealing ring:	1set



Cu 300mm²(suit for Tubular lugs)



Φ30mm Cu/Al cable
(Non-fine strand and extra-fine strand)

HL-50X

ELECTROMECHANICAL CRIMPING TOOL

- Simple and safe: one-button operating concept for controlling all tool functions
- Electronic controlwith locking function monitors full closing of the dies
- Simple and safe: automatic retraction when operation is complete
- Manual retract as required
- Motor stall protection
- Li-ion battery with high capacity and require short charging time
- A temperature sensor makes the tool stop working automatically when the temperture over 60° under long time working

Crimping Die



Crimping effect





Technical data			
Output Force:	16KN	Voltage/capacity:	18V/2.0Ah
Crimping range:	Wire Ferrule End Sleeves:0.5-50mm²	Charging time:	Approx.60 mins
	Non-insulated Terminal andconnector: 0.5-10mm²	Charging voltage:	AC 100V~240V;50~60Hz
		Package:	Plastic box
	Pre-insulated Terminal and Connector: 0.5-6mm²	Weight incl. battery:	4.6kgs

Accessories			
Crimping dies:	6pairs		
Battery:	2pcs	Sealing ring of cylinder:	1set
Charger:	1pc	Sealing ring of safety valve:	1set

HL-300K

BATTERY POWERED CRIMPING TOOL

The tool comes standard with two 18V, 5.0Ah Li-ion batteries and one charger, motor drives, Micro-computer control system, OLED display and two stage hydraulic system with fast feed and power control.



Technical data			
Output Force:	60KN	Voltage/capacity:	18V/5.0Ah
Stroke:	17mm	Charging time:	Approx.90 mins
Max crimping:	Cu 300mm²/Al 240mm²	Charging voltage:	AC 100V~240V;50~60Hz
Cycle time:	2~5s (depend on the dia of cable)	Package:	Plastic box
Ambient temperature:	-10-40℃	Weight incl. battery:	4.6kgs

Accessories			
Crimping dies:	10,16,25,35,50,70,95,120,150,185,240,300mm²		
Battery:	2pcs	Sealing ring of cylinder:	1set
Charger:	1pc	Sealing ring of safety valve:	1set

HL-400K


BATTERY POWERED CRIMPING TOOL

The tool comes standard with two 18V, 5.0Ah Li-ion batteries and one charger, motor drives, Micro-computer control system, OLED display and two stage hydraulic system with fast feed and power control.



Technical data			
Output Force:	120KN	Voltage/capacity:	18V/5.0Ah
Stroke:	42mm	Charging time:	Approx.90 mins
Max crimping:	Cu 400mm²/Al 300mm²	Charging voltage:	AC 100V~240V;50~60Hz
Cycle time:	5~8s (depend on the dia of cable)	Package:	Plastic box
Ambient temperature:	-10-40℃	Weight incl. battery:	7.1kgs

Accessories			
Crimping dies:	16,25,35,50,70,95,120,150,185,240,300,400mm²		
Battery:	2pcs	Sealing ring of cylinder:	1set
Charger:	1pc	Sealing ring of safety valve:	1set

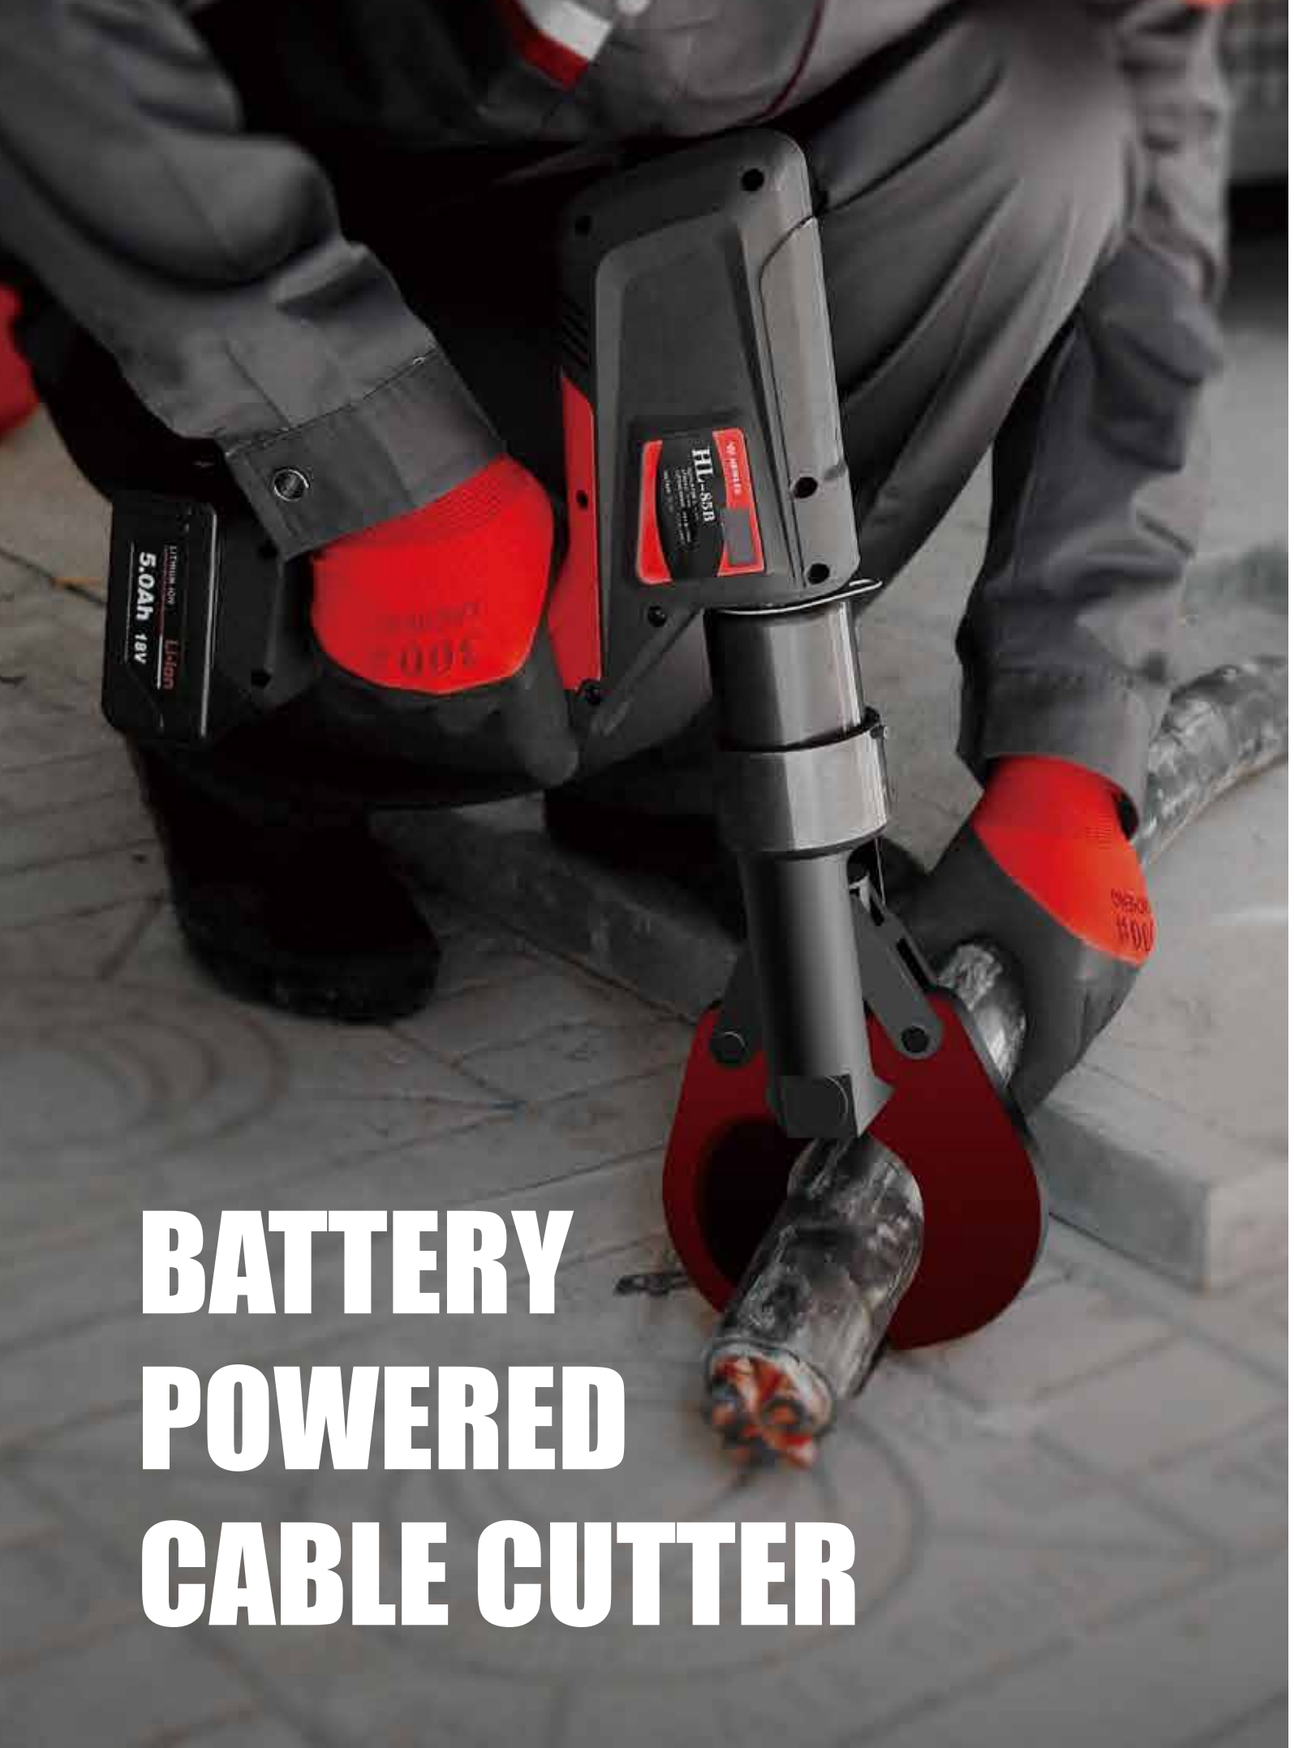

BATTERY POWERED CABLE CUTTER

HEWLEE
EASY CRIMPING EASY WIN

BATTERY CABLE CUTTER

HL-30B

BATTERY POWERED CABLE CUTTING TOOL

- OLED Data Display to show cutting time, Electricity Quantity, maintenance reminding and fault code.
- Air Cooling Heat dissipation System to extend using life.
- Cutting head rotates 350°
- Two stage hydraulic system with fast feed and power control
- Quick motor stop guarantees highest safety for the operator
- Automatic retraction when cut is completed
- Electronic control and monitor of Cutting operation
- Ergonomic design and optimized position of centre of gravity



Technical data			
Output Force:	60KN	Voltage/capacity:	18V/5.0Ah
Stroke:	21mm	Charging time:	Approx.90 mins
Max crimping:	Φ30mm	Charging voltage:	AC 100V~240V;50~60Hz
Type of cable:	Cu/Al cable,ACSR	Package:	Plastic box
Cycle time:	3~5s (depends on size of cable)	Weight incl. battery:	4.1kgs

Accessories			
Battery:	2pcs	Sealing ring of cylinder:	1set
Charger:	1pc	Sealing ring of safety valve:	1set

 √ Cu/AlCable

 √ ACSR

HL-55B

BATTERY POWERED CABLE CUTTING TOOL

5-8S

PER CYCLE TIME



OLED DISPLAY

(Crimping time, Electricity QTY,Maintenance reminding and fault code)

1
YEARS
10000
CYCLES
HL SERIES
BATTERY POWERED CABLE CUTTING TOOL

Characteristics

- OLED Data Display to show cutting time, Electricity Quantity, maintenance reminding and fault code.
- Air Cooling Heat dissipation System to extend using life.
- Cutting head rotates 350°
- Two stage hydraulic system with fast feed and power control
- Quick motor stop guarantees highest safety for the operator
- Automatic retraction when cut is completed
- Electronic control and monitor of Cutting operation
- Ergonomic design and optimized position of centre of gravity

Kitincludes:

- one cutting tool,two 5.0Ah Batteries
- one charger and carrying case

HEWLEE
EASY CRIMPING EASY WIN

EXTRA WIDE APPLICATION RANGE FOR CUTTING DIFFERENT MATERIALS

Technical data	HL-55B
Output Force:	120KN
Stroke:	50mm
Hydraulic Oil:	Shell Tellus T15# S2VHV15
Cutting range:	≤Φ55mm
Armoured cable	Φ55mm
ACSR:	Φ52mm
Cu/Al cable:	Φ55mm
Steel strand:	Φ20mm
Wire rope:	Φ25mm
Size of tool:	458x354x83mm
Voltage/capacity:	18V/5.0Ah
Charging time:	Approx.90 mins
Package:	Plastic box
Accessories	
Battery:	2pcs
Charger:	1pc
Sealing ring of cylinder:	1set
Sealing ring of safety valve:	1set




ACSR √


Armoured Cable √


Cu/AlCable √


Chilled Steel Bridge Steel ×


Steel strand √


Wirerope √


Steel bar √



Technical data	HL-45B	HL-85B	HL-105B
Output Force:	60KN	60KN	120KN
Stroke:	45mm	85mm	105mm
Cutting range:	Φ45mm	Φ85mm	Φ105mm
Type of cable:	Cu/Al cable	Cu/Al Cable, light weight armoured Cu/Al cable(depending on cable type)	
Voltage/capacity:	18V/5.0Ah	18V/5.0Ah	18V/5.0Ah
Charging time:	Approx.90 mins	Approx.90 mins	Approx.90 mins
Charging voltage:	AC 100V~240V;50~60Hz	AC 100V~240V;50~60Hz	AC 100V~240V;50~60Hz
Package:	Plastic box	Plastic box	Plastic box
	Cu/AlCable √ ACSR √	Cu/AlCable √ ACSR × Armoured Cable √	Steel bar ×

BATTERY POWERED CABLE CUTTING TOOL

HL-120B
BATTERY POWERED CABLE CUTTING TOOL

5-18S
PER CYCLE TIME

EFFORTLESS CUTTING
SIMPLY, QUICKLY AND SAFELY



OLED DISPLAY
(Crimping time, Electricity QTY,Maintenance reminding and fault code)

1 YEARS
10000 CYCLES
HL SERIES
BATTERY POWERED CABLE CUTTING TOOL

HEWLEE
EASY CRIMPING EASY WIN

HL-65B HL-85B HL-105B HL-135B
BATTERY POWERED CABLE CUTTING TOOL (Opened head with bolt interlock)

The new addition ED-C series with C type of head give an option for a fast and reliable way to cut operation. ZUPPER get the tool to cutd ifferent kinds of cables, include armoured Cu/Al cable, Cu/Al Cable, the cutting head can rotate 350°, the tool comes standard with two Li-ion batteries and one charger, motor drives, Micro-computer control system, OLED Display and two stage hydraulic system with fast feed and power control. The tool can released automatically, manual retraction is allowed as well.

PERFECT CUTTING, ULTRA FAST
Extra wide application range for cutting different materials

Characteristics

- OLED Data Display to show cutting time, Electricity Quantity, maintenance reminding and fault code.
- Air Cooling Heat dissipation System to extend using life.
- Cutting head rotates 350°
- Two stage hydraulic system with fast feed and power control
- Quick motor stop guarantees highest safety for the operator
- Automatic retraction when cut is completed
- Electronic control and monitor of Cutting operation
- Ergonomic design and optimized position of centre of gravity



Optimal carbide blade With high-strength and more durable

Kitincludes:

- one cutting tool,two 5.0Ah Batteries
- one charger and carrying case



Technical data	HL-65B	HL-85B	HL-105B	HL-120B	HL-135B
Output Force:	60KN	120KN	250KN	250KN	250KN
Stroke:	45mm	45mm	45mm	62mm	72mm
Cutting range:	Φ65mm	Φ85mm	Φ105mm	Φ110mm	Φ135mm
Type of cable:	Cu/Al cable		Cu/Al Cable, light weight armoured Cu/Al cable(depending on cable type)		
Voltage/capacity:	18V/5.0Ah	18V/5.0Ah	18V/5.0Ah	18V/5.0Ah	18V/5.0Ah
Charging time:	Approx.90 mins	Approx.90 mins	Approx.90 mins	Approx.90 mins	Approx.90 mins
Charging voltage:	AC 100V~240V;50~60Hz	AC 100V~240V;50~60Hz	AC 100V~240V;50~60Hz	AC 100V~240V;50~60Hz	AC 100V~240V;50~60Hz
Package:	Plastic box	Plastic box	Plastic box	Plastic box	Plastic box
Tool Size :	410x520x70mm	420x530x70mm	470x560x70mm	480x570x70mm	490x580x70mm
	√ Cu/AlCable	√ Armoured Cable	× ACSR	× Steel bar	

BATTERY POWERED CABLE CUTTING TOOL

HL-50M

BATTERY POWERED CABLE CUTTING TOOL

- The blade is made of a11oy steel,after forging and special heat treatment, it can withstand long time of strenuous work
- Reasonablestructure,light weight ,labor-saving,easy to carry and operate
- Quick motor stop guarantees highest safety for the operator
- Automatic retraction when cut is completed
- Electronic control and monitor of Cutting operation
- Ergonomic design and optimized position of centre of gravity



Armoured cable



All copper cable



Twist cable



Cu/Al cable



Technical data			
Cutting range:	Max Φ50mm for Cu/Al cable	Voltage/capacity:	18V/4.0Ah
	Max 800sqmm for ACSR	Charging time:	Approx.80 mins
	Max 100sqmm for Prestressed steel wire	Charging voltage:	AC 100V~240V;50~60Hz
Cycles/charger:	Approx. 150 cycles (CU 150 mm²)	Package:	Plastic box
Weight incl. battery:	3.5kgs		

Accessories			
Battery:	2pcs	Sealing ring of cylinder:	1set
Charger:	1pc	Sealing ring of safety valve:	1set

BATTERY POWERED NUT SPLITER TOOL

HL-MM36B

BATTERY POWERED NUT SPLITER TOOL

- OLED Data Display to show cutting time, Electricity Quantity, maintenance reminding and fault code.
- Air Cooling Heat dissipation System to extend using life.
- Cutting head rotates 350°
- Two stage hydraulic system with fast feed and power control
- Quick motor stop guarantees highest safety for the operator
- Automatic retraction when cut is completed
- Electronic control and monitor of Cutting operation
- Ergonomic design and optimized position of centre of gravity



REPLACEABLE TOOL BITS



Technical data			
Output Force:	120KN	Voltage/capacity:	18V/5.0Ah
Stroke:	32mm	Charging time:	Approx.90 mins
Cutting range: M8-M24	Long blade head M8-M14	Charging voltage:	AC 100V~240V;50~60Hz
	Mid blade head M14-M20	Package:	Plastic box
	Short blade head M18-M24	Weight incl. battery:	6.6kgs

Accessories			
Battery:	2pcs	Sealing ring of cylinder:	1set
Charger:	1pc	Sealing ring of safety valve:	1set

ELECTRIC POWERED CRIMPING TOOL



HEWLEE
EASY CRIMPING EASY WIN

HL-300Q HL-400Q HL-630Q

ELECTRIC POWERED CRIMPING TOOL

Plug-in type series are full consideration for the cost performance of users, the tool comes standard with 220V input voltage directly, 520W rated power, two stage hydraulic system, save the cost of the batteries with AC series motor, it is perfect experience at a reasonable cost.

- Crimping head rotates 350°
- Two stage hydraulic system, AC Series motor with high efficiency
- Fast speed, automatic oil return
- Adopt low-power high-voltage DC motor,which is more energy-saving and environmentally friendly, with larger output power
- Lower noise,lighter weight, and easier to carry and work than traditional series-connected motors
- Over-current protection function,when themachine is blocked or short-circuited, it will automatically cut off the power



220V **lasting power supply** **Efficiency**



Technical data	HL-300Q	HL-400Q	HL-630Q
Output Force:	60KN	120KN	200KN
Stroke:	17mm	42mm	42mm
Crimping Range:	Cu 300mm²/Al 240mm²	Cu 400mm²/Al 300mm²	Cu 630mm²/Al 500mm²
Crimping Cycle:	3-6s(depends on size of lug)	5-8s(depends on size of lug)	7-15s(depends on size of lug)
Voltage:	AC 220V 50/60Hz(orAC110V 50/60Hz)		
Rated Power:	520W		
Ambient temperature:	-10-50℃		
Weight:	4.2kgs	6.4kgs	7.5kgs
Product size:	270x370x80mm	270x420x80mm	270x470x80mm

Accessories			
Crimping dies:	10,16,25,35,50,70,95,120, 150,185,240,300mm²	16,25,35,50,70,95,120,150, 185,240,300,400mm²	25,35,50,70,95,120,150,185, 240,300,400,500,630mm²
Sealing ring of cylinder:	1pc	1pc	1pc
Sealing ring of safety valve:	1pc	1pc	1pc

HEWLEE
EASY CRIMPING EASY WIN

ELECTRIC POWERED CRIMPING TOOL

HL-300T HL-400T HL-630T

ELECTRIC POWERED CRIMPING TOOL

Plug-in type series are full consideration for the cost performance of users, the tool comes standard with 220V input voltage directly, 520W rated power, two stage hydraulic system, save the cost of the batteries with AC series motor, it is perfect experience at a reasonable cost.

- Crimping head rotates 350°
- Two stage hydraulic system, AC Series motor with high efficiency
- Fast speed, automatic oil return
- Adopt low-power high-voltage DC motor,which is more energy-saving and environmentally friendly, with larger output power
- Lower noise,lighter weight, and easier to carry and work than traditional series-connected motors
- Over-current protection function,when themachine is blocked or short-circuited, it will automatically cut off the power



220V

lasting power supply

Efficiency



Technical data	HL-300T	HL-400T	HL-630T
Output Force:	60KN	120KN	200KN
Stroke:	17mm	42mm	42mm
Crimping Range:	Cu 300mm²/Al 240mm²	Cu 400mm²/Al 300mm²	Cu 630mm²/Al 500mm²
Crimping Cycle:	3-6s(depends on size of lug)	5-8s(depends on size of lug)	7-15s(depends on size of lug)
Voltage:	AC 220V 50/60Hz(orAC110V 50/60Hz)		
Rated Power:	520W		
Ambient temperature:	-10-50℃		
Weight:	4.45kgs	6.7kgs	7.88kgs
Product size:	210x370x80mm	210x420x80mm	210x470x80mm

Accessories			
Crimping dies:	10,16,25,35,50,70,95,120, 150,185,240,300mm²	16,25,35,50,70,95,120,150, 185,240,300,400mm²	25,35,50,70,95,120,150,185, 240,300,400,500,630mm²
Sealing ring of cylinder:	1pc	1pc	1pc
Sealing ring of safety valve:	1pc	1pc	1pc




HL-45Q HL-55Q

ELECTRIC POWERED CABLE CUTTING TOOL

Plug-in type series are full consideration for the cost performance of users, the tool comes standard with 220V input voltage directly, 520W rated power, two stage hydraulic system, save the cost of the batteries with AC series motor, it is perfect experience at a reasonable cost.

- Cutting head rotates 350°
- Two stage hydraulic system, AC Series motor with high efficiency
- D type of cutting head, armoured cable has better applicability
- Adopt low-power high-voltage DC motor,which is more energy-saving and environmentally friendly, with larger output power
- Lower noise,lighter weight, and easier to carry and work than traditional series-connected motors
- Over-current protection function,when themachine is blocked or short-circuited, it will automatically cut off the power

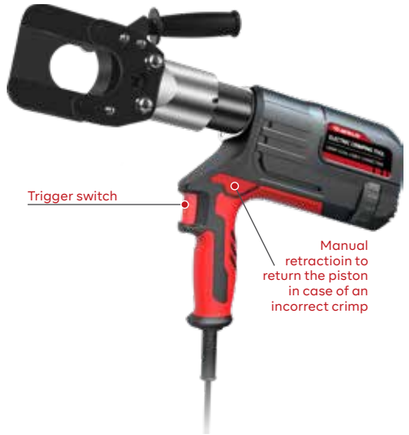

220V | lasting power supply | Efficiency



Technical data	HL-45Q	HL-55Q
Output Force:	60KN	120KN
Stroke:	45mm	50mm
Max cutting diameter:	Φ45mm	Φ55mm
Crimping Cycle:	5-8s(depends on size of lug)	7-10s(depends on size of lug)
Suitable cable:	Cu/Al cable	Cu/Al cable,Armoured Cable,ACSR,Steel strand,Wire rope
Voltage:	AC 220V 50/60Hz(orAC110V 50/60Hz)	
Rated Power:	520W	
Ambient temperature:	-10-50℃	
Weight:	5.7kgs	8.98kgs
Product size:	280x430x80mm	290x450x80mm

Accessories		
Sealing ring of cylinder:	1pc	1pc
Sealing ring of safety valve:	1pc	1pc

HEWLEE
EASY CRIMPING EASY WIN

HL-45T HL-55T

ELECTRIC POWERED CABLE CUTTING TOOL

Plug-in type series are full consideration for the cost performance of users, the tool comes standard with 220V input voltage directly, 520W rated power, two stage hydraulic system, save the cost of the batteries with AC series motor, it is perfect experience at a reasonable cost.

- Cutting head rotates 350°
- Two stage hydraulic system, AC Series motor with high efficiency
- D type of cutting head, armoured cable has better applicability
- Adopt low-power high-voltage DC motor,which is more energy-saving and environmentally friendly, with larger output power
- Lower noise,lighter weight, and easier to carry and work than traditional series-connected motors
- Over-current protection function,when themachine is blocked or short-circuited, it will automatically cut off the power



220V | lasting power supply | Efficiency



Technical data	HL-45T	HL-55T
Output Force:	60KN	120KN
Stroke:	45mm	50mm
Max cutting diameter:	Φ45mm	Φ55mm
Crimping Cycle:	5-8s(depends on size of lug)	7-10s(depends on size of lug)
Suitable cable:	Cu/Al cable	Cu/Al cable,Armoured Cable,ACSR,Steel strand,Wire rope
Voltage:	AC 220V 50/60Hz(orAC110V 50/60Hz)	
Rated Power:	520W	
Ambient temperature:	-10-50℃	
Weight:	5.75kgs	9.3kgs
Product size:	210x430x80mm	210x450x80mm

Accessories		
Sealing ring of cylinder:	1pc	1pc
Sealing ring of safety valve:	1pc	1pc

HEWLEE
EASY CRIMPING EASY WIN

ELECTRIC POWERED CABLE CUTTING TOOL





220V | lasting power supply | Efficiency

Technical data	HL-30Q	HL-85Q
Output Force:	60KN	120KN
Stroke:	21mm	45mm
Max cutting diameter:	Φ30mm	Φ85mm
Crimping Cycle:	3-6s(depends on size of lug)	5-8s(depends on size of lug)
Suitable cable:	Cu/Al cable,ACSR	Cu/Al cable
Voltage:	AC 220V 50/60Hz(orAC110V 50/60Hz)	
Rated Power:	520W	
Ambient temperature:	-10-50℃	

Accessories		
Sealing ring of cylinder:	1pc	1pc
Sealing ring of safety valve:	1pc	1pc



220V | lasting power supply | Efficiency

Technical data	HL-30T	HL-85T
Output Force:	60KN	120KN
Stroke:	21mm	45mm
Max cutting diameter:	Φ30mm	Φ85mm
Crimping Cycle:	3-6s(depends on size of lug)	5-8s(depends on size of lug)
Suitable cable:	Cu/Al cable,ACSR	Cu/Al cable
Voltage:	AC 220V 50/60Hz(orAC110V 50/60Hz)	
Rated Power:	520W	
Ambient temperature:	-10-50℃	

Accessories		
Sealing ring of cylinder:	1pc	1pc
Sealing ring of safety valve:	1pc	1pc

ELECTRIC POWERED PRESS TOOL



HL-25Q HL-1550Q

ELECTRICAL POWERED PRESS TOOL

520W High power
220V lasting power supply,
Reliable and Stable

- Only 3S to finish one cycle press
- Press jaw with piston, to avoid maloperation
- Anti-slip handle and an optimized center of gravity for easier carry
- Motor drives, Micro-computer control system and double valve hydraulic system



220V | lasting power supply | Efficiency



Technical data	HL-25Q	HL-1550Q
Output Force:	32KN	32KN
Stroke:	40mm	40mm
Clamping range:	16-25mm[1/2"- 1"] for steel pipe,copper pipe	16-54mm[1/2"- 2"] for steel pipe,copper pipe
	16-25mm PEX&Multi-layer pipe	16-32mm PEX&Multi-layer pipe
Cycle time:	3-5s(depands on diameter of pipe)	4-6s(depands on diameter of pipe)
Voltage:	AC 220V 50/60Hz(orAC110V 50/60Hz)	
Rated Power:	520W	
Ambient temperature:	-10-50℃	
Weight:	3.66kgs	4.30kgs
Product size:	270x365x80mm	260x405x80mm

Accessories		
Sealing ring of cylinder:	1pc	1pc
Sealing ring of safety valve:	1pc	1pc

HEWLEE
EASY CRIMPING EASY WIN

ELECTRICAL POWERED PRESS TOOL

HL-25T HL-1550T

ELECTRICAL POWERED PRESS TOOL

520W High power
220V lasting power supply,
Reliable and Stable

- Only 3S to finish one cycle press
- Press jaw with piston, to avoid maloperation
- Anti-slip handle and an optimized center of gravity for easier carry
- Motor drives, Micro-computer control system and double valve hydraulic system




Copper tube


Multilayer composite tube


PEX pipe


Stainless steel pipe

220V | lasting power supply | Efficiency



Technical data	HL-25T	HL-1550T
Output Force:	32KN	32KN
Stroke:	40mm	40mm
Clamping range:	16-25mm[1/2"- 1"] for steel pipe,copper pipe	16-54mm[1/2"- 2"] for steel pipe,copper pipe
	16-25mm PEX&Multi-layer pipe	16-32mm PEX&Multi-layer pipe
Cycle time:	3-5s(depands on diameter of pipe)	4-6s(depands on diameter of pipe)
Voltage:	AC 220V 50/60Hz(orAC110V 50/60Hz)	
Rated Power:	520W	
Ambient temperature:	-10-50℃	
Weight:	3.76kgs	4.25kgs
Product size:	210x365x80mm	210x405x80mm

Accessories		
Sealing ring of cylinder:	1pc	1pc
Sealing ring of safety valve:	1pc	1pc

ADVANTAGE OF HEWLEE PRESS JAW

Connecting Plate
- Precision stamping
- Security design

Serial NO.
- Tracking numbers easier to do after-sales service



Precision Forged Jaws
- Made by multi-axis CNC machine
- High strength,sturdy and durable

Special heat treatment process
- Inspection control program to ensure long span life

HEWLEE TOOL have a wealth of design and practical experience, can provide customers with differentiated solutions according to customer needs, and to offer customers with pipe press technical support.

HEWLEE
EASY CRIMPING EASY WIN

PRESS JAWS

AMERICAN STANDARD

Compact series press jaws (VUS)



VUS1/2 VUS3/4 VUS1

TECHNICAL PARAMETER

Split type	Scope of application	Applicable tools
Press tool jaw	Thin-walled stainless steel pipe, carbon steel pipe, purple copper pipe, etc	HL-25/HZT-25rechargeable type power tool

Note: The mold can be customized according to customer requirements. In order to provide better tools, please confirm the standard of pipe fittings before placing an order.

Standard series press jaws (VUS)



VUS1/2 VUS3/4 VUS1 VUS1-1/4



VUS1-1/2 VUS2

TECHNICAL PARAMETER

Split type	Scope of application	Applicable tools
Press tool jaw	Thin-walled stainless steel pipe, carbon steel pipe, purple copper pipe, etc	HL-1550 rechargeable power tool, HL-1550T plug-in power tool, HL-1550B rechargeable power tool

Note: The mold can be customized according to customer requirements. In order to provide better tools, please confirm the standard of pipe fittings before placing an order.

EUROPEAN STANDARD

Compact series press jaws
(V/M)



V15 V18 V22 V28

TECHNICAL PARAMETER

Split type	Scope of application	Applicable tools
Press tool jaw	Thin-walled stainless steel pipe, carbon steel pipe, purple copper pipe, etc	HL-25/HZT-25rechargeable type power tool

Note: The mold can be customized according to customer requirements. In order to provide better tools, please confirm the standard of pipe fittings before placing an order.

Standard series press jaws
(V/M)



V15 V18 V22 V28



DN32-50 connector V35 V42 V54

TECHNICAL PARAMETER

Split type	Scope of application	Applicable tools
Press tool jaw + ring die	Thin-walled stainless steel pipe, carbon steel pipe, purple copper pipe, etc	HL-1550 rechargeable power tool, HL-1550T plug-in power tool, HL-1550B rechargeable power tool

Note: The mold can be customized according to customer requirements. In order to provide better tools, please confirm the standard of pipe fittings before placing an order.

HEWLEE
EASY CRIMPING EASY WIN

PRESS JAWS

THE NEW FLEXIBILITY-ANGLE JAWS

R-type Angle Jaw

Provide with differentiated solutions according to customers requirment
M15,M18,M22,M28,M35
V15, V18, V22, V28, V35



WX 25
Press Chain Adapter Jaw



WX 25N
Press Chain Adapter Jaw

Point pressure design:
Perfect solution to the narrow space operation problems





VUS1/2 VUS3/4 VUS1 VUS1-1/4



WX 50
Press Chain Adapter Jaw



VUS1-1/2



VUS2

TECHNICAL PARAMETER

Split type	Scope of application	Applicable tools
WX 25 Press Chain Adapter Jaw	Stpress thin-wall stainless steel pipe, carbon steel pipe, copper pipe, etc	HL-25/HZT-25rechargeable type power tool
WX50 Press Chain Adapter Jaw	Stpress thin-wall stainless steel pipe, carbon steel pipe, copper pipe, etc	HL-1550 rechargeable power tool, HL-1550T plug-in power tool, HL-1550B rechargeable power tool

Note: The mold can be customized according to customer requirements. In order to provide better tools, please confirm the standard of pipe fittings before placing an order.

UNIVERSAL JAW WITH INTERCHANGEABLE DIES ECONOMIC DESIGN



DN15-25



DN32-50



TECHNICAL PARAMETER

Split type	Scope of application	Applicable tools
DN15-25 Change mode clamp-press jaw	Stpress thin-wall stainless steel pipe, carbon steel pipe, copper pipe, etc	HL-25/HZT-25rechargeable type power tool
DN32-50 Change mode clamp-press jaw	Stpress thin-wall stainless steel pipe, carbon steel pipe, copper pipe, etc	HL-1550 rechargeable power tool, HL-1550T plug-in power tool, HL-1550B rechargeable power tool

Note: The mold can be customized according to customer requirements. In order to provide better tools, please confirm the standard of pipe fittings before placing an order.

HEWLEE
EASY CRIMPING EASY WIN

PRESS JAWS

Compact Series Press Jaws

DESCRIPTION	JAW SIZE	Weight (KGS)
PEX& MULTI-LAYER PIPE	TH16	1.27
	TH20	1.33
	TH26	1.35
	TH32	1.40



DESCRIPTION	JAW SIZE	Weight (KGS)
PEX& MULTI-LAYER PIPE	U16	1.20
	U20	1.29
	U25	1.30
	U32	1.50



DESCRIPTION	JAW SIZE	Weight (KGS)
FOR STAINLESS STEEL /COPPER PIPE	M12	1.23
	M15	1.30
	M18	1.29
	M22	1.37
	M28	1.39
	M35	1.40



DESCRIPTION	JAW SIZE	Weight (KGS)
FOR STAINLESS STEEL /COPPER PIPE	V12	1.23
	V15	1.23
	V18	1.29
	V22	1.38
	V28	1.47



DESCRIPTION	JAW SIZE	Weight (KGS)
FOR STAINLESS STEEL PIPE	SV13	1.23
	SV20	1.27
	SV25	1.34



DESCRIPTION	JAW SIZE	Weight (KGS)
FOR COPPER PIPE	VUS1/2"	1.23
	VUS3/4"	1.26
	VUS1"	1.48



Special jaws can be made according to your requirements.

Standard Series Press Jaws & Press Rings

DESCRIPTION	JAW SIZE	Weight (KGS)	
PEX& MULTI-LAYER PIPE	TH16	2.05	
	TH20	2.00	
	TH25	2.05	
	TH26	2.05	
	TH32	2.10	
	TH40	2.2	
	TH50	1.9	
	TH63	2.67	

DESCRIPTION	JAW SIZE	Weight (KGS)	
PEX& MULTI-LAYER PIPE	U16	1.95	
	U20	2.05	
	U25	2.00	
	U32	2.15	
	U40	2.20	
	U50	2.8	
	U63	2.47	

DESCRIPTION	JAW SIZE	Weight (KGS)	
FOR COPPER PIPE	VAU15	2.00	
	VAU20	2.06	
	VAU25	2.04	
	VAU32	2.09	
	VAU40	1.48	
	VAU50	1.75	

Special jaws can be made according to your requirements.

HEWLEE
EASY CRIMPING EASY WIN

PRESS JAWS

Standard Series Press Jaws & Press Rings

DESCRIPTION	JAW SIZE	Weight (KGS)	
FOR COPPER PIPE	VUS1/2"	2.00	
	VUS3/4"	2.10	
	VUS1"	2.05	
	VUS1-1/4"	2.08	
	VUS1-1/2"	2.70	
	VUS2"	3.90	

DESCRIPTION	JAW SIZE	Weight (KGS)	
FOR STAINLESS STEEL PIPE	SV13	2.01	
	SV20	2.07	
	SV25	2.03	

DESCRIPTION	JAW SIZE	Weight (KGS)	
FOR STAINLESS STEEL /COPPER PIPE	M12	2.00	
	M15	2.00	
	M18	1.95	
	M22	2.00	
	M28	2.00	
	M35	2.05	
	M42	1.35	
	M54	1.60	

DESCRIPTION	JAW SIZE	Weight (KGS)	
FOR STAINLESS STEEL /COPPER PIPE	V12	2.02	
	V15	1.95	
	V18	2.10	
	V22	2.05	
	V28	2.00	
	V35	2.05	
	V42	1.40	
	V54	1.63	

Special jaws can be made according to your requirements.