



江苏赛美特机械有限公司
JIANGSU SAIMEITE MACHINERY CO.,LTD

地址: 盐城市盐都区尚庄镇文化路西侧
电话: 0515-88512877
传真: 0515-88511277
邮箱: export@cnsaimeite.com
网址: www.saimete-tyre.com
Add: WEST OF WEN HUA ROAD, SHANGZHUANG TOWN...
Tel: +86 0515-88512877
Fax: +86 0515-88511277
E-mail: export@cnsaimeite.com
Http:// www.saimete-tyre.com



赛美特机械

赛美特轮胎
Sai mei te

特种轮胎制造专家
Specialist in special tyre manufacturing



江苏赛美特机械有限公司
JIANGSU SAIMEITE MACHINERY CO.,LTD

江苏赛美特机械有限公司(原双前轮胎)创建于2009年,企业总资产1.3亿元,占地32000平方米,是一家专业集设计、生产、销售为一体的轮胎、路面机械产品的生产企业。它拥有优越的技术团队、销售团队及先进的生产线,具有年产10万只减震垫、20万只履带板、30万橡胶轮胎以及30万只钢圈车轮的产能。产品广泛应用于钢铁厂、玻璃厂、陶瓷厂、矿山、建筑、港口、机场、公路建设及军用车辆等领域。并可以根据客户的需求定制产品。公司产品40%遍及国内配套市场,60%远销欧美等国际市场。

目前公司拥有“SAIMEITE”“SQT”、“SULITONG”等自主品牌。在国内,我们与知名品牌厂家(杭叉、诺力、徐工、临工等集团)建立了长期稳定合作关系;在国外,我们与美国“OTR Blackstone”集团、韩国现代集团及其它欧美企业在持续稳定合作。

Jiangsu semet machinery co., LTD. (original double front tire) was founded in 2009, the enterprise total assets 130 million yuan, covers an area of 32,000 square meters, is a professional set design, production, sales as one of the tire, road machinery products production enterprises. It has a superior technical team, sales team and advanced production lines, with an annual production capacity of 100,000 cushioning pads, 200,000 caterpillar tracks, 300,000 rubber tires and 300,000 steel ring wheels. Products are widely used in steel works, glass factories, ceramics factories, mines, construction, ports, airports, highway construction and military vehicles and other fields. And can be customized according to customer needs. 40% of the company's products throughout the domestic supporting market, 60% exported to Europe and the United States and other international markets.

At present, the company has "SAIMEITE," "SQT", "SULITONG" and other independent brands. In China, we have established a long-term and stable cooperative relationship with well-known brand manufacturers (hangforks, Norris, xugong, lingong and other groups). Abroad, we have been cooperating with OTR Blackstone group, hyundai group and other European and American companies.



实力生产基地

公司拥有32000平米的生产基地, 保质, 保量, 保准时。


The company has a production base of 32000 square meters, which guarantees the quality, quantity and time.



产品配套齐全

多种机械轮胎定制, 满足客户多种需求, 一站式服务。

A variety of mechanical tire customization, to meet a variety of customer needs, one-stop service.

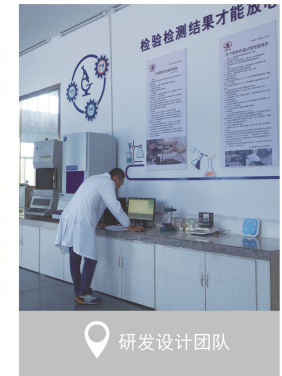


研发设计团队

江苏赛美特机械12年来专注于轮胎的研发与生产, 产品应用行业广泛, 赢得了广大客户的赞许。

Simete machinery 12 years of production experience, product applications in a wide range of industries, won the approval of the majority of customers.



公司永不以今天的荣誉成就为满足，我们将继续努力奋斗，一如既往地吧科技创新作为发展的重点，以人才为基础，进一步扩大与客户合作的力度，不断开拓、创新，用最优质的产品、最佳的服务，满足用户的需求，实现最好的社会效益和经济效益。

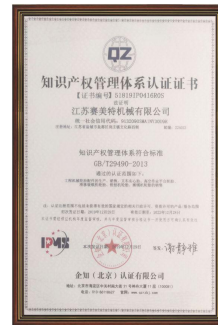

叉车实心胎 FORKLIFT SOLID TYRE

优异承载性 

高耐磨 

强抓地力 



FORKLIFT SOLID TYRE 叉车实心胎

采用三层式结构

耐磨抗撕胎面胶——抗撕裂、耐磨耗、低生热、可供长期使用。

高弹性中间胶——减少内部发热、吸震强、高弹性、缓冲效果好、驾驶舒适、延长使用寿命。

高刚性基部胶——加高强度钢丝圈，提高轮胎与轮辋的最佳配合，防止空转打滑。

Three - story structure is adopted
Wear-resistant and tearing tread adhesive -- tear resistance, abrasion resistance, low heat generation, suitable for long-term use
High elastic intermediate adhesive -- reduce internal heat, strong shock absorption, high elasticity, good buffer effect, comfortable driving, extend service life
High rigid base rubber - high strength steel wire ring, improve the best fit between tire and rim, prevent idling slip.

S301



S304



SM-1



SM-2



S501



S301-1



粘结式 SM-1FB



粘结式 S502



ORDINARY FORKLIFT TYRE

叉车轮胎



序号 NO	轮胎规格 Tyre Size	轮辋 Rim	花纹代码 Patt.no	外胎尺寸		最大负荷 Load(KG) 10km/h	
				OD	SW	驱动轮 Load Wheel	转向轮 Rotation Wheel
				外 径 (mm)	断面宽 (mm)		
1	3.50-5	3.00D	SM-2、S502、S306A	297	100	555	420
2	4.00-8	2.75	S325	423	121	1000	770
3	4.00-8	3.00D	SM-1、SM-2、S301、S325、S502	423	121	1090	840
4	4.00-8	3.75	S325	423	125	1175	905
5	5.00-15	4.5	S502	677	146	2000	1500
6	6.00-9	4	SM-1、SM-2、S301	545	160	1975	1520
7	6.50-10	5	SM-1、SM-2、S301、S304、S502	597	178	2715	2090
8	6.50-16	5.5	S502	749	187	3545	2725
9	7.00-9	5	S301	578	186	2670	2055
10	7.00-12	5	SM-1、SM-2、S301	683	192	3105	2390
11	7.00-15	5.5	S301	759	204	3700	2845
12	7.00-15	6	S502	774	215	4145	3190
13	7.00-15	6.5	S502	774	215	4490	3455
14	7.50-16	5.5	S502	820	220	4035	3150
15	7.50-16	6	S502	820	230	4400	3385
16	7.50-16	6.5	S502	820	230	4770	3670
17	8.25-12	5	S301	735	236	3425	2635
18	8.25-15	6.5	SM-1、SM-2、S301	847	236	5085	3910
19	8.25-20	6.5	SM-2	992	236	5165	4305
20	9.00-20	6.5	S301	1038	259	6160	5135
21	10.00-20	8	S301	1073	278	7300	6085
22	11.00-20	8	S301	1095	300	7715	6430
23	12.00-20	8.5	S301	1180	310	8920	7435
24	14.00-24	10	S301	1368	375	12165	10135
25	16*5-9	3.5	S325	406	125	1100	960
26	28*9-15	7	SM-1、SM-2、S301、S304、S502、SM-1	706	225	4060	3215
27	28*12.5-15	9.75	SM-1	730	317	6200	4770
28	250-15	7	SM-1、SM-2	735	250	5220	4015
29	300-15	8	SM-1、SM-2、S301	838	300	6895	5305
30	355/65-15	9.75	S301	826	372	7800	6000
31	355/50-20	10	S301	847	367	8970	6900

序号 NO	轮胎规格 Tyre Size	轮辋 Rim	花纹代码 Patt.no	外胎尺寸		最大负荷 Load(KG) 10km/h	
				OD	SW	驱动轮 Load Wheel	转向轮 Rotation Wheel
				外 径 (mm)	断面宽 (mm)		
32	5.00-8	3	SM-1、SM-2、S301	469	146	1255	965
33	15*4 1/2-8	3	SM-1、SM-2、S301	380	114	1005	775
34	16*6-8	4.33	SM-1、SM-2、S301	418	162	1545	1190
35	18*7-8	4.33	SM-1、SM-2、S301	457	170	2430	1870
36	21*8-9	6	SM-1、SM-2、S301	535	207	2890	2225
37	23*9-10	6.5	SM-1、SM-2	595	225	3730	2870
38	23*10-12	8	SM-1、SM-2	595	261	4450	3425
39	27*10-12	8	SM-1、SM-2	683	261	4450	3535
40	140/55-9	4	SM-1	375	147	1380	1060
41	200/50-10	6.5	SM-1、SM-2、S301	460	221	2910	2240



MINIATURE FORKLIFT TYRES

微型叉车轮胎

轮胎的优点:

- 1、防爆胎,免维修
- 2、轮胎与钢圈结合紧密,避免长时间作业造成轮胎脱圈
- 3、易装卸
- 4、能耗低
- 5、使用寿命长
- 6、适用于苛刻的作业环境下

Advantages of tires:

1. Explosion-proof tires, no maintenance.
2. The tire is closely combined with the steel ring to avoid long time operation causing the tire to detangle.
3. Easy to load and unload.
4. Low energy consumption5. Long service life6. Suitable for harsh working environment.



S322-1

S306



SAIMEITETIRE
专注于轮胎的研发与生产 • 特种轮胎制造专家
www.saimeitetyre.com



序号 NO	轮胎规格 Tyre Size	花纹 Pattern	公制 mm
1	6*3*4	SM/TR	150*80*100
2	7*3*5	SM/TR	178*76*127
3	9*3*6 1/2	SM/TR	230*75*153
4	10*3*8	SM/TR	250*80*200
5	10 1/2*4*6 1/2	SM/TR	267*106*165
6	10 1/2*5*6	SM/TR	270*127*152
7	10 1/2*5*6 1/2	SM/TR	270*127*165
8	11*5 1/4*5 3/4	SM/TR	280*135*145
9	13*5 3/4*7 1/2	SM/TR	330*145*194
10	13 1/2*5 1/2*8	SM/TR	343*140*203
11	3.50-5	S502	300*100-5
12	250*100-6	TR	250*100-6
13	300*100-6	TR	300*100-6
14	300*100	TR	300*100
15	300*125	TR	300*125
16	320-8	TR	320-8
17	350*110-8	TR	350*110-8
18	400*100	TR	400*100



压配式实心轮胎

PRESSURE MATCHING TYPE SOLID TIRE

优异承载性 

高耐磨 

强抓地力 



FORKLIFT SOLID TYRE

压配式实心轮胎

抓地性强，刹车性能优良，负载行驶稳定性极强，滚动阻力极小，能耗极低，适用于拖车及其它传动、行走机械。钢圈压配式实心轮胎专门为工业车辆设计，适用于平整路面，具有重心低、能耗低、耐刺破、经济适用等特点；采用注射线生产，橡胶体密度高，耐磨性与稳定性好；与钢圈结合紧密，避免胶体与钢圈剥离现象。

Strong grip, excellent braking performance, strong load running stability, minimal rolling resistance, very low energy consumption, suitable for trailers and other transmission, walking machinery. Steel ring compression type solid tire is specially designed for industrial vehicles, suitable for leveling road surface, with low center of gravity, low energy consumption, puncture resistance, economic application and other characteristics; Using injection line production, rubber body density, wear resistance and stability; It is closely combined with the steel ring to avoid the phenomenon of colloid and steel ring stripping.

SM



TR



COMPACTED SOLID TYRE

压配式实心轮胎



序号 NO	规格 Size		花纹形式 PATT.TYPE	最大负荷Load(KG)		
	英制 inch	公制 (mm)		叉车forklif	其他工业车辆Other vehicles	
				转向轮Rotation		
	≤10km/h	≤16km/h		≤16km/h		
1	6*2*4	150*60*100	SM/TR			
	6*3*4	150*80*100	SM/TR			
2	7*3*5	178*76*127	SM/TR			
3	8*3*5	204*76*119	SM/TR			
4	8 1/2*3*6	215*75*148	SM/TR			
5	9*3*5	229*76*127	SM/TR			
	9*4*5	229*102*127	SM/TR			
	9*5*5	229*127*127	SM/TR	790	715	685
6	10*3*6 1/2	254*76*165	SM/TR	445	405	385
	10*4*6 1/2	254*102*165	SM/TR	640	580	555
	10*5*6 1/2	254*127*165	SM/TR	835	755	725
	10*6*6 1/2	254*152*165	SM/TR	1035	935	895
	10*7*6 1/2	254*178*165	SM/TR	1235	1115	1065
7	10 1/2*4*6 1/2	267*102*165	SM/TR	675	610	580
	10 1/2*5*6 1/2	267*127*165	SM/TR	890	805	775
	10 1/2*6*6 1/2	267*152*165	SM/TR	1105	995	955
8	11*5 1/4*8 3/4	280*135*170	SM/TR			
	11 3/4*4*8 3/4	300*90	SM/TR			
	11 3/4*4*6	300*100	SM/TR	740	650	640
	11 3/4*5*6	300*125	SM/TR	805	730	695
9	12*5*7 3/4	305*125*184	SM/TR	865	780	745
	12*5 1/2*8	305*140*203	SM/TR	1100	995	950
	12*6 1/2*8	305*165*203	SM/TR	1340	1210	1160
10	12 1/2*5 3/4*6 1/2	315*145*170	SM/TR	990	895	855
11	13*5 3/4*7 1/2	330*145*193	SM/TR	1065	960	920
12	13 1/2*4 1/2*8	343*114*203	SM/TR	950	855	820
	13 1/2*5 1/2*8	343*140*203	SM/TR	1245	1125	1075
	13 1/2*6 1/2*8	343*165*203	SM/TR	1540	1390	1330
	13 1/2*7 1/2*8	343*191*203	SM/TR	1835	1655	1585
	13 1/2*8 1/2*8	343*216*203	SM/TR	2130	1920	1840
13	14*4 1/2*8	356*114*203	SM/TR	965	870	835
	14*5*10	356*127*254	SM/TR	1100	995	955

序号 NO	规格 Size		花纹形式 PATT.TYPE	最大负荷Load(KG)		
	英制 inch	公制 (mm)		叉车forklif	其他工业车辆Other vehicles	
				转向轮Rotation		
	≤10km/h	≤16km/h		≤16km/h		
14	15*4 1/2*11 1/4	381*114*286	SM/TR	1035	935	895
	15*5*11 1/4	381*127*286	SM/TR	1150	1040	995
	15*6*11 1/4	381*153*286	SM/TR	1425	1285	1230
	15*7*11 1/4	381*178*286	SM/TR	1700	1535	1470
	15*8*11 1/4	381*203*286	SM/TR	1975	1780	1705
15	15*9*11 1/4	381*229*286	SM/TR	2250	2025	1940
	15 1/2*5*10	394*127*254	SM/TR	1215	1100	1050
	15 1/2*6*10	394*153*254	SM/TR	1545	1395	1335
	15 1/2*7*10	394*178*254	SM/TR	1875	1690	1620
	15 1/2*8*10	394*203*254	SM/TR	2205	1985	1905
16	15 1/2*9*10	394*229*254	SM/TR	2505	2280	2190
	16*4 1/2*10 1/2	406*114*267	SM/TR	1145	1025	975
	16*5*10 1/2	406*127*267	SM/TR	1245	1125	1075
	16*5 1/2*10 1/2	406*140*267	SM/TR	1370	1240	1185
	16*6*10 1/2	406*152*267	SM/TR	1580	1430	1365
	16*6 1/2*10 1/2	406*165*267	SM/TR	1750	1580	1510
	16*7*10 1/2	406*178*267	SM/TR	1915	1730	1655
	16*7 1/2*10 1/2	406*191*267	SM/TR	2085	1880	1805
	16*8*10 1/2	406*203*267	SM/TR	2250	2030	1955
17	16*9*10 1/2	406*229*267	SM/TR	2585	2330	2255
	16*7*11 1/4	406*178*286	SM/TR	1890	1705	1630



COMPACTED SOLID TYRE

压配式实心轮胎



序号 NO	规格 Size		花纹形式 PATT.TYPE	最大负荷Load(KG)		
	英制 inch	公制 (mm)		叉车forklif	其他工业车辆Other vehicles	
				转向轮Rotation		
			≤10km/h	≤16km/h	≤16km/h	
18	16 1/4*5*11 1/4	413*127*286	SM/TR	1260	1135	1090
	16 1/4*6*11 1/4	413*152*286	SM/TR	1585	1430	1370
	16 1/4*7*11 1/4	413*178*286	SM/TR	1915	1730	1665
	16 1/4*8*11 1/4	413*203*286	SM/TR	2245	2030	1940
	16 1/4*9*11 1/4	413*229*286	SM/TR	2575	2330	2225
19	18*5*12 1/8	457*127*308	SM/TR	1355	1225	1175
	18*6*12 1/8	457*152*308	SM/TR	1735	1565	1500
	18*7*12 1/8	457*178*308	SM/TR	2110	1905	1820
	18*8*12 1/8	457*203*308	SM/TR	2485	2245	2145
	18*9*12 1/8	457*229*308	SM/TR	2860	2580	2470
	18*10*12 1/8	457*254*308	SM/TR	3235	2915	2795
20	18*7*14	457*178*356	SM/TR	2040	1845	1750
	18*8*14	457*203*356	SM/TR	2405	2175	2086
	18*9*14	457*229*356	SM/TR	2790	2500	2400
21	19*10*14	485*255*350	SM/TR	2990	2680	2560
22	20*5*16	508*127*406	SM/TR	1440	1300	1245
	20*6*16	508*153*406	SM/TR	1790	1620	1540
	20*7*16	508*178*406	SM/TR	2140	1935	1845
	20*8*16	506*203*406	SM/TR	2490	2250	2150
	20*9*16	506*229*406	SM/TR	2840	2565	2455
	20*10*16	506*254*406	SM/TR	3190	2880	2760
23	21*5*15	533*127*381	SM/TR	1520	1375	1315
	21*6*15	533*152*381	SM/TR	1945	1760	1680
	21*7*15	533*178*381	SM/TR	2370	2140	2050
	21*8*15	533*203*381	SM/TR	2795	2525	2415
	21*9*15	533*229*381	SM/TR	3220	2910	2785
	21*10*15	533*254*381	SM/TR	3645	3295	3155
24	21*11*15	533*280*381	SM/TR	4070	3680	3525
	21*9*16	533*229*406	SM/TR	3070	2790	2695
25	22*6*17 3/4	559*152*451	SM	1945	1755	1680
26	22*5*16	559*127*406	SM/TR	1795	1420	1360
	22*6*16	559*152*406	SM/TR	2015	1820	1740
	22*7*16	559*178*406	SM/TR	2455	2220	2120
	22*8*16	559*203*406	SM/TR	2895	2615	2500

序号 NO	规格 Size		花纹形式 PATT.TYPE	最大负荷Load(KG)		
	英制 inch	公制 (mm)		叉车forklif	其他工业车辆Other vehicles	
				转向轮Rotation		
			≤10km/h	≤16km/h	≤16km/h	
27	24 1/2*9*19	620*230*475	SM/TR	3300	2980	2860
	24 1/2*10*19	620*255*475	SM/TR	3550	3195	3065
28	26*6*20	660*152*508	SM/TR	2285	2065	1975
	26*7*20	660*178*508	SM/TR	2785	2515	2405
29	26*8*20	660*203*508	SM/TR	3280	2965	2835
	26*9*20	660*229*508	SM/TR	3528	3185	3050
	26*10*20	660*254*508	SM/TR	3776	3405	3265
	26*11*20	660*280*508	SM/TR	4024	3625	3480
	26*12*20	660*305*508	SM/TR	4272	3845	3695
	28*7*22	711*178*559	SM/TR	2940	2655	2545
	28*8*22	711*203*559	SM/TR	3748	3611	3454
	28*9*22	711*229*559	SM/TR	4000	3848	3682
30	28*10*22	711*254*559	SM/TR	4525	4085	3910
	28*11*22	711*280*559	SM/TR	5050	4560	4365
	28*12*22	711*305*559	SM/TR	5575	5035	4820
	28*14*22	711*356*559	SM/TR	6630	5990	5730
	28*16*22	711*406*559	SM/TR	7685	6940	6645
	36*10*30	915*254*762	SM	5460	4935	4720
	36*12*30	915*305*762	SM	6735	6080	5820
	36*14*30	915*356*706	SM	8010	7230	6920
31	36*16*30	915*406*762	SM	9280	8380	8020
	40*10*30	1016*254*762	SM	8550	7730	7390
	40*12*30	1016*305*762	SM	10550	9520	9115
	40*14*30	1016*356*762	SM	12545	11325	10835
32	40*16*30	1016*508*762	SM	14530	13125	12560





高空作业平台轮胎

High altitude platform tires

防爆胎、免维修、易装卸、能耗低、使用寿命长

Explosion-proof tires, maintenance free, easy to load and unload, low energy consumption, long service life

SCISSOR LIFT TIRES

高空作业平台轮胎

服务于各行业高空作业、设备安装、检修等可移动性高空作业的产品。出于对安全性能及使用环境的要求，一般使用环保无痕实心轮胎。

Service in various industries high-altitude work, equipment installation, maintenance and other mobile high-altitude work products. For the safety of the performance and the use of the environment, the general use of environmental protection seamless solid tires.

S328A	S328B	S330A	S330B
			
S321	S329	S322	S325
			

SCISSOR LIFT TIRES

高空作业平台剪式升降机实心轮胎

服务于各行业高空作业、设备安装、检修等可移动性高空作业的产品。出于对安全性能及使用环境的要求，一般使用环保无痕实心轮胎。

Service in various industries high-altitude work, equipment installation, maintenance and other mobile high-altitude work products. For the safety of the performance and the use of the environment, the general use of environmental protection seamless solid tires.

序号 NO	规格 Size		最大负荷Load(KG)		其它工业车辆 Othre industrial 16km/h	适用车型 Applicable Machine
	英制 inch	公制 (mm)	驱动轮 Driving wheel	从动轮 From the pulley		
1	10*3	254*76	500	445	385	Genie SCISSORLIFT
2	12*3*10	305/76-254	620	565	540	BOBCAT
3	12*4*10	305/100-255	835	745	645	BOBCAT
4	12*4*8	200*8	835	745	645	Snork 1930, Skyjack 1930
5	12*4.5	306*115*237	970	865	745	Genie 1930
6	12.5*4.25	317*127*246	1100	990	855	Optimum 8
7	12 3/4*4	323*100	850	750	675	JLG 1932E2; 1930ES; 1930RS
8	14*4.5	355*115	1085	965	835	SCISSORLIFT
9	15*5	381*127	1290	1150	995	GENIE 2646; 3246; COMPACT 10/12
10	16*5	406*127	1400	1245	1075	Skyjack 3220; 3226; 4626; 4623; JLG3246E2; 3246ES; 3246RS
11	22*7*17 3/4	559*178*450.8	2620	2330	2015	Z-30/20N Z33/Z34/Z40
12	23 1/2*7 1/2	600*190	4240	3775	3265	Haulotte J12; Genie Z30/20
13	25*6 3/4*21 1/4	670*170*540	4240	3775	3265	JLG E300AJP
14	30*10-16	762*254*406	3990	3250	2945	BOBCAT
15	31*6*10	787*152*254 (Instead 10-16.5)	4230	3080	3260	BOBCAT150
16	33*6*11	838*152*279(Instead 12-16.5)	5060	3700	3900	GD4369;BOBCAT 650
17	33*12-20	838*305*508	4265	4045	3975	BOBCAT
18	230*80	230*80	470	415	360	SCISSORLIFT
19	250*80	250*80	880			

CURVED, STRAIGHT ARM SOLID TYRE

高空作业平台曲、直臂实心轮胎

服务于各行业高空作业、设备安装、检修等可移动性高空作业的产品。出于对安全性能及使用环境的要求，一般使用环保无痕实心轮胎改为一般使用超耐磨、高弹性实心轮胎。

Service in various industries high-altitude work, equipment installation, maintenance and other mobile high-altitude work products. Due to the requirements of safety performance and use environment, the general use of environmental protection non-trace solid tires instead of the general use of ultra-wear-resisting, high elastic solid tires.

序号 NO	轮胎规格 Tyre Size	轮辋 Rim	外直径/mm Outside diameter	断面宽/mm Section width	负荷/kg Load	可替代轮胎 Alternative tyre specification	适用机型 Suitable model
1	30*10-16	6.0-16	790	236	3250KGS	31*10*10 10-16.5	Bobcat Caterpillar
2	31*10-16	6.0-16	790	255	3425KGS	31*10*10 10-16.5	Bobcat Caterpillar
3	33*12-20	8.0-20	837	290	4045KGS	31*10*10 10-16.5	Bobcat Caterpillar
4	36*12-20	8.0-20	935	290	5245KGS	31*10*10 10-16.5	Bobcat Caterpillar
5	36*14-20	8.5-20	935	360	6115KGS	31*6*11 12-16.5	Genie S360,JLG600S
6	15.00-20	11.00-20	980	370	6345KGS		Boom Lift
7	18.00-20	14.00-20	1082	457	8000KGS		Boom Lift
8	250-15	7.5-15	735	250	4305KGS	31*6*11 12-16.5	Bobcat Caterpillar
9	315-22		810	318	3975KGS		Bobcat Caterpillar
10	385/65-24	10.00-24	1060	360	7636KGS	15-22.5 385/65D22.5	Genie S-3200, S80JLG-860
11	445/65-24	12.00-24	1150	430	9000KGS	18-22.5 445/65D22.5	Genie S-3800, S-100, S-125, JLG-1350



CURVED AND STRAIGHT ARM POLYURETHANE FILLED TIRES 高空作业平台曲、直臂聚氨酯填充轮胎

泡沫填充轮胎可以让你的工作车辆行驶在满是铁钉、碎玻璃、尖锐金属片、碎石的环境下，不用担心轮胎会爆炸泄气而停止工作，为您提供一个最安全、方便的解决方案。

Foam-filled tires allow your work vehicle to drive in an environment full of nails, broken glass, sharp metal sheets, and gravel without the fear that the tires will explode and deflate and stop working, providing you with the safest and most convenient solution.

序号 NO	轮胎规格 Tyre Size	层级 PR	断面宽 SW	外直径 OD	压力 Load	负荷 Load	重量 Weight	花纹 Tread	花纹深 Tread	轮辋 Rim
1	9-14.5	12	9.49	28	75	4370@10MPH	60	RIB	0.673	14.5*7
2	10-16.5	10	10.94	31.06	75	4710@10MPH	64	R4	0.673	16.5*8.25
3	10-16.5	10	10.94	31.1	75	4710@10MPH	64	R4 NM	0.673	16.5*8.25
4	12-16.5	12	12.25	33.4	80	6320@80MPH	87	R4	0.72	16.5*9.75
5	12-16.5	12	12.75	33.875	80	6320@80MPH	87	R4	0.72	16.5*9.75
6	12-16.5	12	12.35	33.25	80	6320@80MPH	87	R4	0.72	16.5*9.75
7	14-17.5	14	13.7	35.97	75	8540@10MPH	110	R4	0.787	17.5*10.5
8	14-17.5	14	13.7	35.97	75	8540@10MPH	110	R4	0.787	17.5*10.5
9	14-17.5	14	13.7	35.97	75	8540@10MPH	110	R4	0.787	17.5*10.5
10	15-625	18	15.16	40.75	100	12300@5MPH	154	R4	0.81	24.5*13
11	18-625	18	17.17	41	100	15200@5MPH	174	R4	0.81	24.5*15
12	26*12-16.5	8	12	26.38	80	6320@80MPH	48	R4	0.72	16.5*9.75
13	26*12D380	8	12	26.38	80	6320@80MPH	48	R4	0.653	15*10
14	33*15.50-16.5	12	15.75	33.46	80	8090@5MPH	102.2	R4	0.72	16.5*12
15	33*15.50-16.5	14	15.75	34.65	80	8090@5MPH	115.7	R4	0.72or	16.5*12
16	33*15.50-16.5	12	15.86	33.77	80	8090@5MPH	102.2	R4	0.72or	16.5*12
17	33*15.50-16.5	14	16.05	33.58	80	8090@5MPH	115.7	R4	0.72or	16.5*12
18	355/55D24.5 (14-24.5)	14	13.39	37.8	85	7600@10MPH	96	R4	0.787	24.5*11.75
19	445/50D710	18	17.52	46.5	105	16100@5MPH	245	R4	0.802	22.5*13
20	445/65D710	18	17.52	46.5	105	16100@5MPH	257.7	R4	0.802	22.5*13
21	IN240/55D17.5	12	9.1	28.8	100	4440@10MPH 6367Static	69	R4	0.413	17.5*6.75
22	IN385/65D19.5	16	15.63	39.13	100	11400@5MPH	176	R4	0.81	19.5*11.75
23	IN385/65D19.5	16	15.63	39.13	100	11400@5MPH	176	R4 NM	0.81	19.5*11.75
24	IN385/65D22.5	16	15.6	42.7	100	12300@5MPH 16100Static	189	R4	0.811	22.5*11.75
25	IN385/65D22.5	16	15.25	43.62	100	12300@5MPH 16100Static	189	R4	0.811	22.5*11.75
26	IN385/65D22.5	16	15.25	42.38	100	12300@5MPH 16100Static	189	R4	0.811	22.5*11.75
27	IN445/55D19.5	16	16.75	40.25	115	13200@5MPH	235	R4	0.902	19.5*13
28	IN445/55D22.5	18	16.25	46.38	115	16100@5MPH	222	R4	0.902	22.5*13
29	IN445/55D22.5	18	17.25	45.5	115	16100@5MPH	249	R4	0.902	22.5*13

滑移装载机轮胎

Slip transfer machine tires



充气式实心轮胎

粘结式实心轮胎



SLIP TRANSFER MACHINE TIRES

滑移装载机轮胎

极佳耐磨性、爬坡性、转向灵活性、启动扭力、胎纹抓着力, 特殊配方设计, 耐磨耐切割性能好。

Excellent wear resistance, climbing, steering flexibility, starting torque, traction, special formula design, good wear resistance and cutting performance.

序号 NO	实心轮胎 Solid tyre	钢圈规格 Steel specification	充气胎尺寸 Inflated tyre size	可替代轮胎 Alternative tyre specification	轮胎尺寸 Tyre size
1	445/65-24	12.00-24	双、单、无侧孔	445/65-22.5	1140*430
2	385/65-24	10.00-24	双、单、无侧孔	385/65-22.5	1060*360
		10.00-24	双、单、无侧孔		1015*345
3	36*12-20	8.0-20	双侧孔	14-17.5	940*320
4	36*14-20	8.5-20	双侧孔		940*350
5	15.00-20	10.00-20	双侧孔	15-19.5	945*360
6	18.00-20	14.00-20	双侧孔	12-16.5	945*450
		7.5/6.0-20	双、单、无侧孔		840*280
7	33*12-20	6.5-20	单侧孔	10-16.5	840*250
		6.5-20	双侧孔		800*200-20
8	31*8.5-20	7.5-20	双侧孔	10-16.5	800*336-20
		7.5-20	双侧孔		800*280-20
9	31*12-20	8.0-20	双侧孔	10-16.5	800*236-16
10	31*10-16	6.0-16	双侧孔		800*265-16
11	31*12-16	6.0-16	双侧孔	10-16.5	756*236-20
		7.0-20	单、无侧孔		756*236-16
12	30*10-20	6.0-16	双、单、无侧孔	10-16.5	675*280-15
		6.0-16	双、单、无侧孔		675*200-15
13	27*12-15	8.5-15	双、单、无侧孔	10-16.5	575*190-12
14	27*8.5-15	5.50-15	双、单、无侧孔		575*145-12
15	23*8.5-12	5.0-12	单、无侧孔	10-16.5	
16	5.70-12	4.00-12	单、无侧孔		



SAIMEITETIRE

www.saimette-tyre.com

专注于轮胎的研发与生产 • 特种轮胎制造专家

工程机械轮胎

Construction machinery tyre



CONSTRUCTION MACHINERY TYRE

工程机械轮胎

负荷大、流动阻力小、能耗低、耐磨性好、耐刺穿、防胎爆、免维修, 适用于港口、冶金行业的正面吊、龙门吊、装载机等特殊车辆。

Large load, small flow resistance, low energy consumption, good wear resistance, puncture resistance, anti-tire blowout, maintenance free, suitable for port, metallurgy industry front crane, gantry crane, loader and other special vehicles.

序号 NO	轮胎规格 Tyre Size	轮辋 Rim	外直径/mm section width	断面宽/mm section width	最大负荷 Max Load (KG)		
					10MPH	16MPH	25MPH
1	8.25-16	6.5	805	194	3460	3190	2955
2	9.00-16	6.0	884	259	3760	3460	3185
3	10.00-16	8.0	884	278	5230	4775	3670
4	20.5/70-16	10.0	878	275	6135	5965	5625
5	16/70-16	10.0	878	275	6135	5965	5625
6	16/70-20	13.0	1012	375	9445	9105	8600
7	9.00-20	6.50	1038	259	5135	4690	4355
8	10.00-20	8.00	1073	278	6085	5560	5165
9	11.00-20	8.00	1095	300	6430	5870	5450
10	12.00-20	8.50	1180	310	7435	6785	6300
11	14.00-24	10.00	1368	375	10135	9255	8595
12	17.5-25	14.00-25	1344	437	9680	8800	8000
13	20.5-25	17.00-25	1490	530	10890	9900	9000
14	23.5-25	19.00-25	1585	585	14597	13270	12064
15	26.5-25	22.00-25	1750	670	18513	16830	15300
16	29.5-25	25.00-25	1870	750	26378	23980	21800



www.saimette-tyre.com

SAIMEITETIRE

专注于轮胎的研发与生产 • 特种轮胎制造专家

路面机械产品

Road machinery products



MILL PLANER, AMORTIZING AUXILIARY TIRES

铣刨机、摊辅机轮胎



适用车型:

铣刨机: 维特根 W100\W1000C\W1000F\W35DC\W1000L\W350, 三一重工 SANY、徐工 1 米机 XM101、XM130\XG500A\XM50A、万邦-凯雷一米机、华通 1 米 \0.5 米 \1.3 米 \LXZY600B 老款、北方 1000QDB、西筑 LX120\BITELL1 米机、戴维派克 PL350T

摊辅机: 徐工 XM、新鼎盛、华通动力 SPL60、鼎盛摊辅机

破碎机: 德州破碎机

Applicable model: Milling and planing machine: W100 \ W1000C \ w35f \ W35DC \ W1000L \ W350, SANY heavy industry, XCMG 1-meter machine XM101, XM130 \ XG500A \ XM50A, wbg-carlyle 1-meter machine, huatong 1-meter \ 0.5m \ 1.3m \ LXZY600B old model, north 1000QDB, xizu LX120 \ bitell1-meter machine, David parker PL350T

Auxiliary machines: XCMG XM, new dingsheng, huatong power SPL60, dingsheng auxiliary machines

Crusher: the Texas crusher

序号 No	规格 Gauge	适用车型 Applicable models
1	620*250*475 (压配式轮胎)	W100后轮/三一重工后轮
2	620*255*455 (粘结式轮胎)	
3	620*230*475 (压配式轮胎)	
4	620*230*455 (粘结式轮胎)	W100前轮/三一重工前轮
5	720*275*532 (粘结式轮胎)	
6	720*254*532 (粘结式轮胎)	兖州铣刨机、三明重工1米前后轮
7	660*254*480 (粘结式轮胎) 加管	徐工1米前轮新、老款, 万邦-凯雷1米机前轮
8	660*254*480 (粘结式轮胎)	徐工1米后轮 (110)、华通1米 (120)、华通1.3米后轮 (120)
9	660*254*480 (压配式轮胎)	W1000C前后轮、华通1米、1.3米前后轮、W1000F前后轮、CAT
10	660*275*480 (粘结式轮胎)	宏大1米前后轮、陕建1米前后轮、山河SWM100\鼎盛LXL1000
11	660*275*508 (压配式轮胎)	北方1000QDB前后轮、西筑LX120前后轮
12	660*305*480 (粘结式轮胎)	
13	645*305*410	XM130A徐工后轮
14	560*254*398 (粘结式轮胎)	XG101K前后轮、XG1003前后轮
15		W35DC前轮老款、BITELL11米机、W50、W50H
16	560*280*398 (粘结式轮胎) 加管	戴纳派克PL350T前轮、XG500徐工前后轮、W1000L前后轮
17	580*305*398 (粘结式轮胎)	徐工摊辅机
18	560*356*398 (粘结式轮胎)	戴纳派克F161-8W摊辅机
19	560*356*398 (粘结式轮胎) 加管	ABG475/455-前轮、新鼎盛摊辅机、华通动力SPL60摊辅机转向轮
20	533*148*380 (粘结式轮胎)	鼎盛摊辅机轮胎
21	485*250*398 (粘结式轮胎)	华通0.5米
22	500*250*382 (粘结式轮胎) 加管	XM50A前轮、35DC前新老款
23	408*125*300 (粘结式轮胎)	天顺长城前导向轮
24	408*125*275 (粘结式轮胎) 加管	W35DC后轮、徐工后轮、LXZY500B华通老款后轮、W350

SEGMENTS

履带板



适用车型:

摊辅机: ABG323, 325, 326; ABG423, 422, 8820, 8620; 福格勒 S1500, S1600, S1800, S2100; 戴纳派克; 德马格; 比泰利; 徐工 9 米以下机型: 英格索兰 7820, 6620; 柳工; 马连尼 2100; 三一系列 (三条筋 190); 中联系列; 华通系列; 徐工 95, 951, 四川新筑; 成都新筑; 西安新筑路。

铣刨机: 维特根 W1000F, W1200F, W1900 (96 块), W2000DC, W2000, 中联 BG2000, 宏大 HD2000, 三一 SANY, 戴纳派克 PL2000, 沈阳北方 2000, 卡特 CAT。

Applicable Machine

ABG323, 325, 326; ABG423, 422, 882, 0862; F he S1500 S1600, S1800 S2100; Dana pike; Demag; Terry; XCMG models less than 9 meters; Ingersoll rand 7820 6620; Liugong, By analysis, 2100; Three series (three sinews 190); Zhonglian series; Huatong series; XCMG 95, 951, sichuan new building; Chengdu new building; A new road was built in xi 'an.

Milling and planing machine: wittgen W1000F, W1200F, W1900 (96 pieces), W2000DC, W2000, zhonglian BG2000, hongda HD2000, SANY, danapake PL2000, shenyang north 2000, CAT.

■履带板 Rubber Track Pad for Paver

部件名称 Part Name	尺寸 Size
Steel Plate	300*170*B2N
Rubber Pad	300*130*50PN
Steel Plate	300*167*DS
Rubber Pad	320*135*50P
Steel Plate	320*170*D3N
Rubber Pad	320*135*50PN
Steel Plate	320*170*B2N
Rubber Pad	320*135*50PN
Steel Plate	350*155*B2
Rubber Pad	350*135*55
Steel Plate	400*185*B2
Rubber Pad	400*135*60
Steel Plate	400*185*M3



SAIMEITETIRE
专注于轮胎的研发与生产 • 特种轮胎制造专家

BRACKET TRUCK AND GANTRY CRANE TIRE

支架搬运车及龙门吊轮胎

此轮胎是为采矿工业所特别设计的，使支架搬运车 / 支架拖车在长壁开采时可提供高承载的拖运或支撑功能，像是支撑矿坑顶部等等

我们可根据客户所提供的荷重条件提供多样的客制化轮胎及钢圈。任何要求都将针对低散热与高耐磨轮胎配方分别客制化。

This tyre is specially designed for the mining industry to provide high load haulage or support functions such as supporting the top of a mine pit during longwall mining.

We can provide a variety of customized tires and rims according to the load conditions provided by customers. Any requirements will be customized for low heat dissipation and high wear tire formula.

规格 Size	断面宽 (mm) Section width (mm)	直径 (mm) Diameter (mm)	花纹深 (mm) Pattern depth (mm)	最大负荷 (KG) Maximum load (KG)
54*25	635	1375	50	35000
54*24	610	1375	50	35000
54*26	660	1375	50	37000
54*28	710	1375	50	47000
56*22	560	1425	50	37000
60*18.5	470	1510	50	27000
60*14	355	1510	50	27000
63*18	440	1570	50	32000
69*18.5	455	1750	50	37000
69*21	530	1750	50	40000
69*22	567	1750	50	40000
69*23.6	600	1750	50	42000



SAIMEITETIRE

www.saimeite-tyre.com 专注于轮胎的研发与生产 • 特种轮胎制造专家



SAIMEITETIRE

www.saimeite-tyre.com 专注于轮胎的研发与生产 • 特种轮胎制造专家

