

Customisable functionality for touch tap assemblies

Product parameters
and scene display

1.Touch faucet assembly-JHCH-001



➤ Parameters

- Suitable for water pipe calibre: 4 points
- Static power consumption: ≤ 0.5 W
- 5W (d.c) ≤ 3 W Suitable for water pressure: 0.05Mpa-0.6Mpa
- Power supply: DC6V DC
- Touch mode: built-in

Scene



2.Touch faucet assembly-JHCH-001-2



➤ Parameters

- Suitable for water pipe calibre: 4 points
- Static power consumption: $\leq 0.5W$
- (d.c) $\leq 3W$ Suitable for water pressure: 0.05Mpa-0.6Mpa
- Power supply: DC6V DC
- Touch mode: external

Scene



3.Touch faucet assembly-JHCH-002



Parameters

- Suitable for water pipe calibre: 2 minutes quick connect
- Static power consumption: $\leq 0.5W$
- (d.c) $\leq 3W$ Suitable for water pressure: 0.05Mpa-0.6Mpa Power supply: DC6V DC
- Touch mode: external

适用场景



4.Touch faucet assembly-JHCH-003




Scene



Parameters

- Suitable for water pipe calibre: 2 minutes quick connect
- to 2 minutes external pressure static power
- consumption: $\leq 0.5W$ (d.c) $\leq 3W$ suitable for water
- pressure: 0.05Mpa-0.6Mpa power supply mode power
- supply mode: DC6V direct current

5. Touch Faucet Assembly-JHCH-003-2

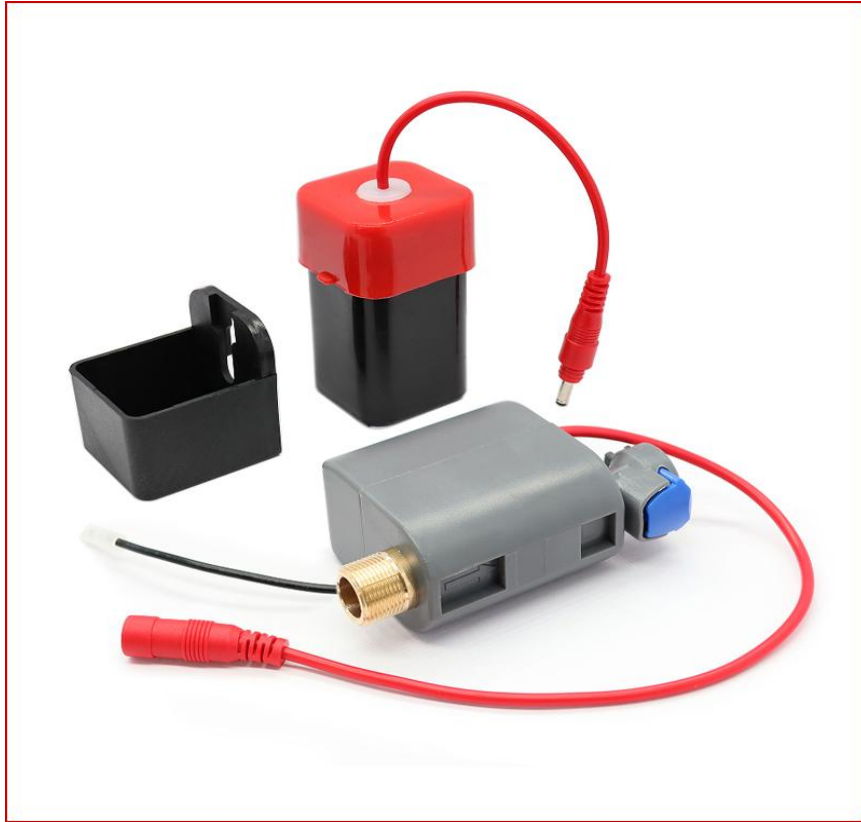

Parameters

- Suitable for water pipe calibre: 2 minutes quick connect to 2 minutes external pressure
- Static power consumption: $\leq 0.5W$ (d.c) $\leq 3W$ suitable for water pressure: 0.05Mpa-0.6Mpa Power supply: power supply: DC6V DC
- Touch mode: external

Scene



6.Touch faucet assembly-accessories



➤ Insulating washers



➤ check valves