DORABO 地博 • 为世界创造连接

CREATING CONNECTIONS FOR THE WORLD

宁波地博电气有限公司

NINGBO DORABO ELECTRIC CO., LTD

国内事业部（Domestic Business Division）：

电话（Tel ）：+86-400-860-0988

网址（Web ）：www.terminalblock.net

邮箱（E-mail）：steven.lu@terminalblock.net

地址（Add）：No. 869 Changxing Road, Changhe Town, Cixi City, Ningbo City, Zhejiang Province, P.R.China

中国浙江省宁波市慈溪市长河镇长兴路 869 号

国际事业部（International Business Division）：

电话（Tel ）：+86-15988827951 +86-13185980275

网址（Web ）：www.terminalblock.net

邮箱（E-mail）：info@terminalblock.net

微信二维码 WeChat QR Code　微信公众号 WeChat Official Account　微信视频号 WeChat Channels

DORABO



连接器目录

Connector Catalog

宁波地博电气有限公司

NINGBO DORABO ELECTRIC CO., LTD

COMPANY PROFILE

公司简介



浙江省宁波市慈溪市长河镇长兴路 869 号
(No. 869, Changx, Changhe Town, Cixi NingboCity, Province)

Dibo Electric is a globally leading provider of integrated solutions for industrial connectors, as well as a top manufacturer in the field of terminal blocks and industrial electrical connections.

The company's products are sold worldwide, covering more than 100 countries and regions including China, the United States, Germany, the United Kingdom, Italy, Spain, Japan, Singapore, etc. They are widely used in industrial automation, instrumentation, power and electrical engineering, rail transit, shipping, new energy, elevators, lighting, security and other industries.

At present, all products of Dibo Electric have passed a number of safety certifications such as CQC, UL, VDE, CE, and the company has fully implemented quality management systems including ISO9001 and ISO14001.

地博电气是全球领先的工业连接器整体解决方案提供商，也是接线端子与工业电气连接领域的顶尖制造企业。

公司产品畅销全球，覆盖中国、美国、德国、英国、意大利、西班牙、日本、新加坡等100多个国家和地区，广泛应用于工业自动化、仪器仪表、电力电气、轨道交通、船舶、新能源、电梯、照明、安防等多个行业。

目前，地博电气全线产品已通过 CQC、UL、VDE、CE 等多项安规认证，并全面实施 ISO9001、ISO14001 等质量管理体系。


CERTIFICATION DISPLAY

认证展示





APPLICATION SCENARIOS
应用场景

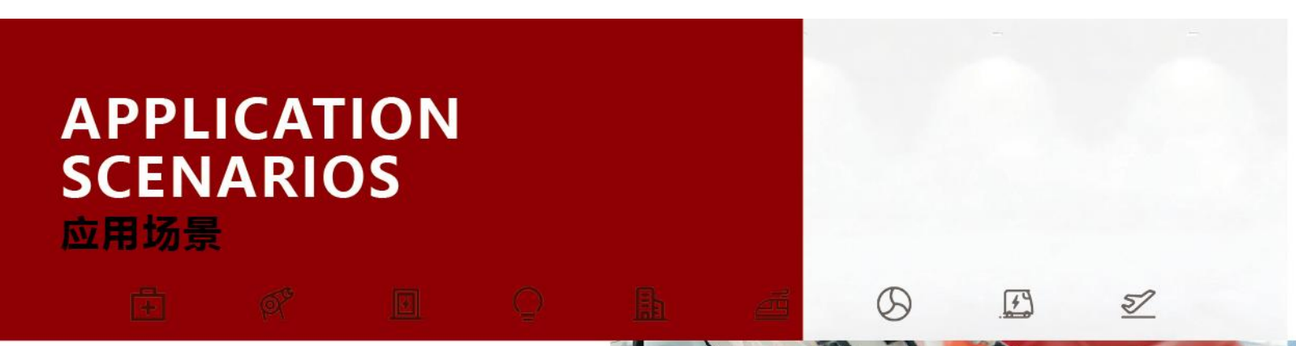

We provide high-reliability connection solutions for high-end medical equipment such as patient monitors and imaging devices.Plug-in terminals facilitate modular equipment maintenance; barrier terminals ensure stable power supply to the power section; micro DIP switches are used for precise address coding. All products comply with medical-grade safety standards, ensuring signal integrity and patient safety in sensitive environments.

在监护仪、影像设备等高端医疗设备中,我们提供高可靠性连接方案。插拔式端子便于设备模块化维护;栅栏式端子确保电源部分稳定供电;微型拨码开关用于精确的地址编码。所有产品均符合医疗级安全标准,确保设备在敏感环境下的信号完整性与患者安全。





Reliability is critical in train control systems and carriage equipment. Our screw terminals feature shockproof and anti-loosening properties; high-current energy storage connectors provide support for power systems; and flame-retardant rail-mounted terminals are used in on-board control cabinets. The products strictly comply with rail standards such as EN 45545, ensuring stable operation in vibration, high and low temperature environments.

在列车控制系统和车厢设备中,可靠性至关重要。我们的螺钉式端子具备抗震防松特性;大电流储能连接器为动力系统提供保障;阻燃等级的轨接式端子用于车载控制柜。产品严格遵循EN 45545等轨道标准,确保在震动、高低温环境下稳定运行。



For harsh scenarios such as PLCs and remote I/O stations, we provide high-reliability connection solutions. Rail-mounted terminals serve as the core wiring component in control cabinets; DIP switches enable fast on-site configuration of module addresses and parameters, enhancing configuration flexibility; Shock-resistant screw terminals ensure reliable power connections; Plug-in terminals facilitate module maintenance. Our products feature superior anti-interference performance and mechanical strength, guaranteeing stable and efficient operation of automated production lines.

在 PLC、远程 I/O 站等严苛场景中,我们提供高可靠性连接方案。轨接式端子是控制柜的布线核心;拨码开关用于模块地址与参数的现场快速设定,提升配置灵活性;抗震螺钉式端子确保动力连接可靠;插拔式端子则便于模块维护。产品具备卓越的抗干扰性与机械强度,保障自动化产线稳定高效运行。

Facing the challenges of extreme temperature differences and severe vibration in wind turbine nacelles, we provide robust and durable connection solutions. Shock-resistant screw terminals connect the control units; high-performance energy storage connectors are used in pitch systems; barrier terminals with anti-corrosion plating withstand harsh environments. Our products feature high reliability, ensuring the continuous operation of wind power systems under extreme conditions.

面对风机舱内剧烈温差、震动挑战,我们提供坚固耐用的连接方案。抗震螺钉式端子连接控制单元;高性能储能连接器用于变桨系统;防腐镀层的栅栏式端子应对恶劣环境。产品具备高可靠性,确保风力发电系统在极端条件下的持续运行。





In power transmission and distribution control cabinets and switchgear, we have extremely high requirements for safety and current-carrying capacity. High-current screw-type and rail-mounted terminals are the main products, providing high-pressure screw connections to ensure long-term conductivity; energy storage connectors are used in energy storage systems. The products meet stringent industrial environments, ensuring the stability and safety of power and energy systems.

在输配电控制柜、开关设备中,我们对安全性与载流能力要求极高。大电流螺钉式与轨接式端子是主力,提供高压力螺钉连接,确保长期导电性;储能连接器用于储能系统。产品满足严苛的工业环境,保障电力能源系统的稳定与安全。





For core components such as battery packs (BMS), motor controllers, and charging piles, we provide high-performance connections. Energy storage connectors undertake the interconnection of high-voltage battery packs;
anti-vibration screw terminals are used for control boards; compact plug-in terminals meet the demands of automotive electronic equipment, helping to achieve safe and efficient electric mobility.

在电池包(BMS)、电机控制器、充电桩等核心部件,我们提供高性能连接。储能连接器担当高压电池组互联重任;抗震动螺钉式端子用于控制板;紧凑型插拔式端子满足车载电子设备需求,助力实现安全、高效的电动出行。



From indoor lighting to outdoor landscape lighting projects, we provide a wide range of solutions. Spring-loaded terminals offer maintenance-free, fast wiring for LED drivers, especially suitable for high-vibration environments. Plug-in terminals simplify luminaire production and maintenance. Compact wiring terminals meet the tight space requirements inside driver power supplies. Barrier terminals are used for power distribution. The products feature excellent electrical insulation and weather resistance, ensuring the long-term stable operation of lighting systems.


从室内灯具到户外景观亮化工程,我们提供多样化解决方案。弹簧式端子为 LED 驱动电源提供免维护的快速接线,尤其适用于高频振动环境;插拔式端子简化灯具生产与维护;小体积布线式端子满足驱动电源内部紧凑空间需求;栅栏式端子用于电源分配。产品具备优良的电气绝缘性和耐候性,保障照明系统长期稳定工作。

Complete Systems for Commercial Aviation
In the civil aviation market, design engineers strive to reduce aircraft weight and costs while enhancing safety, functionality, and passenger experience in the cost-competitive travel industry. Dibo is your reliable partner to meet these demands. Our system solutions integrate connectors, transceivers, wiring harnesses, and flexible optical circuits, supported by strong in-house capabilities to design customized solutions. As a member of industry standard committees, we can help you address the future challenges of the commercial aviation industry.

适用于商业航空的完整系统
在民用航空市场中,设计工程师们努力减少飞机重量和成本,同时又要在成本竞争激烈的旅游业中提高安全性、功能和乘客体验。
地博 是您值得信赖的合作伙伴,能够满足这些需求。我们的系统解决方案集成了连接器、收发器、线束和光学柔性电路,以及出众的内部能力来设计定制解决方案。作为行业标准委员会的一员,可以帮助您应对商业航空行业未来面临的挑战




CONTENT
目录

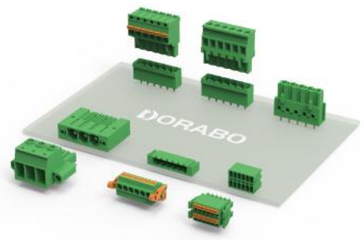


插拔式接线端子
Plug-in Terminal Block 06



螺钉式接线端子
Screw Terminal Block 70



栅栏式接线端子
Barrier Terminal Block 98




布线式接线端子
Wiring Terminal Block 118

CONTENT
目录




弹簧式接线端子
Spring-type terminal Block 122

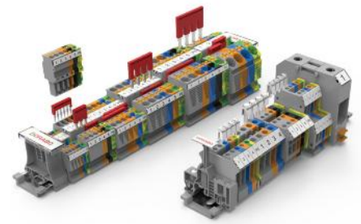

轨装式接线端子
Rail-mounted Terminal Block 129



储能连接器
Energy Storage Connector 130

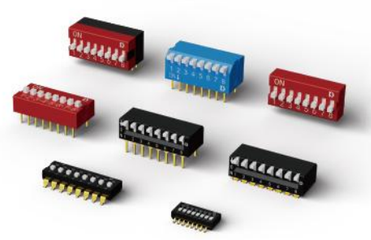


拨码开关
DIP Switch 131

Plug-in Terminal Block

插拔式接线端子

Pluggable terminal blocks are used to connect wires and printed circuit boards, allowing for easy and safe transmission of signals, data, and power. With a needle pitch from 2.5mm to 15 mm, current strength can reach 125 A, and our XS to XL COMBICON range always provides the correct solution for your equipment or control cabinet design. It supports multiple connection method and installation method are highly flexible and suitable for all applications. The product design complies with international standards such as IEC60998 and UL1059. Obtained UL certified in the United States.

插拔式连接器用于连接导线和印刷电路板，轻松安全地传输信号、数据和动力。针距从2.5 mm到 15 mm，电流强度可达 125 A，我们的XS至XL COMBICON范围总是能为您的设备或控制柜设计提供正确的解决方案。支持多种连接方法和安装方式，灵活性高并且适用于所有应用场合。产品设计符合IEC60998和UL1059等国际标准。已获得美国UL认证。

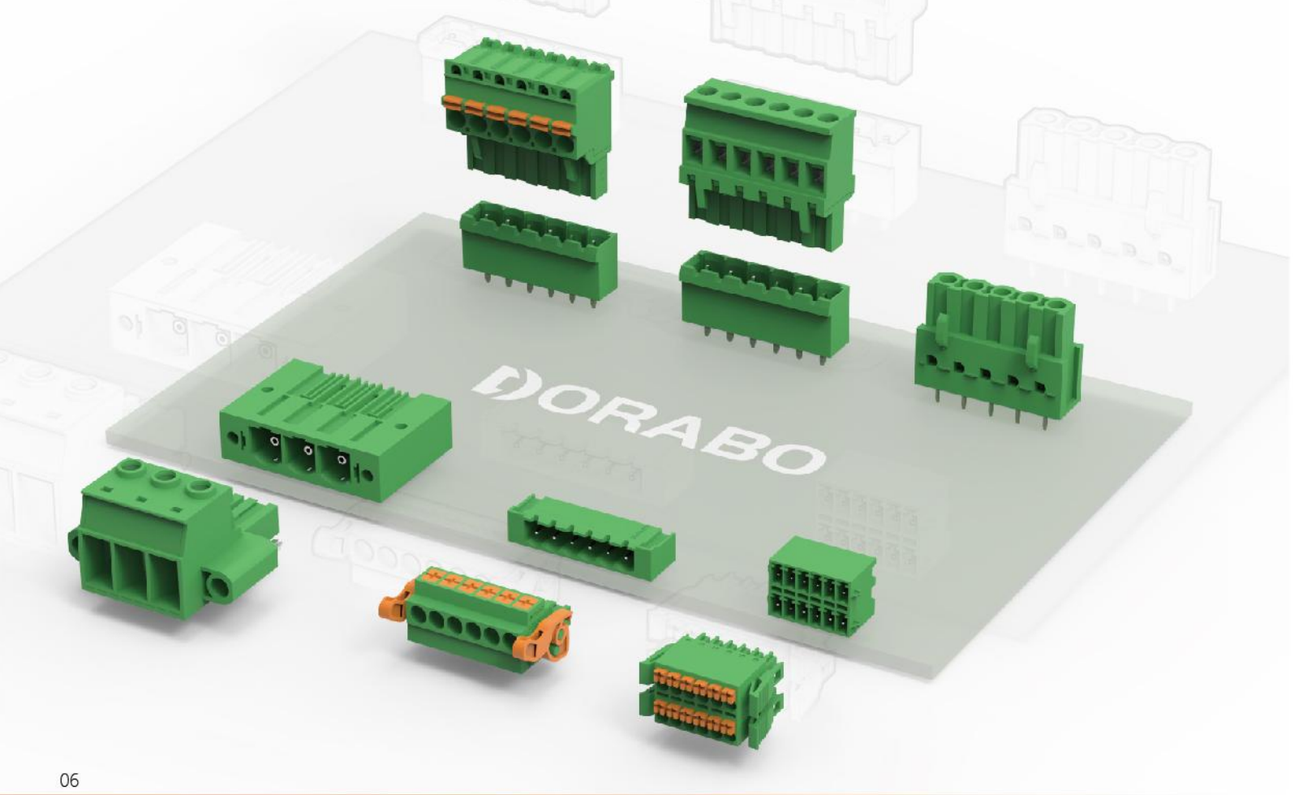


ISO9001 ISO14001 RoHS REACH

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	10	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB332R-5.0

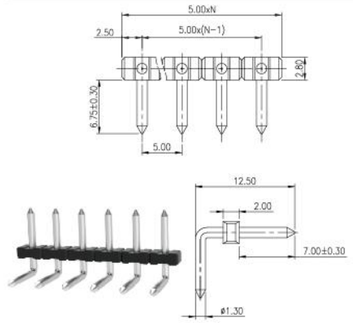


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB332V-5.0

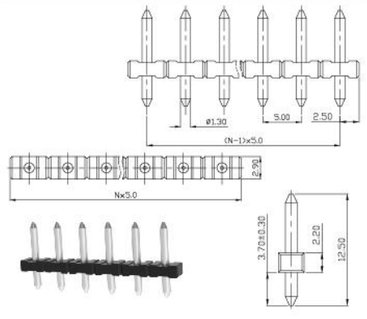


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB332V-3.5

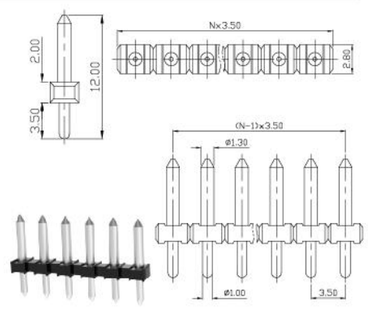


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB331W-5.0

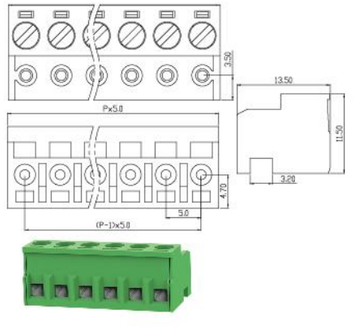


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	250
额定电流 Rated Current [A]	12	-	14
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB331K-5.0

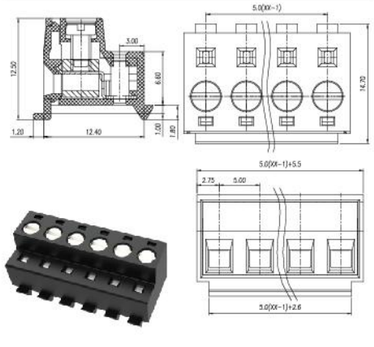

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		


DB331-5.0

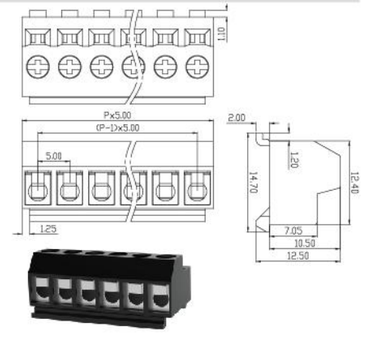

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	300	-	300
额定电压 Rated Voltage [V]	8	-	10
额定电流 Rated Current [A]	28-16		
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	3.5		
间距 Pitch [mm]	M2.5/0.2		
螺丝 Screw/扭矩 Torque(Max) [N.m]			

DB332-3.5

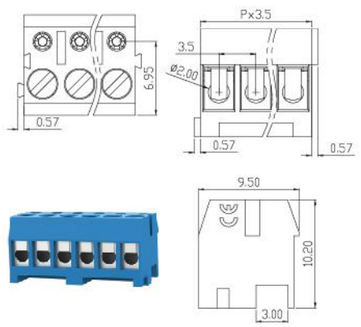


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	300	-	250
额定电压 Rated Voltage [V]	10	-	10
额定电流 Rated Current [A]	28-16		
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	5.0		
间距 Pitch [mm]	M2.5/0.4		
螺丝 Screw/扭矩 Torque(Max) [N.m]			

DB332-5.0

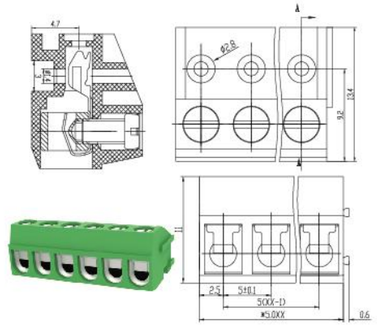


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	300	-	300
额定电压 Rated Voltage [V]	10	-	10
额定电流 Rated Current [A]	26-16		
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	3.5		
间距 Pitch [mm]	0.2		
螺丝 Screw/扭矩 Torque(Max) [N.m]			

DB335-3.5

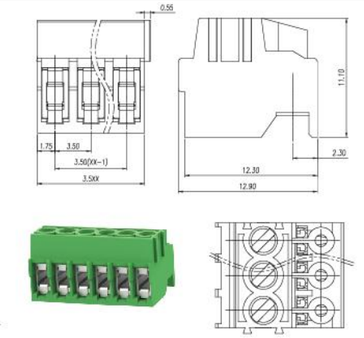


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EZF-5.0

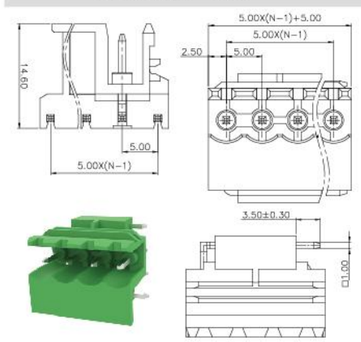


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	300	-	300
额定电流 Rated Current [A]	15	-	15
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ELF-5.0

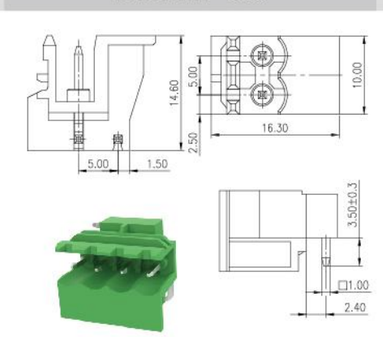

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	600	600	300
额定电流 Rated Current [A]	65	65	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB3ERMF-10.16

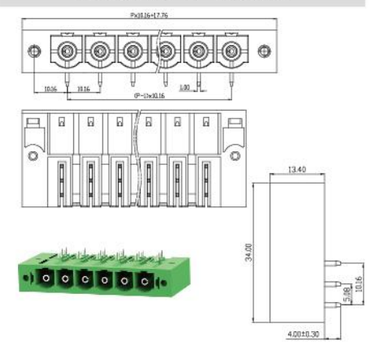

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	600	600	300
额定电压 Rated Voltage [V]	65	65	5
额定电流 Rated Current [A]	-		
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	10.16		
间距 Pitch [mm]	-		
螺丝 Screw/扭矩 Torque(Max) [N.m]			

DB3ERCF-10.16

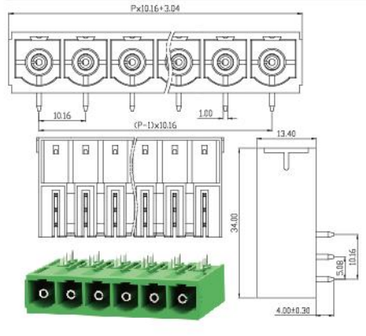


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	600	600	300
额定电压 Rated Voltage [V]	65	65	5
额定电流 Rated Current [A]	-		
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	10.16		
间距 Pitch [mm]	-		
螺丝 Screw/扭矩 Torque(Max) [N.m]			

DB3ERC-10.16

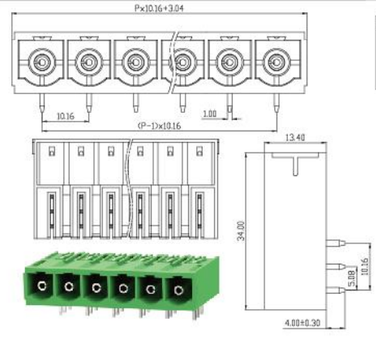


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	600	600	300
额定电压 Rated Voltage [V]	65	65	5
额定电流 Rated Current [A]	-		
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	10.16		
间距 Pitch [mm]	-		
螺丝 Screw/扭矩 Torque(Max) [N.m]			

DB3ERM-10.16

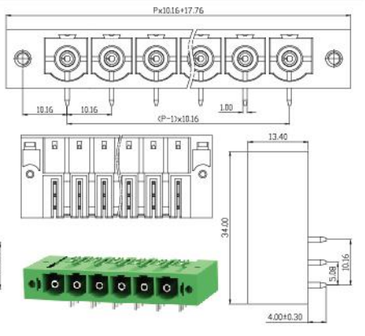


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	300	300	-
额定电流 Rated Current [A]	30	30	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB3EVM-10.16

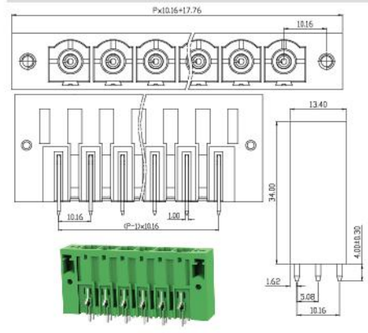


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	600	600	300
额定电流 Rated Current [A]	65	65	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB3EVC-10.16

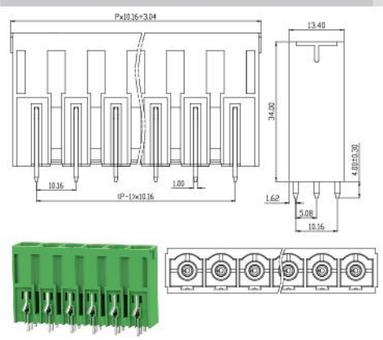

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	300	300	-
额定电流 Rated Current [A]	30	30	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB3CM-7.62

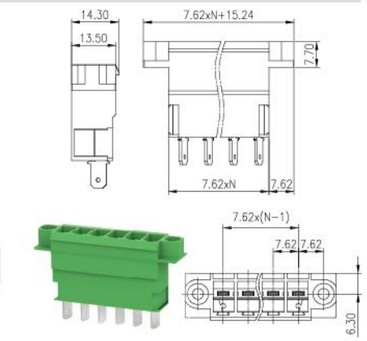

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	42	42	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB3ERL-7.62

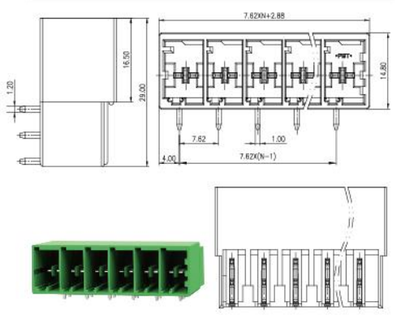


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	42	42	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB3EVL-7.62

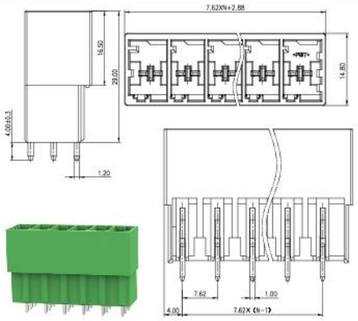


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB3EVM-7.62

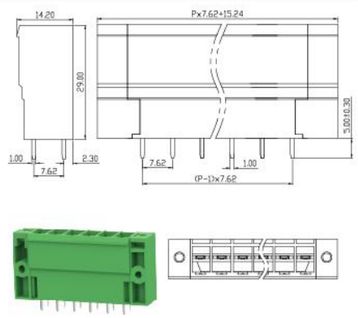


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB3EVC-7.62

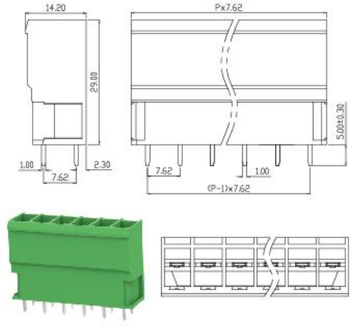


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB3ERM-7.62

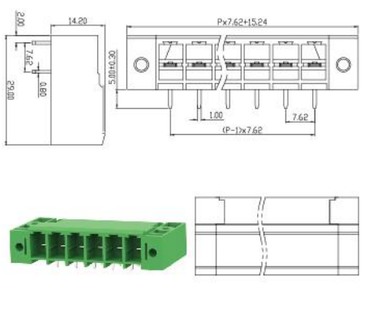

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB3ERC-7.62

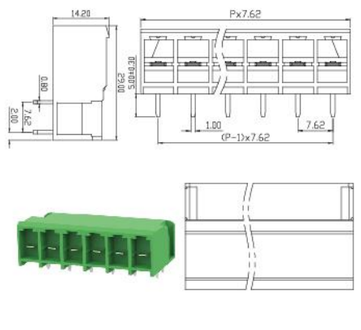

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	600
额定电流 Rated Current [A]	41	41	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB3ERHMF-7.62

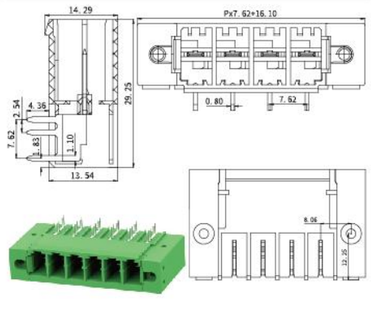


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	600
额定电流 Rated Current [A]	41	41	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB3ERHF-7.62

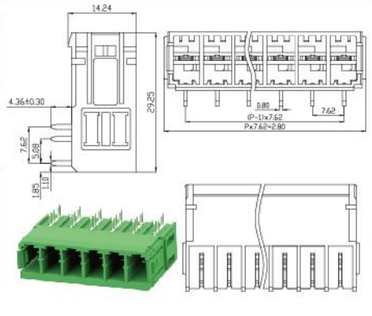


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	600
额定电流 Rated Current [A]	41	41	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB3ERHM-7.62

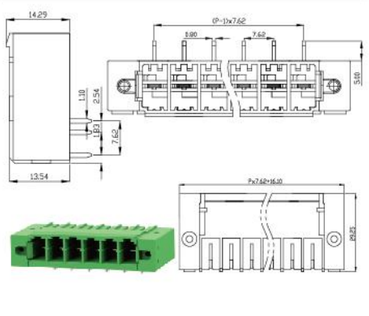


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	-
额定电流 Rated Current [A]	30	30	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB3ERH-7.62

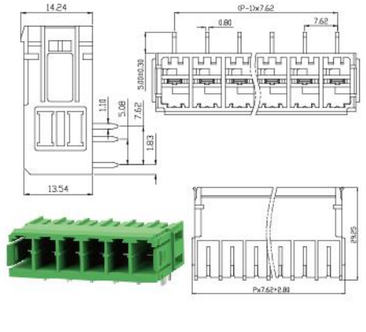


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	600
额定电流 Rated Current [A]	42	42	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB3EVHM-7.62

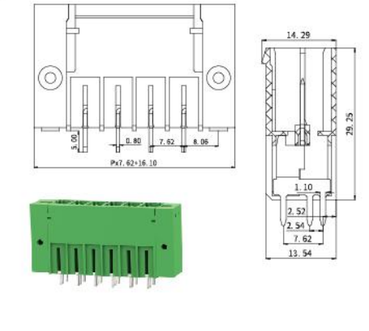

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	-
额定电流 Rated Current [A]	30	30	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB3EVH-7.62

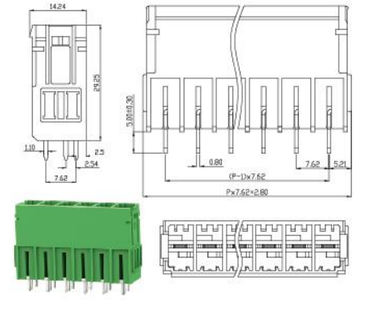

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ELM-5.08

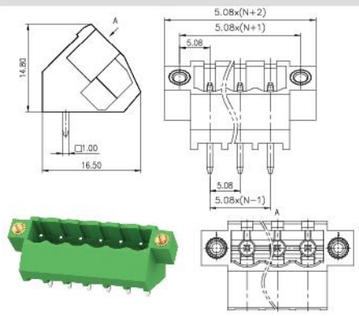


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ELC-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EL-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ELM-3.81

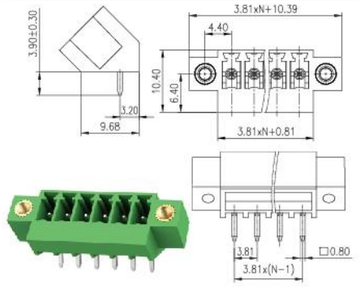


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ELC-3.81



UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EVM-7.62

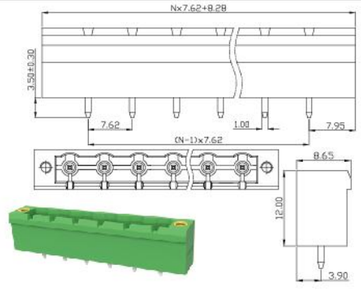

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVM-7.5

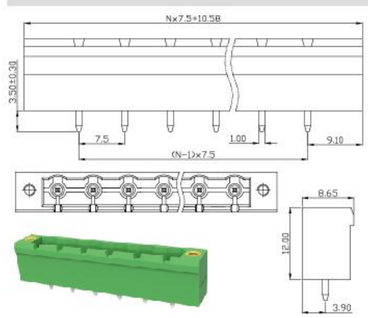


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVM-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVM-5.0

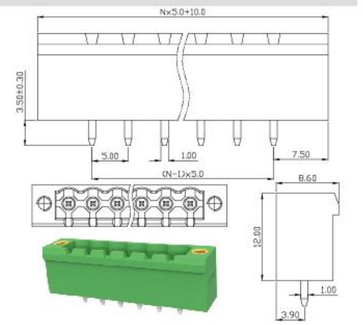


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVM-3.81




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVM-3.5



UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EVTM-5.08

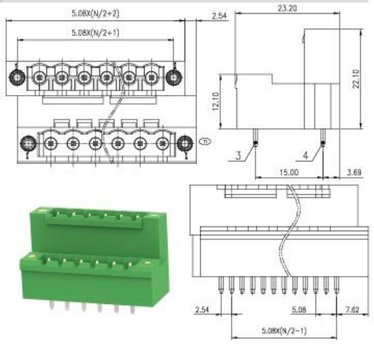

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVTC-5.08

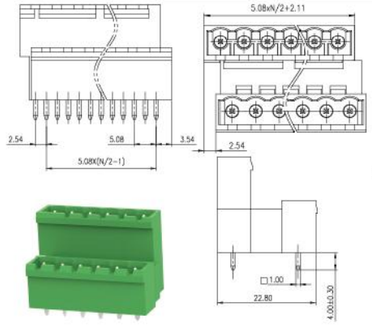


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERTM-5.08

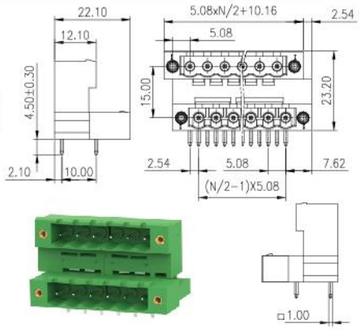


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERTC-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERT-5.08

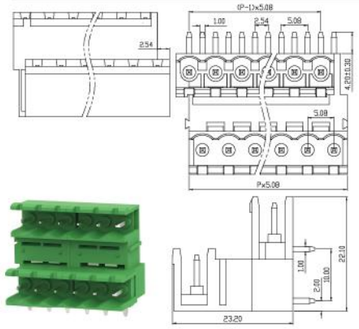


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVT-5.08



UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVTM-3.81




ISO9001 ISO14001 RoHS REACH cULus CE DVE SIRIM CQC

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVTC-3.81




UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERTM-3.81

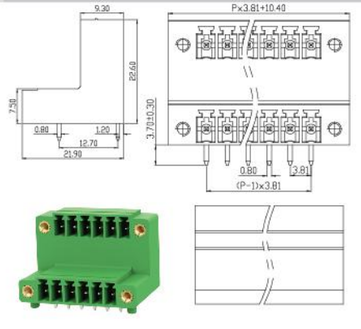


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERTC-3.81

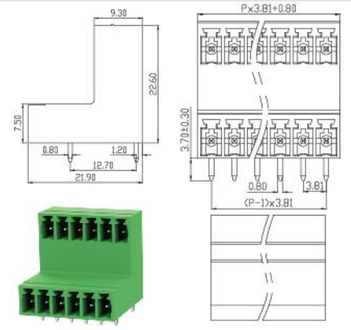


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVHM-3.81

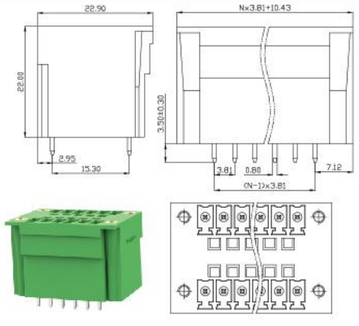


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVHM-3.5

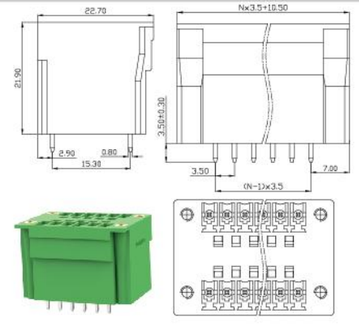

UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EVH-5.08

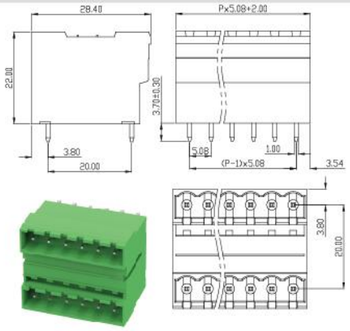

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVH-3.81

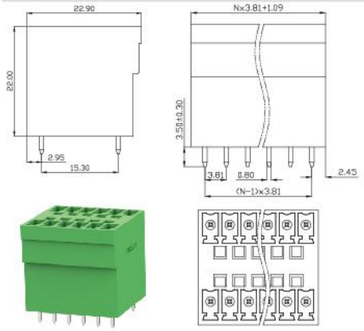


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVH-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	125	-	-
额定电流 Rated Current [A]	4	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	2.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVH-2.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERM-10.0

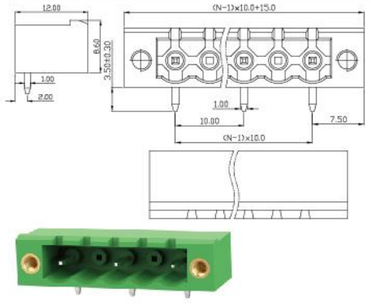


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERM-10.16

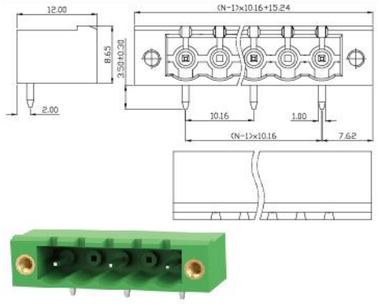

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2ERC-10.0

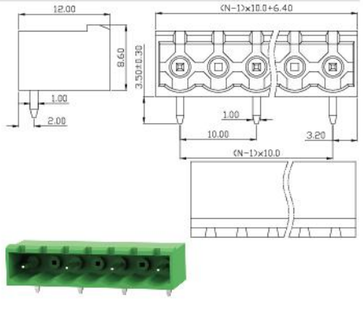

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERC-10.16

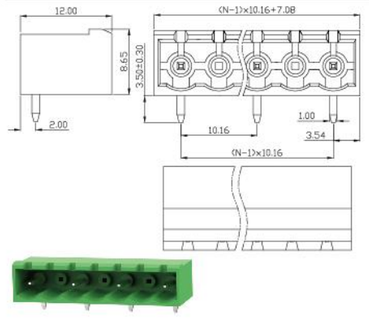


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ER-10.0

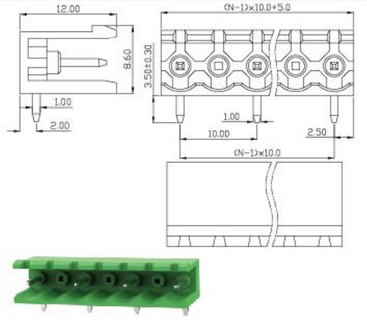


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ER-10.16

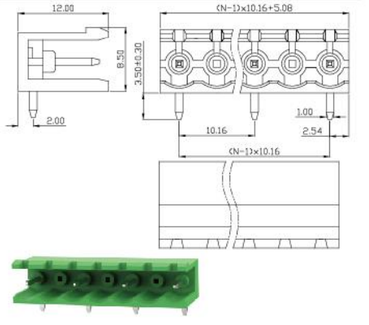


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVM-10.0

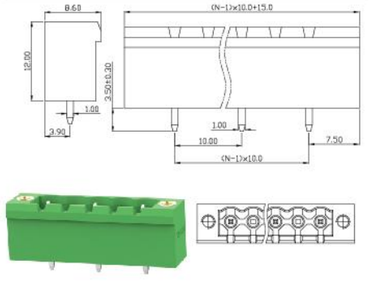


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVM-10.16

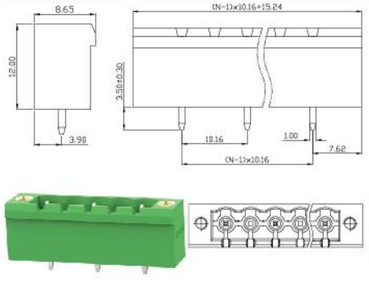

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EVC-10.0

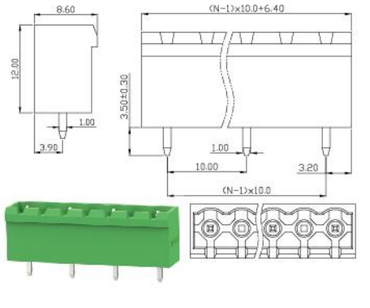

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVC-10.16

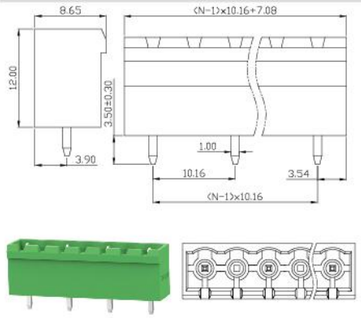


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EV-10.0

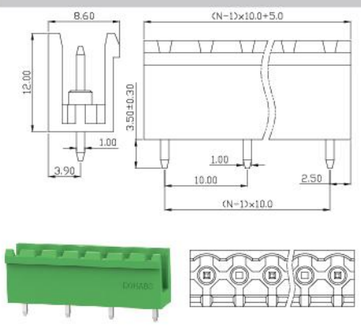


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EV-10.16

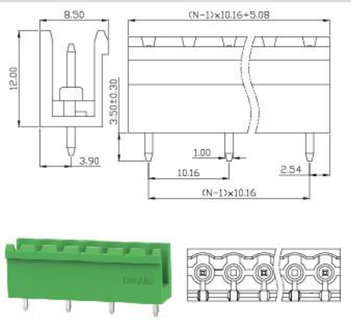


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVC-7.62

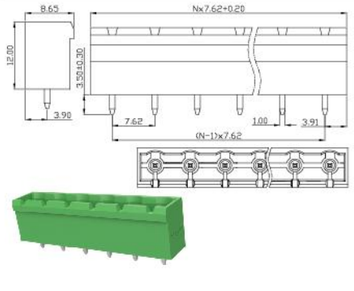


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVC-7.5

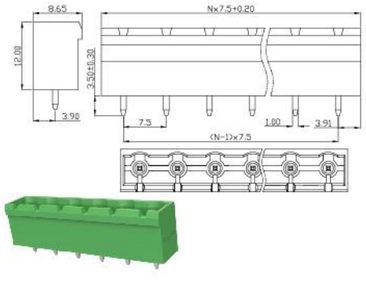

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EVC-5.08



插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVC-5.0

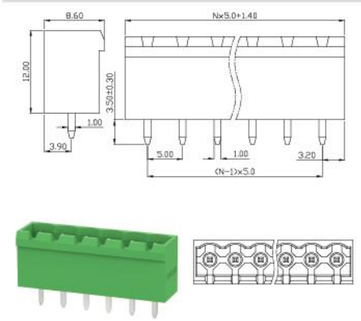


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB1EV-3.81

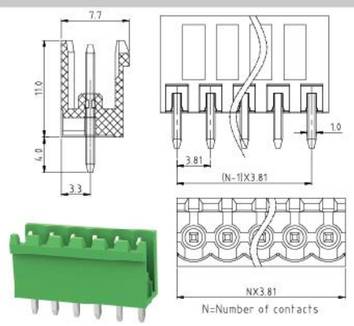


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB1EVC-3.81

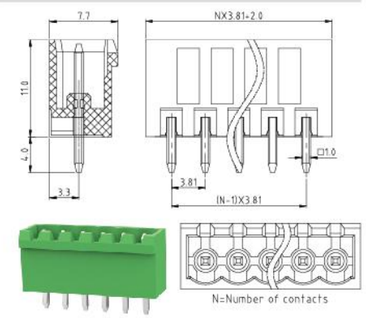


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB1EVC-5.08

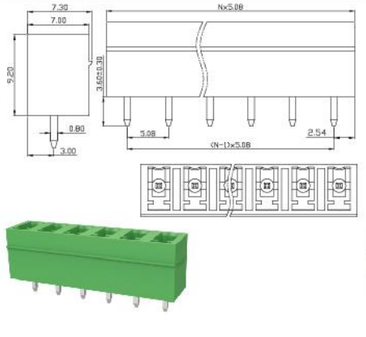


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVC-3.81

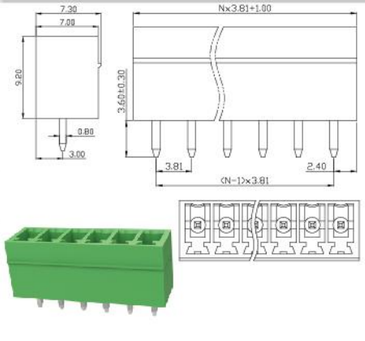

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EVC-3.5

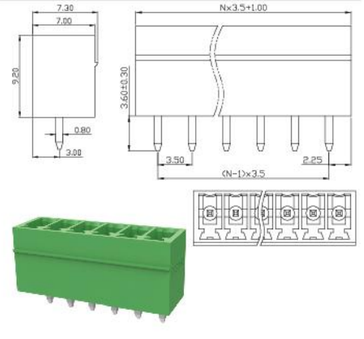

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVC-2.54




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	2.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVC-2.5




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EV-7.62

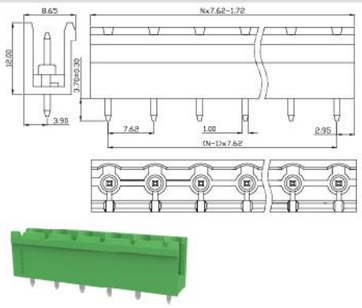


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EV-7.5

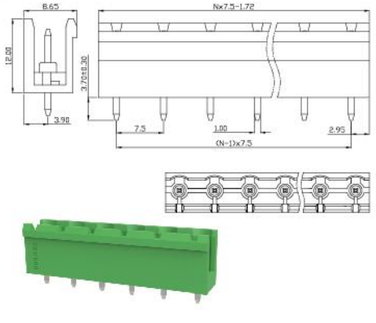


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EV-5.08

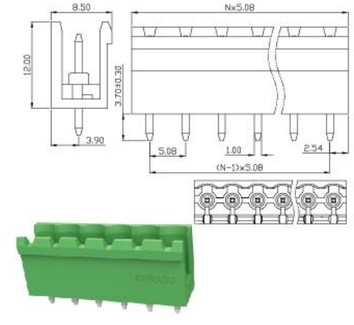

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EV-5.0

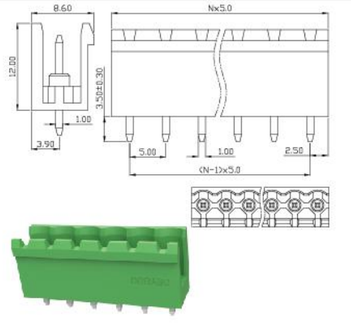

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERM-7.62




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERM-7.5

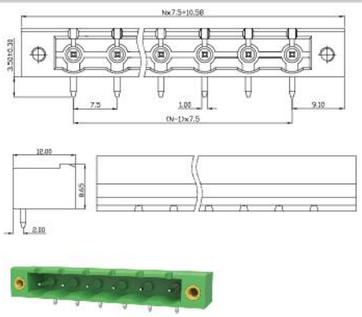


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERM-5.08

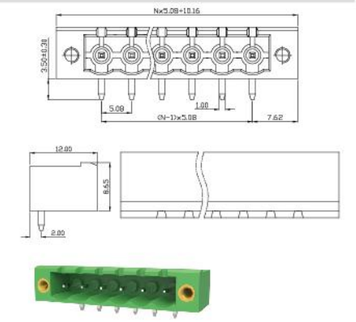


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERM-5.0




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB1ERM-5.08

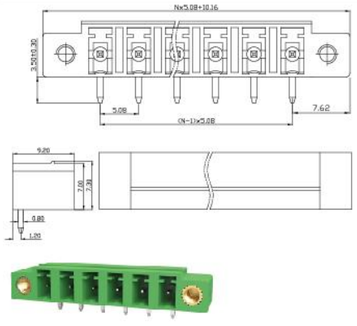

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2ERM-3.81

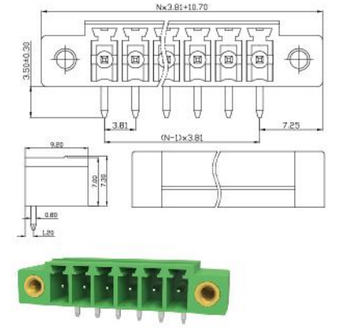

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERM-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERMF-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERMF-3.81




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERMF-3.5

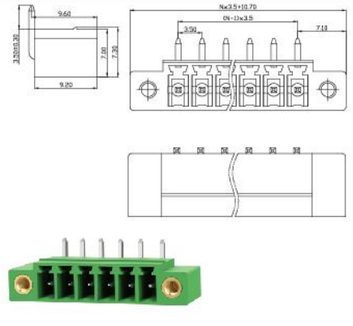


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	50	-
额定电流 Rated Current [A]	8	8	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERHCM-3.5



UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	50	-
额定电流 Rated Current [A]	8	8	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2ERHC-3.5



插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	50	-
额定电流 Rated Current [A]	8	8	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVHC-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	10	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERHDM-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERHD-3.5

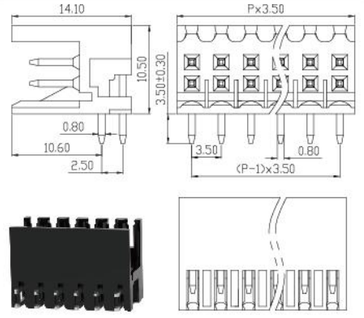


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	10	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERHDC-3.5

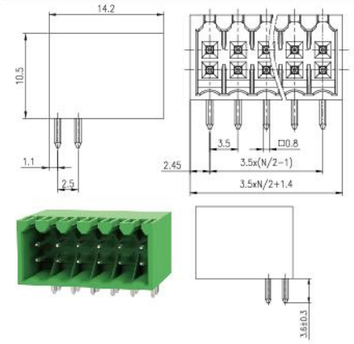


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	50	-
额定电流 Rated Current [A]	10	10	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVHDM-3.5



UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	50	-
额定电流 Rated Current [A]	10	10	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EVHDC-3.5



插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVHD-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERHBM-THR-3.81

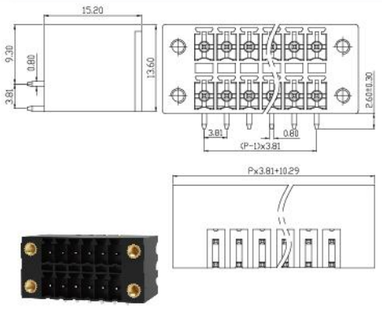


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERHBG-THR-3.81




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERHB-THR-3.81




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERHBM-THR-3.5

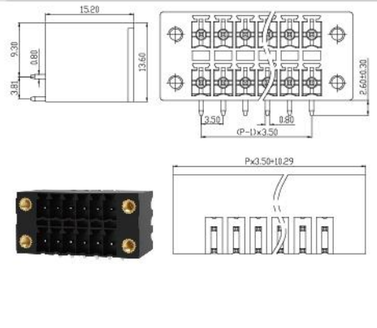

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2ERHBG-THR-3.5



插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERHB-THR-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVHBM-THR-3.81

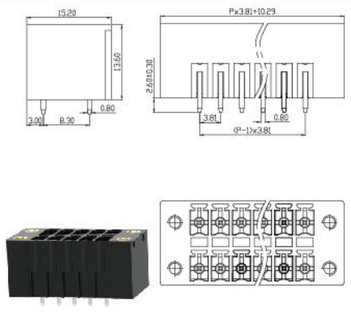


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVHBG-THR-3.81

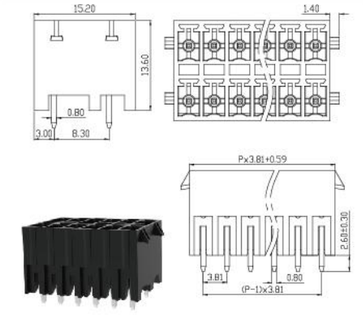


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVHB-THR-3.81




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVHBM-THR-3.5

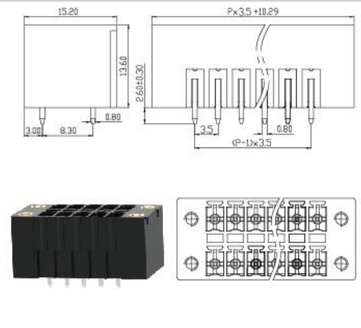

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EVHBG-THR-3.5

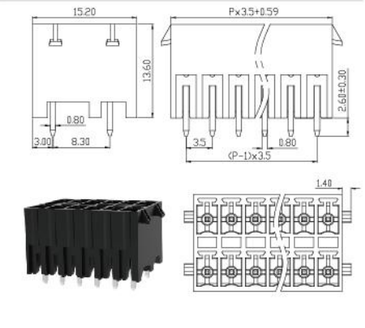

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVHB-THR-3.5

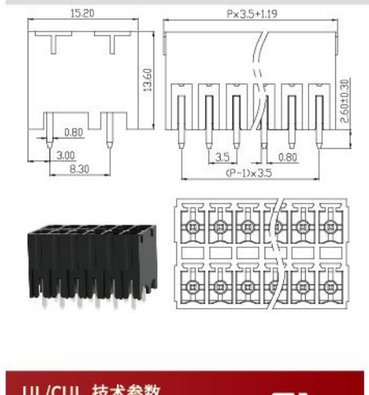


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.3		

DB2ERHM-5.08

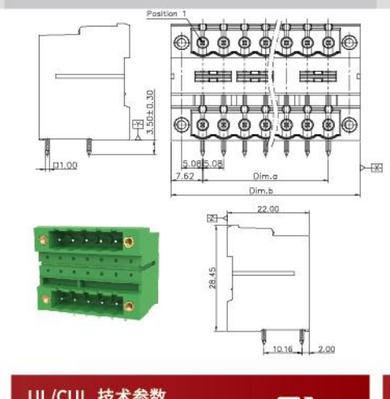


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERHM-3.81




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERHM-3.5

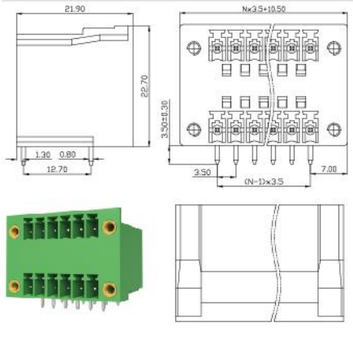


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERH-5.08

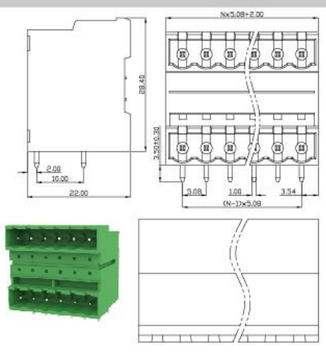

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2ERH-3.81

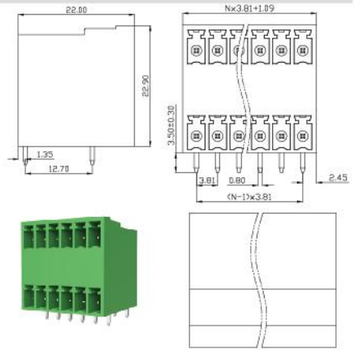

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERH-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	125	-	-
额定电流 Rated Current [A]	4	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	2.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERH-2.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERF-5.08

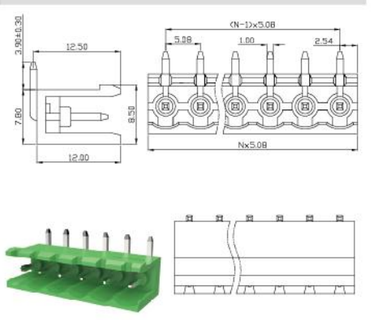


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERCF-5.08

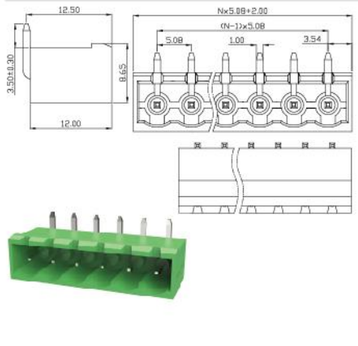


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERCF-3.81

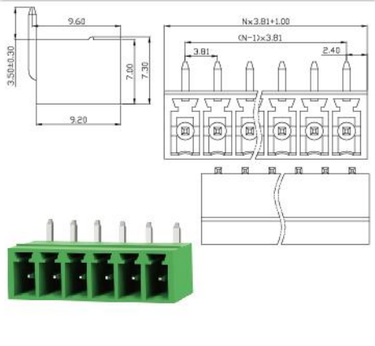

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2ERCF-3.5

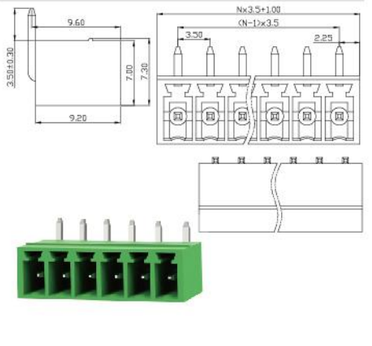

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERC-7.62

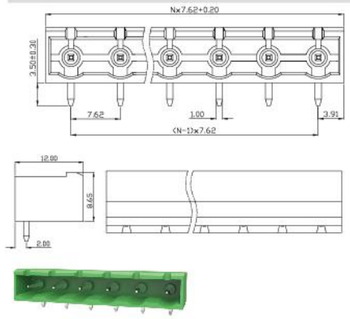


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERC-7.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERC-5.08

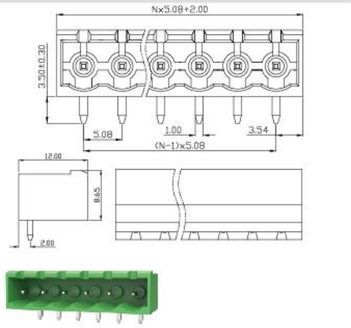


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERC-5.0

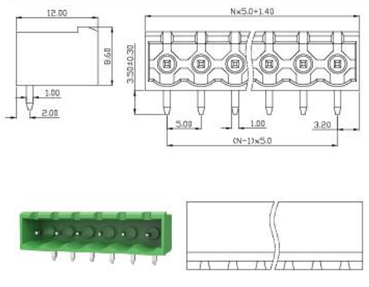


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB1ER-3.81

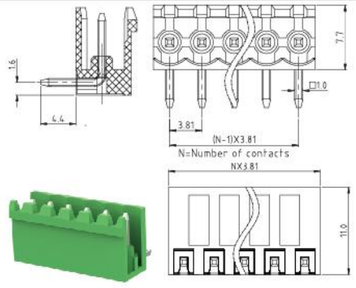

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB1ERC-3.81

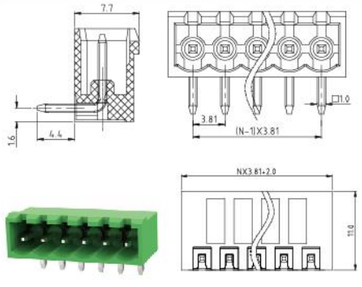

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB1ERC-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERG-3.81




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERC-2.54

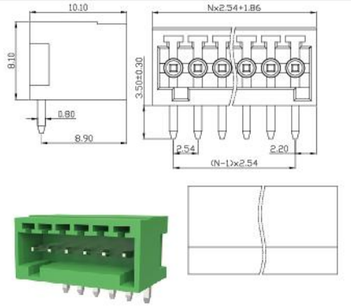


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERG-3.5

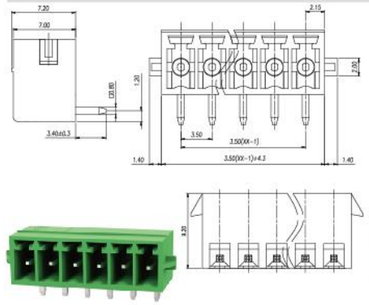

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2ERC-3.5

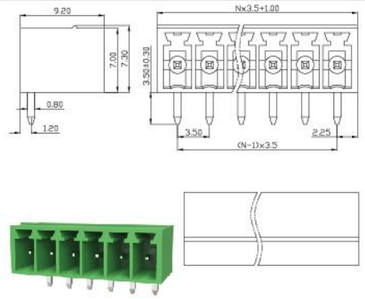

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	2.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERC-2.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ER-7.62

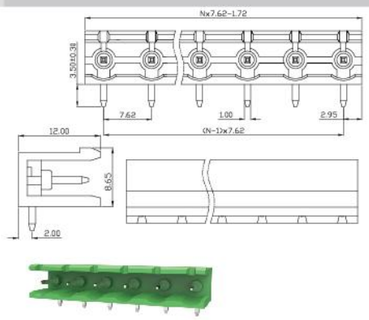


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ER-7.5

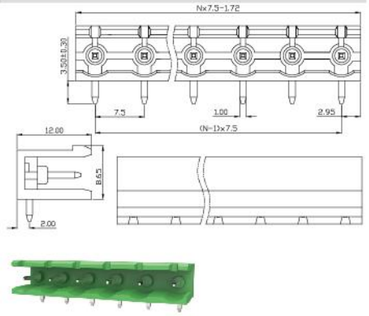


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ER-5.08

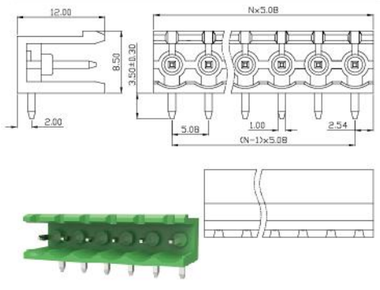


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ER-5.0

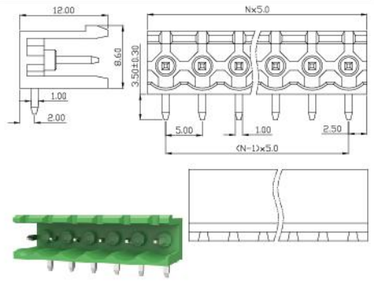

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	10	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EJ-5.08



插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EBM-7.62

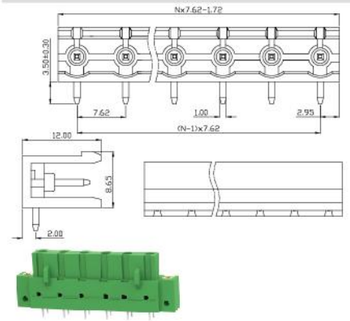


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EBM-5.08

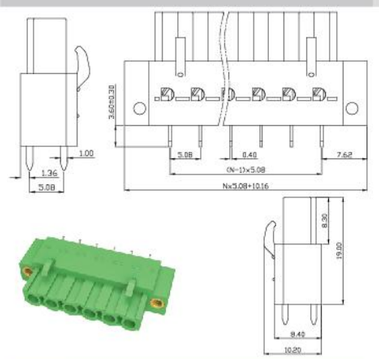


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EBM-5.0

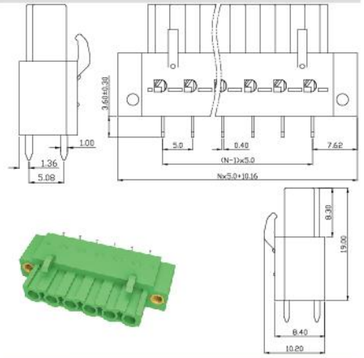


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EBM-3.81

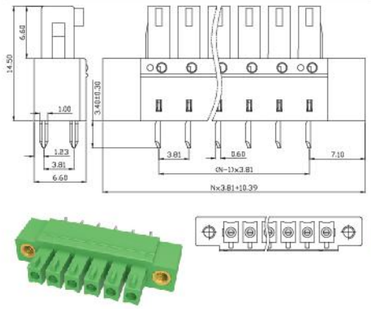


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EBM-3.5

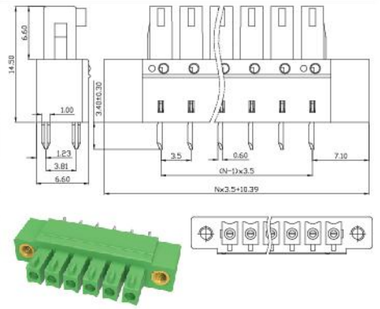

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EB-7.62

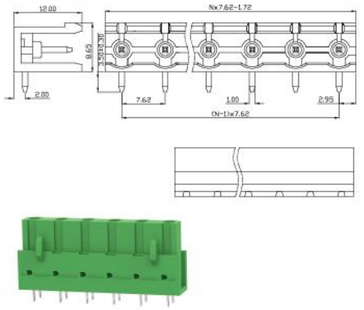

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EB-5.08

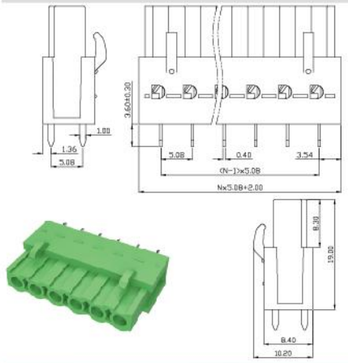


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EB-5.0

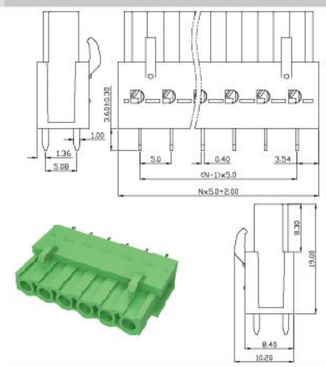


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EB-3.81

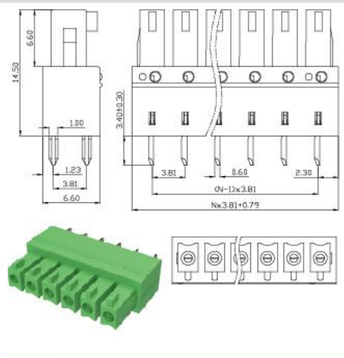


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EB-3.5

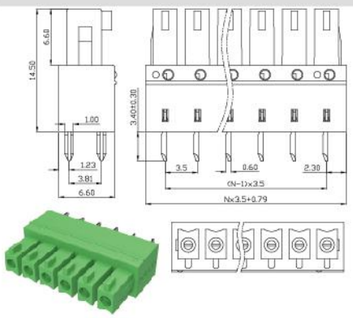


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EAM-7.62

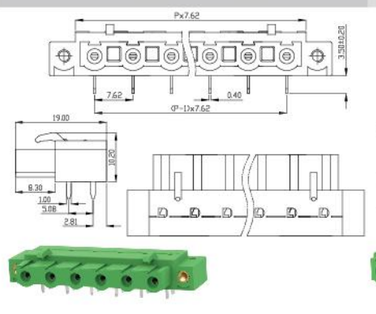

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EAM-5.08

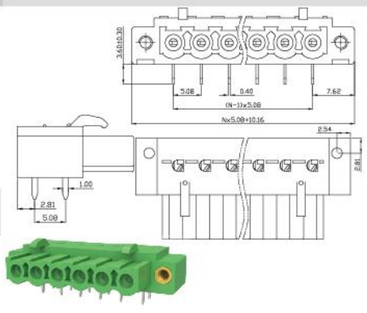


ISO9001 ISO14001 RoHS REACH cULus CE VDE SAA CQC

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EAM-5.0

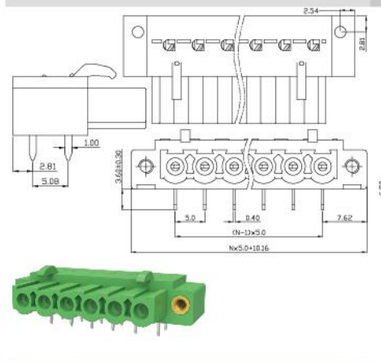


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EAM-3.81

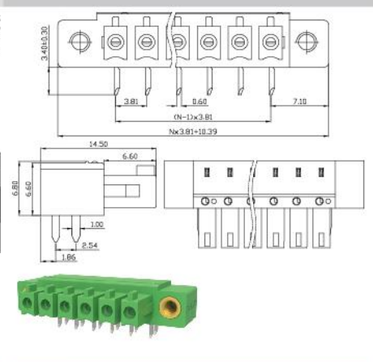


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EAM-3.5

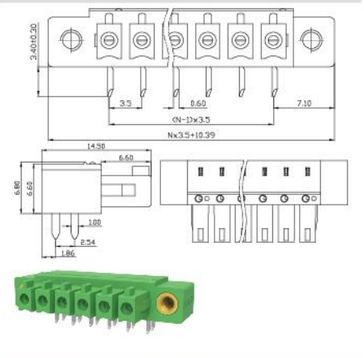


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EA-7.62

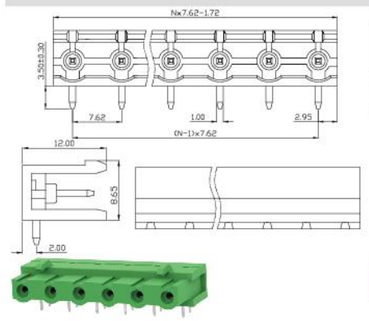


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EA-5.08

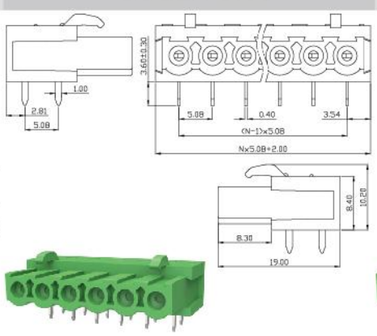

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EA-5.0

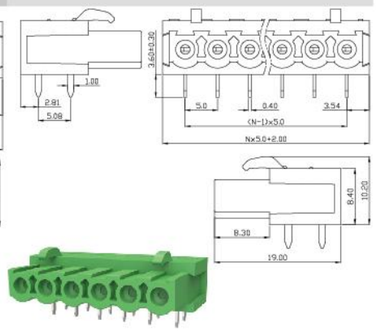


Tel：+86-400-860-0988 | Web：www.terminalblock.net

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EA-3.81

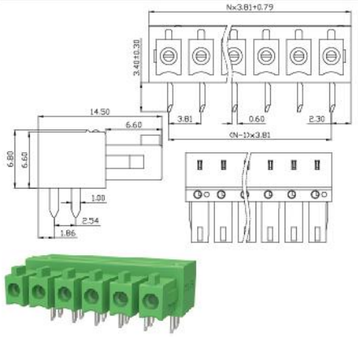


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EA-3.5

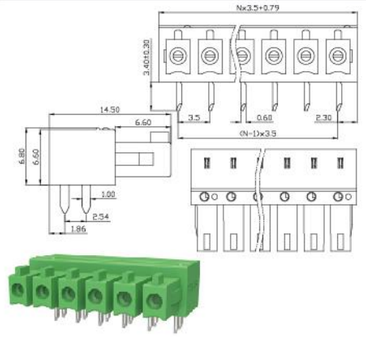


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EBG-3.5

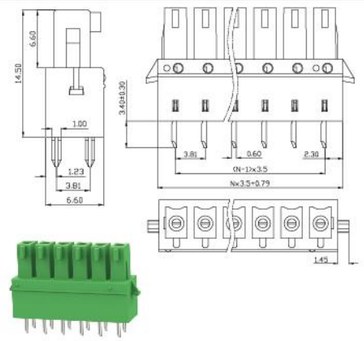


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-10		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EAG-3.5

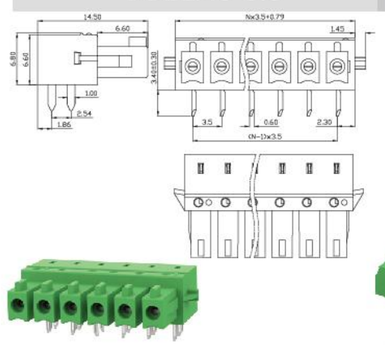


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-10		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB3CKM-7.62

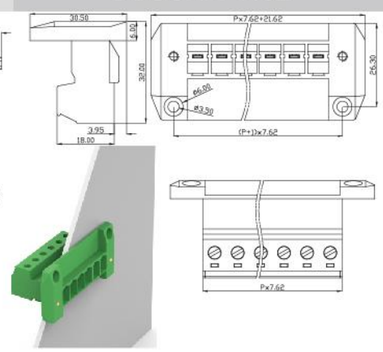

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		


DB2CM-5.08

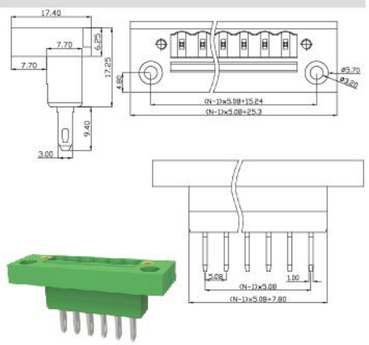

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2CM-3.81

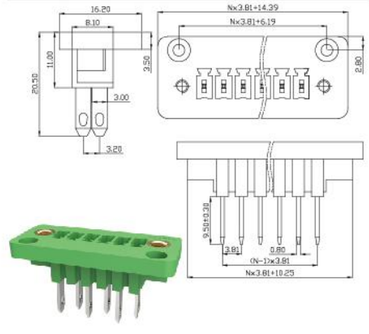


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EUGBM-5.08

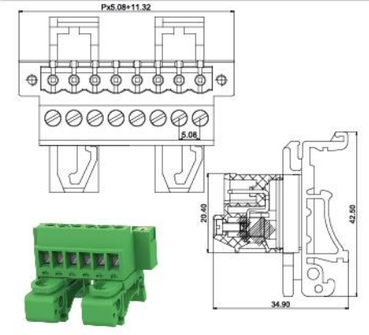


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EUGB-5.08

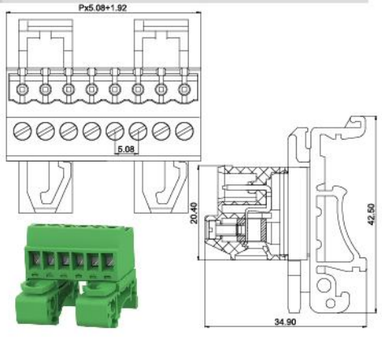


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB2EGBM-5.08

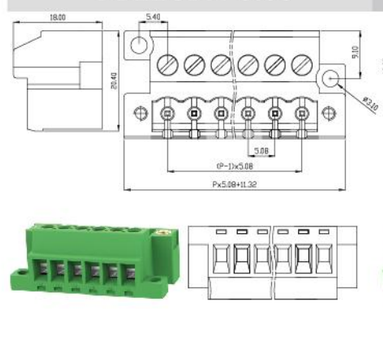


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB2EGB-5.08

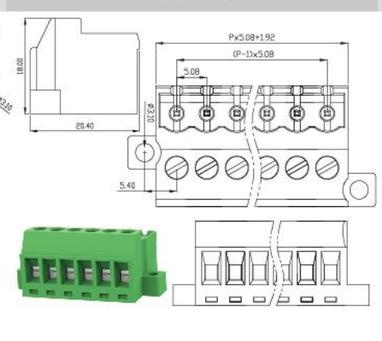

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		


DB2EGBM-3.81

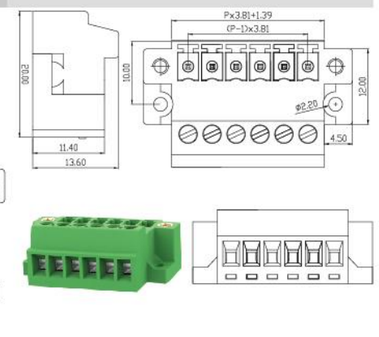

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB2EGB-3.81




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.2		

DB2EVKM-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB2EVK-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EURKM-5.08

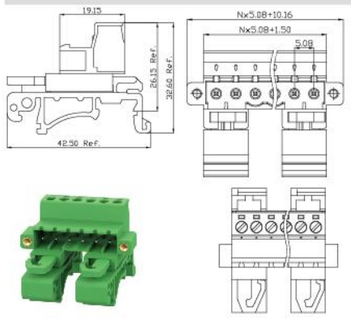


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EURK-5.08



UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


DB2ERKM-5.08

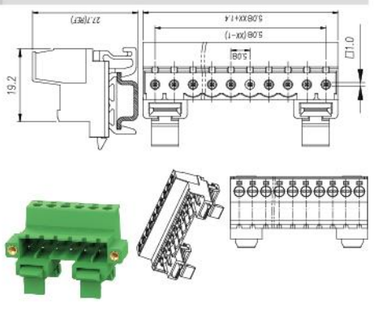

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2ERK-5.08

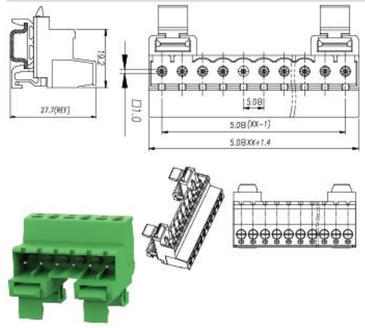


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2ERK-5.0

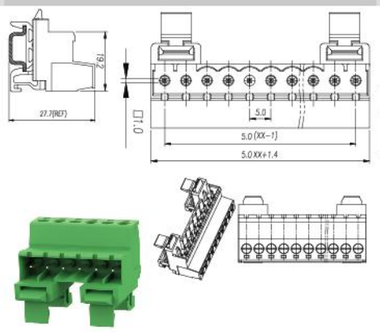


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	300
额定电流 Rated Current [A]	65	65	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	20-6		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DB3EKM-10.16

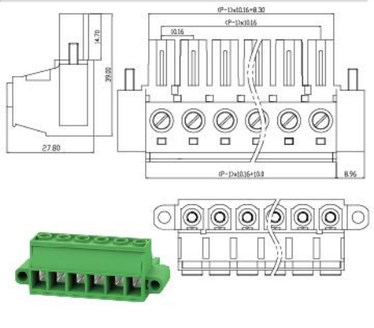


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	-
额定电流 Rated Current [A]	42	42	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	20-8		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB3EK-10.16

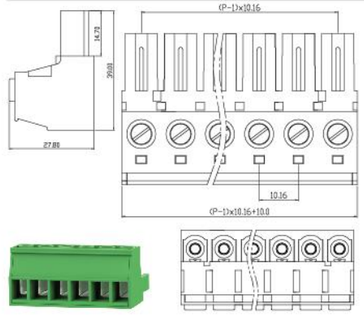


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	35	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-8		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB3EKDL-7.62

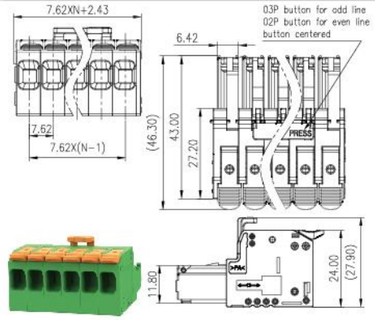


DB3EKD-7.62

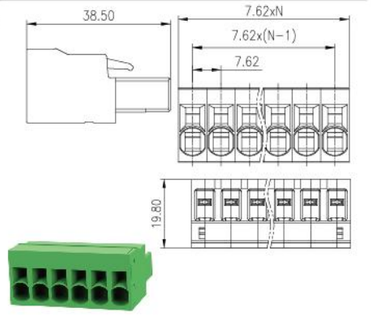

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	300
额定电流 Rated Current [A]	41	41	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-8		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB3EKHM-7.62

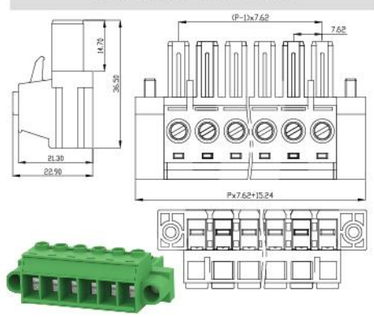


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	300
额定电流 Rated Current [A]	41	41	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-8		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB3EKH-7.62

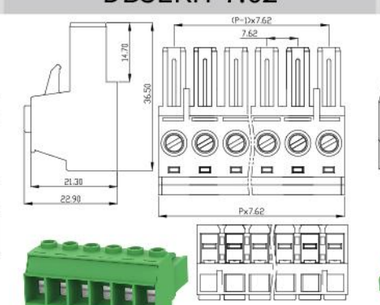


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-8		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB3EKM-7.62

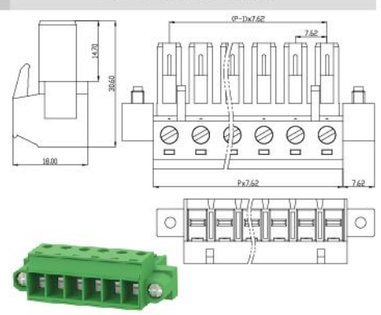


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	300
额定电流 Rated Current [A]	41	41	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-8		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB3EK-7.62

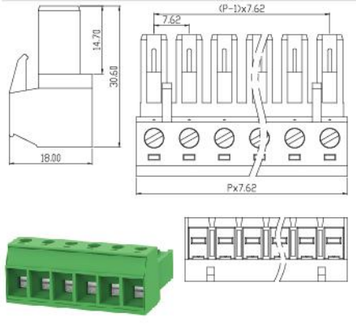


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKRP-7.62

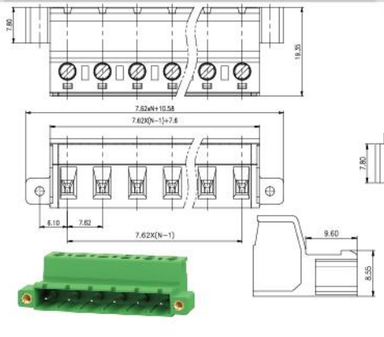

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


DB2EKRM-7.62

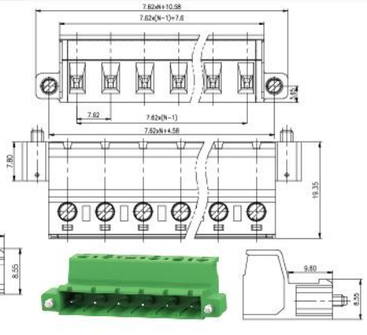

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKR-7.62

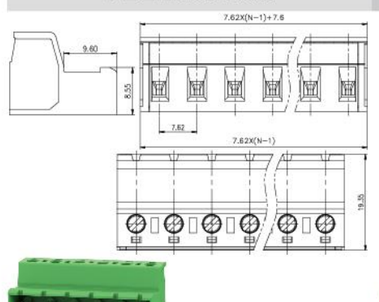


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKRP-5.08

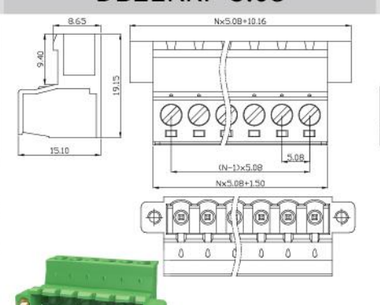


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKRN-5.08

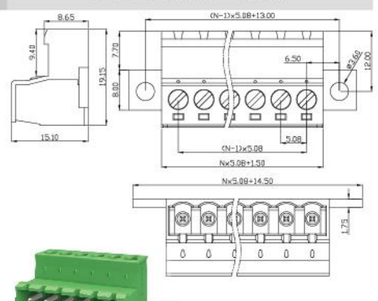


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.4		

DB2EKP-5.0




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKR-5.08

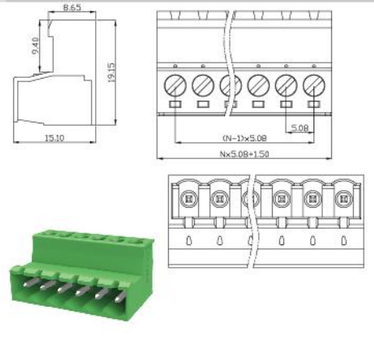

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	-	-	-
额定电流 Rated Current [A]	-	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EWC-5.08

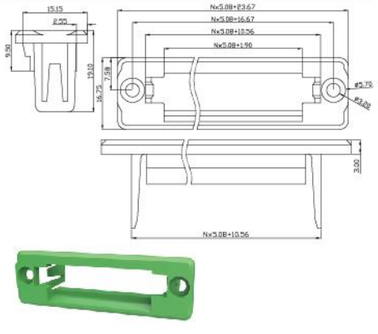

插拔式接线端子 Plug-in Terminal Block


DB2EKRP-3.81

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

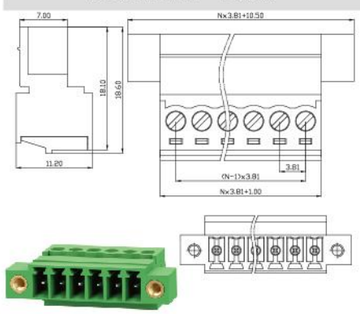


DB2EKRN-3.81

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

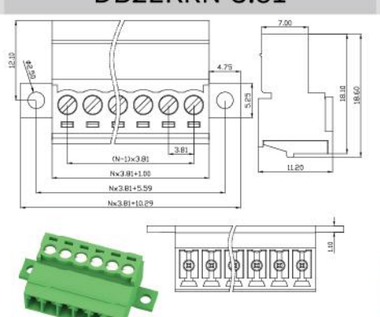


DB2EKR-3.81

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		




DB2EWC-3.81

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	-	-	-
额定电流 Rated Current [A]	-	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

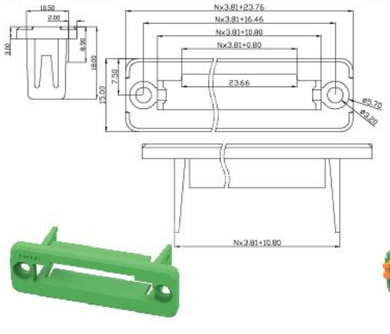


DB2EKN-3.81

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	150	-	150
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

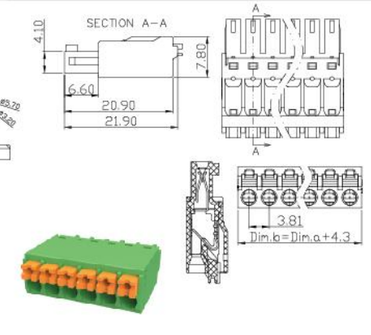

DB2EKN-3.5


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		



插拔式接线端子 Plug-in Terminal Block


DB2EKNRG-3.5

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

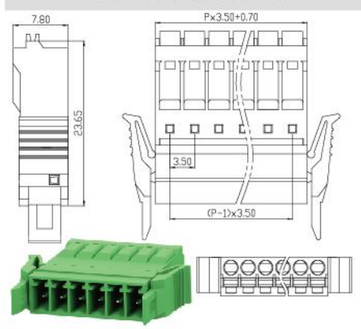


DB2EKNR-3.5

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

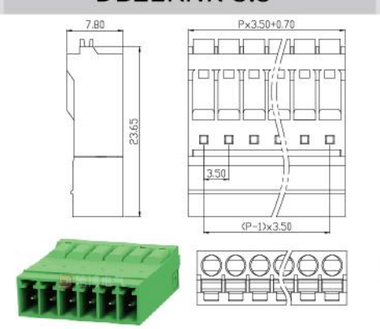


DB2EKNM-3.81

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

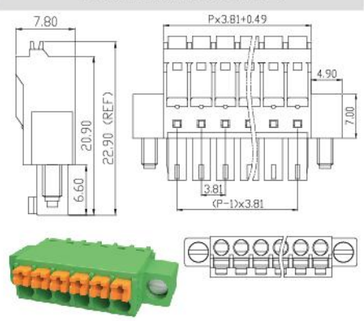


DB2EKNGB-3.5

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	150	-	150
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

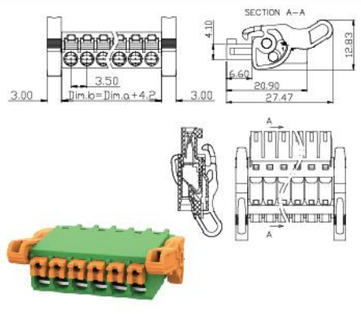


DB2EKNM-3.5

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

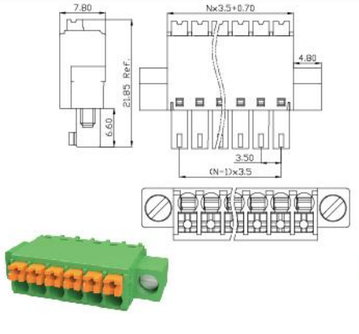

DB2EKNG-3.81


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

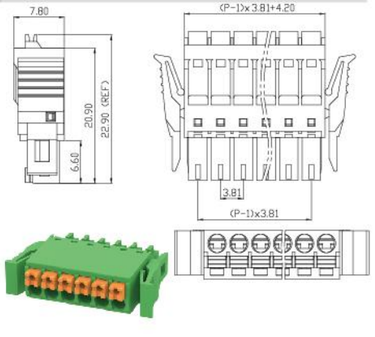

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKNG-3.5

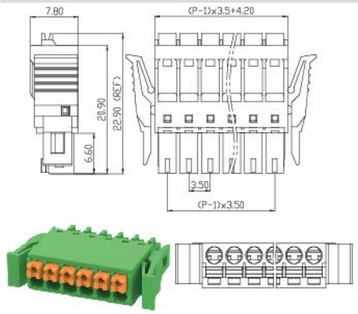


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	50	300
额定电流 Rated Current [A]	10	10	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKNHBM-3.5

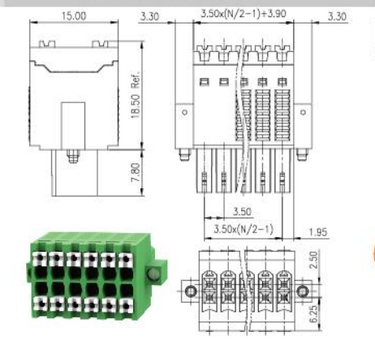


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	50	300
额定电流 Rated Current [A]	10	10	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKNHBG-3.5

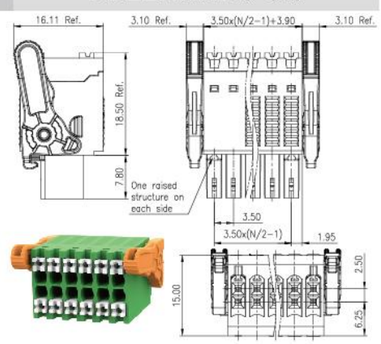


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	50	300
额定电流 Rated Current [A]	10	10	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKNHB-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	50	-
额定电流 Rated Current [A]	8	8	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKNHM-3.5

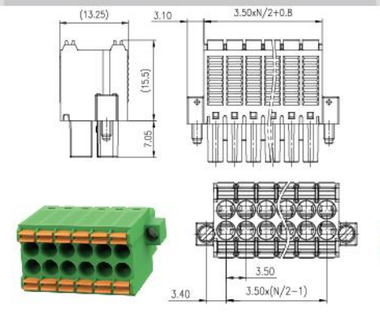

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	50	-
额定电流 Rated Current [A]	8	8	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EKNHG-3.5



插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	50	-
额定电流 Rated Current [A]	8	8	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKNH-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKNNG-3.5

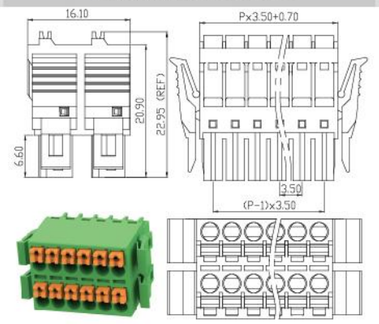


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKNNM-3.5

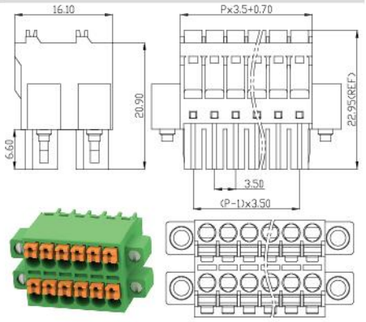


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKNN-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKZM-5.08

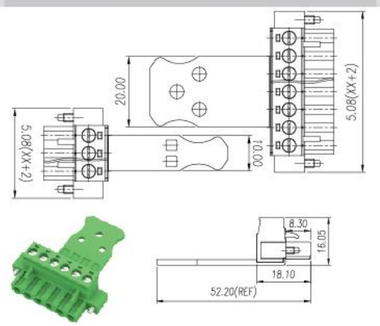

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


DB2EKZ-5.08

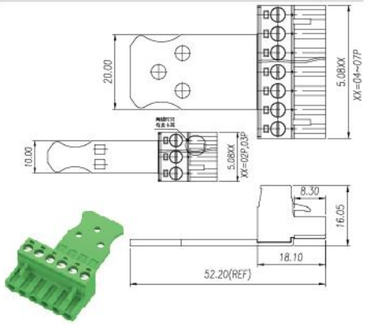

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB2EKWM-5.08

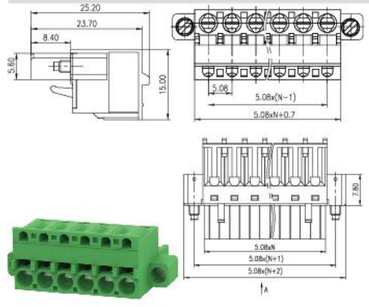


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB2EKW-5.08

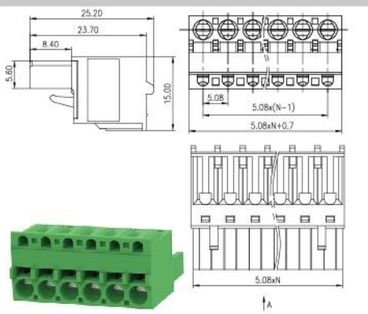


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB2EKLM-5.08

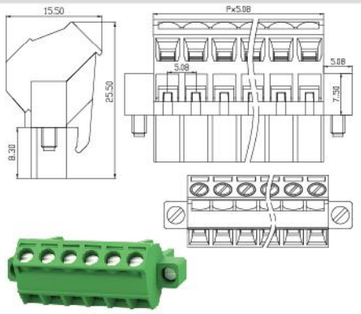


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	12
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB2EKL-5.08

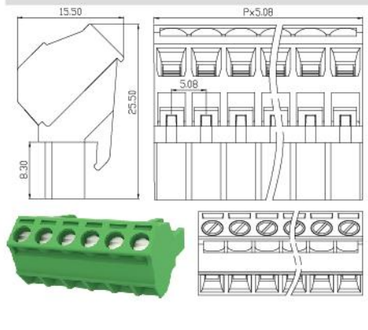


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	18	-	12
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	30-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.6		

DB2EKJ-5.08

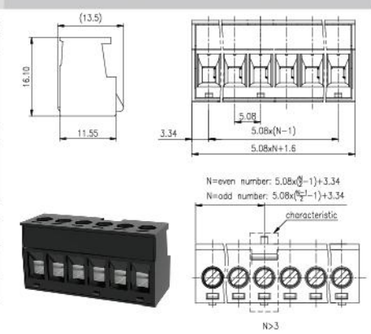

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		


DB2EKHM-5.08

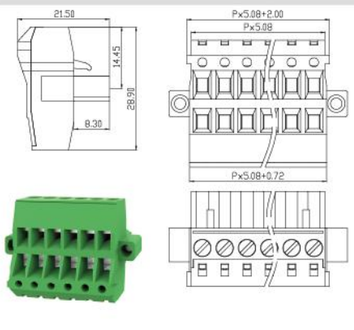

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB2EKH-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB2EKF-5.0

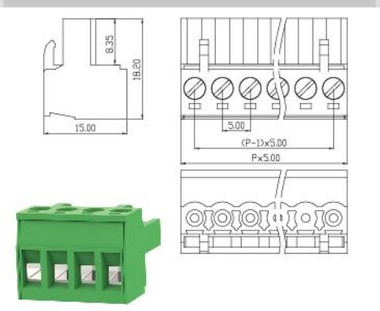


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKM-7.62

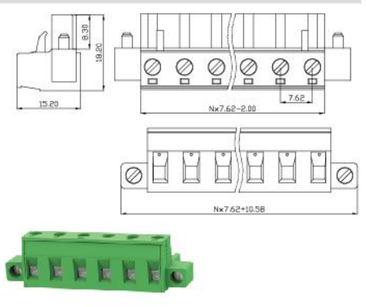


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKM-7.5

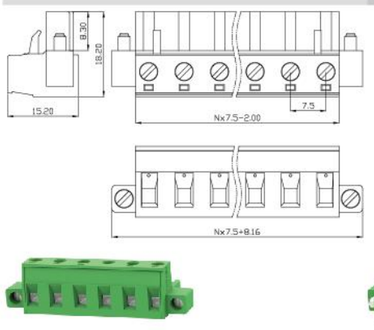


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKM-10.0

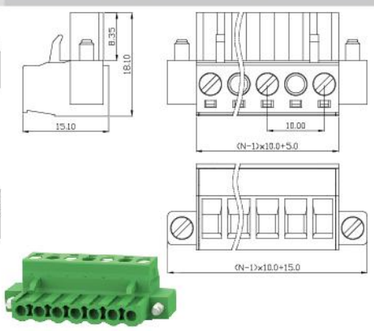

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


DB2EKM-10.16

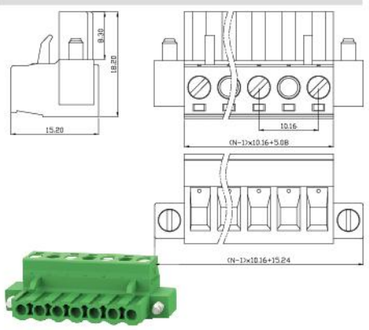

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EK-10.0




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EK-10.16

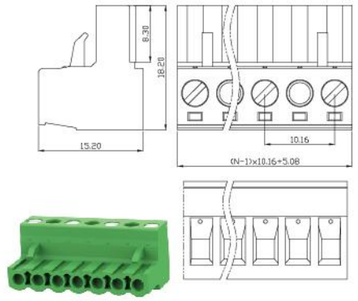


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB2EKM-5.08

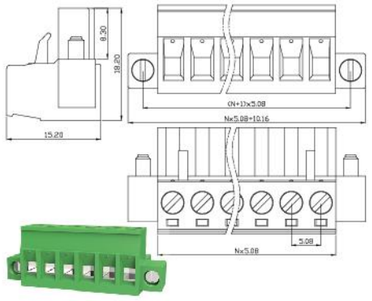


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKM-5.0

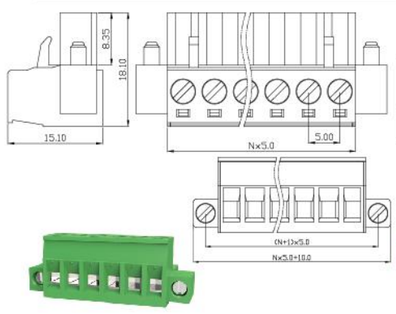


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKM-3.81

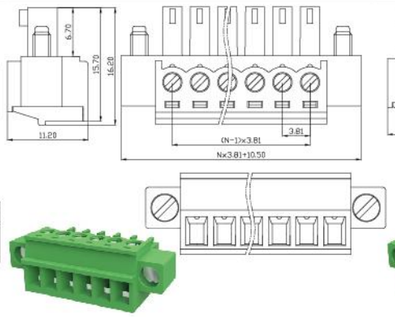

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		


DB2EKM-3.5

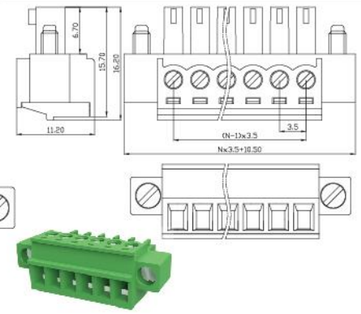

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		

DB2EKG-3.5

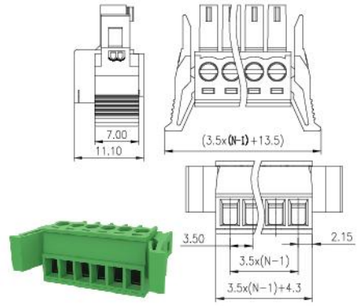


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		

DB1EKM-5.08

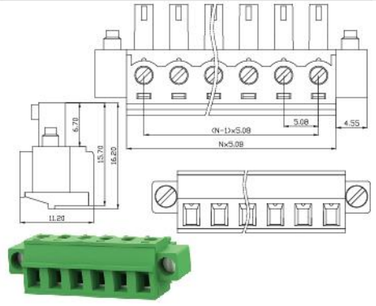


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		

DB1EK-3.81

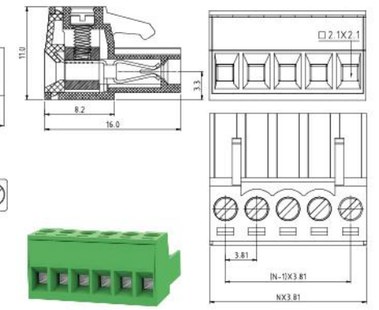


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	10	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB1EK-5.08

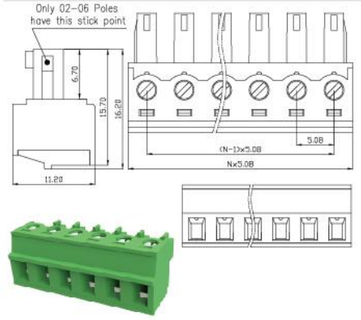


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDRP-5.08

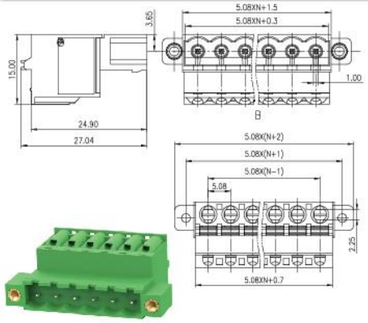

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	10	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EKDRM-5.08

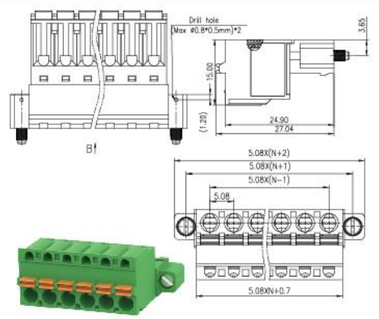

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	10	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDR-5.08

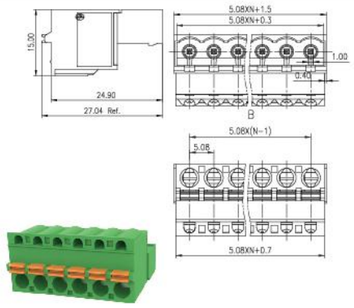


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDM-7.62

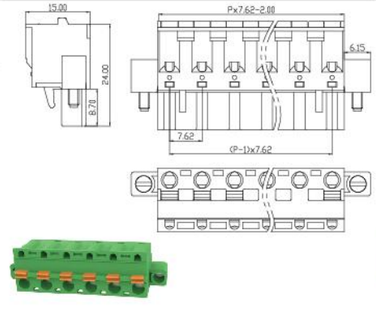


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

B2EKDM-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDM-3.81




UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDM-3.5

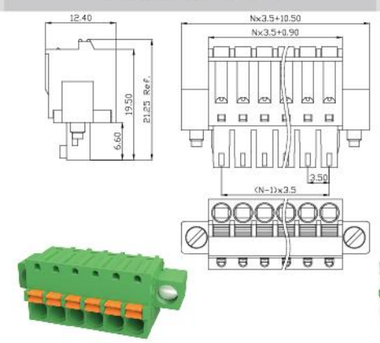

UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EKD-7.62

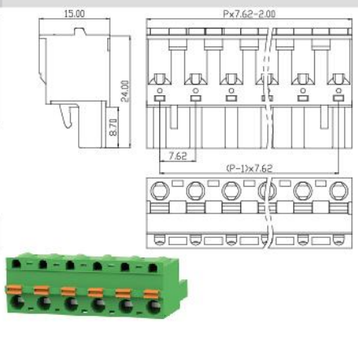

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKNM-5.08

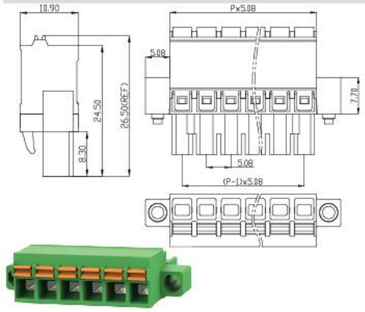


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKN-5.08

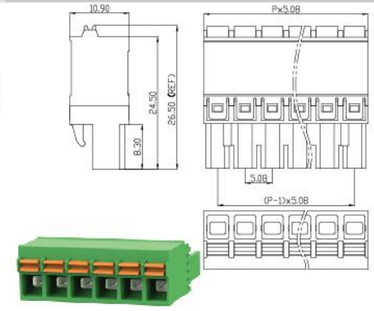


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKNM-5.0

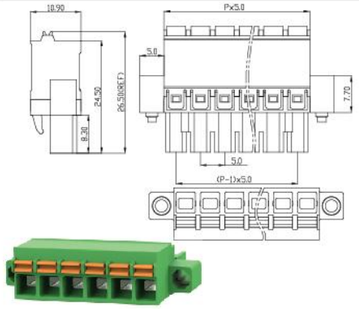


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKN-5.0

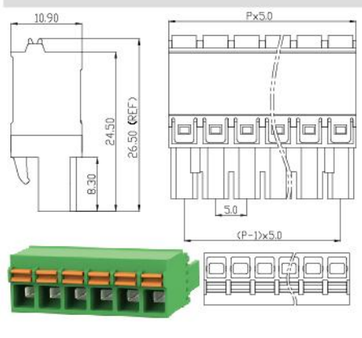


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKD-5.08

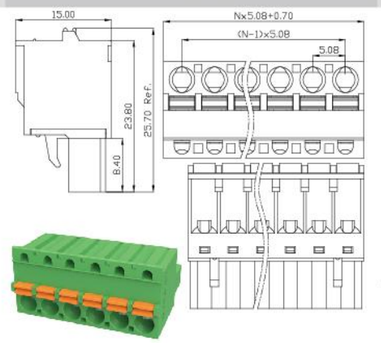

UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EKD-3.81

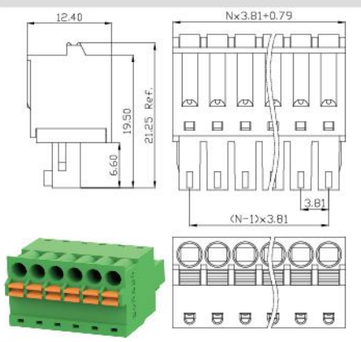

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKD-3.5




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-20		
间距 Pitch [mm]	2.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKD-2.5

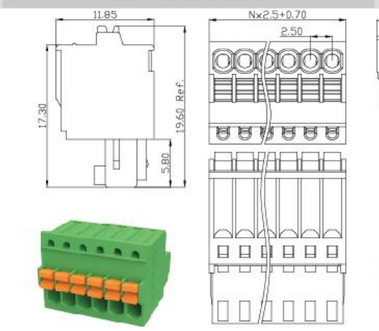


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDHG-5.08

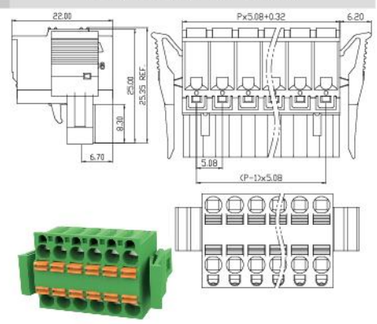


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDHM-5.08

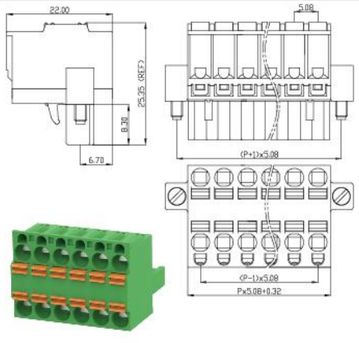


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDH-5.08

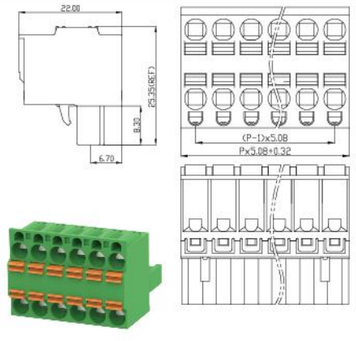

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EKDF-5.08

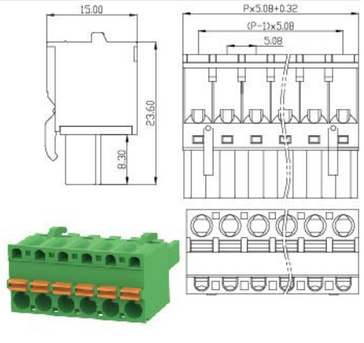

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDFM-5.08

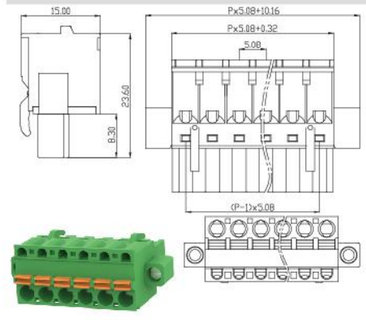


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDAM-5.08

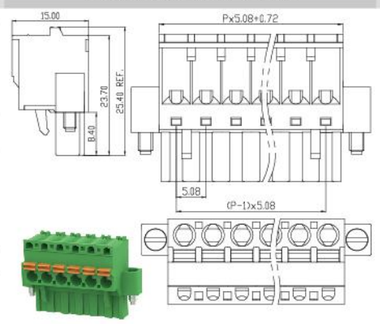


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDA-5.08

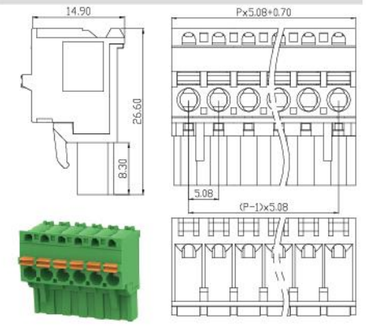


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB2EKCM-5.08

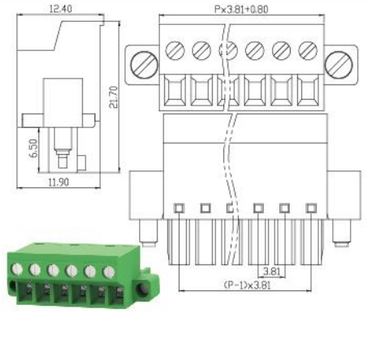


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		

DB2EKCM-3.81

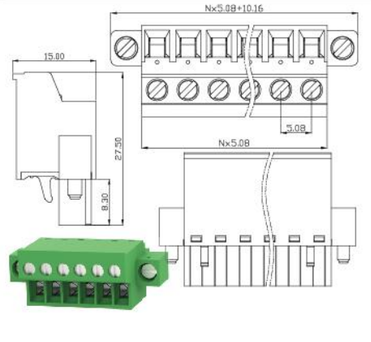

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		


DB2EKC-5.08

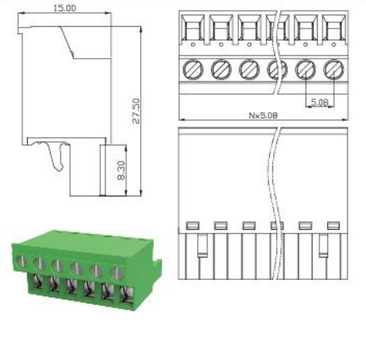

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.2		

DB2EKC-3.81

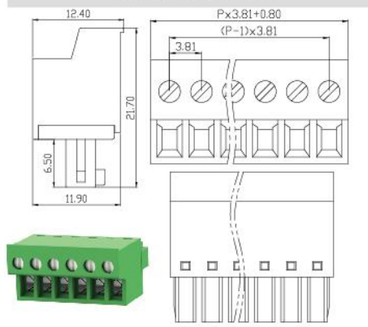


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKBM-7.62

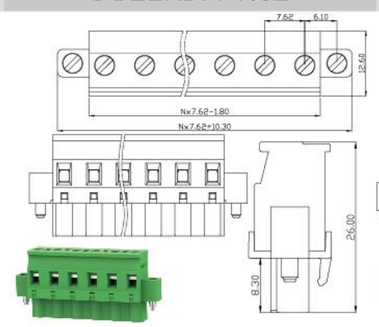


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKBM-7.5

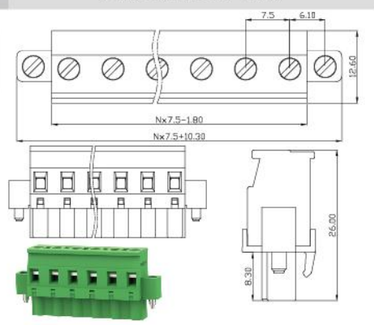


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKBM-5.08

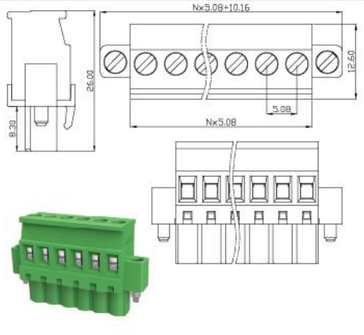


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKBM-5.0

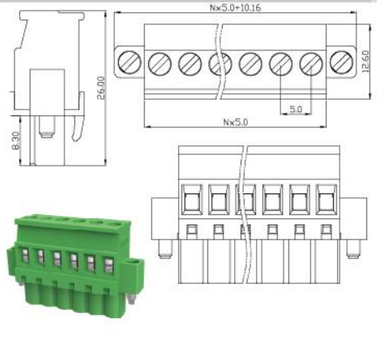

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		


DB2EKBM-3.81

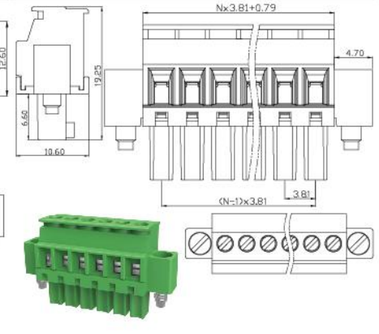

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB2EKBM-3.5

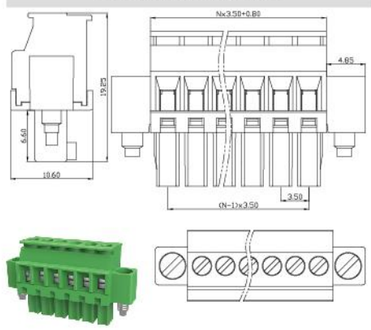


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKB-7.62

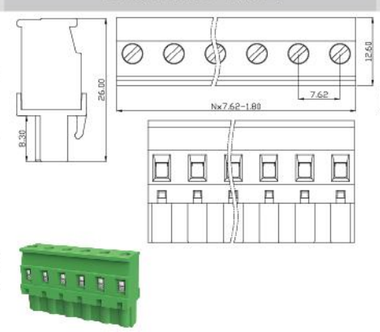


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKB-7.5

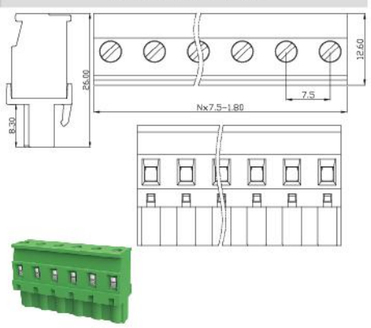


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKB-5.08

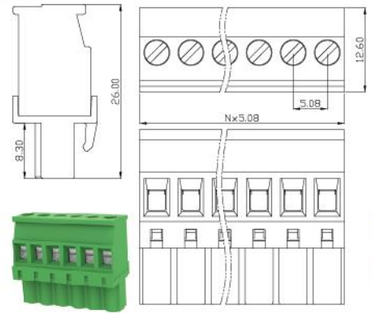


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKB-5.0

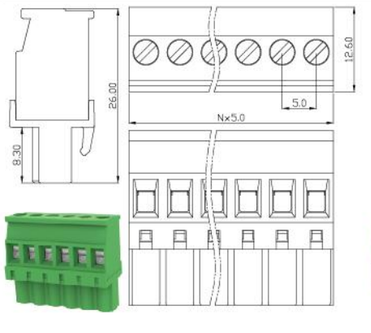

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		


DB2EKB-3.81

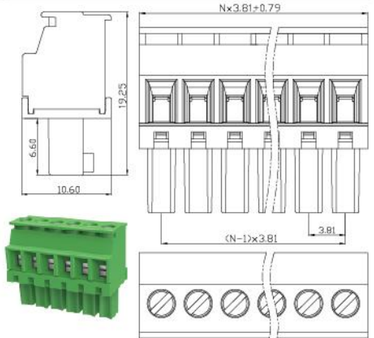

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB2EKB-3.5

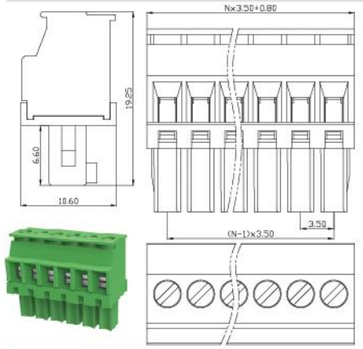


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKAM-7.62

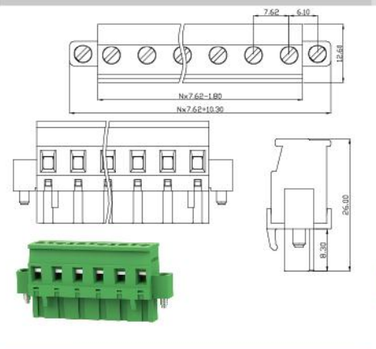


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKAM-7.5

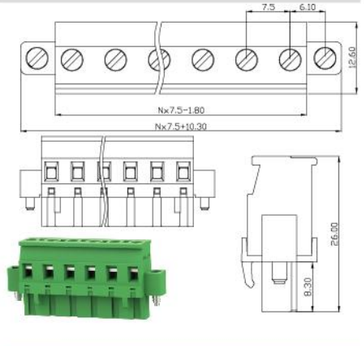


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKAM-5.08

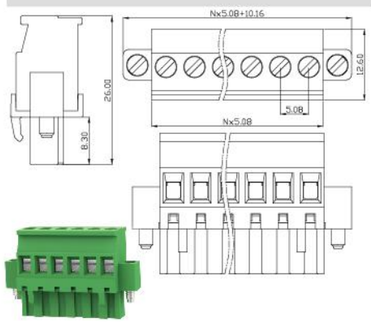


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKAM-5.0

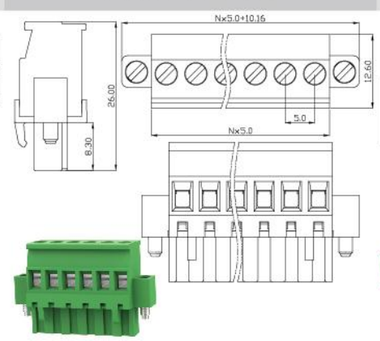

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		


DB2EKAM-3.81

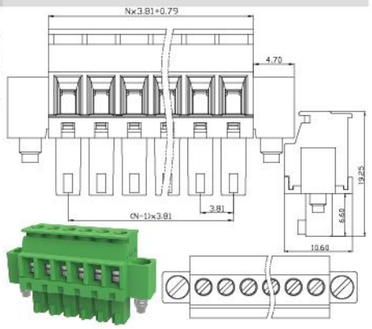

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB2EKAM-3.5

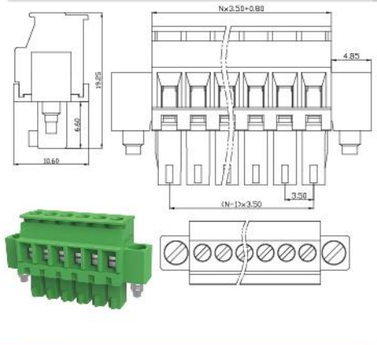


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKA-7.62

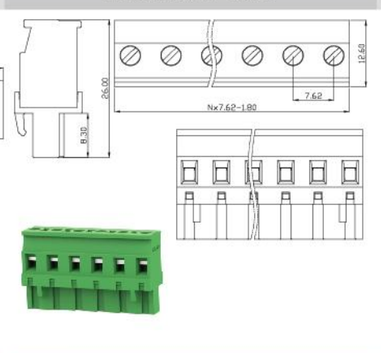


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKA-7.5

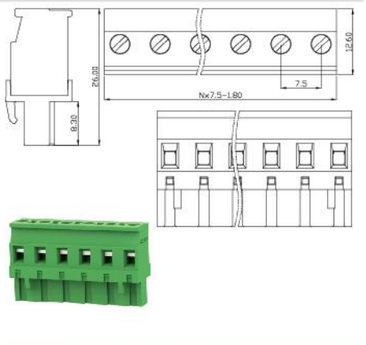


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKA-5.08

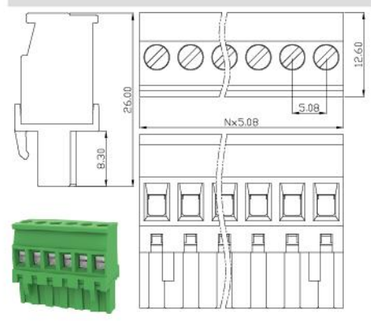


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKA-5.0

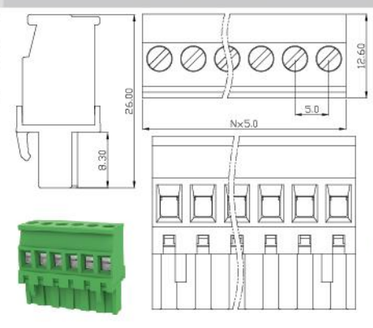

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		


DB2EKA-3.81

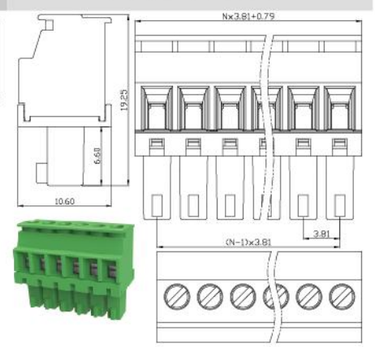

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB2EKA-3.5

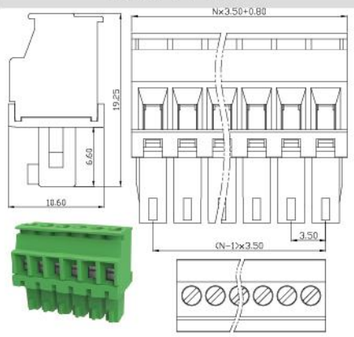


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	0.4		

DB2EKAHM-5.08

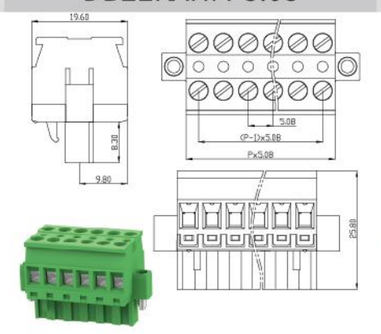


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	0.4		

DB2EKAH-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKYAM-5.08

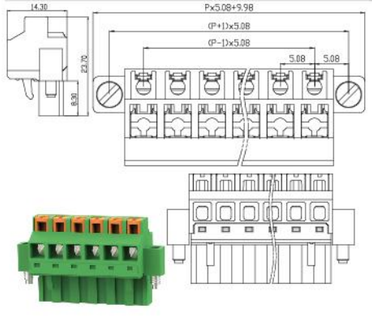


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKYA-5.08

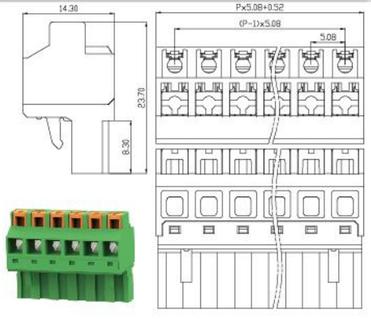

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


DB2EK-7.62

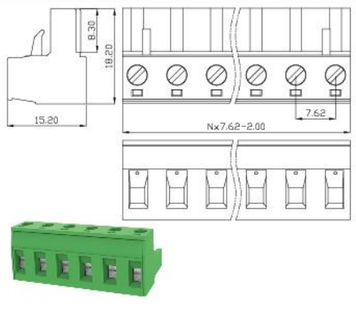

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EK-7.5

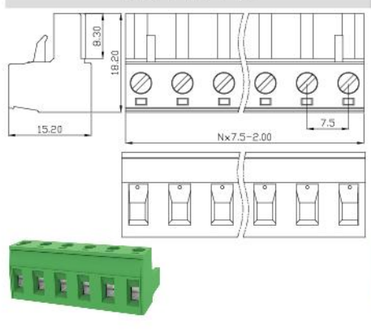


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EK-5.0

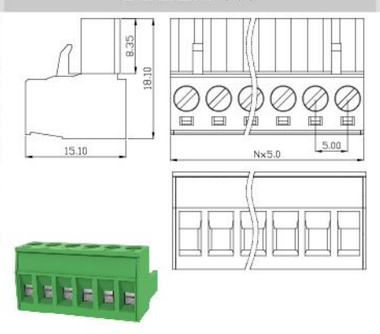


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EK-5.0

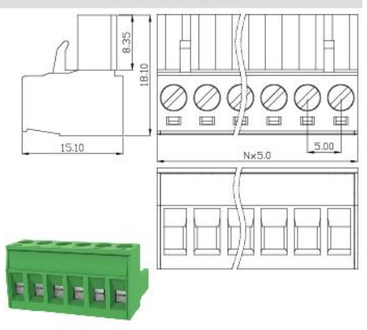


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB2EK-3.81

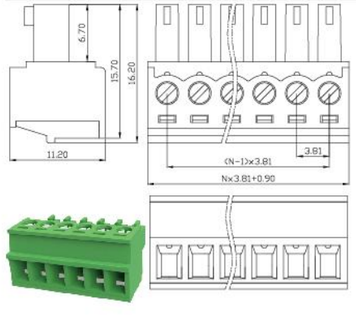


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB2EK-3.5

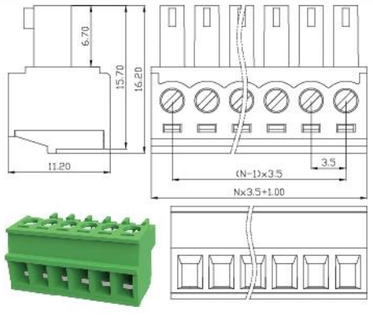

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	50	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-20		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M1.6/0.1		


DB2EK-2.54

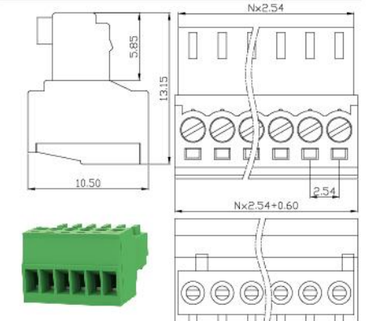

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	50	-
额定电流 Rated Current [A]	8	8	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVHCM-3.5

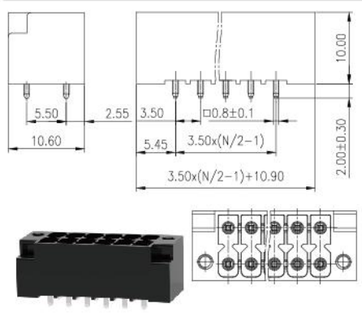


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	7	-	7
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-14		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB233B-5.08

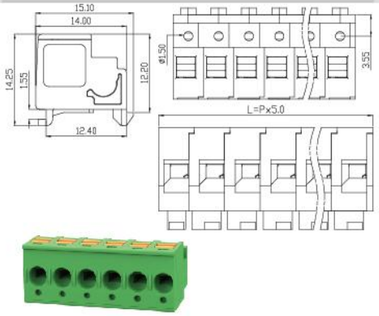


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	0.4		

DB1EPWP-3.81

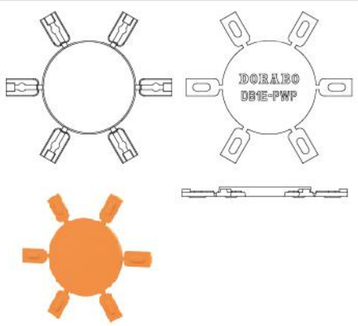


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		

DB1EK-3.81




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB1ERM-3.81

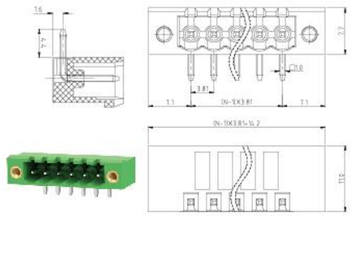

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		


DB1EVM-3.81

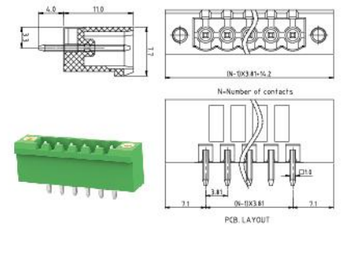

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	250	320	630
额定电流 Rated Current [A]	8	8	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB1EVM-5.08

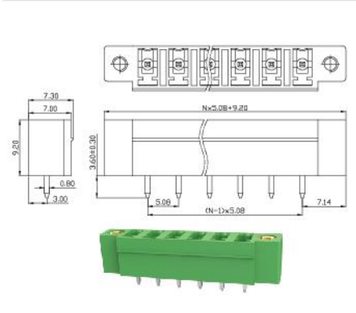


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	35	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-8		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EAKM-7.62




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-18		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EEK-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EERC-2.54

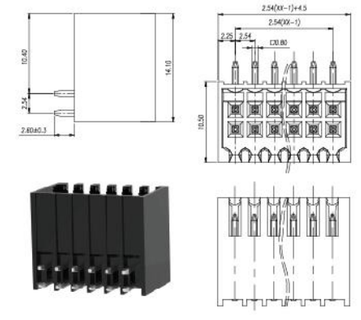


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EERC-3.5



UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EEVC-2.54



插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EEVC-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKA-7.62

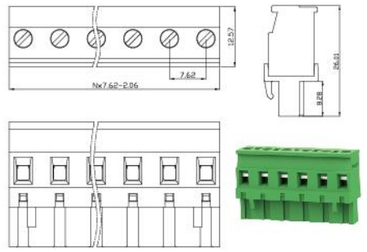


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB2EKC-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		

DB2EKCM-3.81

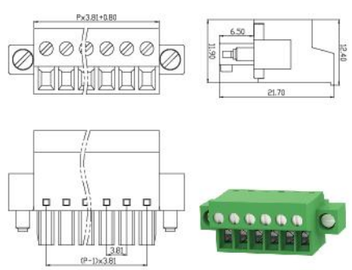


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB2EKCM-5.08

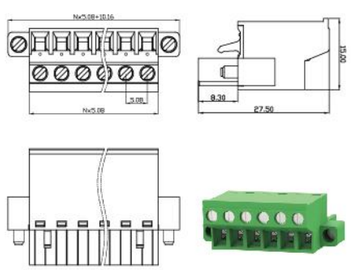

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-20		
间距 Pitch [mm]	2.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EKD-2.5



插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKD-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKD-7.62

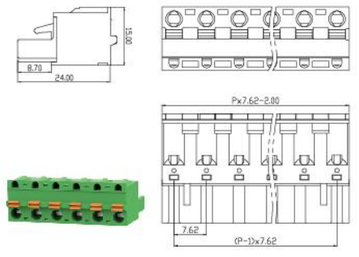


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDA-5.08

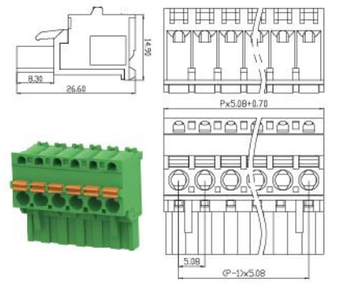


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDAM-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDF-5.08

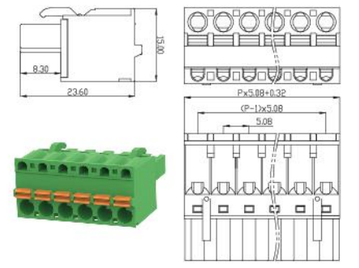

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EKDFM-5.08

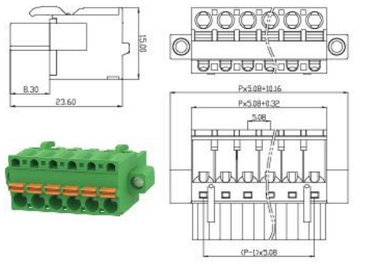

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDG-5.0

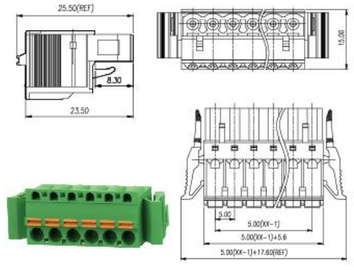


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDG-5.08

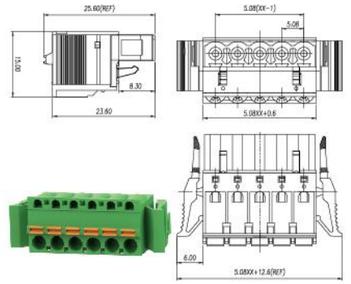


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB2EKDH-5.08

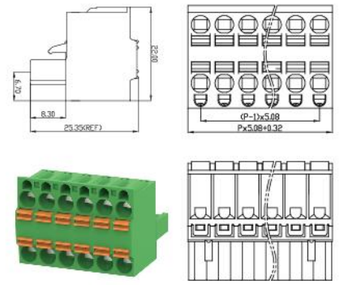


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDHG-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDHM-5.08

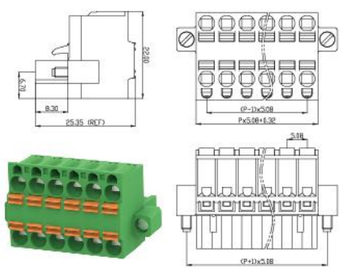

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EKDM-7.62

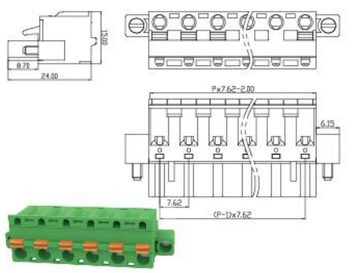

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKDRN-5.08

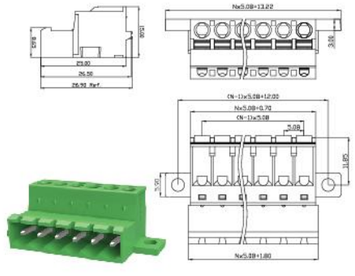


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKFM-5.08

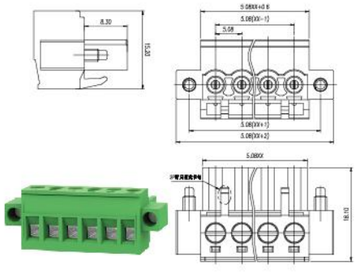


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKM-7.62

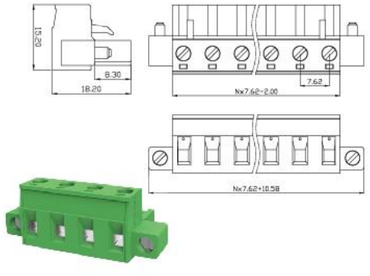


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKN-3.5

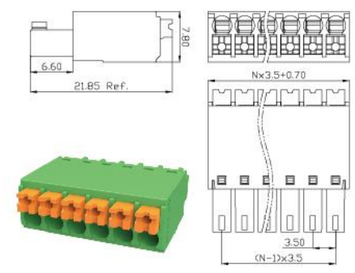


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	150
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKN-3.81

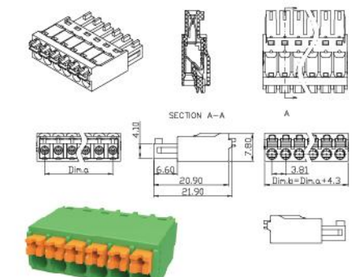

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EKNG-3.81

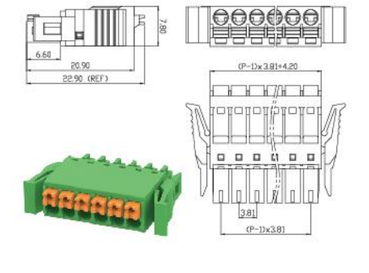

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	150
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKNGB-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKNH-5.08

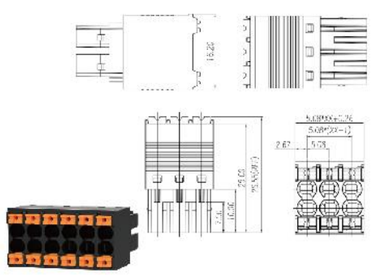


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	30-20		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKNHB-2.54




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKNHBM-2.54




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKNM-3.5

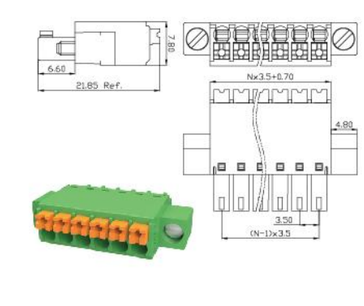

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EKNM-3.81



插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKNN-3.81




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKNR-3.5

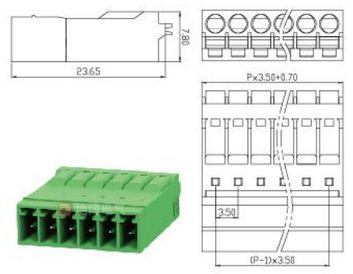


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKNRG-3.5

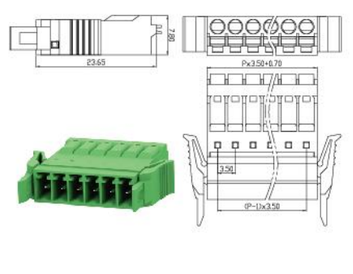


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB2EKR-7.62

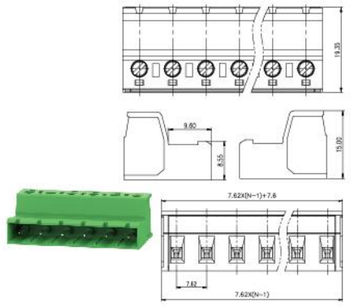


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB2EKR-3.81

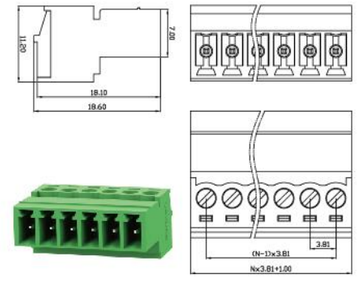

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EKRN-3.81

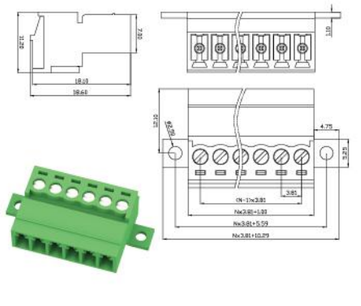

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB2EKRP-3.81

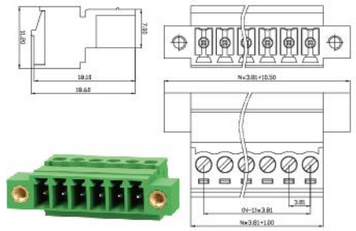


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKS-5.08

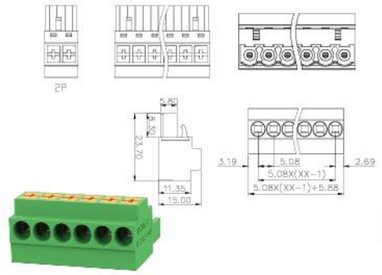


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EKSG-5.08

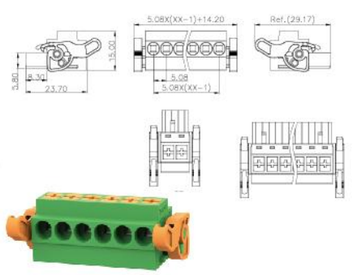


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.3		

DB2EKSM-5.08

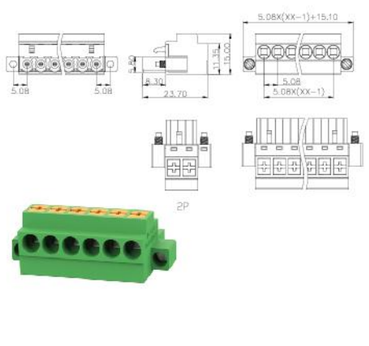


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ELC-3.5

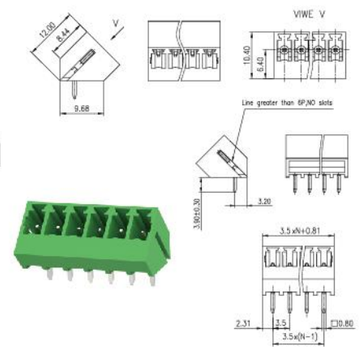

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	-	-	-
额定电流 Rated Current [A]	-	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EPWI-5.08



插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	-	-	-
额定电流 Rated Current [A]	-	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EPWP-5.08

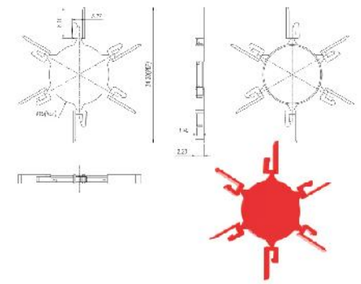


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERG-3.81

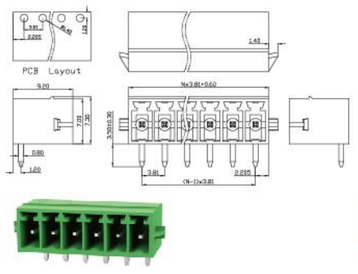


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERG-5.0

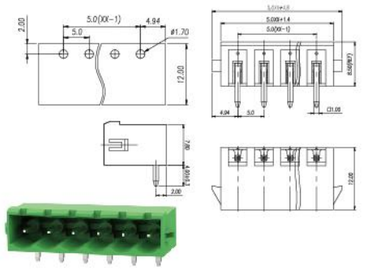


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	-	-	-
额定电流 Rated Current [A]	-	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERG-5.08

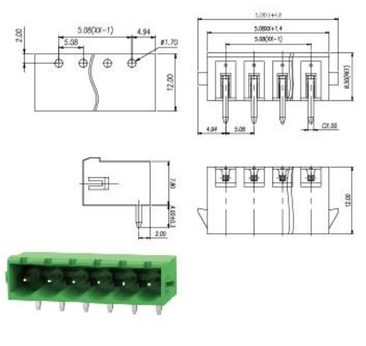


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2ERHBM-5.08

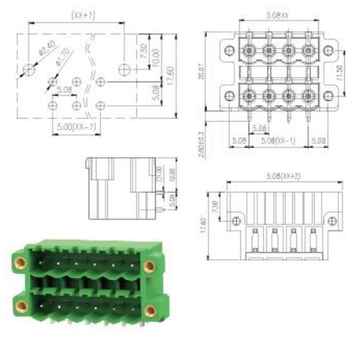

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2ERHC-5.08

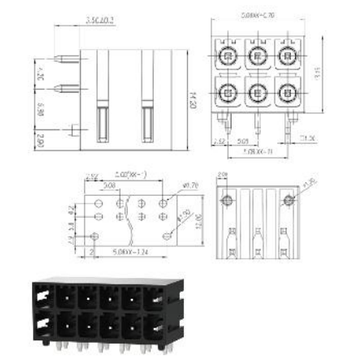

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVG-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVG-3.81




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB2EVG-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVHM-5.0

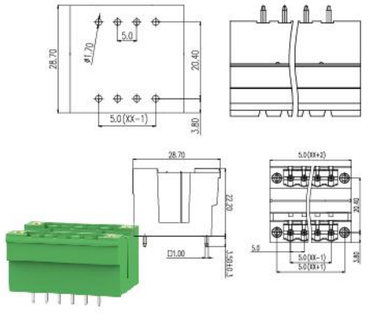


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2EVHM-5.08



UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	-	-	-
额定电流 Rated Current [A]	-	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EWC-3.81

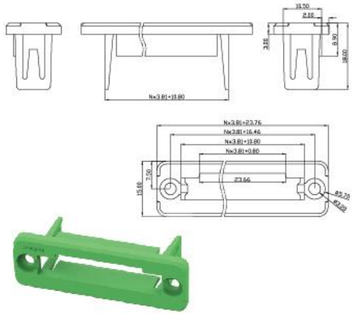

插拔式接线端子 Plug-in Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	-
额定电流 Rated Current [A]	20	20	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2KHV-7.62

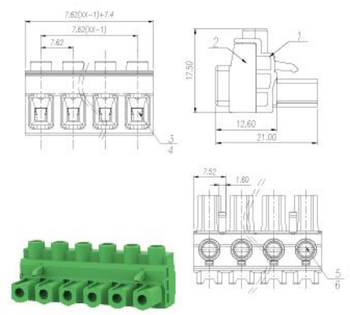


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	600
额定电流 Rated Current [A]	41	41	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB3EA-7.62

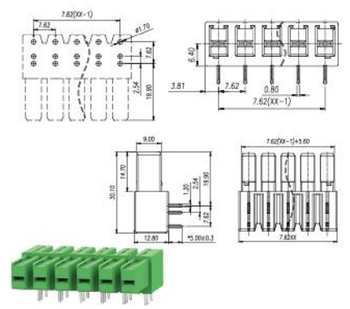


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	600
额定电流 Rated Current [A]	41	41	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB3EKH-7.62

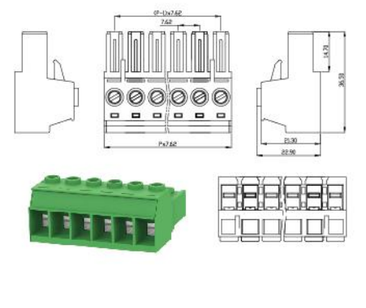


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	-
额定电流 Rated Current [A]	41	41	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-8		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB3EKHG-7.62

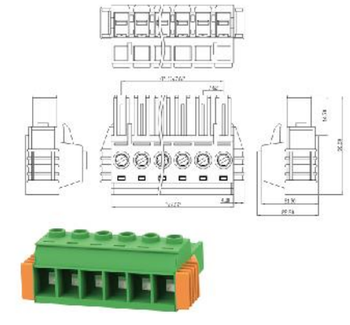


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	-
额定电流 Rated Current [A]	41	41	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-8		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB3EKR-7.62

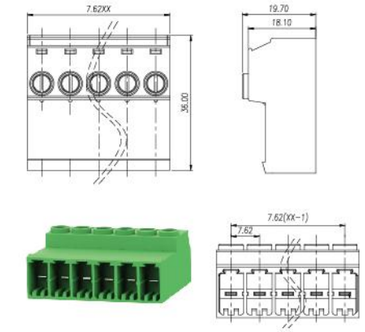

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	-
额定电流 Rated Current [A]	35	35	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-8		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB3EKVM-7.62

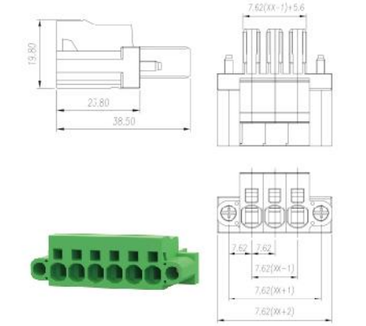


Screw Terminal Block

螺钉式接线端子

其以最经济的方式，利用夹线体升降的原理，在设计上兼顾了结构紧凑及连接牢固两大特点。主要以2P、3P为基数，能根据需要自主拼接组合成任何需要的位数。产品可以连接截面为0.08mm²至16mm²的所有类型的导线，间距从2.54mm至15.0mm可供选择]，有90°、135°、180°三种进线方式。产品设计符合国际标准，如IEC60998和UL1059。我们已获得中国的CQC认证和美国的UL认证。


The spring type terminal block utilizes the principle of lifting and lowering the clamp body in the most economical way, and takes into account the two major characteristics of compact structure an dfirm connection in design. Mainly based on 2P and 3P, the poles can be independently concatenated and combined into any desired number of digits according to needs. The product can connect all types of wires with a cross-section of 0.08mm² to 16mm². The spacing can be selected from 2.54mm to 15.0mm, and there are three entry methods: 90°, 135°, and 180°. The product design complies with international standards such as IEC60998 and UL 1059. It has obtained UL certification in the United States.

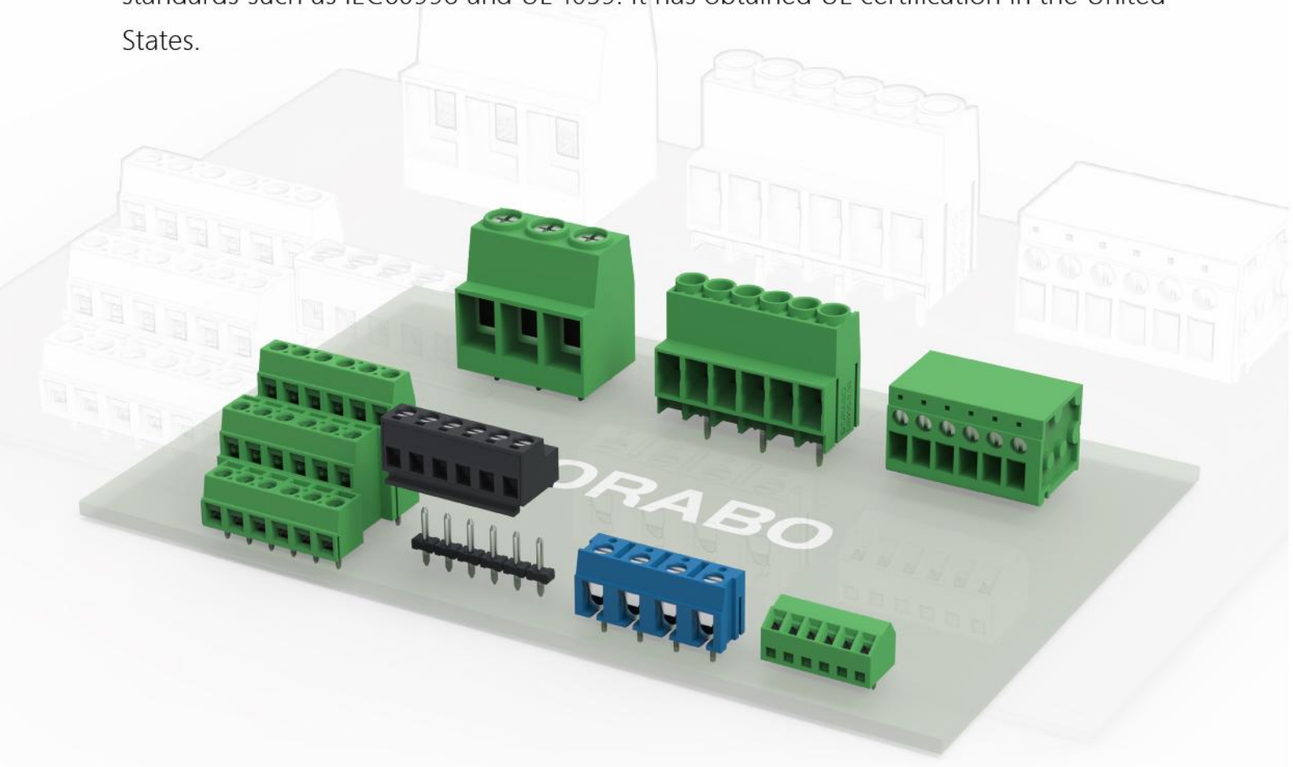

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.6/0.4		

DB303-5.0




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	20-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB302-7.5




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.6/0.4		

DB302-5.0




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	10	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		

DB302V-3.5

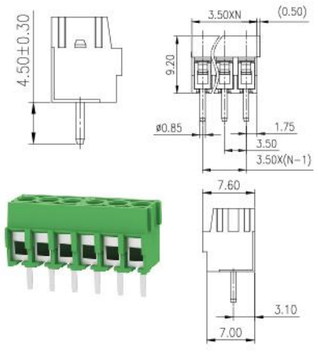


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB302R-3.5

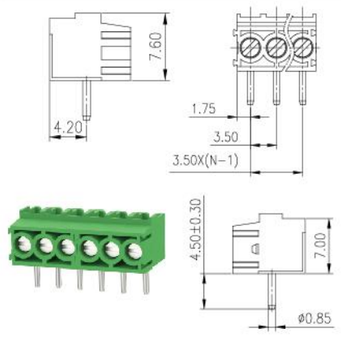

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.6/0.4		


DB301S-5.0

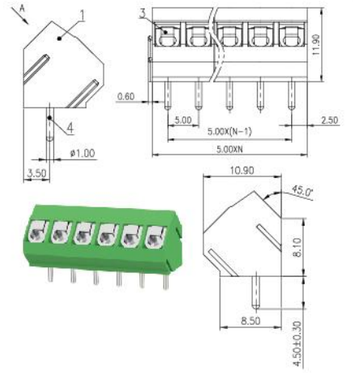

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	250	-	250
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB301V-5.0




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	7	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	3.96		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB301V-3.96

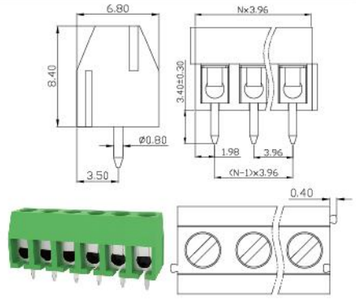


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	7	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB301V-3.81

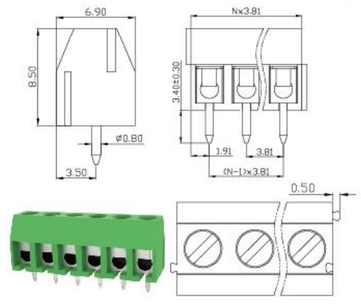


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	7	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	3.96		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB301V-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	250	-	250
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB301R-5.0

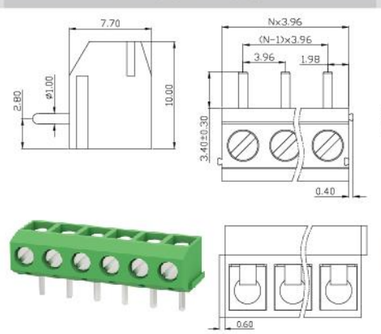

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	7	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	3.96		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		


DB301R-3.96

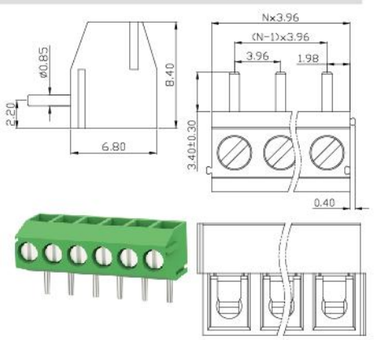

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	7	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		

DB301R-3.81

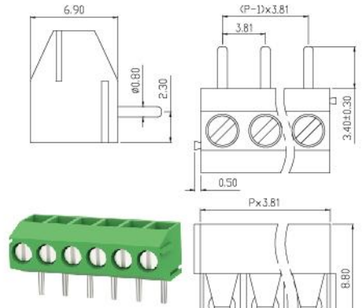


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	7	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		

DB301R-3.5

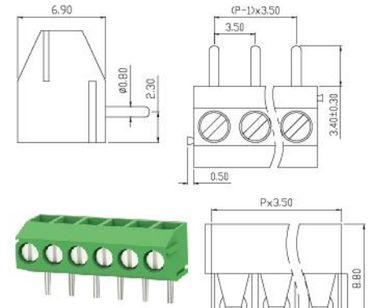


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3.0/0.5		

DB300F-7.5

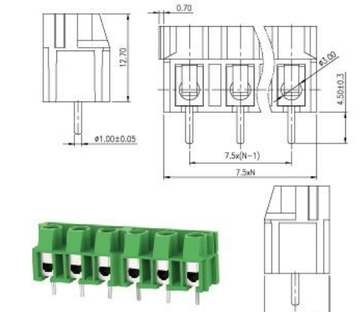


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	130	-	130
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3.0/0.5		

DB300V-7.5

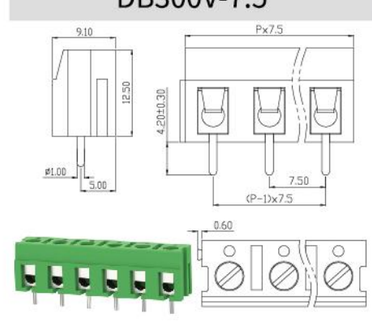


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	10	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB300H-5.0

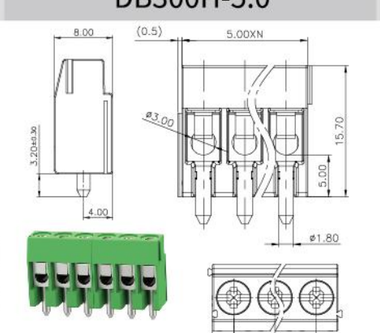

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	250	-	250
额定电流 Rated Current [A]	16	-	16
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.50		


DB300V-5.0

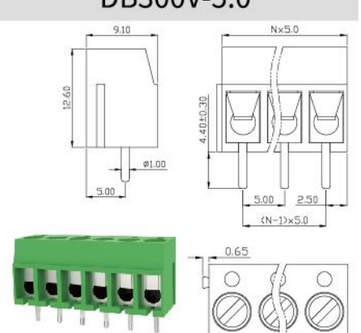

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	7	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		

DB300V-3.81

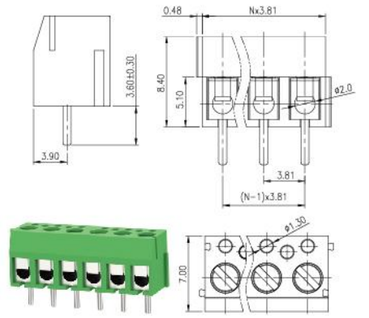


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB300R-5.0

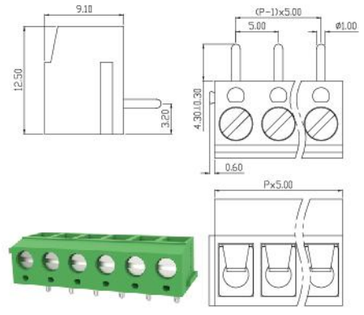


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	130	-	-
额定电流 Rated Current [A]	7	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		

DB300R-3.81

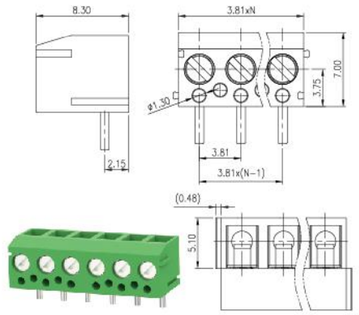


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB167-7.62

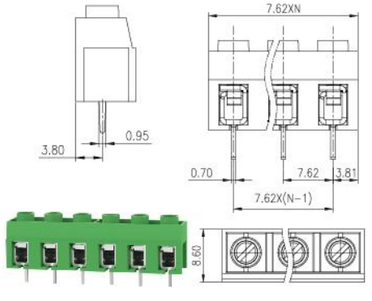


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.35		

DB167V-5.0

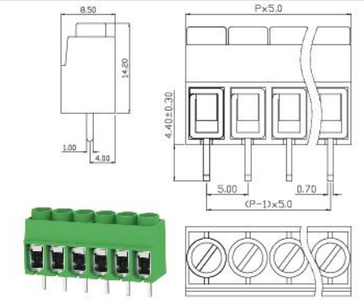

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		


DB167R-5.0

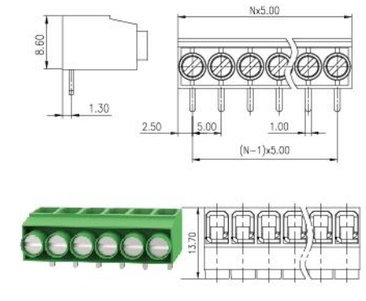

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB166-7.5

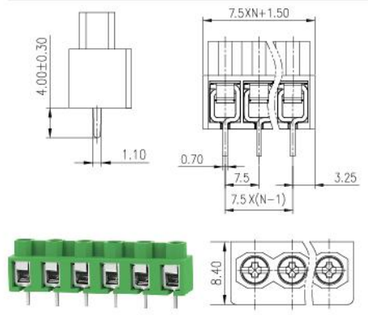


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB166-5.0

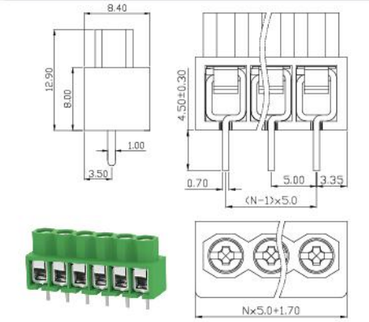


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.25		

DB126-7.5

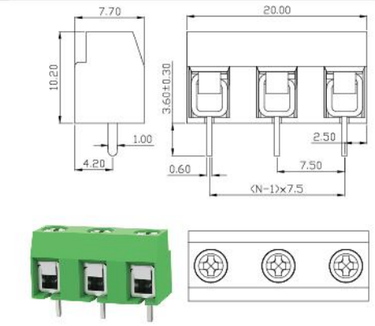


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.25		

DB126-7.5

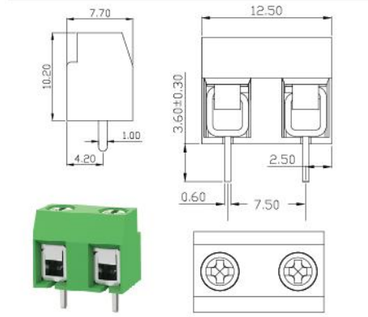


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.25		

DB126V-5.0

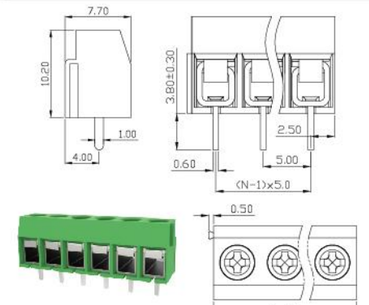

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.25		


DB126R-5.0

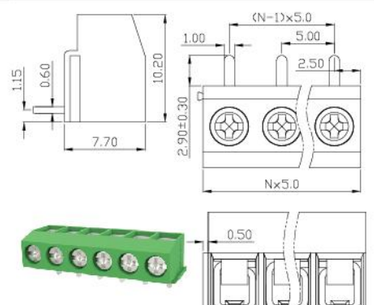

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB125A-3.81




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB125A-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB125H-3.81




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	16	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB125H-3.5

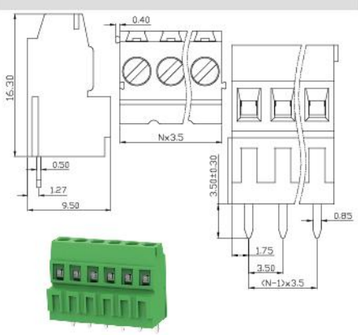


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	16	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB125-5.08

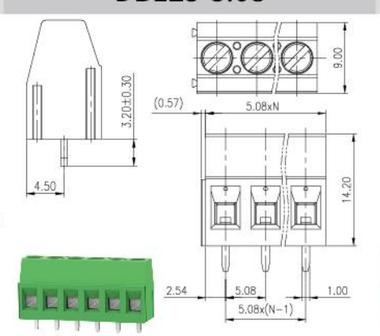

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	16	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		


DB125-5.0

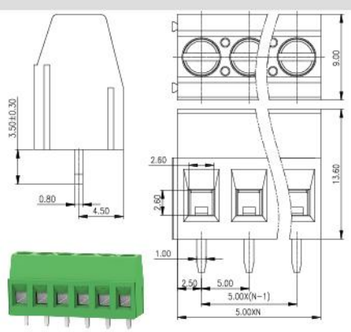

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	150	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	30-14		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		

DB121-3.5

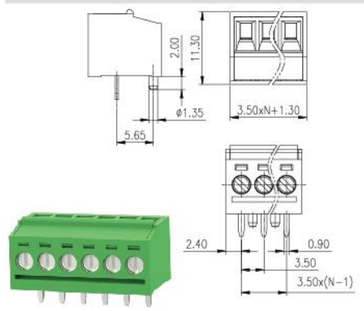


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB125-3.81

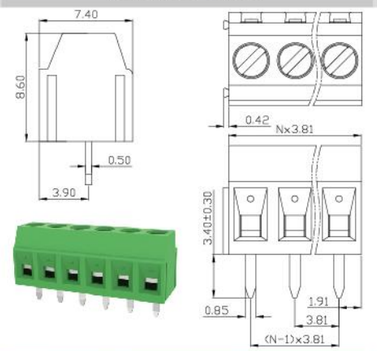


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB125-3.5

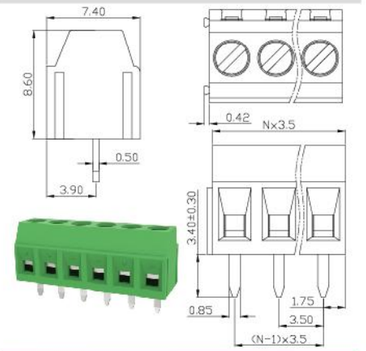


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	7	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-18		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M1.6/0.1		

DB125-2.54

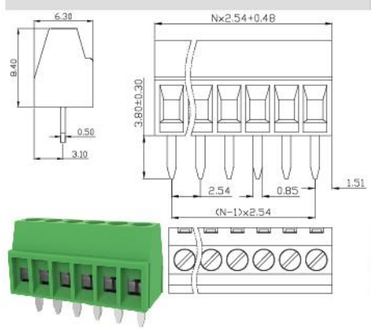


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	200	-	200
额定电流 Rated Current [A]	13.5	-	13.5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	30-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB124-3.81

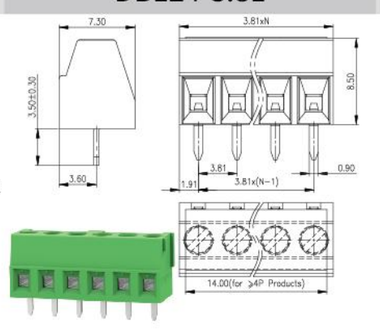

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	200	-	200
额定电流 Rated Current [A]	13.5	-	13.5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	30-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB124-3.5

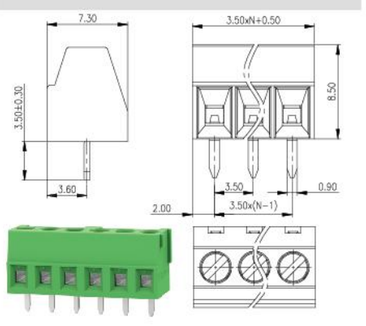

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-10		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3.0/0.5		

DB105V-7.62




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB105V-7.5

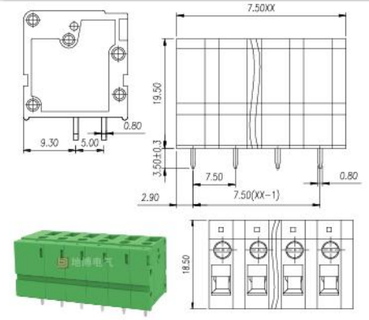

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB105V-5.0

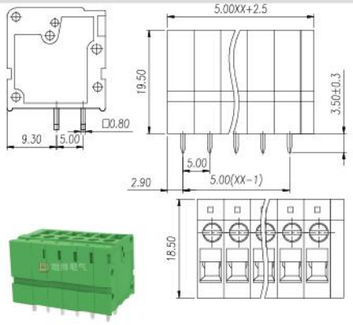


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-10		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3.0/0.5		

DB105R-7.62


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-16		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB105R-7.5

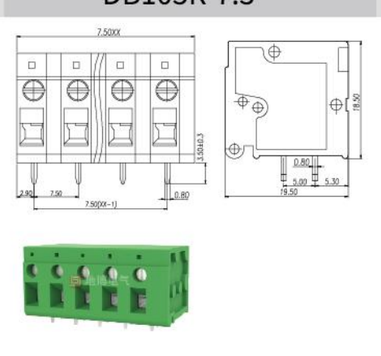

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-10		
间距 Pitch [mm]	6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3.0/0.5		


DB105R-6.35

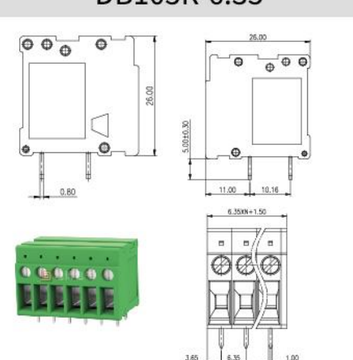

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB105R-5.0

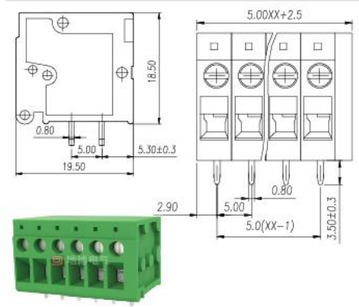


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB104-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB103-5.08

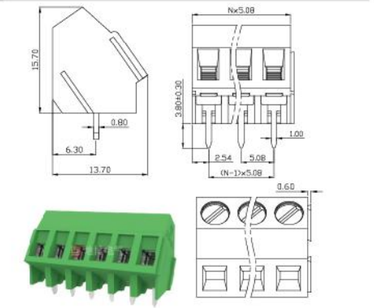


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB103R-5.0

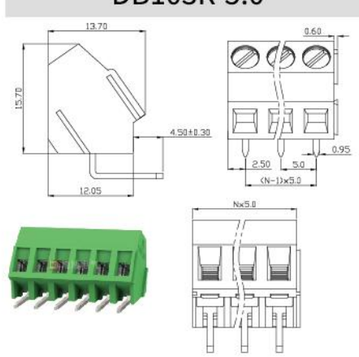


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB103-5.0

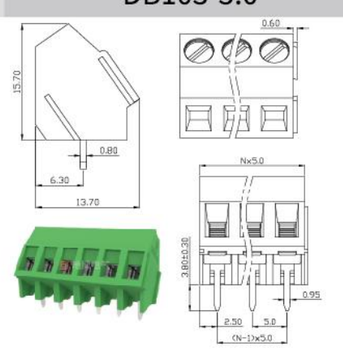

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		


DB102-5.0

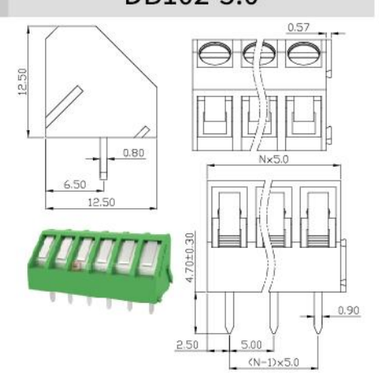

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-10		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB910R-7.62




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-10		
间距 Pitch [mm]	6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB910R-6.35

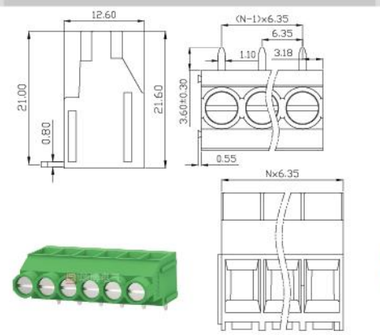


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB910R-5.0




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.52		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB910S-9.52




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB910S-6.35



UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	30
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-10		
间距 Pitch [mm]	9.52		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


DB910-9.52

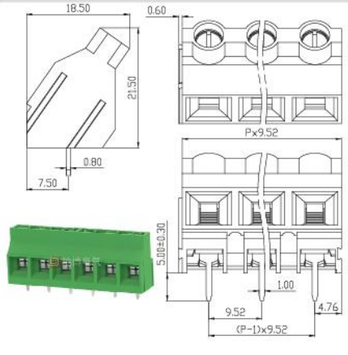

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-10		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB910-7.62




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	50
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-10		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB910-7.5




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB910-6.35




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB910-5.0




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.52		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3.0/0.5		

DB910A-9.52



UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


DB910A-6.35

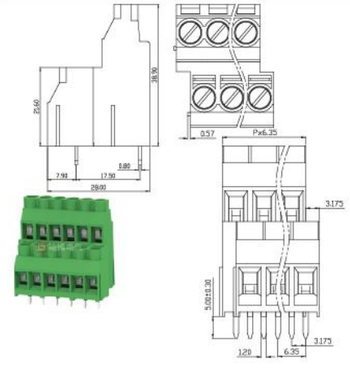

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB130V-7.62




UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	7	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB311R-5.0




UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	20	20	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	30-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.6		

DB910RF-7.5

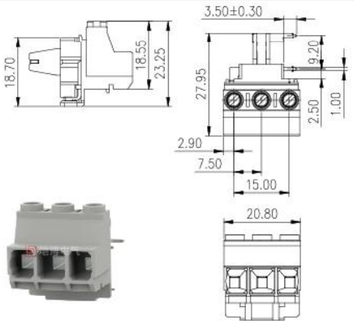


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.52		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB910LF-7.5




UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	-
额定电流 Rated Current [A]	160	160	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-2/0		
间距 Pitch [mm]	17.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M6/5.5		

DB930-9.52

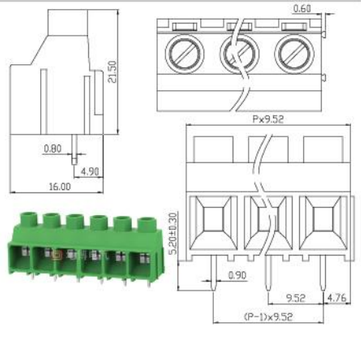

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	20	20	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	30-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.6		

DB930A-9.52

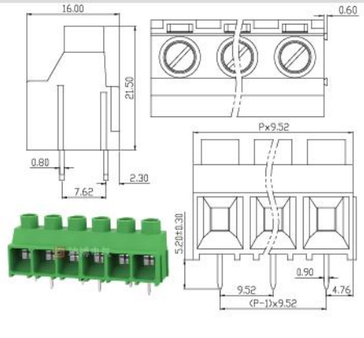


ISO9001 ISO14001 RoHS REACH cULus CE VDE SP CQC

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.52		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB930B-9.52

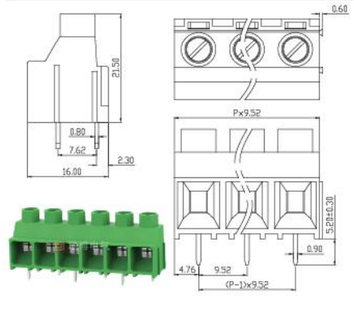


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	100	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-3		
间距 Pitch [mm]	19.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M5.0/2.0		

DB139-19.0

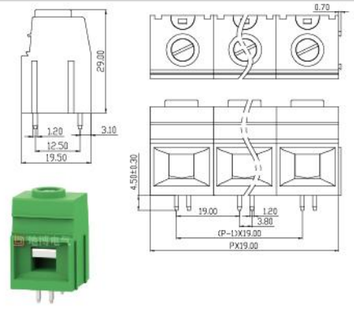


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	-
额定电流 Rated Current [A]	160	160	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-2/0		
间距 Pitch [mm]	17.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M6/5.5		

DB138M-17.5

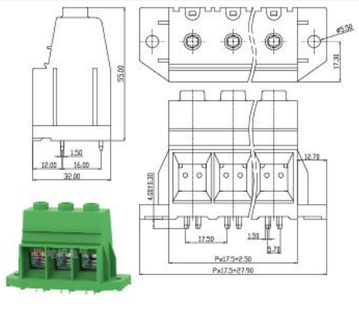


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	115	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	20-2		
间距 Pitch [mm]	15.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M5/2.0		

DB138-17.5




UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	115	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	20-2		
间距 Pitch [mm]	15.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M5/2.0		

DB137M-15.0

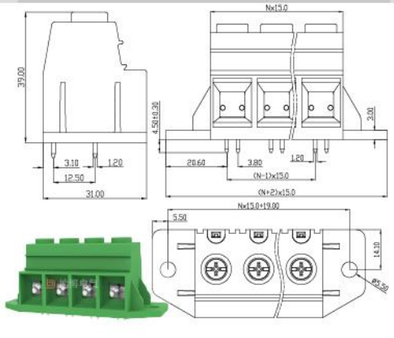

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	115	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	20-2		
间距 Pitch [mm]	15.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M5/2.0		

DB137-15.0

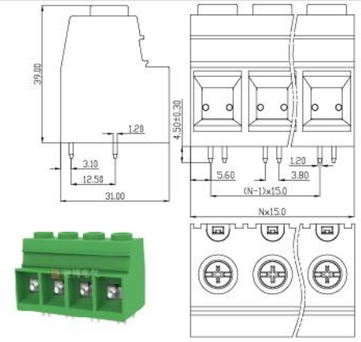


Tel：+86-400-860-0988 | Web：www.terminalblock.net

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	65	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	20-6		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DB136HA-10.16




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	65	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	20-6		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DB136HB-10.16




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	65	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-6		
间距 Pitch [mm]	12.7		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DB136H-12.7




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	65	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-6		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DB136H-10.16




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	65	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-6		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DB136-10.16



UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	52	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	20-6		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


DB135-10.16

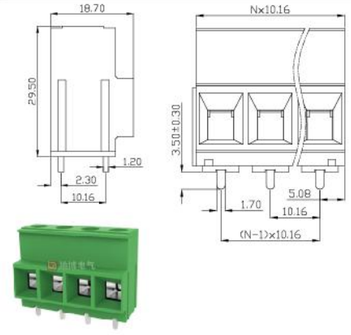

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	65	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-6		
间距 Pitch [mm]	12.7		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4.0/1.2		

DB116B-12.7

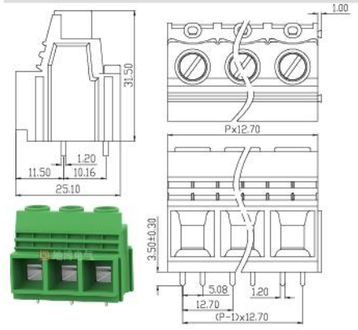


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	65	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-6		
间距 Pitch [mm]	12.7		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4.0/1.2		

DB116A-12.7

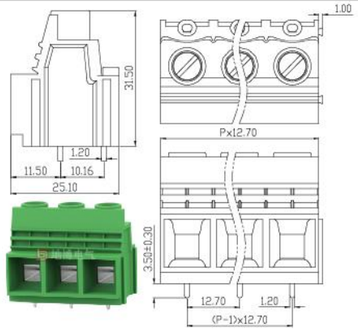


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	65	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-6		
间距 Pitch [mm]	12.7		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4.0/1.2		

DB116B-10.16

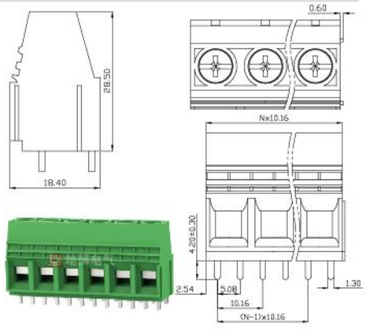


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	65	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	20-6		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DB116A-10.16




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	150	300
额定电流 Rated Current [A]	20	20	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB130-7.62

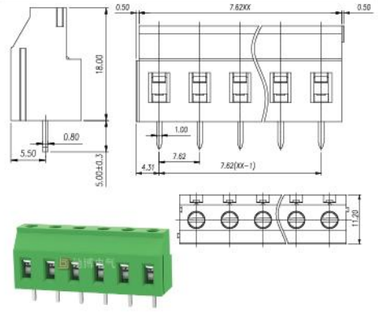

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


DB130H-5.08

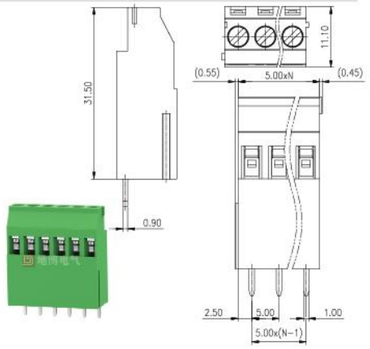

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB130-5.08

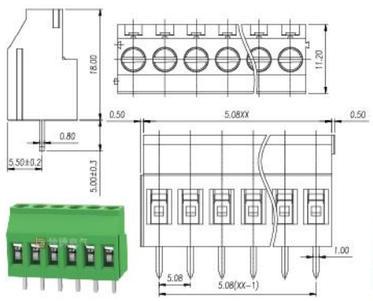


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB130A3-5.08

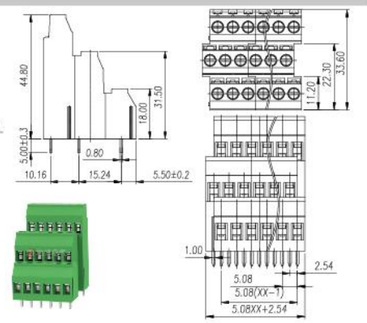


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB130A-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	0.2-2.5		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.6		

DB130LF-5.0




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB129S-5.08

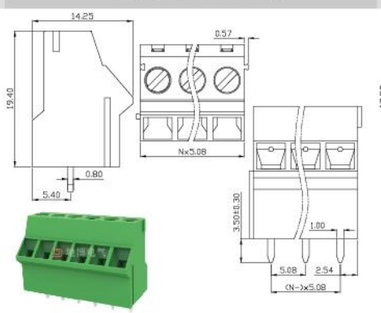


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB129R-7.62

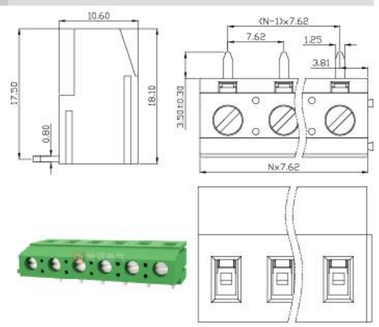


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB130B-5.08

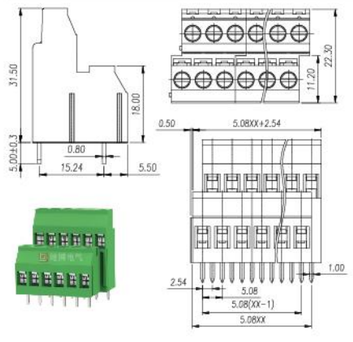


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB130C-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB130RF-5.0

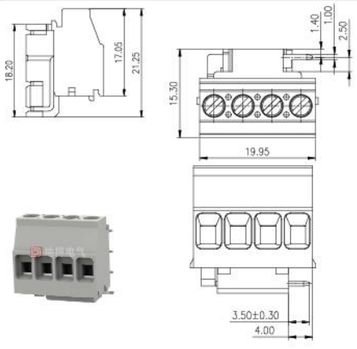


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB129R-7.5

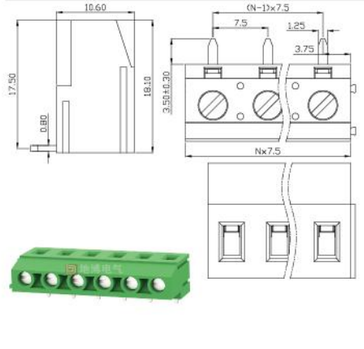


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB129R-5.08

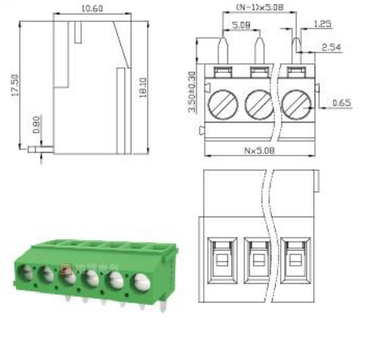

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


DB129R-5.0

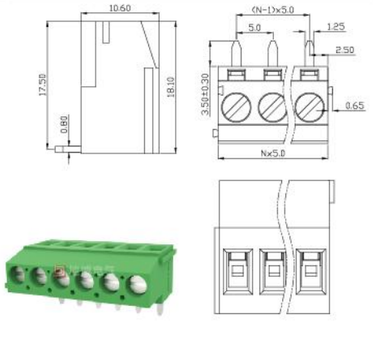

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3.0/0.5		

DB129RG-5.08

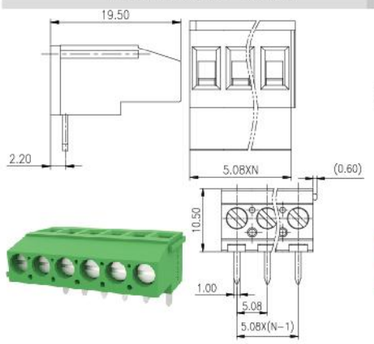


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB129V-7.62

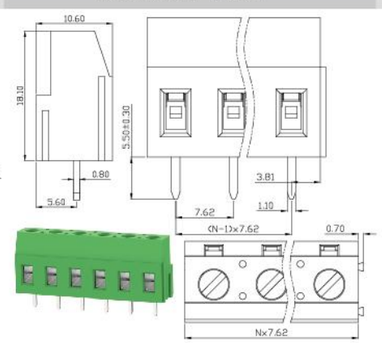


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB129V-7.5

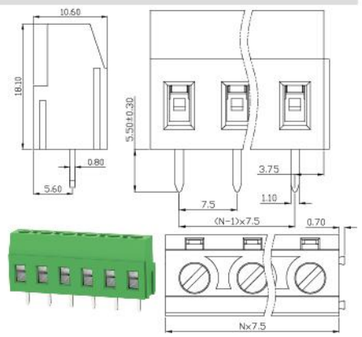


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB129VG-5.08

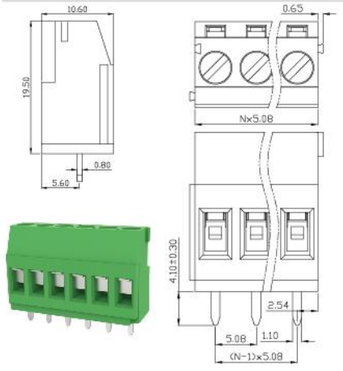


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB129V-5.08

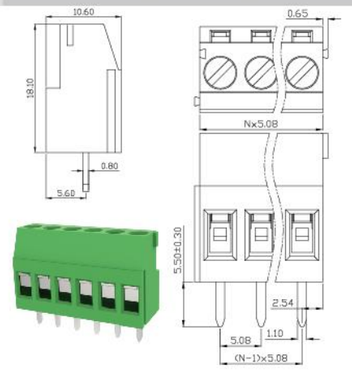

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.6		


DB129V-5.0

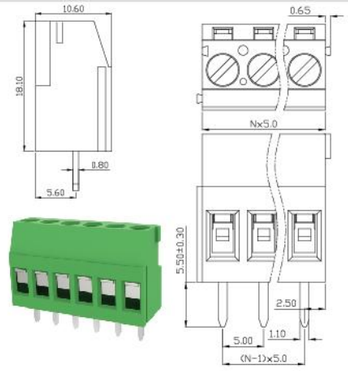

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.35		

DB123-5.08

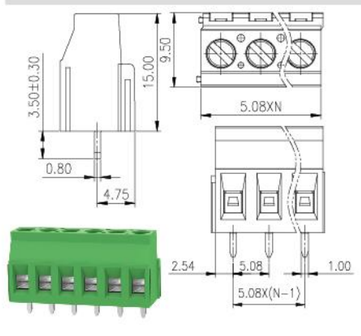


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128V-7.62

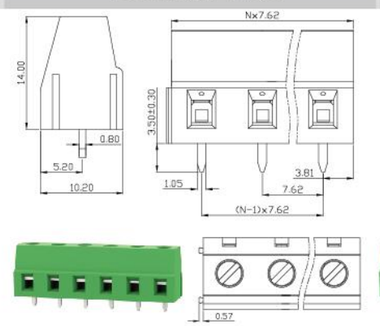


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128V-7.5

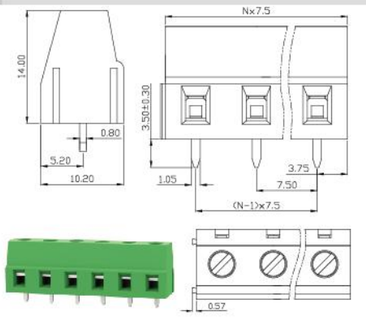


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128V-5.08

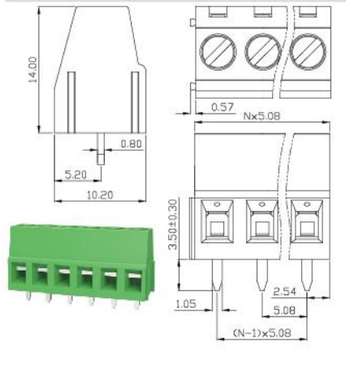


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128V-5.0

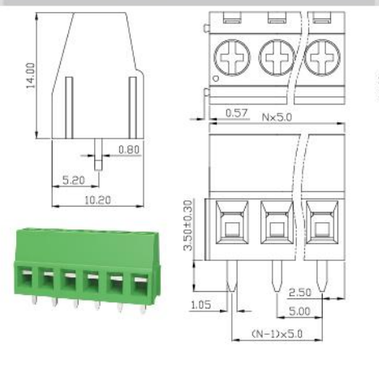

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		


DB128R-7.62

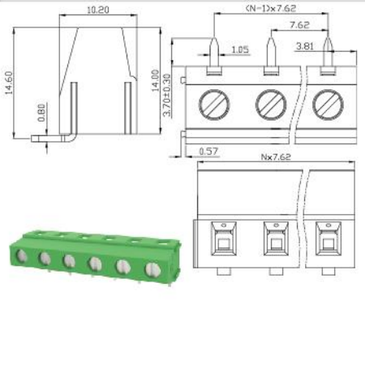

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128R-7.5

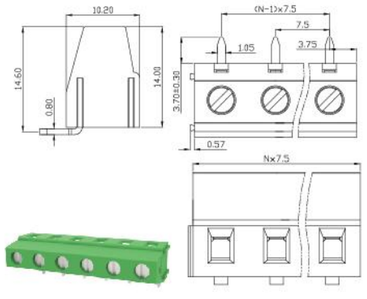


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128R-5.08




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128R-5.0




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128L-5.08




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128L-5.0

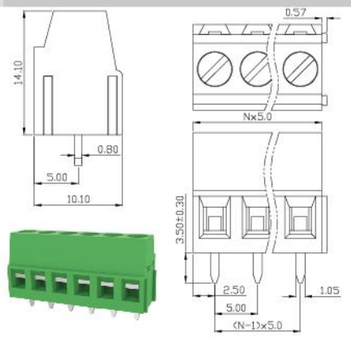

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		


DB128T-5.0

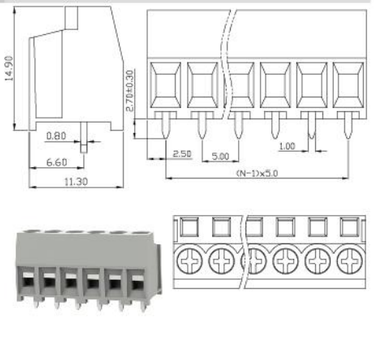

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128HH-5.08

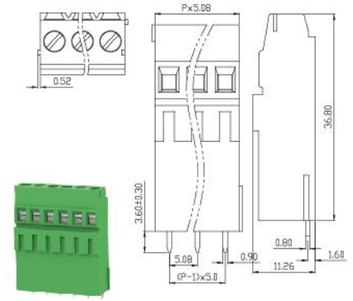


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128HH-5.0

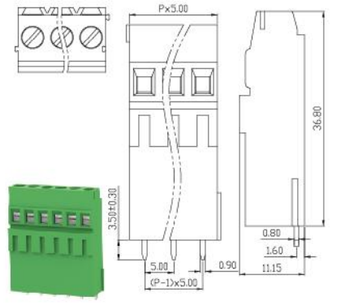


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128H-5.08

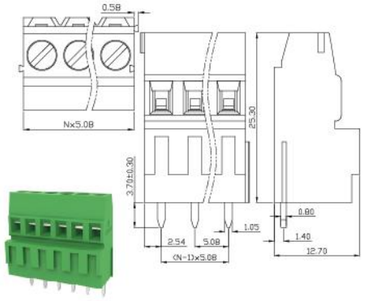


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128H-5.0

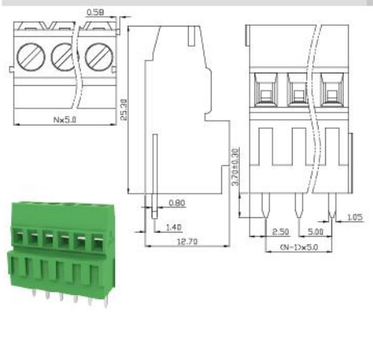


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128A3-5.08

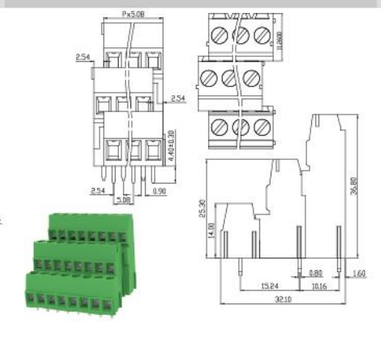

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		


DB128A3-5.0

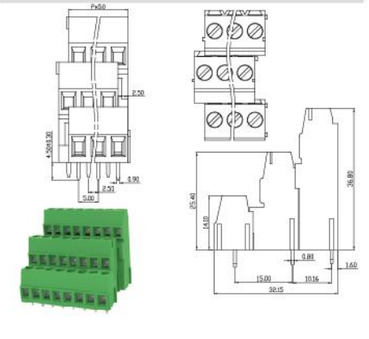

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128AA-5.08

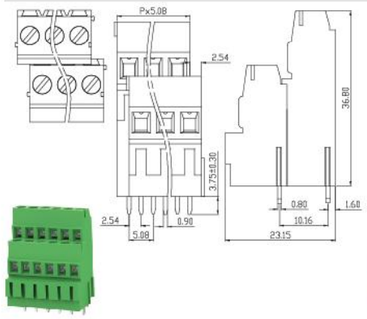


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128AA-5.0

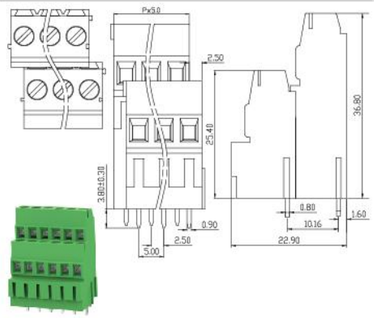


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128A-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128A-5.0




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128BB-5.08

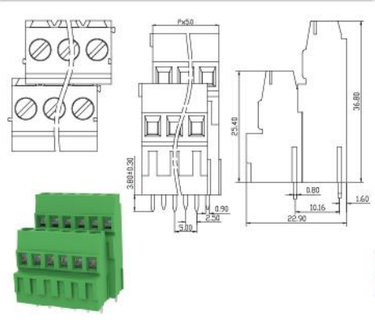

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		


DB128BB-5.0

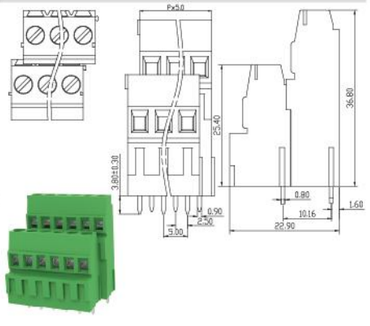

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	20
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128B-5.08

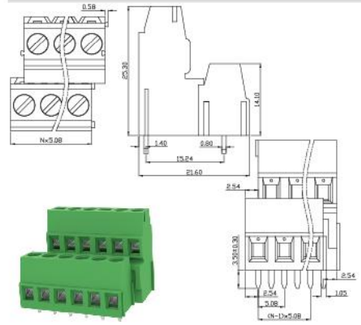


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB128B-5.0

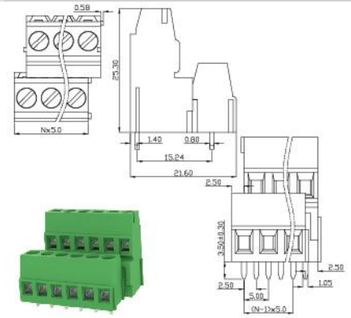


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	12	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.50		

DB127-7.62

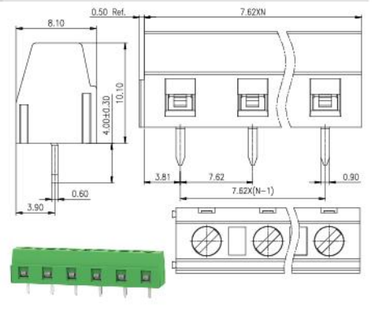


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB127L-5.08




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB127V-5.08

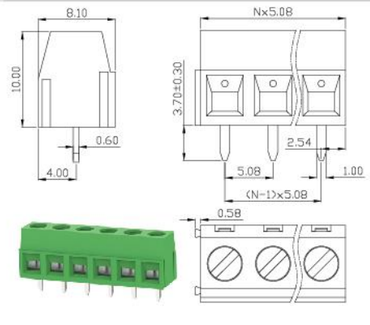

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		


DB127V-5.0

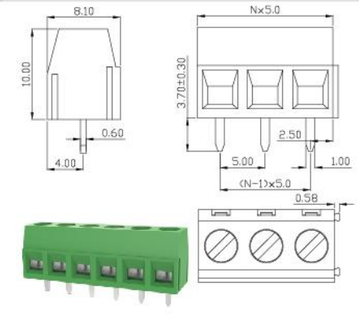

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.4		

DB127HH-5.0

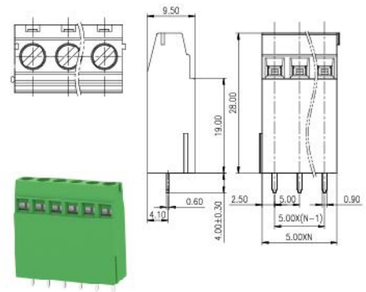


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	12-10		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.35		

DB127H-5.08

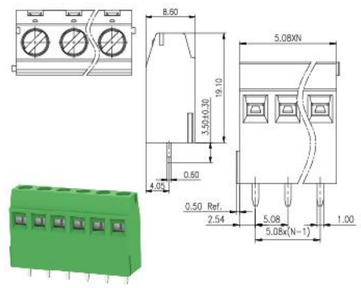


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB127R-5.08

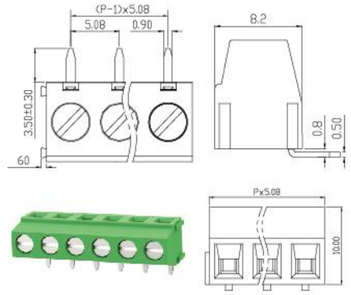


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB127R-5.0

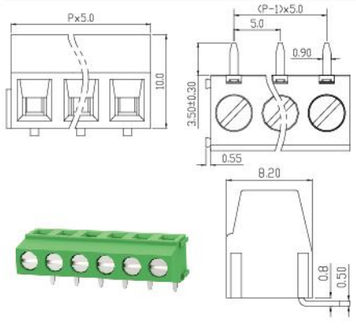


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M.3/0.5		

DB127S-5.08

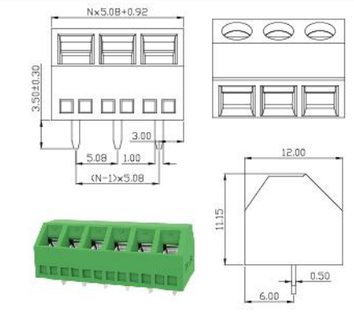

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		


DB127S-5.0

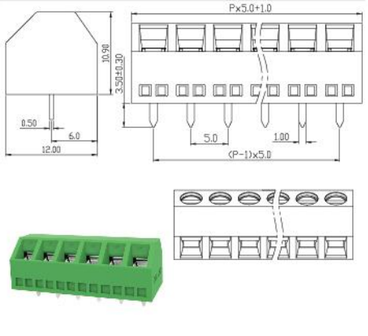

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB127S-3.81




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB127S-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB127A-5.08

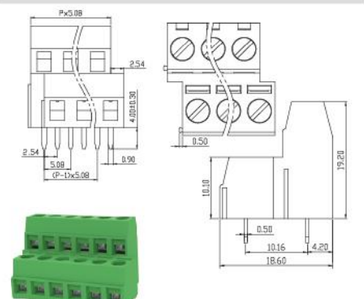


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	30-14		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		

DB127A3-5.08

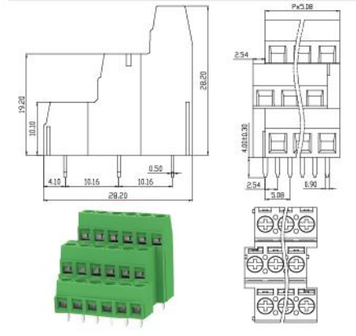


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

DB127A-5.0



UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	30-14		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		


DB121-3.5

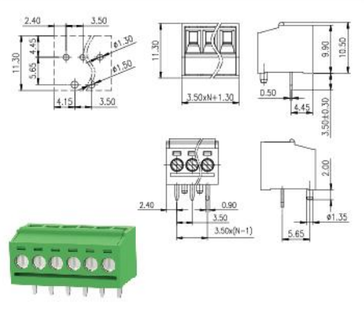

螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB125B-3.81




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB125B-3.5




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB125A3-3.81

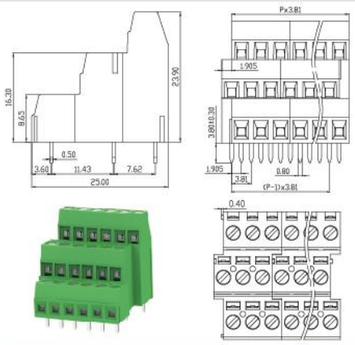


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB129VG-5.0

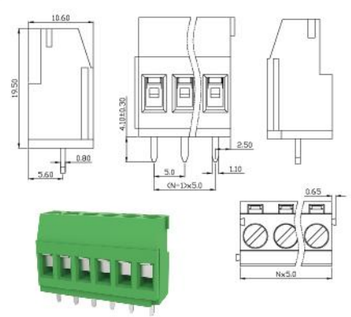


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DB130V-5.0

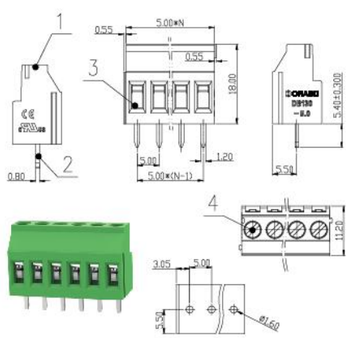

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


DB130V-5.08



螺钉式接线端子 Screw Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	30-14		
间距 Pitch [mm]	6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		

DB930A-6.35

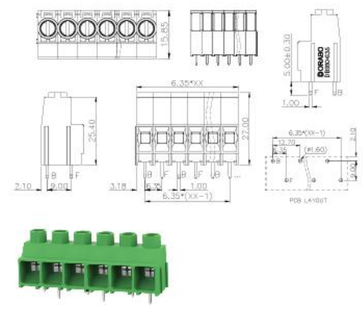

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	7	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

DB311V-5.0

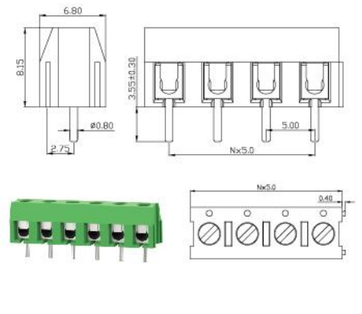


Barrier Terminal Block

栅栏式接线端子

栅栏式端子台的设计，提供了6.35~13mm多种规格脚距选择。各规格均可搭配各种端子，对应电压150~600V，电流10~40A。产品提供双面隔板以及三面隔板设计，方便不同的线路接线保护与导引。产品设计符合IEC60998国际标准，如UL1059。我们已获得中国的CQC认证和美国的UL认证。


The design of the fence type terminal block provides multiple specifications of foot pitch options ranging from 6.35 to 13mm. Various specifications can be paired with various terminals, corresponding to a voltage of 150-600V, the current is 10-40A. The product provides double-sided and three sided partition designs for convenient protection and guidance of different circuit wiring. The product design complies with IEC60998 International standards such as UL1059. We have obtained CQC certification in China and UL certification in the United States.

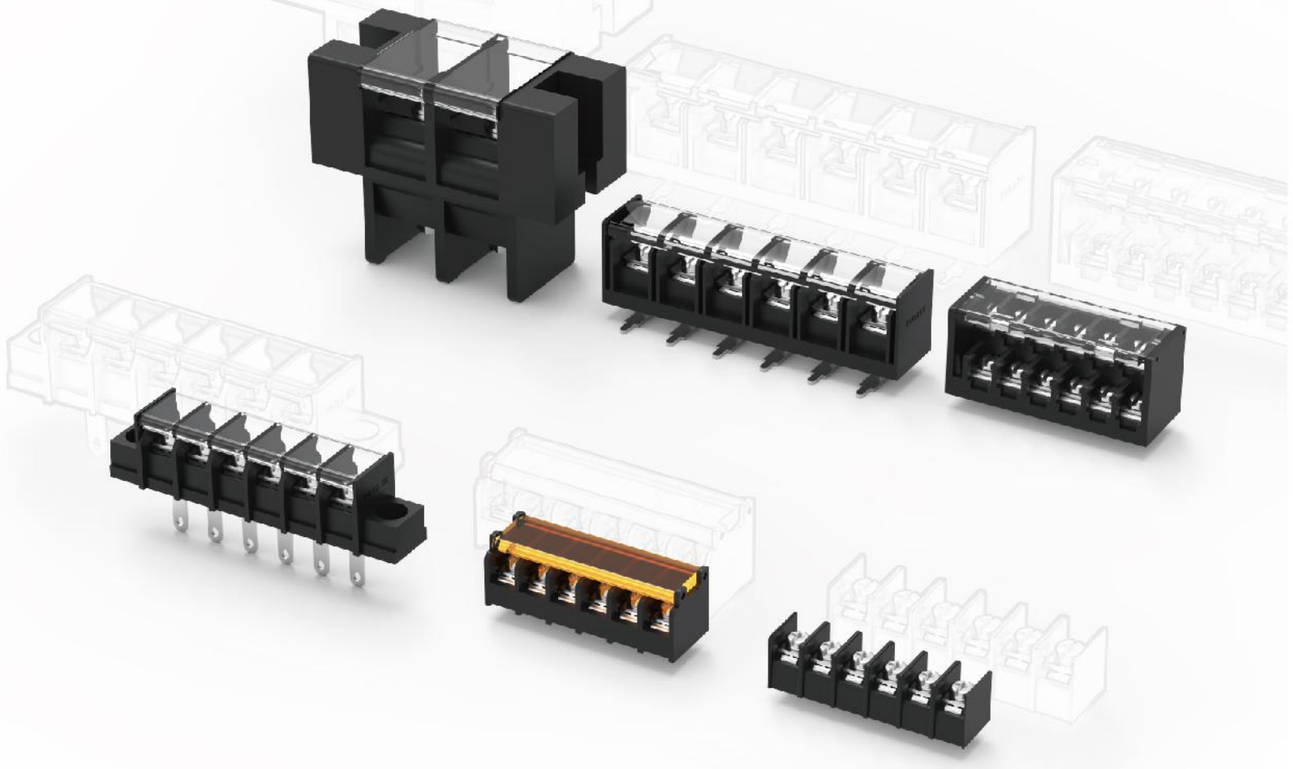

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	30	30	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	11.11		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT50R-11.11

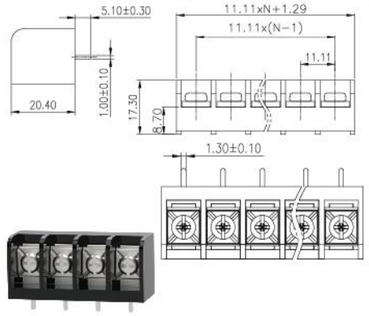


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	150	300
额定电流 Rated Current [A]	30	30	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	11.11		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT50-11.11

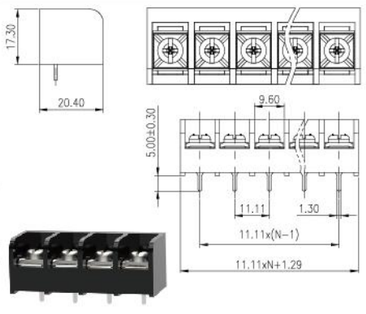


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT50GR-9.5

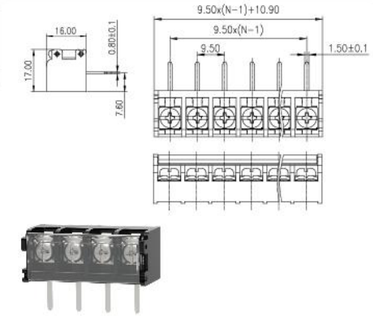


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT50G-9.5

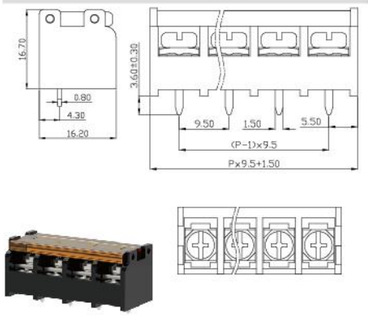


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	8.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT50G-8.5

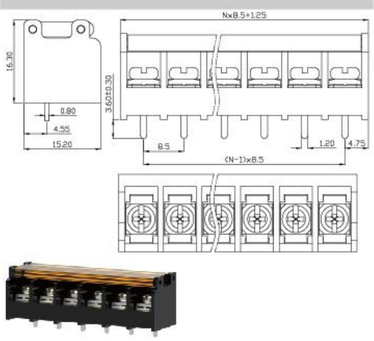

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


DBT50G-8.25

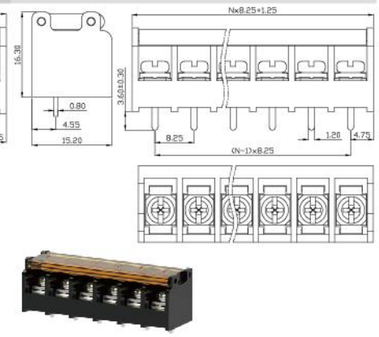

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT50G-7.62

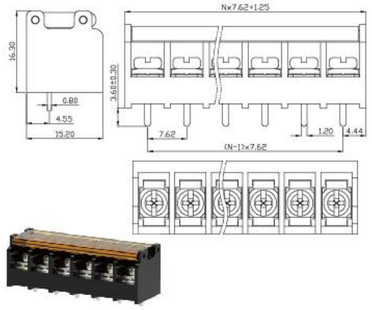


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-16		
间距 Pitch [mm]	6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT50G-6.35

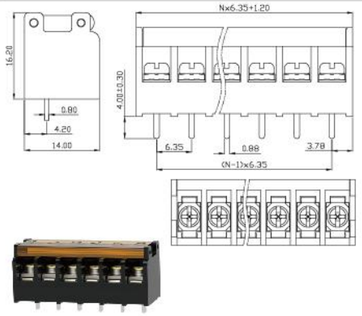


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT50P-9.5

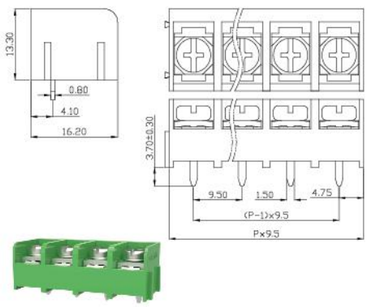


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	150	300
额定电流 Rated Current [A]	20	20	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT50R-9.5

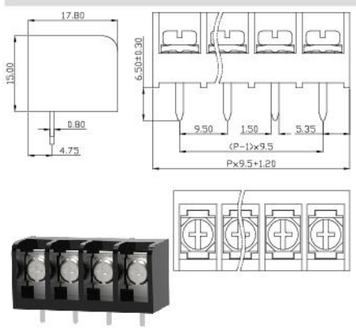


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	30	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT50B-9.5



UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


DBT50-9.5

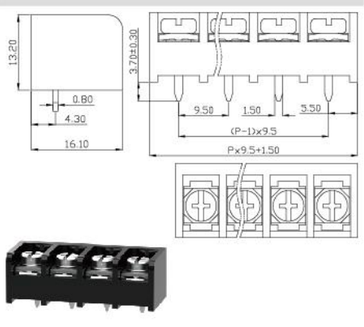

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M./0.8		

DBT50-8.5

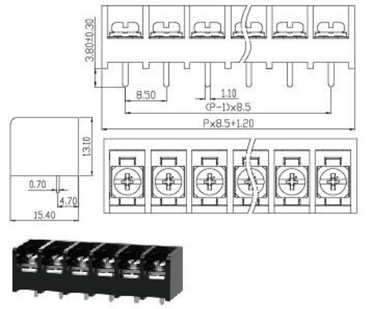


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

DBT50R-8.25

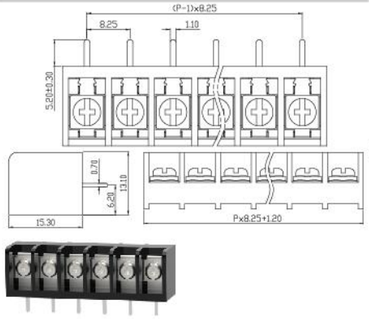


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT50-8.25

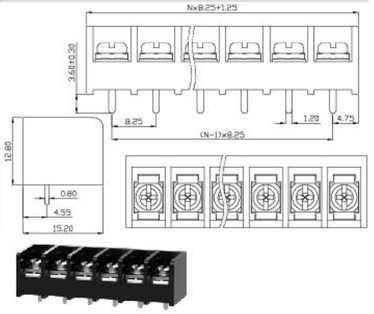


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT50-7.62




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-16		
间距 Pitch [mm]	6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT50-6.35

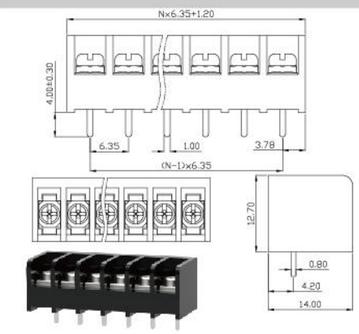

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		


DBT50R-6.35

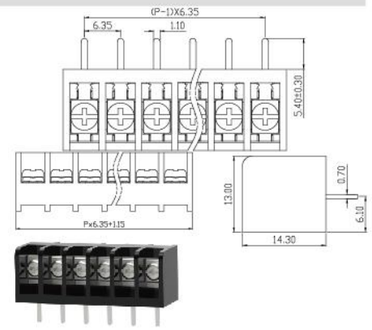

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-16		
间距 Pitch [mm]	6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT50P-6.35




UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	65	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	14-6		
间距 Pitch [mm]	16.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M6/3.0		

DBT40CC-16.0

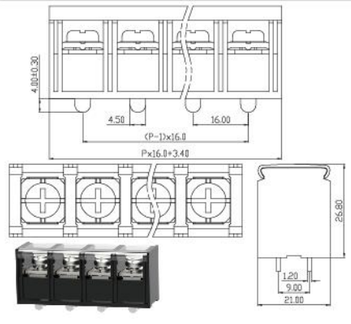


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	40	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	13.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT40RM-13.0

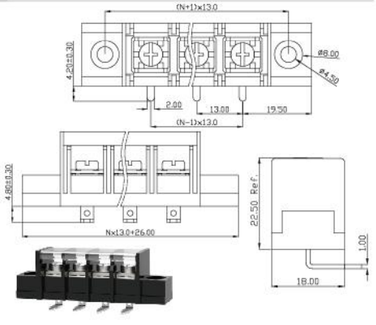


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-0		
间距 Pitch [mm]	13.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT40HM-13.0

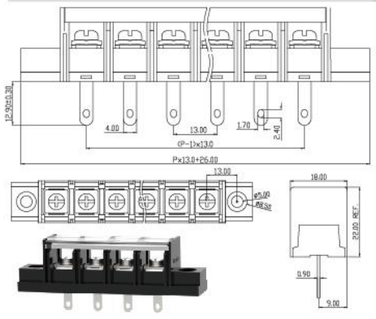


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-0		
间距 Pitch [mm]	13.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT40SM-13.0

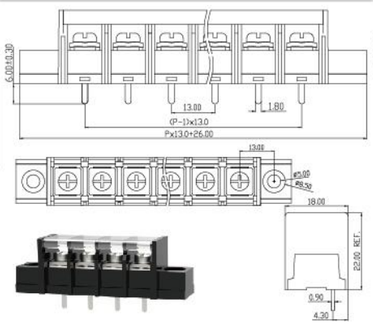

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	40	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	13.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


DBT40CM-13.0

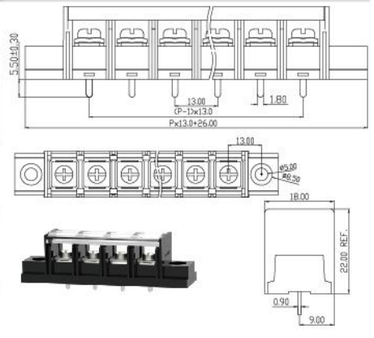

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	40	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	13.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT40R-13.0

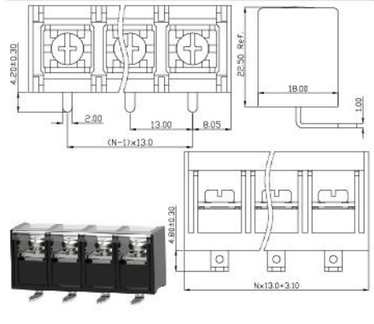


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	13.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/1.4		

DBT40H-13.0

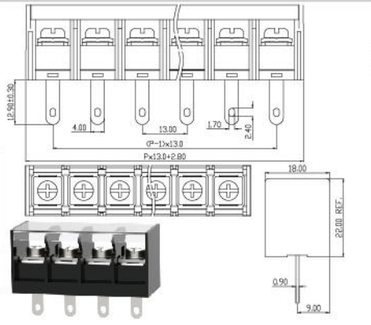


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	13.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT40S-13.0

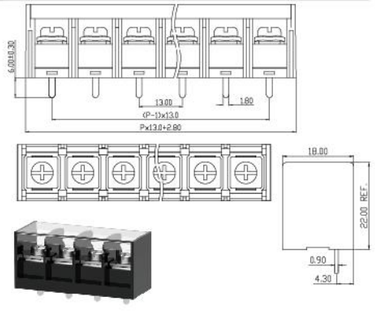


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT40C-13.0

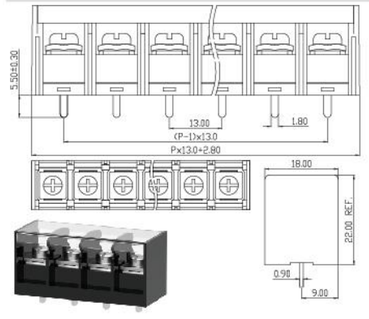


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-12		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT40RM-11.0

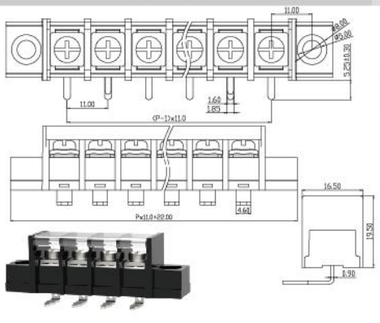


DBT40HM-11.0

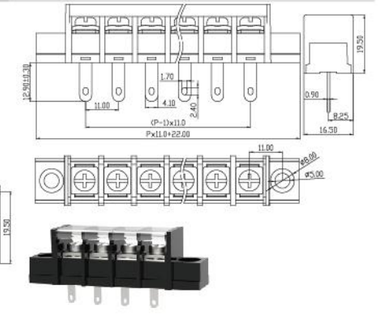

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT40SM-11.0




UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT40CM-11.0

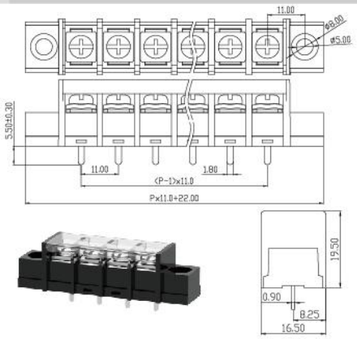


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT40R-11.0

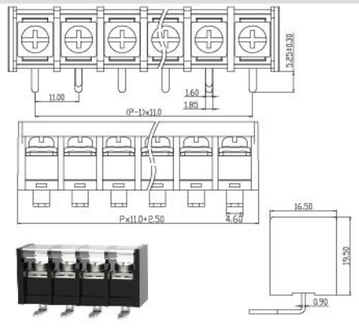


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT40H-11.0

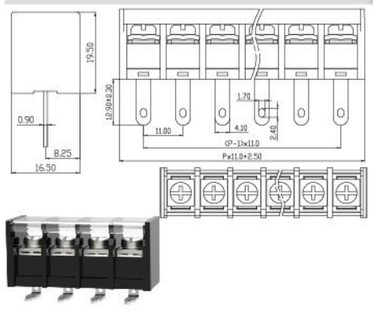


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT40S-11.0

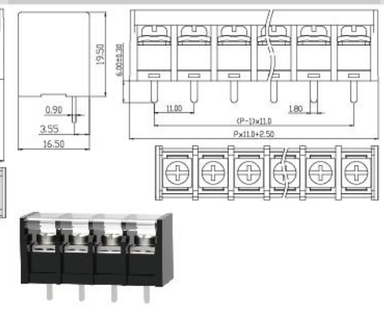

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT40C-11.0

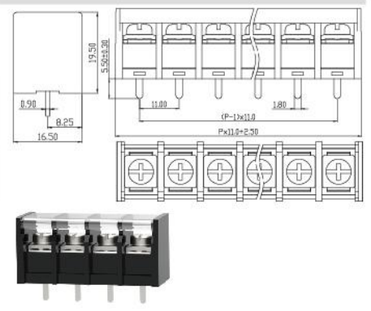


ISO9001 ISO14001 RoHS REACH cULus CE DVE SIRIM CEC

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT40RM-10.0

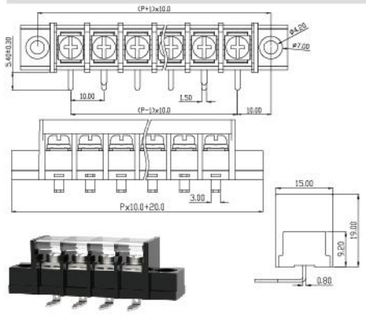


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT40HM-10.0

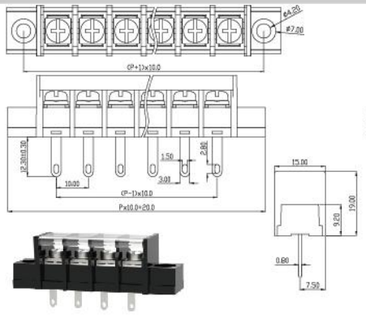


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT40SM-10.0

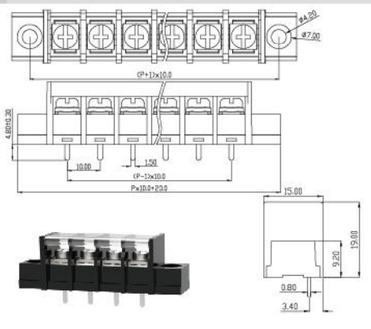


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT40CM-10.0

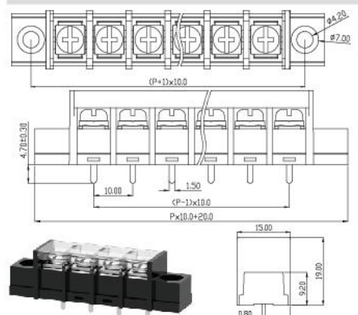


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT40R-10.0

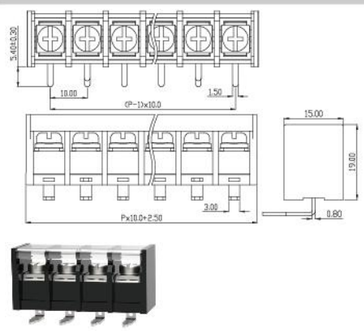

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT40H-10.0

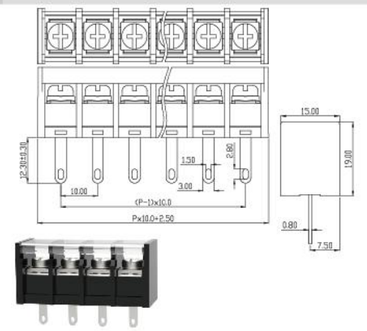


Tel: +86-400-860-0988 | Web: www.terminalblock.net

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT40S-10.0

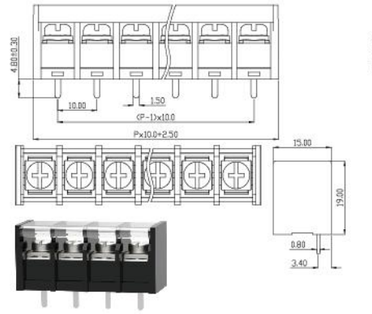


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT40C-10.0

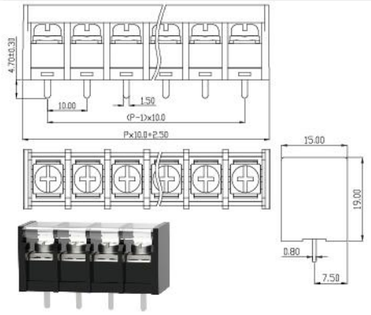


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	230	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT40RM-9.5

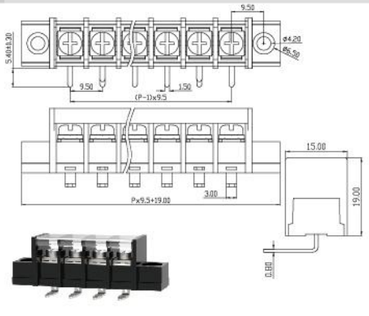


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT40HM-9.5

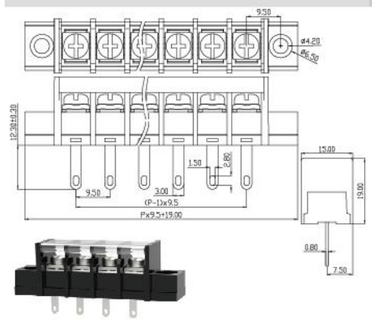


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT40SM-9.5

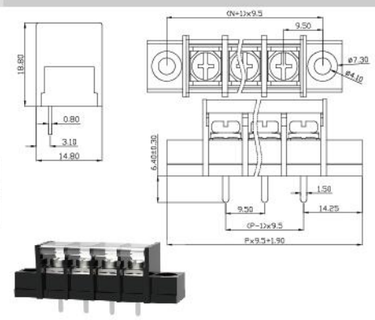

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


DBT40CM-9.5

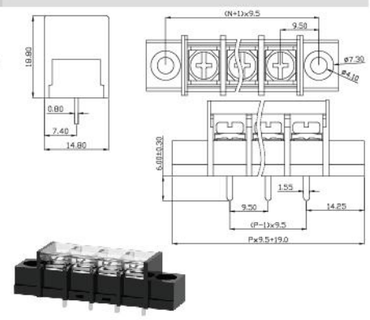

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT40R-9.5

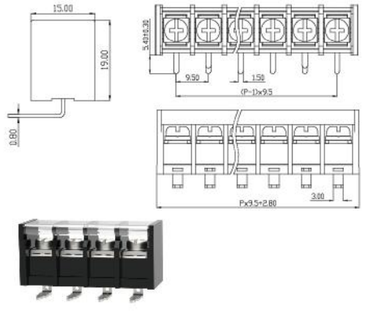


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT40H-9.5

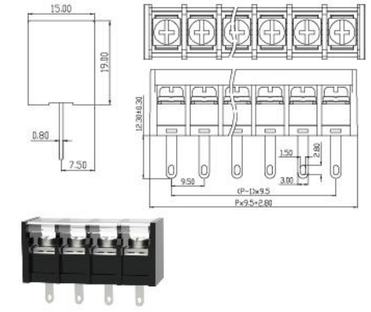


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT40S-9.5

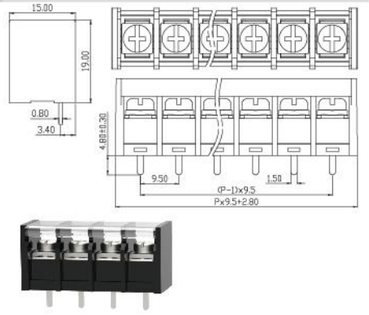


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

DBT40C-9.5

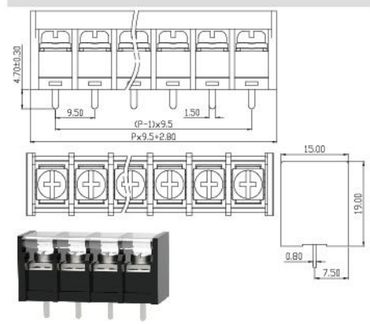


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

DBT40RM-8.25

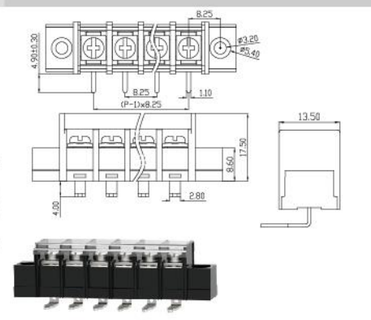

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		


DBT40HM-8.25

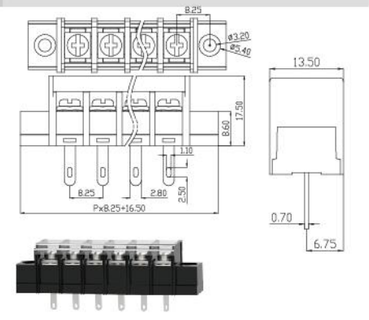

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

DBT40SM-8.25

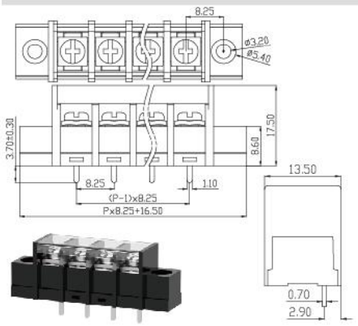


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

DBT40CM-8.25

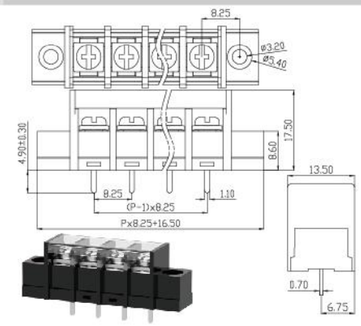


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

DBT40R-8.25

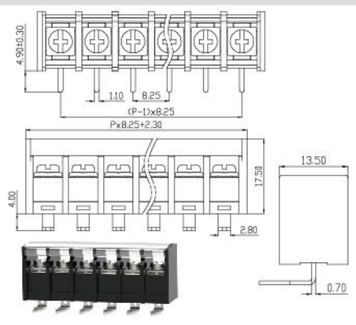


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

DBT40H-8.25

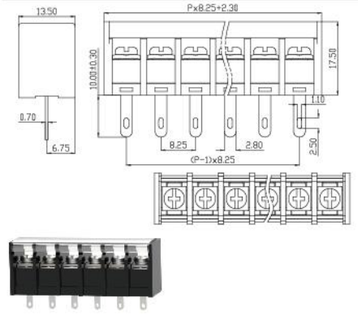


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

DBT40S-8.25

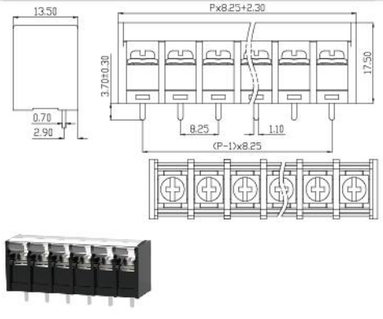

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		


DBT40C-8.25

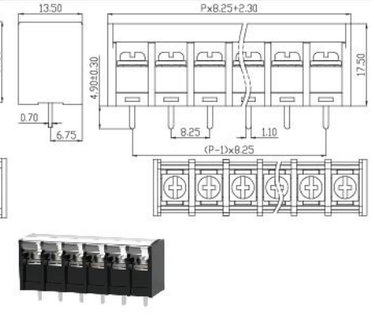

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

DBT40RM-7.62

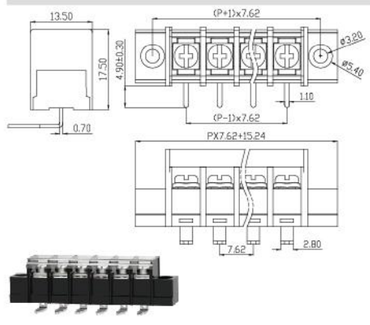


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

DBT40HM-7.62

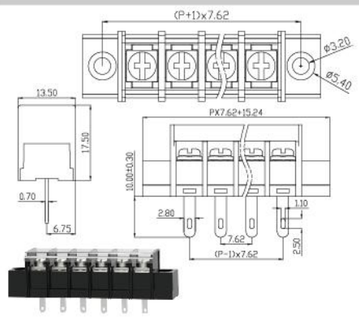


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

DBT40SM-7.62

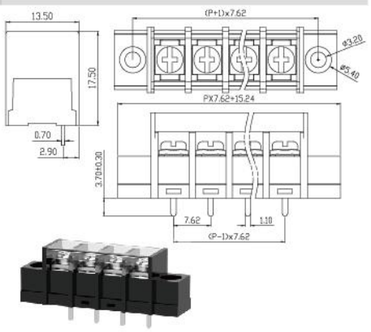


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT40CM-7.62

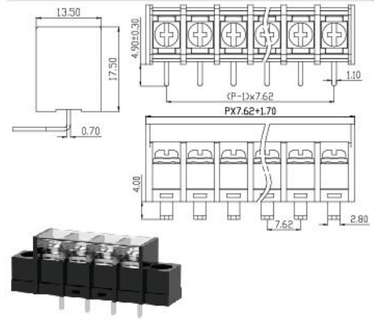


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

DBT40R-7.62

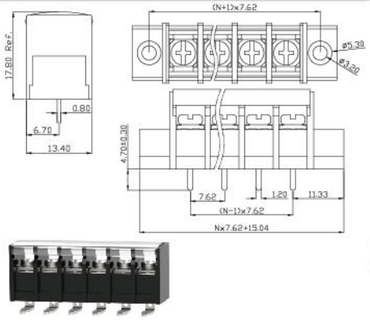

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		


DBT40H-7.62

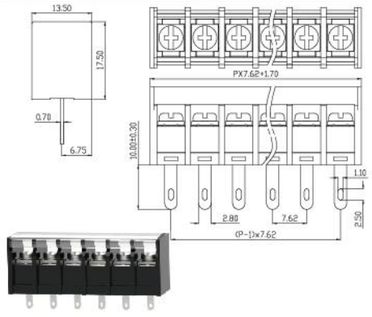

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

DBT40S-7.62

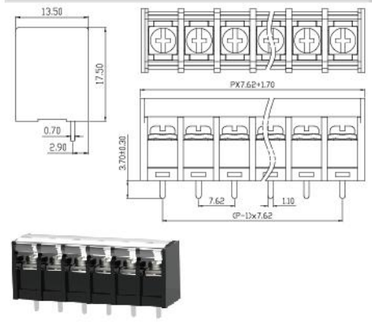


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT40C-7.62

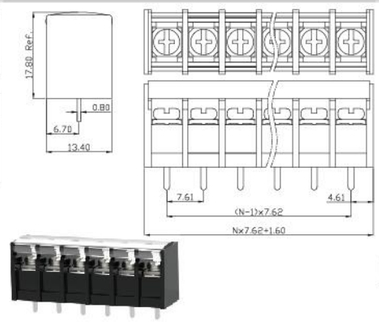


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	30	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT30RM-11.0

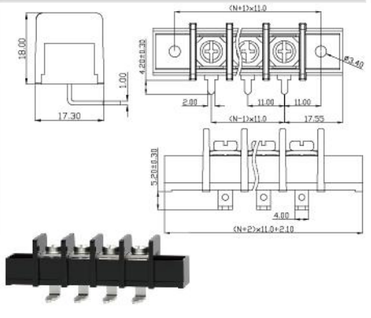


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	30	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT30HM-11.0

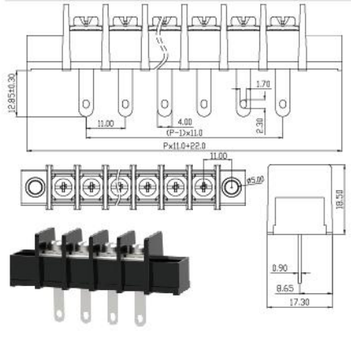


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	30	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT30SM-11.0

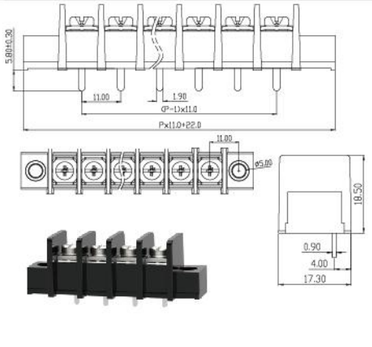

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	30	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


DBT30CM-11.0

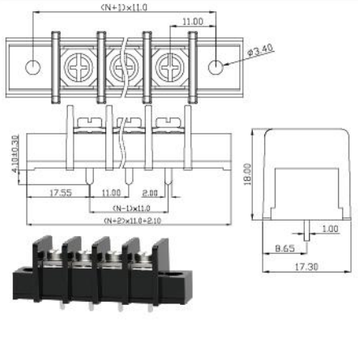

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	30	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT30R-11.0

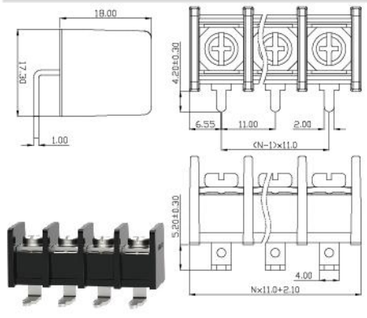


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT30H-11.0

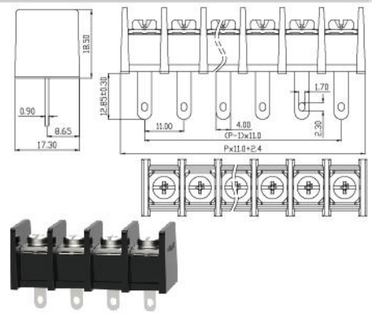


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	5	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT30S-11.0

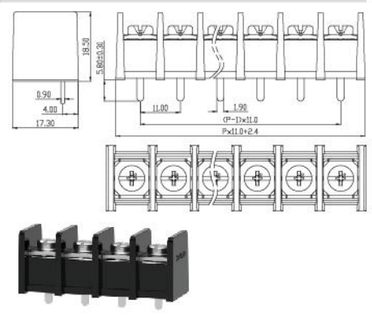


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT30C-11.0

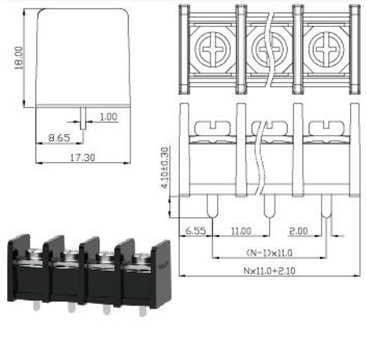


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	30	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT30RM-10.0

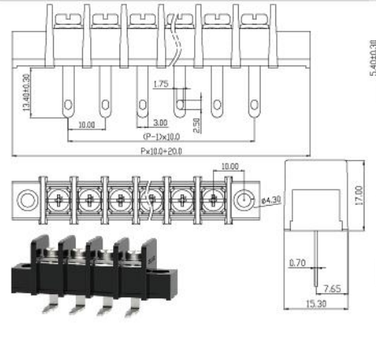

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		


DBT30HM-10.0

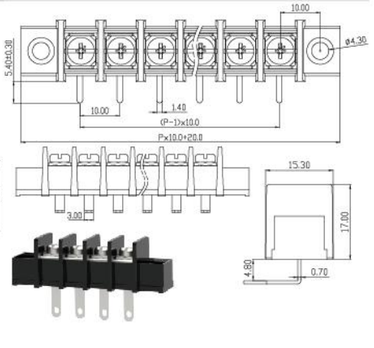

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT30SM-10.0

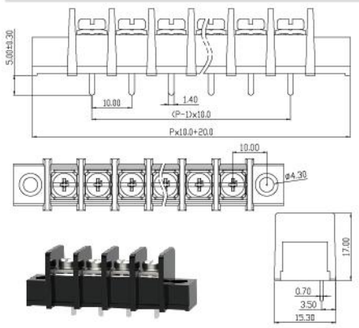


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT30CM-10.0

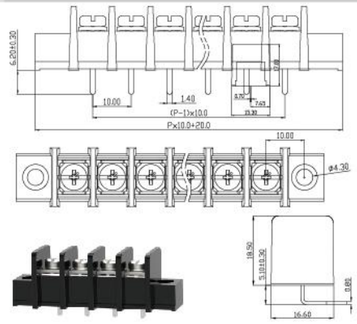


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT30R-10.0




UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT30H-10.0

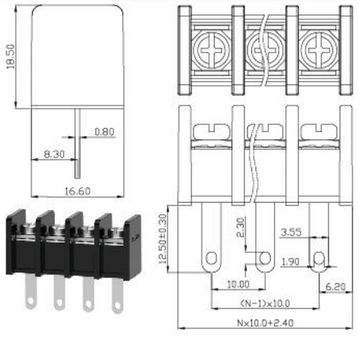


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT30S-10.0

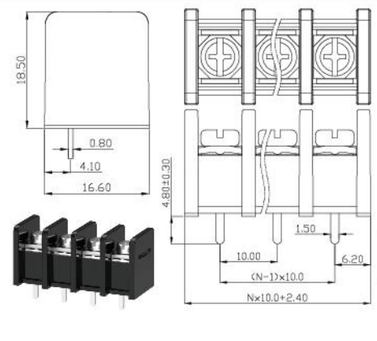

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


DBT30C-10.0

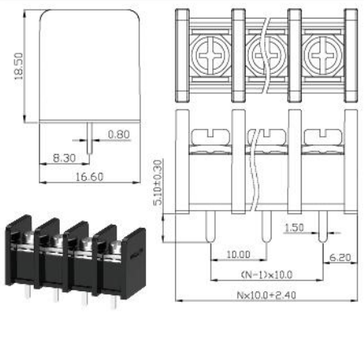

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT30RM-9.5

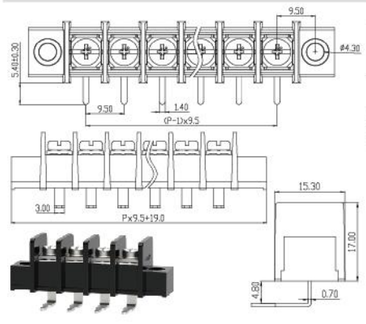


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT30HM-9.5

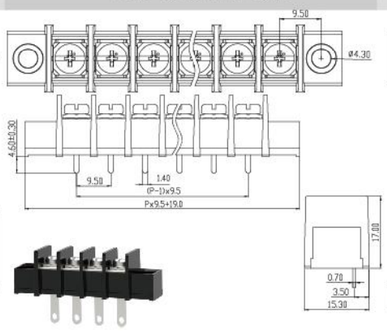


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

DBT30SM-9.5

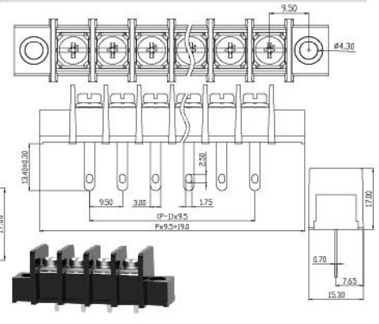


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT30CM-9.5

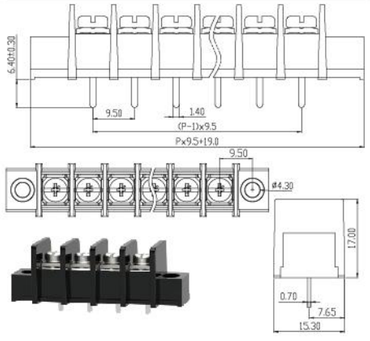


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT30R-9.5

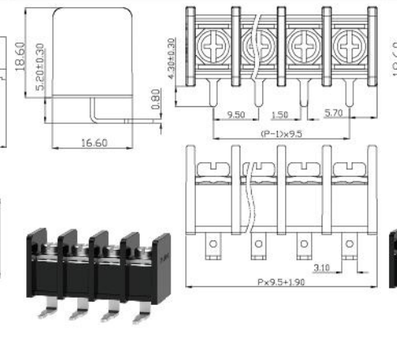

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


DBT30H-9.5

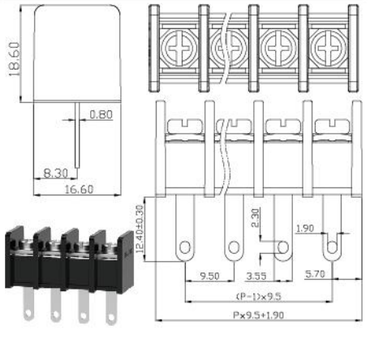

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT30S-9.5

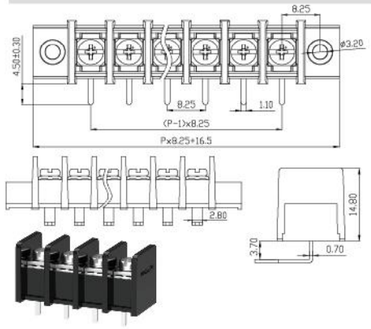


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT30C-9.5

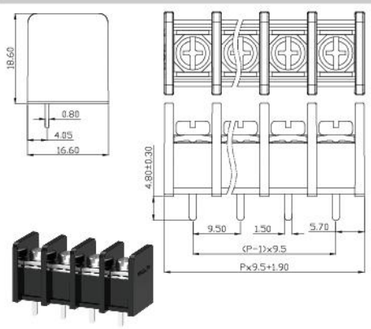


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

DBT30RM-8.25

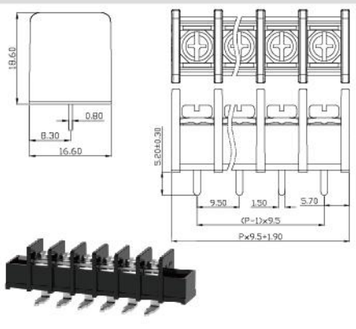


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

DBT30HM-8.25

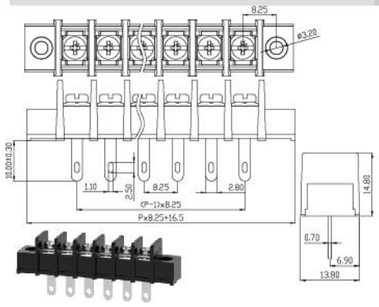


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

DBT30SM-8.25

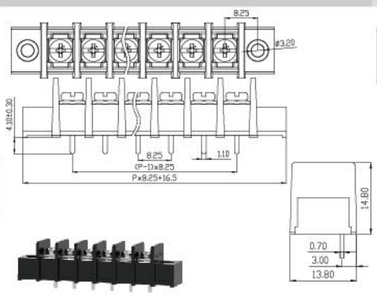

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		


DBT30CM-8.25

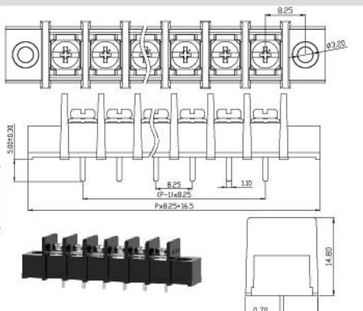

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT30R-8.25

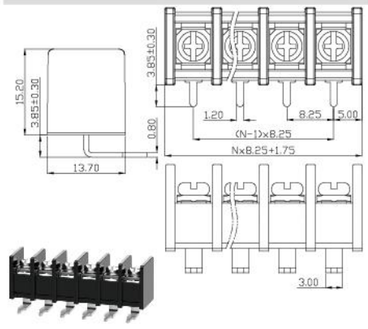


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	12	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

DBT30H-8.25

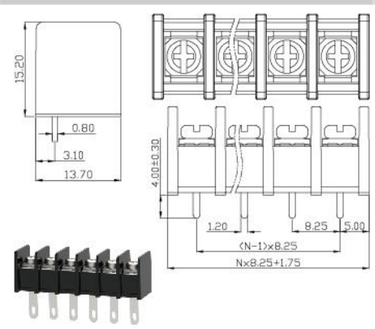


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT30S-8.25

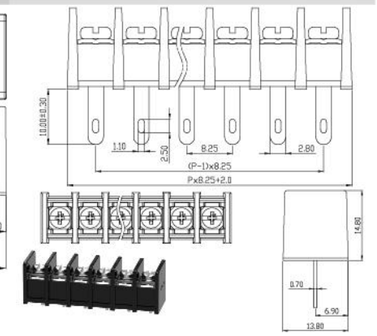


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT30C-8.25

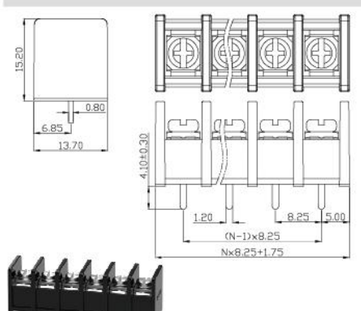


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT30RM-7.62

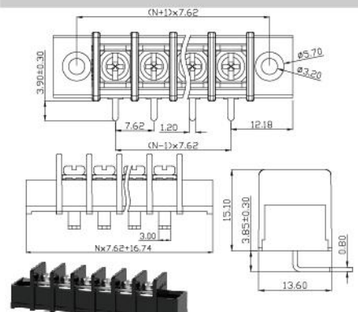

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		


DBT30HM-7.62

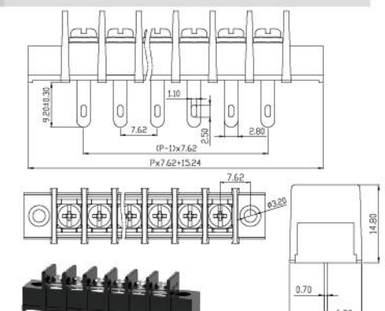

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT30SM-7.62

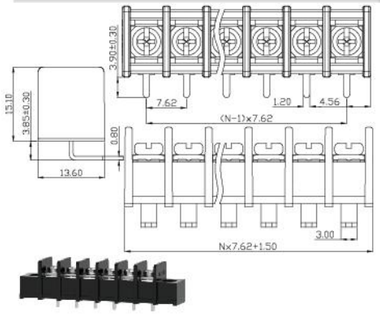


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT30CM-7.62

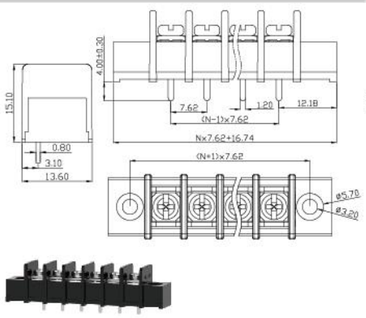


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT30R-7.62

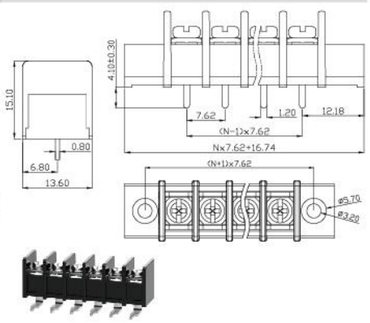


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

DBT30H-7.62

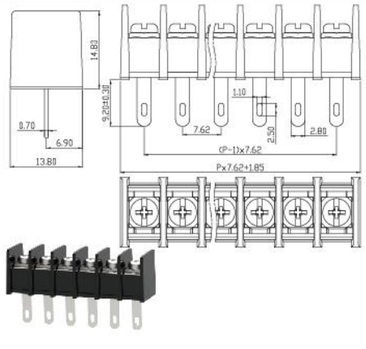


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT30S-7.62

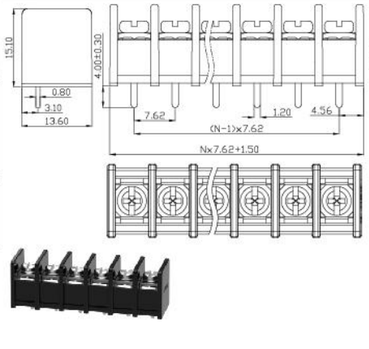

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


DBT30C-7.62

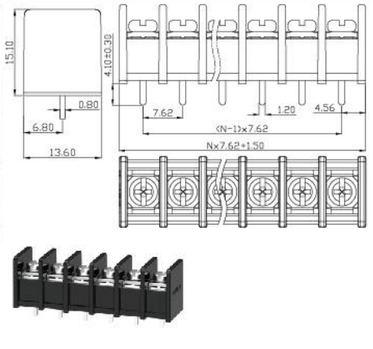

栅栏式接线端子 Barrier Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

DBT10-10.0

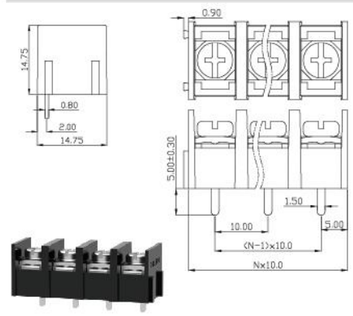


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT10-8.5

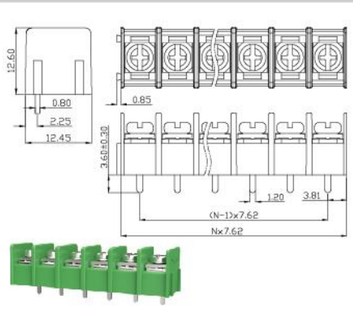


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT10-7.62

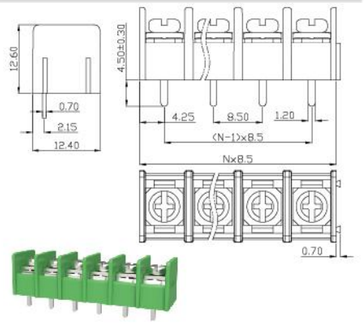


UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	600
额定电流 Rated Current [A]	30	-	32
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	1.2/10.62		

DBT50BR-9.5

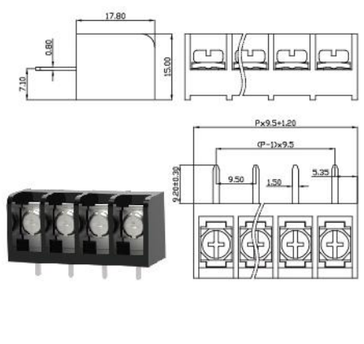

UL/CUL 技术参数 UL/CUL Technical Data cULus			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

DBT50GR-6.35

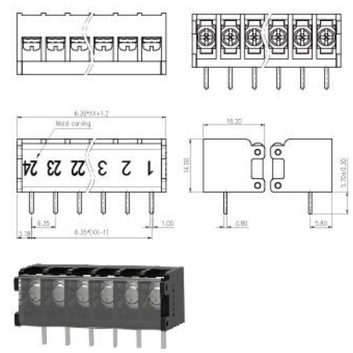


Wiring Terminal Block

布线式接线端子

产品经济简单，贯通连接可靠，可以连接截面为0.5mm²至16mm²的所有类型的导线，间距8.2mm至16.5mm可供选择，分开弹片两大类型。产品设计符合国际标准，如IEC60998和UL1059。我们已获得中国的CQC认证和美国的UL认证。


Convenient and reliable connection of two conductors, with a connection cross-section of 0.5mm² To 16mm² All types of wires, with or without fuses, in two types of configurations. The product design complies with international standards such as IEC60998 and UL 1059. We have obtained CQC certifcation in China and UL certification in the United States.

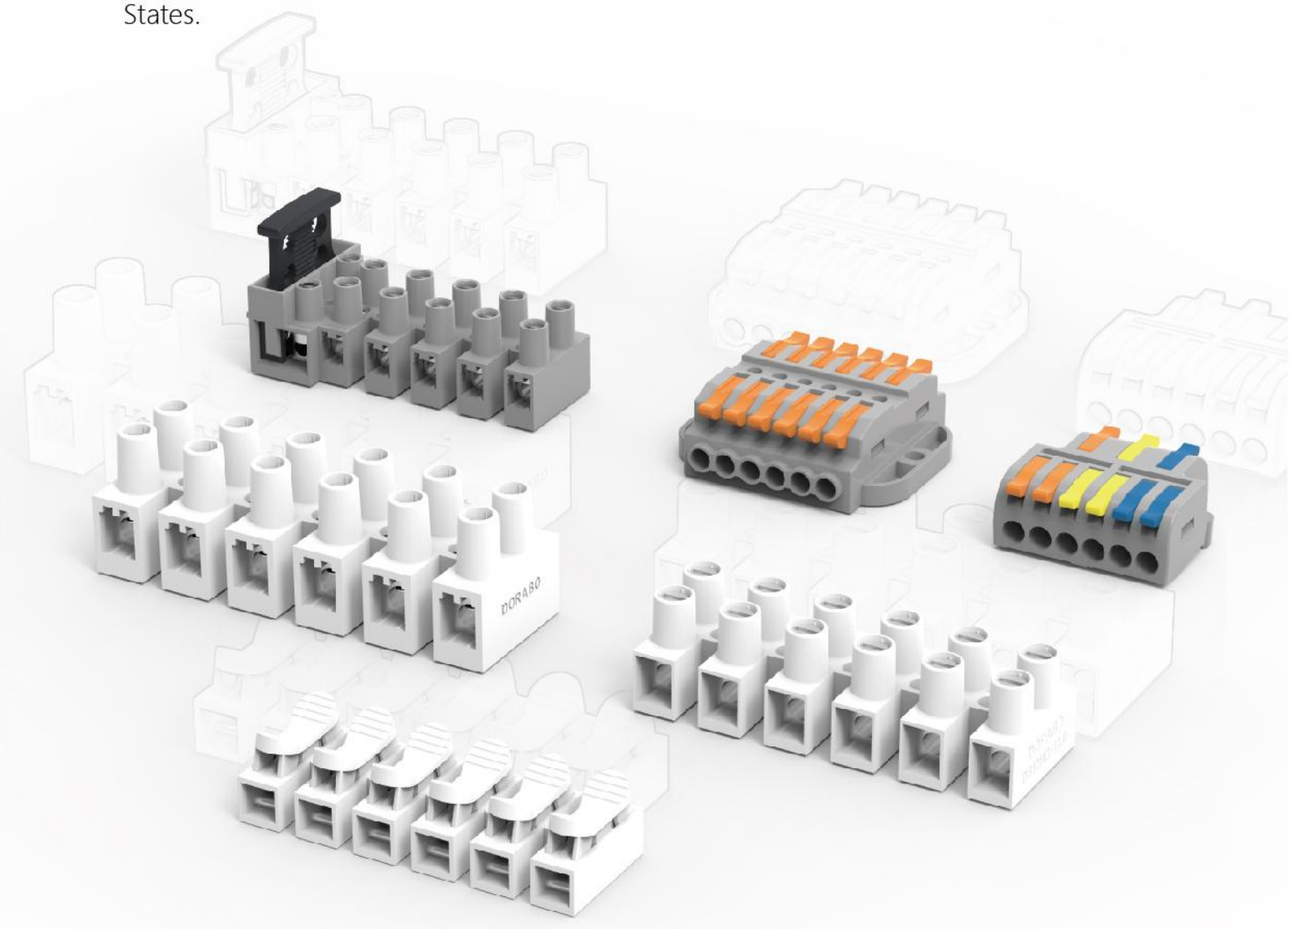

布线式接线端子 Wiring Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data		UL/CUL 技术参数 UL/CUL Technical Data		UL/CUL 技术参数 UL/CUL Technical Data	
等级 Use Group	-	等级 Use Group	-	等级 Use Group	-
额定电压 Rated Voltage [V]	300	额定电压 Rated Voltage [V]	600	额定电压 Rated Voltage [V]	300
额定电流 Rated Current [A]	85	额定电流 Rated Current [A]	65	额定电流 Rated Current [A]	50
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	16-4	接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	14-8	接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	20-8
间距 Pitch [mm]	16.5	间距 Pitch [mm]	14.5	间距 Pitch [mm]	13.50
螺丝 Screw/扭矩 Torque(Max) [N.m]	M5/0.2	螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2	螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2

DB18H-16.5

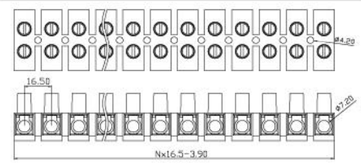




DB16H-14.5

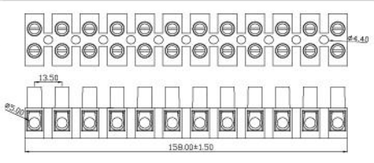




DB14H-13.5

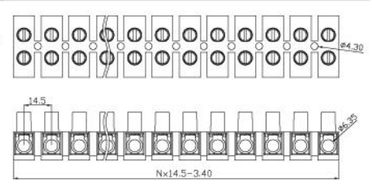




UL/CUL 技术参数 UL/CUL Technical Data		UL/CUL 技术参数 UL/CUL Technical Data		UL/CUL 技术参数 UL/CUL Technical Data	
等级 Use Group	-	等级 Use Group	-	等级 Use Group	-
额定电压 Rated Voltage [V]	300	额定电压 Rated Voltage [V]	300	额定电压 Rated Voltage [V]	300
额定电流 Rated Current [A]	35	额定电流 Rated Current [A]	30	额定电流 Rated Current [A]	20
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10	接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-10	接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12
间距 Pitch [mm]	12.00	间距 Pitch [mm]	10.0	间距 Pitch [mm]	8.2
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3.5/0.8	螺丝 Screw/扭矩 Torque(Max) [N.m]	-	螺丝 Screw/扭矩 Torque(Max) [N.m]	-

DB12H-12.0

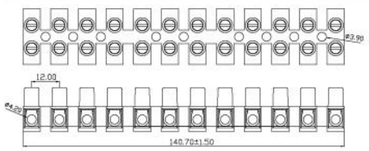





DB10H-10.0

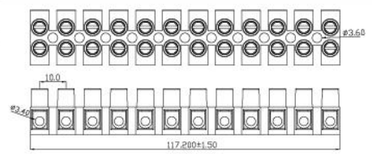



DB8H-8.2

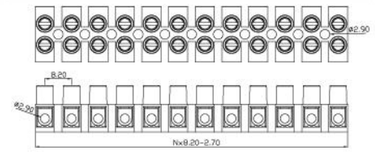


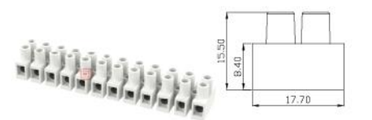

布线式接线端子 Wiring Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	cULus
等级 Use Group	-
额定电压 Rated Voltage [V]	300
额定电流 Rated Current [A]	15
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-14
间距 Pitch [mm]	10.0
螺丝 Screw/扭矩 Torque(Max) [N.m]	-

DB801-10.0

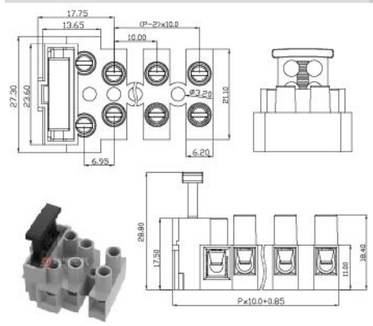


UL/CUL 技术参数 UL/CUL Technical Data	cULus		
等级 Use Group	III	II	I
额定电压 Rated Voltage [V]	250	-	400
额定电流 Rated Current [A]	32	-	32
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB31-5.0-3P-GY

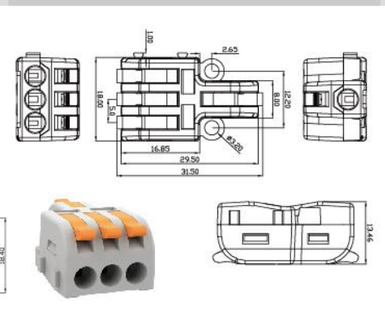


UL/CUL 技术参数 UL/CUL Technical Data	cULus		
等级 Use Group	III	II	I
额定电压 Rated Voltage [V]	250	-	400
额定电流 Rated Current [A]	32	-	32
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB21-5.0-2X4P-GY

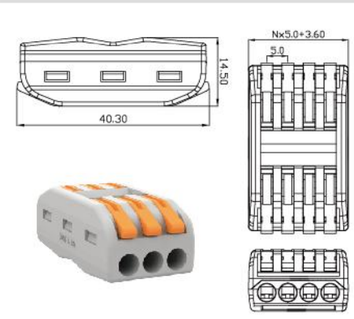


UL/CUL 技术参数 UL/CUL Technical Data	cULus		
等级 Use Group	III	II	I
额定电压 Rated Voltage [V]	300	400	600
额定电流 Rated Current [A]	32	32	32
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	8.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB21U-8.0-1P-GY

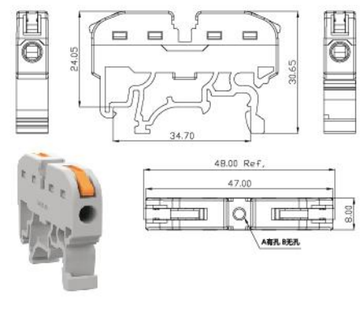


UL/CUL 技术参数 UL/CUL Technical Data	cULus		
等级 Use Group	III	II	I
额定电压 Rated Voltage [V]	250	-	400
额定电流 Rated Current [A]	32	-	32
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB32-5.0-2-4P-GY

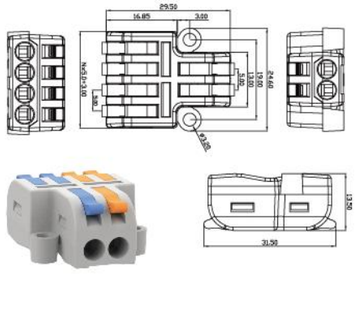

UL/CUL 技术参数 UL/CUL Technical Data	cULus		
等级 Use Group	III	II	I
额定电压 Rated Voltage [V]	250	400	600
额定电流 Rated Current [A]	32	32	32
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB21M-5.0-2X3P

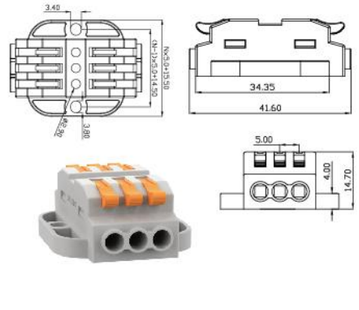

布线式接线端子 Wiring Terminal Block

UL/CUL 技术参数 UL/CUL Technical Data	cULus		
等级 Use Group	III	II	I
额定电压 Rated Voltage [V]	250	-	400
额定电流 Rated Current [A]	32	-	32
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB33-5.0-3-6P-GY

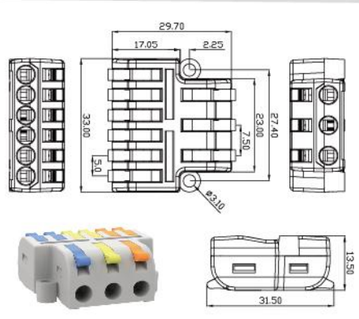

Spring-type terminal block

弹簧式接线端子

结合接线焊板功能为一体的端子台，安装迅速并且节省空间易于维护。运用多种接线技术，有各种不同进线角度可供选择。针对不同的使用方式，提供单层/多层的接插选择，因应不同焊接方法提供材质上的选择。产品设计符合IEC60998和UL1059等国际标准，并已在美国获得UL认证。


Spring type PCB wiring terminals, with cage and V-shaped spring connection methods, have vibration resistance characteristics and can be connected with a cross-sectional area of 0.08mm² to 16mm². All types of wires with a spacing of 2.5mm to 10.16mm are available for selection, and can be used interchangeably with screw connected PCB wiring terminals, increasing flexibility in applications. The product design complies with international standards such as IEC60998 and UL1059. Has obtained UL certification in the United States.



弹簧式接线端子 Spring-type Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	4	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-18		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB141R-2.54




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	4	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-18		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB141V-2.54




UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB212TR-3.5

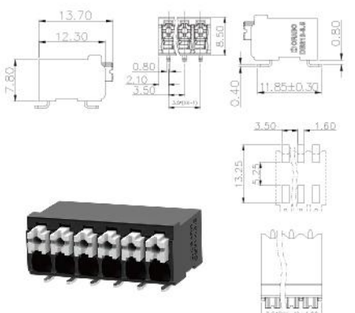


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-16		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB212TR-5.0

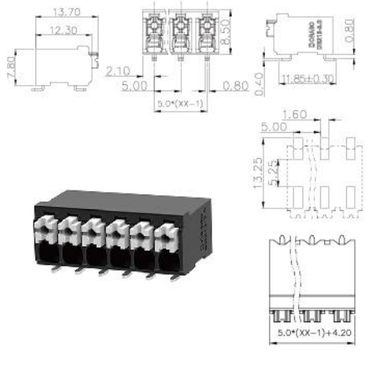


UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB212TV-3.5

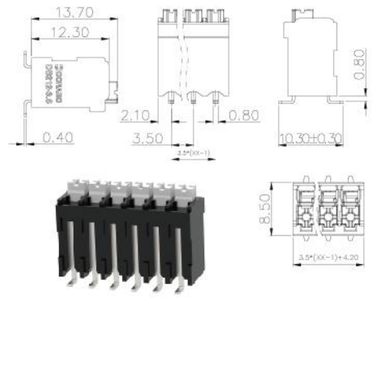

UL/CUL 技术参数 UL/CUL Technical Data	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB212TV-5.0

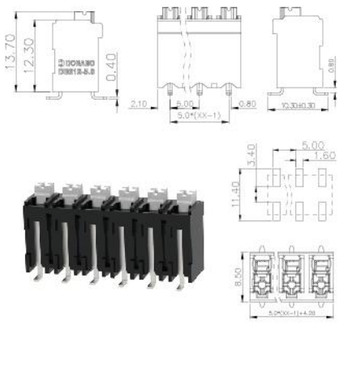

弹簧式接线端子 Spring-type Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	600	600	-
额定电流 Rated Current [A]	51	51	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-4		
间距 Pitch [mm]	15.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB240R-15.0

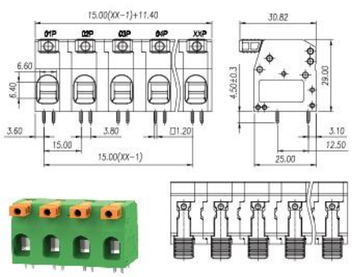


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	600	600	-
额定电流 Rated Current [A]	51	51	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-4		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB240RB-10.0

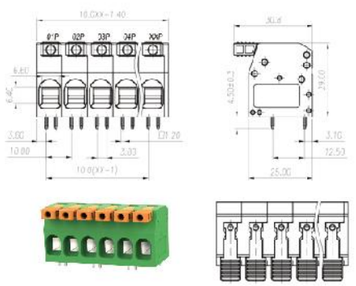


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB242-5.0

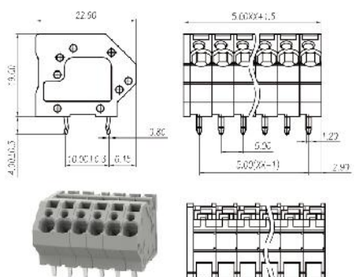


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	5	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB250S-3.5

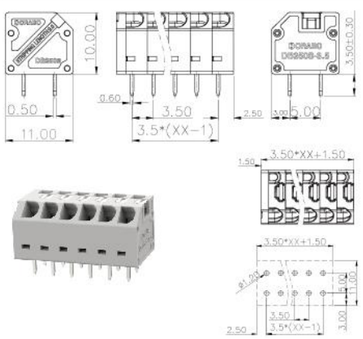


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB250S-5.0

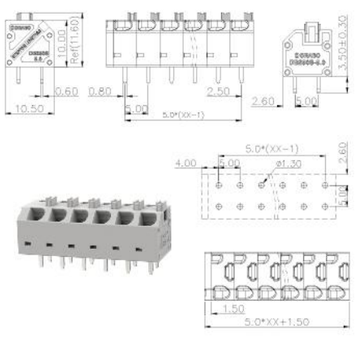

UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	5	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB251S-3.5

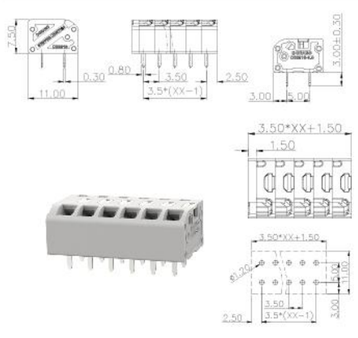

弹簧式接线端子 Spring-type Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	5	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	7.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB251S-7.0

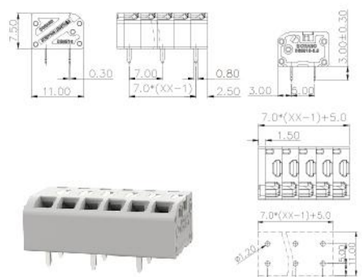


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-10		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB271RA-7.5

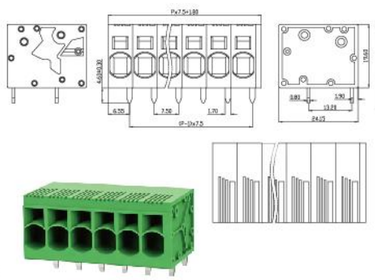


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	70	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-4		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB271RA-10.0

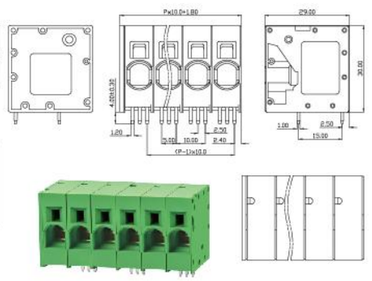


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	20-12		
间距 Pitch [mm]	6.9		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB271VA-7.5

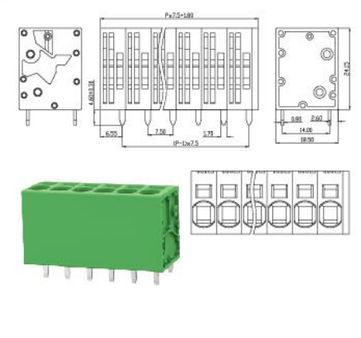


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	70	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	18-4		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB271VA-10.0

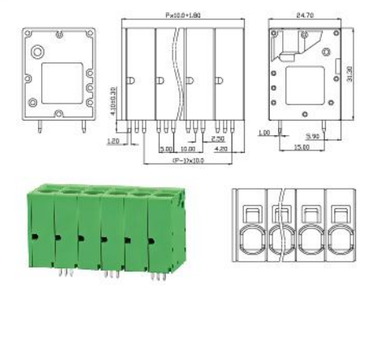

UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	20-12		
间距 Pitch [mm]	6.9		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB290R-6.9

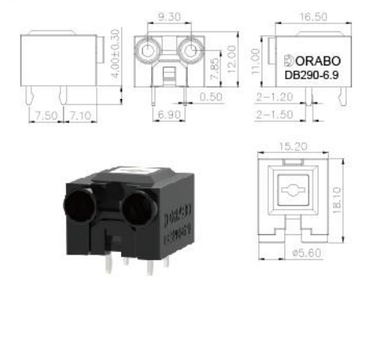

弹簧式接线端子 Spring-type Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	9.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB290R-9.0

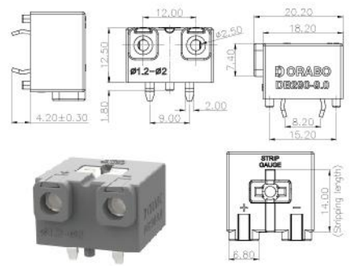


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB803-3.5

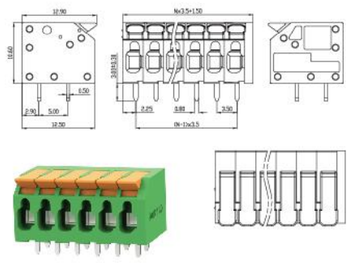


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB803-5.0

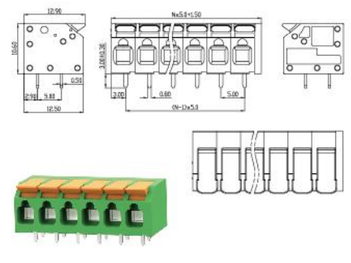


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	9	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	4.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB806R-5.0

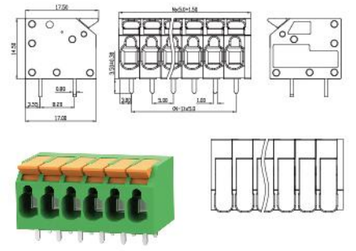


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB806R-7.5

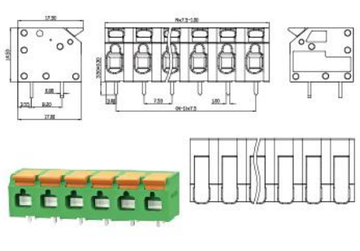

UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	32	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB806R-8.25

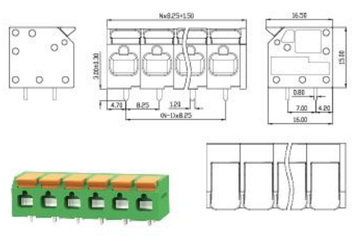

弹簧式接线端子 Spring-type Terminal Block


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	32	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB806R-9.5

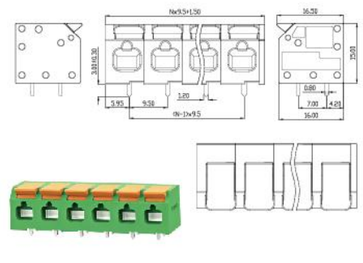


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB806V-5.0

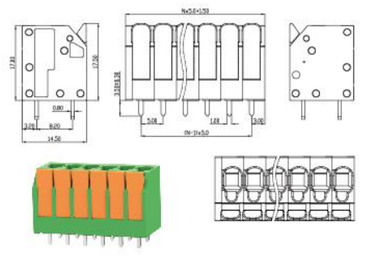


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB806V-7.5

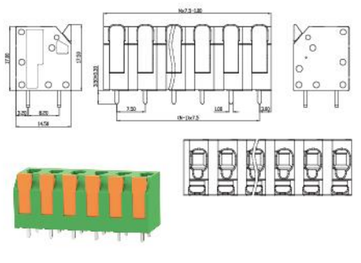


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	9	-	-
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	4.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2062B-4.0

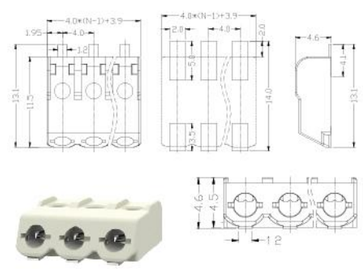


UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	9	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	4.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2062C-4.0

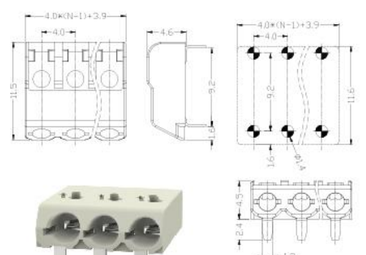

UL/CUL 技术参数 UL/CUL Technical Data cULus	B	C	D
等级 Use Group			
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	9	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	4.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

DB2062V-4.0

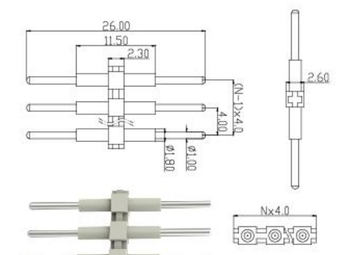

ISO9001 ISO14001 RoHS REACH


弹簧式接线端子 Spring-type Terminal Block

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	6.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	6	-	6
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-14		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	600
额定电流 Rated Current [A]	41	41	5
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	8-24		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2072-6.0

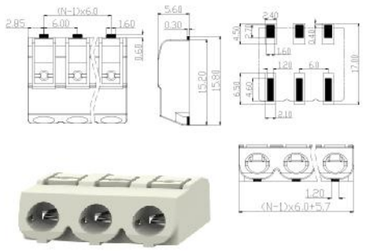

DB2393-3.5

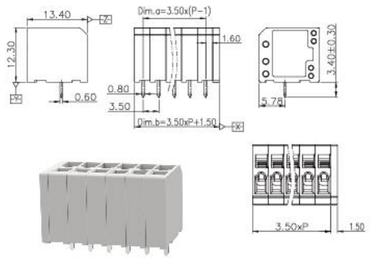

DB2406S-7.5




Rail-mounted Terminal Block

轨装式接线端子

轨装式接线端子采用弹片或压线框夹线技术，接线操作方便、抗震稳定并支持DIN导轨安装。满足0.2-16平方所有类型的导线连接，安全可靠的将电路中的各种电信号连通。产品设计制造符合并通过IEC/EN60947相关标准测试。符合UL1059等相关标准的要求。

The rail mounted wiring terminal adopts spring clip or wire pressing frame clamping technology, which is convenient for wiring operation, vibration resistance, and supports DIN rail installation. Meet 0.2-16squaremm² Connect all types of wires to safely and reliably connect various electricalsignals in the circuit. The product design and manufacturing standards havebeen tested and certified to IEC/EN 60947. Testing according to relevant standardssuch as UL1059.

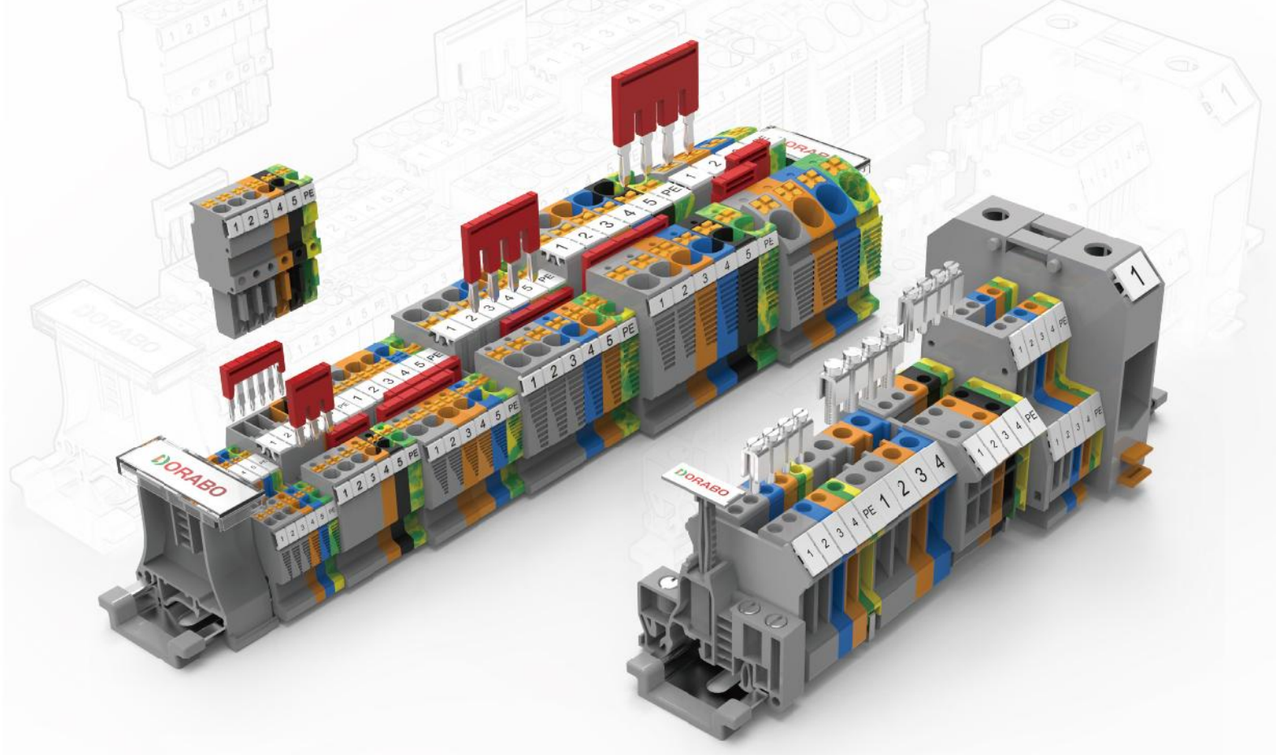

Energy Storage Connector
储能连接器

储能连接器具备IP67/IP20系列规格及快插连接器，电流满足100A-350A，丰富的产品系列，为客户提供灵活选择。为客户提供专业的定制服务，从零件到成套方案，线缆预制等为客户提供一站式服务。

产品设计符合ISO9001体系认证，已取得TUV和UL认证。

Energy storage connectors are available in IP67/IP20 series specifications and plug-and-play quick connectors, with current ratings from 100A to 350A. The extensive product range provides customers with flexible options. Professional customized services are offered to customers, providing one-stop solutions from components to complete systems and cablepre-assembly.

Product design complies with the ISO9001 system certiPcation, and TUV andUL certiPcations have been obtained.



DIP Switch
拨码开关

拨码开关（DIP 开关）基于二进制编码，由多独立开关单元组成，拨杆切换 “ON”（1）/“OFF”（0）状态实现编码 。结构紧凑，外壳用绝缘阻燃材料，触点常镀金，适应 -40℃至 85℃工业级环境 。操作方式有滑动型、琴键型等 。用于设备地址设置、参数配置，如工业控制、消费电子等，拨动即可灵活调整设备功能 。

DIP switches operate on binary coding principles and are composed of multiple independent switch units. Coding is realized by toggling each switch between the "ON" (1) and "OFF" (0) positions. Featuring a compact design with an insulating, flame-retardant housing and gold-plated contacts, they are suitable for industrial-grade environments ranging from -40°C to 85°C. Available in slide-actuated, piano-key, and other operation styles, they are widely used for device address setting and parameter configuration in industrial control and consumer electronics applications, enabling flexible adjustment of device functions through simple toggling.

