DORABO 地博 • 为世界创造连接

CREATING CONNECTIONS FOR THE WORLD

宁波地博电气有限公司

NINGBO DORABO ELECTRIC CO., LTD

国内事业部（Domestic Business Division）：

电话（Tel ） ：+86-400-860-0988

网址（Web ）：www.terminalblock.net

邮箱（E-mail）：steven.lu@terminalblock.net

地址（Add） ：No. 869 Changxing Road, Changhe Town, Cixi City, Ningbo City, Zhejiang Province, P.R.China

中国浙江省宁波市慈溪市长河镇长兴路 869 号

国际事业部（International Business Division）：

电话（Tel ） ：+86-15988827951 +86-13185980275

网址（Web ）：www.terminalblock.net


邮箱（E-mail）：info@terminalblock.net

微信二维码 WeChat QR Code

微信公众号 WeChat Official Account

微信视频号 WeChat Channels

DORABO

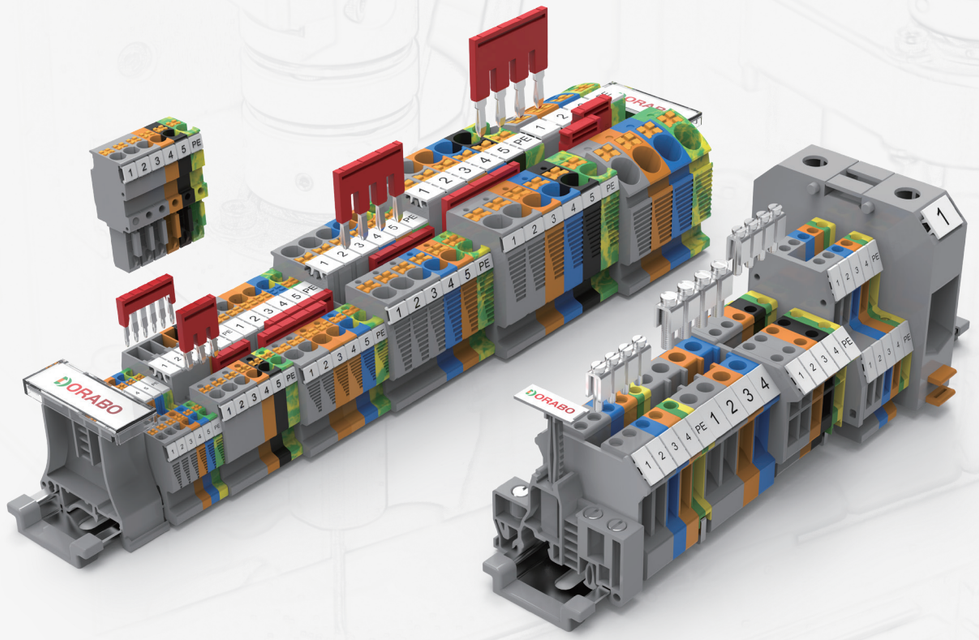

轨装式接线端子目录 2

Catalog of Rail mounted Wiring Terminals 2

宁波地博电气有限公司

NINGBO DORABO ELECTRIC CO., LTD





	4mm² 悬臂式保险丝端子，可接5 x 20 mm G型保险丝 4mm² Lever-type fuse terminal block, for 5 x 20 mm G fuse			4mm² 悬臂式带发光二极管保险丝端子，可接5 x 20 mm G型保险丝 4mm² Lever-type fuse terminal block, for 5 x 20 mm G fuse , with LED		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 [mm] Note：Height With DIN Rail NS 35/7.5	6.2	59.55	75.6	6.2	59.55	75.6
额定参数Rated Parameters	IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	500	600		500	600	
额定电流Rated Current [A]	6.3	10		6.3	10	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-6	0.2-4	0.2-4	0.2-6	0.2-4	0.2-4
[AWG]	26-10	26-10	26-10	26-10	26-10	26-10
螺钉类型Screw Type [*]		M3			M3	
扭矩Torque [N.m]		0.6			0.6	
其余参数Other Parameters						
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0		
剥线长度Strip length [mm]	9			9		
	订货信息Order Information			订货信息Order Information		
产品Product 颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5 黑Black	TU4-FUSE-BK(黑色)			TU4-FUSELED24-BK(黑色)		
	配套附件Accessory			配套附件Accessory		
盖板Cover Plate 颜色Colour	订货号Order NO.			订货号Order NO.		
盖板Cover Plate						
跨接件Jumper						
极数Poles No.	订货号Order NO.			订货号Order NO.		
2	TJA6.2-2			TJA6.2-2		
3	TJA6.2-3			TJA6.2-3		
4	TJA6.2-4			TJA6.2-4		
5	TJA6.2-5			TJA6.2-5		
6	TJA6.2-6			TJA6.2-6		
7	TJA6.2-7			TJA6.2-7		
8	TJA6.2-8			TJA6.2-8		
9	TJA6.2-9			TJA6.2-9		
10	TJA6.2-10			TJA6.2-10		
正面标记(小)Front Marker(Small)	订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	TMB6.2-100			TMB6.2-100		
正面标记(大)Front Marker(Big)	订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	306801			306801		
卷带标记（50米一卷） Winding marking (50 meters/roll)	TMZ9.6-50			TMZ9.6-50		








	4mm² 刀闸分断接线端子 Knife-disconnect terminal block			4mm² 分断接线端子 4mm² Disconnect terminal block			4mm² 悬臂式分断端子 4mm² Lever-type disconnect terminal block		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 [mm] Note：Height With DIN Rail NS 35/7.5	6.2	59.55	46.2	6.2	59.55	46.2	6.2	59.55	75.6
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	500	600		500	600		500	600	
额定电流Rated Current [A]	20	16		20	16		6.3	10	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-6	0.2-4	0.2-4	0.2-6	0.2-4	0.2-4	0.2-6	0.2-4	0.2-4
[AWG]	26-10	26-10	26-10	26-10	26-10	26-10	26-10	26-10	26-10
螺钉类型Screw Type [*]		M3			M3			M3	
扭矩Torque [N.m]		0.6			0.6			0.6	
其余参数Other Parameters									
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0		
剥线长度Strip length [mm]				9			9		
	订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5 灰Gray	TU4-MT-GY			TU4-TG-GY			TU4-SPLIT		
橙Orange	TU4-MT-OG			TU4-TG-OG					
蓝Blue	TU4-MT-BU			TU4-TG-BU					
	配套附件Accessory			配套附件Accessory			配套附件Accessory		
盖板Cover Plate 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
盖板Cover Plate									
跨接件Jumper									
极数Poles No.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	TJA6.2-2			TJA6.2-2			TJA6.2-2		
3	TJA6.2-3			TJA6.2-3			TJA6.2-3		
4	TJA6.2-4			TJA6.2-4			TJA6.2-4		
5	TJA6.2-5			TJA6.2-5			TJA6.2-5		
6	TJA6.2-6			TJA6.2-6			TJA6.2-6		
7	TJA6.2-7			TJA6.2-7			TJA6.2-7		
8	TJA6.2-8			TJA6.2-8			TJA6.2-8		
9	TJA6.2-9			TJA6.2-9			TJA6.2-9		
10	TJA6.2-10			TJA6.2-10			TJA6.2-10		
正面标记(小)Front Marker(Small)	订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	TMB6.2-100			TMB6.2-100			TMB6.2-100		
正面标记(大)Front Marker(Big)	订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	306801			306801			306801		
卷带标记（50米一卷） Winding marking (50 meters/roll)	TMZ9.6-50			TMZ9.6-50			TMZ9.6-50		


TA系列弹簧接线端子

TA Rail-mounted Terminal Blocks With Spring-cage Clamp

TA系列弹簧接线端子采用笼式弹簧接线技术，可以将2-4根0.2-16mm² 的导线建立起安全可靠的电力和信号连接，产品广泛应用于电梯、轨道交通、船舶、楼宇智能、重型设备及工业自动化等领域。产品设计制造符合IEC/EN60947、UL1059等相关国际标准。

TA series rail-mounted spring cage clamp terminal blocks use spring cage connection technology, make 2-4, 0.2-16mm^2 wire establish a secure and reliable electricity and signal connection. The products are widely used in elevators, rail transportations, ships, buildings, heavy equipments and industrial automations. Product design and manufacturing in line with relevant international standards such as IEC60947, UL1059.

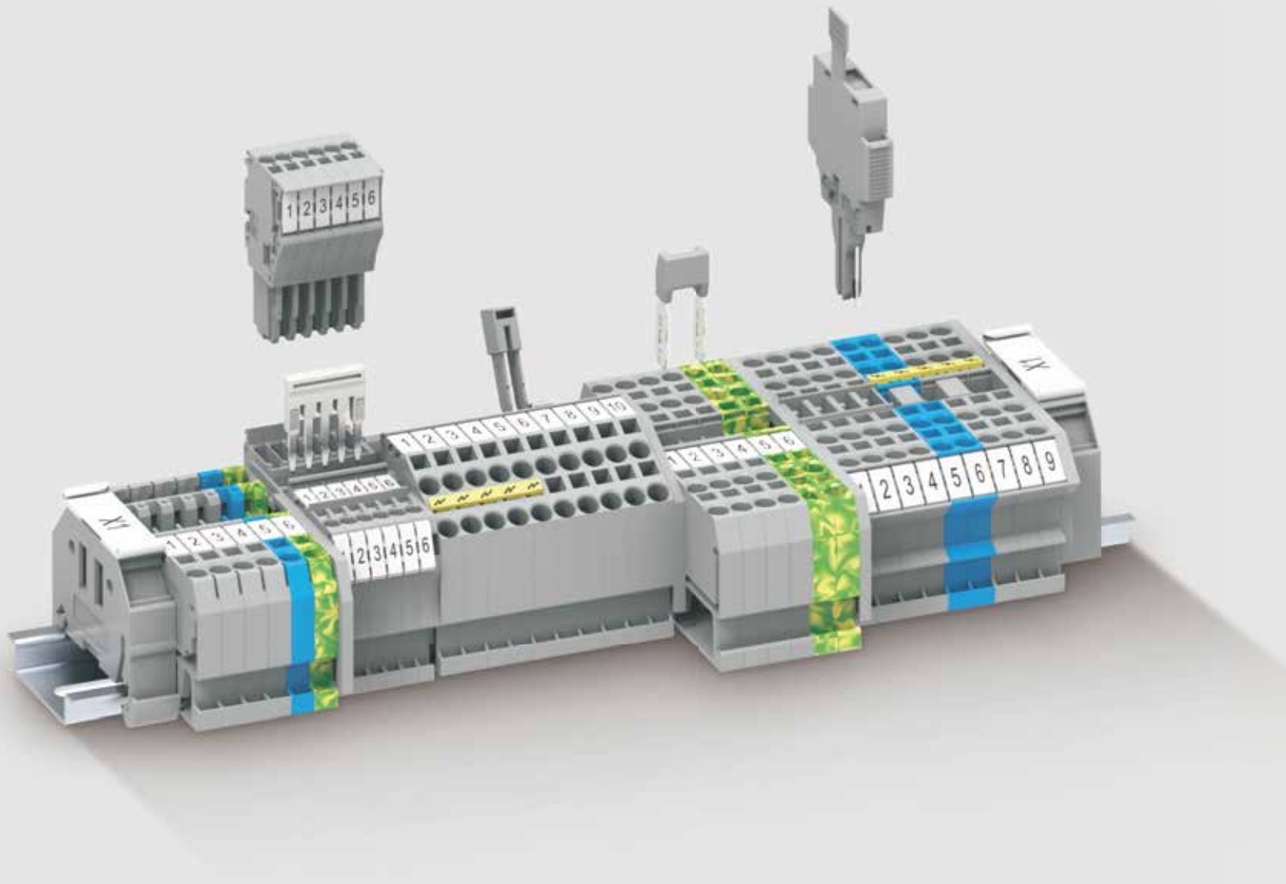


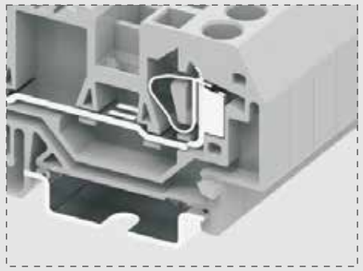

连接结构 Connection Structure

▲ 端子之间可相互连接固定


▲ Terminals can be connected to each other

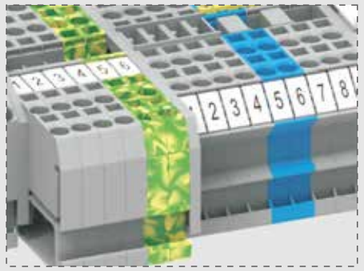

标识 Marking

▲ 具有正面标记与侧面标记两种标识，可适用于各种不同的空间环境


▲ Front marker and side marker can be used in the different space environments

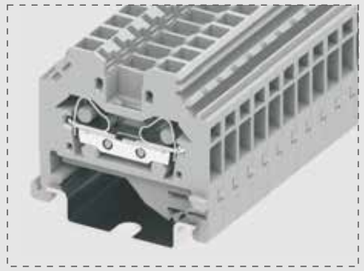

侧面接线 Side-entry wiring

▲ 从侧面接线，满足不同的空间环境下的接线方式

▲ Side-entry wiring can meet the connection in different space environments

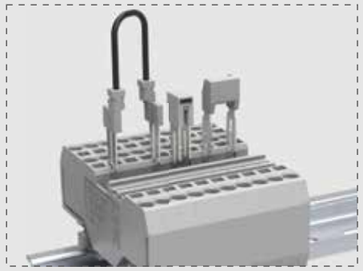

跨接件 Jumper

▲ 采用相邻跨接件、间隔跨接桥和导线跨接三种形式，可实现多种电路设计


▲ Adjacent jumpers, staggered jumpers and wire jumpers can realize multiple circuit designs



保险盒 Fuse Box

▲ 端子上可安装保险盒，保险盒内可安装保险管


▲ A fuse box can be installed on the terminal, and a fuse can be installed in the fuse box

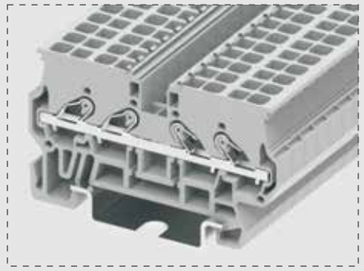

直插式端子 Straight Plug Type Terminal Block

▲ 无需借助特殊接线工具即可完成接线

▲ Wiring is done without special wiring tools

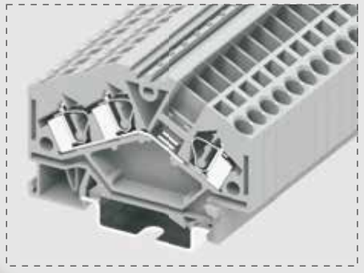

斜面端子 Angled Type Terminal Block

▲ 斜面型的设计减小了端子的外型尺寸，节省空间


▲ Angled type reduces the size of the terminal and saves space



功能端子 Functional Terminal Block

▲ 带二极管和指示灯的接线端子，可方便实现各种不同的电路开关功能

▲ Wiring terminals with diodes and indicator lights for easy implementation of various circuit switching functions

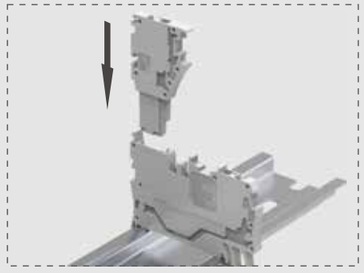

插拔式端子 Pluggable Terminal Block

▲ 将弹簧接线端子与插头相结合，提供灵活的接线方式

▲ Plug-in terminal blocks and female plugs provide the flexible wiring











	1.5mm² 一进一出接线端子 1-1 Feed Through Terminal Block			2.5mm² 一进一出接线端子 1-1 Feed Through Terminal Block			4mm² 一进一出接线端子 1-1 Feed Through Terminal Block			6mm² 一进一出接线端子 1-1 Feed Through Terminal Block			10mm² 一进一出接线端子 1-1 Feed Through Terminal Block		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5 [mm]	4	51.6	34.5	5	52.8	35.3	6	59	36	8	73.6	40	10	76.7	42.5
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	800	600		800	600		800	600		800	600		800	600	
额定电流Rated Current [A]	18	10		24	20		32	20		41	30		57	50	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-1.5	0.2-1.5	0.2-1	0.2-2.5	0.2-2.5	0.2-1.5	0.2-4	0.2-4	0.2-2.5	0.2-6	0.2-6	0.2-4	0.2-10	0.2-10	0.2-6
[AWG]	28-16	28-16	28-16	28-14	28-14	28-14	28-12	28-12	28-12	28-10	28-10	28-10	28-8	28-8	28-8
其余参数Other Parameters															
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0			V0			V0		
剥线长度Strip length [mm]	8-9			8-9			9-10			12-13			12-13		
	订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5 灰Gray	215921			225921			204921			206921			210921		
橙Orange	215922			225922			204922			206922			210922		
蓝Blue	215924			225924			204924			206923			210923		
	配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
灰Gray	215121			225121			204121			206121			210121		
端板Cover Plate 橙Orange	215122			225122			204122			206122			210122		
*	*			*			*			*			*		
跨接件Jumper 颜色Colour															
灰Gray	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
相邻跨接桥Adjacent Jumper	215301			225301			204301			206301			210301		
间隔跨接桥Staggered Jumper	*			225321-3			*			*			*		
导线跨接桥Wire Jumper	*			225311(L=60mm) 225312(L=110mm) 225313(L=250mm)			*			*			*		
安全警告标记 Protective Warning Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5位PCS	215701			225701			204701			206701			210701		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
100PCS一片 （可提供印字服务Printing Service）	215801			225801			225801			225801			225801		




16mm² 一进一出接线端子
1-1 Feed Through Terminal Block

		技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	12	93.8	45
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	800	600	
额定电流Rated Current	[A]	76	65	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-16	0.2-16	0.2-10
	[AWG]	28-6	28-6	28-6
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	16-17		

		订货信息Order Information
产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	灰Gray	216921
	橙Orange	216922
	蓝Blue	216923

		配套附件Accessory
端板Cover Plate		订货号Order NO.
端板Cover Plate	灰Gray	216121
	橙Orange	216122
	*	*
跨接件Jumper	颜色Colour	
	灰Gray	订货号Order NO.
相邻跨接桥Adjacent Jumper		216301
间隔跨接桥Staggered Jumper		*
导线跨接桥Wire Jumper		*
安全警告标记 **Protective Warning Marker**		订货号Order NO.
5位PCS		216701
正面标记和侧面标记Front And Side Marker		订货号Order NO.
100PCS一片 （可提供印字服务Printing Service）		225801



1.5mm² 一进一出接地端子
1-1 Feed Through Ground Terminal Block

		技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	4	51.6	34.5
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-1.5	0.2-1.5	0.2-1
	[AWG]	28-16	28-16	28-16
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	8-9		

		订货信息Order Information
产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	黄绿Yellow green	215927
	*	*
	*	*

		配套附件Accessory
端板Cover Plate		订货号Order NO.
端板Cover Plate	灰Gray	215121
	橙Orange	215122
	*	*
跨接件Jumper	颜色Colour	
	灰Gray	订货号Order NO.
相邻跨接桥Adjacent Jumper		*
间隔跨接桥Staggered Jumper		*
导线跨接桥Wire Jumper		*
安全警告标记 **Protective Warning Marker**		订货号Order NO.
5位PCS		215701
正面标记和侧面标记Front And Side Marker		订货号Order NO.
100PCS一片 （可提供印字服务Printing Service）		215801



2.5mm² 一进一出接地端子
1-1 Feed Through Ground Terminal Block

		技术参数Technical Parameter		
		厚度Thickness	宽度Width	高度Height
	[mm]	5	52.8	35.3
		IEC	UL	
	[V]	*	*	
	[A]	*	*	
		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-2.5	0.2-2.5	0.2-1.5
	[AWG]	28-14	28-14	28-14
		V0		
	[mm]	8-9		

		订货信息Order Information
	颜色Colour	订货号Order NO.
	黄绿Yellow green	225927
	*	*
	*	*

		配套附件Accessory
		订货号Order NO.
	灰Gray	225121
	橙Orange	225122
	*	*
	颜色Colour	
	灰Gray	订货号Order NO.
		*
		*
		*
		订货号Order NO.
		225701
		订货号Order NO.
		225801











		4mm² 一进一出接地端子 1-1 Feed Through Ground Terminal Block			6mm² 一进一出接地端子 1-1 Feed Through Ground Terminal Block			10mm² 一进一出接地端子 1-1 Feed Through Ground Terminal Block			16mm² 一进一出接地端子 1-1 Feed Through Ground Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	6	59	36	8	73.6	40	10	76.7	42.5	12	93.8	45
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*		*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*		*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-4	0.2-2.5	0.2-6	0.2-6	0.2-4	0.2-10	0.2-10	0.2-6	0.2-16	0.2-16	0.2-10
	[AWG]	28-12	28-12	28-12	28-10	28-10	28-10	28-8	28-8	28-8	28-6	28-6	28-6
其余参数Other Parameters													
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0		
剥线长度Strip length	[mm]	9-10			12-13			12-13			16-17		
		订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail**	黄绿Yellow green	204927			206927			210927			216927		
	*	*			*			*			*		
NS 35/7.5	*	*			*			*			*		
		配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
端板Cover Plate	灰Gray	204121			206121			210121			216121		
	橙Orange	204122			206122			210122			216122		
	*	*			*			*			*		
跨接件Jumper	颜色Colour												
	灰Gray	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
相邻跨接桥Adjacent Jumper		*			*			*			*		
间隔跨接桥Staggered Jumper		*			*			*			*		
导线跨接桥Wire Jumper		*			*			*			*		
安全警告标记 **Protective Warning Marker**		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5位PCS		204701			206701			210701			216701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
100PCS一片 （可提供印字服务Printing Service）		225801			225801			225801			225801		



6mm² 一进一出接线端子（侧面标记）
1-1 Feed Through Terminal Block (Side Marking)




10mm² 一进一出接线端子（侧面标记）
1-1 Feed Through Terminal Block (Side Marking)




16mm² 一进一出接线端子（侧面标记）
1-1 Feed Through Terminal Block (Side Marking)

		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	8	62	38.5	10	69.5	41	12	80	45
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	600		800	600		800	600	
额定电流Rated Current	[A]	41	30		57	50		76	65	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-6	0.2-6	0.2-4	0.2-10	0.2-10	0.2-6	0.2-16	0.2-16	0.2-10
	[AWG]	28-10	28-10	28-10	28-8	28-8	28-8	28-6	28-6	28-6
其余参数Other Parameters										
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0		
剥线长度Strip length	[mm]	12-13			12-13			16-17		
		订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	灰Gray	206911			210911			216911		
	橙Orange	206912			210912			216912		
	蓝Blue	206913			210913			216913		
		配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.		
端板Cover Plate	灰Gray	206111			210111			216111		
	橙Orange	206112			210112			216122		
	*	*			*			*		
跨接件Jumper	颜色Colour									
	灰Gray	订货号Order NO.			订货号Order NO.			订货号Order NO.		
相邻跨接桥Adjacent Jumper		206301			210301			216301		
间隔跨接桥Staggered Jumper		*			*			*		
导线跨接桥Wire Jumper		*			*			*		
安全警告标记 **Protective Warning Marker**		订货号Order NO.			订货号Order NO.			订货号Order NO.		
5位PCS		206701			210701			216701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
100PCS一片 （可提供印字服务Printing Service）		225801			225801			225801		




6mm²，一进一出接地端子（侧面标记）
1-1 Feed Through Ground Terminal Block (Side Marking)

		技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	8	62	38.5
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-6	0.2-6	0.2-4
	[AWG]	28-10	28-10	28-10
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	12-13		
		订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.		
适配NS 35/7.5导轨	黄绿Yellow green	206917		
Can Be Used For DIN Rail	*	*		
NS 35/7.5	*	*		
		配套附件Accessory		
端板Cover Plate		订货号Order NO.		
端板Cover Plate	灰Gray	206111		
	橙Orange	206112		
	*	*		
跨接件Jumper	颜色Colour			
	灰Gray	订货号Order NO.		
相邻跨接桥Adjacent Jumper		*		
间隔跨接桥Staggered Jumper		*		
导线跨接桥Wire Jumper		*		
安全警告标记 Protective Warning Marker		订货号Order NO.		
5位PCS		206701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
100PCS一片 （可提供印字服务Printing Service）		225801		



10mm²，一进一出接地端子（侧面标记）
1-1 Feed Through Ground Terminal Block (Side Marking)

		技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	10	69.5	41
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-10	0.2-10	0.2-6
	[AWG]	28-8	28-8	28-8
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	12-13		
		订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.		
适配NS 35/7.5导轨	黄绿Yellow green	210917		
Can Be Used For DIN Rail	*	*		
NS 35/7.5	*	*		
		配套附件Accessory		
端板Cover Plate		订货号Order NO.		
端板Cover Plate	灰Gray	210111		
	橙Orange	210112		
	*	*		
跨接件Jumper	颜色Colour			
	灰Gray	订货号Order NO.		
相邻跨接桥Adjacent Jumper		*		
间隔跨接桥Staggered Jumper		*		
导线跨接桥Wire Jumper		*		
安全警告标记 Protective Warning Marker		订货号Order NO.		
5位PCS		210701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
100PCS一片 （可提供印字服务Printing Service）		225801		



16mm²，一进一出接地端子（侧面标记）
1-1 Feed Through Ground Terminal Block (Side Marking)

		技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	12	80	45
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-16	0.2-16	0.2-10
	[AWG]	28-6	28-6	28-6
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	16-17		
		订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.		
适配NS 35/7.5导轨	黄绿Yellow green	216917		
Can Be Used For DIN Rail	*	*		
NS 35/7.5	*	*		
		配套附件Accessory		
端板Cover Plate		订货号Order NO.		
端板Cover Plate	灰Gray	216111		
	橙Orange	216122		
	*	*		
跨接件Jumper	颜色Colour			
	灰Gray	订货号Order NO.		
相邻跨接桥Adjacent Jumper		*		
间隔跨接桥Staggered Jumper		*		
导线跨接桥Wire Jumper		*		
安全警告标记 Protective Warning Marker		订货号Order NO.		
5位PCS		216701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
100PCS一片 （可提供印字服务Printing Service）		225801		



2.5mm² 一进一出侧面接线端子
1-1 Feed Through Terminal Block of Side-entry



4mm² 一进一出侧面接线端子
1-1 Feed Through Terminal Block of Side-entry



6mm² 一进一出侧面接线端子
1-1 Feed Through Terminal Block of Side-entry




10mm² 一进一出侧面接线端子
1-1 Feed Through Terminal Block of Side-entry





16mm² 一进一出侧面接线端子
1-1 Feed Through Terminal Block of Side-entry


		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	5	38.4	38	6	40.2	40	8	46	44.5	10	52.2	49	12	58.4	53
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	600		800	600		800	600		800	600		800	600	
额定电流Rated Current	[A]	24	20		32	20		41	30		57	50		76	65	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm^2]	0.2-2.5	0.2-2.5	0.2-1.5	0.2-4	0.2-4	0.2-2.5	0.2-6	0.2-6	0.2-4	0.2-10	0.2-10	0.2-6	0.2-16	0.2-16	0.2-10
	[AWG]	28-14	28-14	28-14	28-12	28-12	28-12	28-10	28-10	28-10	28-8	28-8	28-8	28-6	28-6	28-6
其余参数Other Parameters																
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0			V0		
剥线长度Strip length	[mm]	8-9			9-10			12-13			12-13			16-17		
		订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	灰Gray	225915			204901			206901			210901			216901		
	橙Orange	*			*			*			*			*		
	蓝Blue	225916			204902			206902			210902			216902		
		配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
端板Cover Plate	灰Gray	225111			204101			206101			210101			216101		
	橙Orange	225112			204102			206102			210102			216102		
	*	*			*			*			*			*		
跨接件Jumper	颜色Colour															
	灰Gray	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
相邻跨接桥Adjacent Jumper		225301			204301			206301			210301			216301		
间隔跨接桥Staggered Jumper		*			*			*			*			*		
导线跨接桥Wire Jumper		*			*			*			*			*		
安全警告标记 **Protective Warning Marker**		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5位PCS		225701			204701			206701			210701			216701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
100PCS一片 （可提供印字服务Printing Service）		225801			225801			225801			225801			225801		











		2.5mm² 一进一出侧面接地端子 1-1 Feed Through Ground Terminal Block of Side-entry			4mm² 一进一出侧面接地端子 1-1 Feed Through Ground Terminal Block of Side-entry			6mm² 一进一出侧面接地端子 1-1 Feed Through Ground Terminal Block of Side-entry			10mm² 一进一出侧面接地端子 1-1 Feed Through Ground Terminal Block of Side-entry			16mm² 一进一出侧面接地端子 1-1 Feed Through Ground Terminal Block of Side-entry		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	5	38.4	38	6	40.2	40	8	46	44.5	10	52.2	49	12	58.4	53
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*		*	*		*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*		*	*		*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-2.5	0.2-2.5	0.2-1.5	0.2-4	0.2-4	0.2-2.5	0.2-6	0.2-6	0.2-4	0.2-10	0.2-10	0.2-6	0.2-16	0.2-16	0.2-10
	[AWG]	28-14	28-14	28-14	28-12	28-12	28-12	28-10	28-10	28-10	28-8	28-8	28-8	28-6	28-6	28-6
其余参数Other Parameters																
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0			V0		
剥线长度Strip length	[mm]	8-9			9-10			12-13			12-13			16-17		
		订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail**	黄绿Yellow green	225917			204907			206907			210907			216907		
	*	*			*			*			*			*		
NS 35/7.5	*	*			*			*			*			*		
		配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
端板Cover Plate	灰Gray	225111			204101			206101			210101			216101		
	橙Orange	225112			204102			206102			210102			216102		
	*	*			*			*			*			*		
跨接件Jumper	颜色Colour															
	灰Gray	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
相邻跨接桥Adjacent Jumper		*			*			*			*			*		
间隔跨接桥Staggered Jumper		*			*			*			*			*		
导线跨接桥Wire Jumper		*			*			*			*			*		
安全警告标记 **Protective Warning Marker**		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5位PCS		225701			204701			206701			210701			216701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
100PCS一片 （可提供印字服务Printing Service）		225801			225801			225801			225801			225801		












		1.5mm² 一进两出接线端子 1-2 Feed Through Terminal Block			2.5mm² 一进两出接线端子 1-2 Feed Through Terminal Block			4mm² 一进两出接线端子 1-2 Feed Through Terminal Block			6mm² 一进两出接线端子 1-2 Feed Through Terminal Block			10mm² 一进两出接线端子 1-2 Feed Through Terminal Block		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	4	62.1	34.5	5	64.4	35.5	6	72.6	36	8	92.2	40	10	96.6	42.5
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	600		800	600		800	600		800	600		800	600	
额定电流Rated Current	[A]	18	10		24	20		32	20		41	30		57	50	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm^2]	0.2-1.5	0.2-1.5	0.2-1	0.2-2.5	0.2-2.5	0.2-1.5	0.2-4	0.2-4	0.2-2.5	0.2-6	0.2-6	0.2-4	0.2-10	0.2-10	0.2-6
	[AWG]	28-16	28-16	28-16	28-14	28-14	28-14	28-12	28-12	28-12	28-10	28-10	28-10	28-8	28-8	28-8
其余参数Other Parameters																
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0			V0		
剥线长度Strip length	[mm]	8-9			8-9			9-10			12-13			12-13		
		订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	灰Gray	215951			225951			204951			206951			210951		
	橙Orange	215952			225952			204952			206952			210952		
	蓝Blue	215954			225954			204954			206953			210953		
		配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
端板Cover Plate	灰Gray	215151			225151			204151			206151			210151		
	橙Orange	215152			225152			204152			206152			210152		
	*	*			*			*			*			*		
跨接件Jumper	颜色Colour															
	灰Gray	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
相邻跨接桥Adjacent Jumper		215301			225301			204301			206301			210301		
间隔跨接桥Staggered Jumper		*			225321-3			*			*			*		
导线跨接桥Wire Jumper		*			225311(L=60mm) 225312(L=110mm) 225313(L=250mm)			*			*			*		
安全警告标记 **Protective Warning Marker**		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5位PCS		215701			225701			204701			206701			210701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
100PCS一片 （可提供印字服务Printing Service）		215801			225801			225801			225801			225801		









16mm² 一进两出接线端子
1-2 Feed Through Terminal Block

		技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	12	103.5	45
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	800	600	
额定电流Rated Current	[A]	76	65	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-16	0.2-16	0.2-10
	[AWG]	28-6	28-6	28-6
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	16-17		

			订货信息Order Information
产品Product	颜色Colour		订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	灰Gray		216951
	橙Orange		216952
	蓝Blue		216953

			配套附件Accessory
端板Cover Plate			订货号Order NO.
端板Cover Plate	灰Gray		216151
	橙Orange		216152
	*		*
跨接件Jumper	颜色Colour		
	灰Gray		订货号Order NO.
相邻跨接桥Adjacent Jumper			*
间隔跨接桥Staggered Jumper			*
导线跨接桥Wire Jumper			*
安全警告标记 **Protective Warning Marker**			订货号Order NO.
5位PCS			216701
正面标记和侧面标记Front And Side Marker			订货号Order NO.
100PCS一片 （可提供印字服务Printing Service）			225801









1.5mm² 一进两出接地端子
1-2 Feed Through Ground Terminal Block

		技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	4	62.1	34.5
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-1.5	0.2-1.5	0.2-1
	[AWG]	28-16	28-16	28-16
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	8-9		

			订货信息Order Information
产品Product	颜色Colour		订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	黄绿Yellow green		215957
	*		*
	*		*

			配套附件Accessory
端板Cover Plate			订货号Order NO.
端板Cover Plate	灰Gray		215151
	橙Orange		215152
	*		*
跨接件Jumper	颜色Colour		
	灰Gray		订货号Order NO.
相邻跨接桥Adjacent Jumper			*
间隔跨接桥Staggered Jumper			*
导线跨接桥Wire Jumper			*
安全警告标记 **Protective Warning Marker**			订货号Order NO.
5位PCS			215701
正面标记和侧面标记Front And Side Marker			订货号Order NO.
100PCS一片 （可提供印字服务Printing Service）			215801







2.5mm² 一进两出接地端子
1-2 Feed Through Ground Terminal Block

		技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	5	64.4	35.5
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-2.5	0.2-2.5	0.2-1.5
	[AWG]	28-14	28-14	28-14
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	8-9		

			订货信息Order Information
产品Product	颜色Colour		订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	黄绿Yellow green		225957
	*		*
	*		*

			配套附件Accessory
端板Cover Plate			订货号Order NO.
端板Cover Plate	灰Gray		225151
	橙Orange		225152
	*		*
跨接件Jumper	颜色Colour		
	灰Gray		订货号Order NO.
相邻跨接桥Adjacent Jumper			*
间隔跨接桥Staggered Jumper			*
导线跨接桥Wire Jumper			*
安全警告标记 **Protective Warning Marker**			订货号Order NO.
5位PCS			225701
正面标记和侧面标记Front And Side Marker			订货号Order NO.
100PCS一片 （可提供印字服务Printing Service）			225801









		4mm² 一进两出接地端子 1-2 Feed Through Ground Terminal Block			6mm² 一进两出接地端子 1-2 Feed Through Ground Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	6	73.5	36	8	92.2	40
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-4	0.2-2.5	0.2-6	0.2-6	0.2-4
	[AWG]	28-12	28-12	28-12	28-10	28-10	28-10
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	9-10			12-13		
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail**	黄绿Yellow green	204957			206957		
	*	*			*		
NS 35/7.5	*	*			*		
		配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.		
端板Cover Plate	灰Gray	204151			206151		
	橙Orange	204152			206152		
	*	*			*		
跨接件Jumper	颜色Colour						
	灰Gray	订货号Order NO.			订货号Order NO.		
相邻跨接桥Adjacent Jumper		*			*		
间隔跨接桥Staggered Jumper		*			*		
导线跨接桥Wire Jumper		*			*		
安全警告标记 **Protective Warning Marker**		订货号Order NO.			订货号Order NO.		
5位PCS		204701			206701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
100PCS一片 （可提供印字服务Printing Service）		225801			225801		

		10mm² 一进两出接地端子 1-2 Feed Through Ground Terminal Block			16mm² 一进两出接地端子 1-2 Feed Through Ground Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	10	96.6	42.5	12	103.5	45
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-10	0.2-10	0.2-6	0.2-16	0.2-16	0.2-10
	[AWG]	28-8	28-8	28-8	28-6	28-6	28-6
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	12-13			16-17		
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail**	黄绿Yellow green	210957			216957		
	*	*			*		
NS 35/7.5	*	*			*		
		配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.		
端板Cover Plate	灰Gray	210151			216151		
	橙Orange	210152			216152		
	*	*			*		
跨接件Jumper	颜色Colour						
	灰Gray	订货号Order NO.			订货号Order NO.		
相邻跨接桥Adjacent Jumper		*			*		
间隔跨接桥Staggered Jumper		*			*		
导线跨接桥Wire Jumper		*			*		
安全警告标记 **Protective Warning Marker**		订货号Order NO.			订货号Order NO.		
5位PCS		210701			216701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
100PCS一片 （可提供印字服务Printing Service）		225801			225801		












	1.5mm² 两进两出接线端子 2-2 Feed Through Terminal Block			2.5mm² 两进两出接线端子 2-2 Feed Through Terminal Block			4mm² 两进两出接线端子 2-2 Feed Through Terminal Block			1.5mm² 两进两出接线端子(侧面标记) 2-2 Feed Through Terminal Block(Side Marking)			2.5mm² 两进两出接线端子(侧面标记) 2-2 Feed Through Terminal Block(Side Marking)		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5 [mm]	4	72.6	34.5	5	75.9	35.5	6	86.2	36	4	68	34.5	5	73	35.5
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	800	600		800	600		800	600		800	600		800	600	
额定电流Rated Current [A]	18	10		24	20		32	20		18	10		24	20	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-1.5	0.2-1.5	0.2-1	0.2-2.5	0.2-2.5	0.2-1.5	0.2-4	0.2-4	0.2-2.5	0.2-1.5	0.2-1.5	0.2-1	0.2-2.5	0.2-2.5	0.2-1.5
[AWG]	28-16	28-16	28-16	28-14	28-14	28-14	28-12	28-12	28-12	28-16	28-16	28-16	28-14	28-14	28-14
其余参数Other Parameters															
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0			V0			V0		
剥线长度Strip length [mm]	8-9			8-9			9-10			8-9			8-9		
	订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5 灰Gray	215931			225931			204931			215901			225901		
橙Orange	215932			225932			204932			*			*		
蓝Blue	215934			225934			204934			215902			225902		
	配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
灰Gray	215131			225131			204131			215101			225101		
端板Cover Plate 橙Orange	215132			225132			204132			215102			225102		
*	*			*			*			*			*		
跨接件Jumper 颜色Colour															
灰Gray	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
相邻跨接桥Adjacent Jumper	215301			225301			204301			215301			225301		
间隔跨接桥Staggered Jumper	*			225321-3			*			*			225321-3		
导线跨接桥Wire Jumper	*			225311(L=60mm) 225312(L=110mm) 225313(L=250mm)			*			*			225311(L=60mm) 225312(L=110mm) 225313(L=250mm)		
安全警告标记 Protective Warning Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5位PCS	215701			225701			204701			215701			225701		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
100PCS一片 （可提供印字服务Printing Service）	215801			225801			225801			215801			225801		







1.5mm² 两进两出接地端子 2-2 Feed Through Ground Terminal Block

		技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	4	72.6	34.5
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-1.5	0.2-1.5	0.2-1
	[AWG]	28-16	28-16	28-16
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	8-9		
		订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green	215947		
	*	*		
	*	*		
		配套附件Accessory		
端板Cover Plate		订货号Order NO.		
端板Cover Plate	灰Gray	215131		
	橙Orange	215132		
	*	*		
跨接件Jumper	颜色Colour			
	灰Gray	订货号Order NO.		
相邻跨接桥Adjacent Jumper		*		
间隔跨接桥Staggered Jumper		*		
导线跨接桥Wire Jumper		*		
安全警告标记 Protective Warning Marker		订货号Order NO.		
5位PCS		215701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
100PCS一片 （可提供印字服务Printing Service）		215801		

2.5mm² 两进两出接地端子 2-2 Feed Through Ground Terminal Block

		技术参数Technical Parameter		
		厚度Thickness	宽度Width	高度Height
		5	75.9	35.5
		IEC	UL	
		*	*	
		*	*	
		刚性Solid	柔性Fine Stranded	带冷压头Furrule
		0.2-2.5	0.2-2.5	0.2-1.5
		28-14	28-14	28-14
		V0		
		8-9		
		订货信息Order Information		
		订货号Order NO.		
		225947		
		*	*	
		*	*	
		配套附件Accessory		
		订货号Order NO.		
		225131		
		225132		
		*	*	
		订货号Order NO.		
		*	*	
		*	*	
		*	*	
		订货号Order NO.		
		225701		
		订货号Order NO.		
		225801		

4mm² 两进两出接地端子 2-2 Feed Through Ground Terminal Block

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6	86.2	36
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-4	0.2-2.5
28-12	28-12	28-12
V0		
9-10		
订货信息Order Information		
订货号Order NO.		
204947		
*		
*		
配套附件Accessory		
订货号Order NO.		
204131		
204132		
*		
订货号Order NO.		
*		
*		
*		
订货号Order NO.		
204701		
订货号Order NO.		
225801		











	1.5mm² 两进两出分断式接线端子 2-2 Feed Through Disconnect Terminal Block			2.5mm² 两进两出分断式接线端子 2-2 Feed Through Disconnect Terminal Block			4mm² 两进两出分断式接线端子 2-2 Feed Through Disconnect Terminal Block			1.5mm² 两进两出分断式接线端子(侧面标记) 2-2 Feed Through Disconnect Terminal Block Rail(Side Marking)			2.5mm² 两进两出分断式接线端子(侧面标记) 2-2 Feed Through Disconnect Terminal Block(Side Marking)		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5 [mm]	4	72.6	34.5	5	75.9	35.5	6	86.2	36	4	68	34.5	5	73	35.5
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	800	600		800	600		800	600		800	600		800	600	
额定电流Rated Current [A]	18	10		24	20		32	20		18	10		24	20	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-1.5	0.2-1.5	0.2-1	0.2-2.5	0.2-2.5	0.2-1.5	0.2-4	0.2-4	0.2-2.5	0.2-1.5	0.2-1.5	0.2-1	0.2-2.5	0.2-2.5	0.2-1.5
[AWG]	28-16	28-16	28-16	28-14	28-14	28-14	28-12	28-12	28-12	28-16	28-16	28-16	28-14	28-14	28-14
其余参数Other Parameters															
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0			V0			V0		
剥线长度Strip length [mm]	8-9			8-9			9-10			8-9			8-9		
	订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5 灰Gray	215936			225936			204936			215903			225903		
橙Orange	215937			225937			204937			*			*		
蓝Blue	215939			225939			204939			215904			225904		
	配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
灰Gray	215131			225131			204131			215101			225101		
端板Cover Plate 橙Orange	215132			225132			204132			215102			225102		
*	*			*			*			*			*		
跨接件Jumper 颜色Colour															
灰Gray	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
相邻跨接桥Adjacent Jumper	*			*			*			*			*		
间隔跨接桥Staggered Jumper	*			*			*			*			*		
导线跨接桥Wire Jumper	*			*			*			*			*		
安全警告标记 Protective Warning Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5位PCS	215701			225701			204701			215701			225701		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
100PCS一片 （可提供印字服务Printing Service）	215801			225801			225801			225801			225801		



2.5mm² 两进两出分断式保险丝接线端子(侧面标记)
2-2 Feed Through Fuse Terminal Block With Interrupted Power Rail(Side Marking)

		技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	5	72.6	35.5
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	800	600	
额定电流Rated Current	[A]	24	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-2.5	0.2-2.5	0.2-1.5
	[AWG]	28-14	28-14	28-14
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0	
剥线长度Strip length	[mm]		8-9	

		订货信息Order Information
产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	灰Gray	225908
	橙Orange	*
	蓝Blue	*

		配套附件Accessory
端板Cover Plate		订货号Order NO.
端板Cover Plate	灰Gray	225101
	橙Orange	225102
	*	*
跨接件Jumper	颜色Colour	
	灰Gray	订货号Order NO.
相邻跨接桥Adjacent Jumper		*
间隔跨接桥Staggered Jumper		*
导线跨接桥Wire Jumper		*
安全警告标记 **Protective Warning Marker**		订货号Order NO.
5位PCS		225701
正面标记和侧面标记Front And Side Marker		订货号Order NO.
100PCS一片 （可提供印字服务Printing Service）		225801

保险丝盒订货号:
225221(可接发光管220V)、225231(普通型)
适用于: 225908、G型
保险管规格5x20mm和5x25mm

Fuse Box P/N:
225221(For LED Light 220V), 225231(Normal Type)
App for: 225908, G Type
Fuse Size: 5x20mm, 5x25mm



2.5mm² 一进两出斜面接线端子
1-2 Feed Through Angled Type Terminal Block

		技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	5	50	43.5
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	800	600	
额定电流Rated Current	[A]	24	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-2.5	0.2-2.5	0.2-1.5
	[AWG]	28-14	28-14	28-14
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0	
剥线长度Strip length	[mm]		8-9	

		订货信息Order Information
产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	灰Gray	225961
	橙Orange	225962
	蓝Blue	225963

		配套附件Accessory
端板Cover Plate		订货号Order NO.
端板Cover Plate	灰Gray	225161
	橙Orange	225162
	*	*
跨接件Jumper	颜色Colour	
	灰Gray	订货号Order NO.
相邻跨接桥Adjacent Jumper		225301
间隔跨接桥Staggered Jumper		225321-3
导线跨接桥Wire Jumper		225311(L=60mm) 225312(L=110mm) 225313(L=250mm)
安全警告标记 **Protective Warning Marker**		订货号Order NO.
5位PCS		225701
正面标记和侧面标记Front And Side Marker		订货号Order NO.
100PCS一片 （可提供印字服务Printing Service）		225801



4mm² 一进两出斜面接线端子
1-2 Feed Through Angled Type Terminal Block

		技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	6	61.2	43.5
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	800	600	
额定电流Rated Current	[A]	32	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-4	0.2-2.5
	[AWG]	28-12	28-12	28-12
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0	
剥线长度Strip length	[mm]		9-10	

		订货信息Order Information
产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	灰Gray	204961
	橙Orange	204962
	蓝Blue	204963

		配套附件Accessory
端板Cover Plate		订货号Order NO.
端板Cover Plate	灰Gray	204161
	橙Orange	204162
	*	*
跨接件Jumper	颜色Colour	
	灰Gray	订货号Order NO.
相邻跨接桥Adjacent Jumper		204301
间隔跨接桥Staggered Jumper		*
导线跨接桥Wire Jumper		*
安全警告标记 **Protective Warning Marker**		订货号Order NO.
5位PCS		204701
正面标记和侧面标记Front And Side Marker		订货号Order NO.
100PCS一片 （可提供印字服务Printing Service）		225801




2.5mm² 两进两出斜面接线端子
2-2 Feed Through Angled Type Terminal Block

		技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	5	50.2	43.5
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	800	600	
额定电流Rated Current	[A]	24	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-2.5	0.2-2.5	0.2-1.5
	[AWG]	28-14	28-14	28-14
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	8-9		

		订货信息Order Information
产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	灰Gray	225965
	橙Orange	225966
	蓝Blue	225967

		配套附件Accessory
端板Cover Plate		订货号Order NO.
端板Cover Plate	灰Gray	225161
	橙Orange	225162
	*	*
跨接件Jumper	颜色Colour	
	灰Gray	订货号Order NO.
相邻跨接桥Adjacent Jumper		*
间隔跨接桥Staggered Jumper		*
导线跨接桥Wire Jumper		*
安全警告标记 **Protective Warning Marker**		订货号Order NO.
5位PCS		225701
正面标记和侧面标记Front And Side Marker		订货号Order NO.
100PCS一片 （可提供印字服务Printing Service）		225801



2.5mm² 一进两出斜面接地端子
1-2 Feed Through Ground Angled Type Terminal Block

		技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	5	50	43.5
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-2.5	0.2-2.5	0.2-1.5
	[AWG]	28-14	28-14	28-14
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	8-9		

		订货信息Order Information
产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	黄绿Yellow green	225964
	*	*
	*	*

		配套附件Accessory
端板Cover Plate		订货号Order NO.
端板Cover Plate	灰Gray	225161
	橙Orange	225162
	*	*
跨接件Jumper	颜色Colour	
	灰Gray	订货号Order NO.
相邻跨接桥Adjacent Jumper		*
间隔跨接桥Staggered Jumper		*
导线跨接桥Wire Jumper		*
安全警告标记 **Protective Warning Marker**		订货号Order NO.
5位PCS		225701
正面标记和侧面标记Front And Side Marker		订货号Order NO.
100PCS一片 （可提供印字服务Printing Service）		225801




4mm² 一进两出斜面接地端子
1-2 Feed Through Ground Angled Type Terminal Block


		技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	6	61.2	43.5
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-4	0.2-2.5
	[AWG]	28-12	28-12	28-12
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	9-10		

		订货信息Order Information
产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	黄绿Yellow green	204964
	*	*
	*	*

		配套附件Accessory
端板Cover Plate		订货号Order NO.
端板Cover Plate	灰Gray	204161
	橙Orange	204162
	*	*
跨接件Jumper	颜色Colour	
	灰Gray	订货号Order NO.
相邻跨接桥Adjacent Jumper		*
间隔跨接桥Staggered Jumper		*
导线跨接桥Wire Jumper		*
安全警告标记 **Protective Warning Marker**		订货号Order NO.
5位PCS		204701
正面标记和侧面标记Front And Side Marker		订货号Order NO.
100PCS一片 （可提供印字服务Printing Service）		225801








		1.5mm² 一针一线插拔式接线端子 1-1 Feed Through Pluggable Terminal Block			2.5mm² 一针一线插拔式接线端子 1-1 Feed Through Pluggable Terminal Block			1.5mm² 两针两线插拔式接线端子 2-2 Feed Through Pluggable Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	3.5	49.5	29.6	5	53	35.5	3.5	85.8	29.6
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	500	300		800	600		500	300	
额定电流Rated Current	[A]	13.5	10		24	20		13.5	10	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-1.5	0.2-1.5	0.2-1	0.2-2.5	0.2-2.5	0.2-1.5	0.2-1.5	0.2-1.5	0.2-1
	[AWG]	24-16	24-16	24-16	28-14	28-14	28-14	24-16	24-16	24-16
其余参数Other Parameters										
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0		
剥线长度Strip length	[mm]	8-9			8-9			8-9		
		订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	灰Gray	2150-1201			225981			2150-1401		
	橙Orange	2150-1202			225982			2150-1402		
	蓝Blue	2150-1204			225984			2150-1404		
		配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.		
端板Cover Plate	灰Gray	2150-1291			225181			2150-1491		
	橙Orange	2150-1292			225182			2150-1492		
	*	*			*			*		
跨接件Jumper	颜色Colour									
	灰Gray	订货号Order NO.			订货号Order NO.			订货号Order NO.		
相邻跨接桥Adjacent Jumper		2150-302~2150-320 注: (2-20位梳状跨接桥)			225301			2150-302~2150-320		
间隔跨接桥Staggered Jumper		2150-402~2150-410 注: (2-20位跨盖板跨接桥)			225321-3			2150-402~2150-410		
导线跨接桥Wire Jumper		*			225311(L=60mm) 225312(L=110mm) 225313(L=250mm)			*		
安全警告标记 **Protective Warning Marker**		订货号Order NO.			订货号Order NO.			订货号Order NO.		
5位PCS		215701			225701			215701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
100PCS一片 （可提供印字服务Printing Service）		2150-801			225801			2150-801		










	1.5mm² 一针一线插拔式接地端子 1-1 Feed Through Ground Pluggable Terminal Block			2.5mm² 一针一线插拔式接地端子 1-1 Feed Through Ground Pluggable Terminal Block			1.5mm² 两针两线插拔式接地端子 2-2 Feed Through Ground Pluggable Terminal Block			1.5mm² 插头 Plug		
尺寸Size	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5 [mm]	厚度Thickness 3.5	宽度Width 49.5	高度Height 29.6	厚度Thickness 5	宽度Width 53	高度Height 35.5	厚度Thickness 3.5	宽度Width 85.8	高度Height 29.6	尺寸Size [mm]	厚度Thickness (P*3.5+1)	宽度Width 38.95	高度Height 21.5
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL		**额定参数Rated Parameters**	IEC	UL	
额定电压Rated Voltage [V]	*	*		*	*		*	*		额定电压Rated Voltage [V]	500	300	
额定电流Rated Current [A]	*	*		*	*		*	*		额定电流Rated Current [A]	13.5	10	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	**接线容量Wire Range**	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-1.5	0.2-1.5	0.2-1	0.2-2.5	0.2-2.5	0.2-1.5	0.2-1.5	0.2-1.5	0.2-1	[mm²]	0.2-1.5	0.2-1.5	0.2-1
[AWG]	24-16	24-16	24-16	28-14	28-14	28-14	24-16	24-16	24-16	[AWG]	24-16	24-16	24-16
其余参数Other Parameters										**其余参数Other Parameters**			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0			绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0		
剥线长度Strip length [mm]	8-9			8-9			8-9			[mm]	8-9		
	订货信息Order Information			订货信息Order Information			订货信息Order Information				订货信息Order Information		
产品Product 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			**产品Product** 位数Pole No. 颜色Colour	订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5 黄绿Yellow green	2150-1207			225987			2150-1407			1 灰Gray	2150-101		
*	*			*			*			... ...	...		
*	*			*			*			15 灰Gray	2150-115		
	配套附件Accessory			配套附件Accessory			配套附件Accessory				配套附件Accessory		
端板Cover Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.			**端板Cover Plate**	订货号Order NO.		
端板Cover Plate 灰Gray	2150-1291			225181			2150-1491			端板Cover Plate (2150-1XX已包含盖板) 灰Gray	*		
橙Orange	2150-1292			225182			2150-1492			橙Orange	*		
*	*			*			*			*	*		
跨接件Jumper 颜色Colour										**跨接件Jumper** 颜色Colour			
灰Gray	订货号Order NO.			订货号Order NO.			订货号Order NO.			灰Gray	订货号Order NO.		
相邻跨接桥Adjacent Jumper	*			*			*			相邻跨接桥Adjacent Jumper	*		
间隔跨接桥Staggered Jumper	*			*			*			间隔跨接桥Staggered Jumper	*		
导线跨接桥Wire Jumper	*			*			*			导线跨接桥Wire Jumper	*		
安全警告标记 Protective Warning Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			**安全警告标记 Protective Warning Marker**	订货号Order NO.		
5位PCS	215701			225701			215701			5位PCS	215701		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			**正面标记和侧面标记Front And Side Marker**	订货号Order NO.		
100PCS一片 （可提供印字服务Printing Service）	2150-801			225801			2150-801			100PCS一片 （可提供印字服务Printing Service）	2150-801		


UK系列螺钉接线端子

UK Rail-mounted Terminal Blocks With Screw Clamp

UK系列螺钉接线端子使用螺钉压线框技术，能够完成各种客户需求的端子组合并提供丰富的组合端子附件供客户挑选使用。能够最大程度的保证客户操作的舒适性，既节省了占用空间又便于操作实现。广泛应用于各种低压电力设备的控制连接转换。产品设计制造符合IEC60947、UL1059等国际标准，并取得CQC、UL、VDE、TUV、CE、ROHS等认证。

UK series rail-mounted screw terminal blocks use screw pressure wire frame technology, is able to complete the terminal connection of a variety of customers' needs and provide a rich combination of terminal accessories. Able to ensure the greatest degree of customers operations comfort, save space and easy to operate. It widely used in the control of the respective low-voltage electrical equipment. Prouctc design and manufacturing in line with relevant international standards such as IEC60947, UL1059 and achieved CQC, UL, VDE, CE, ROHS certification.

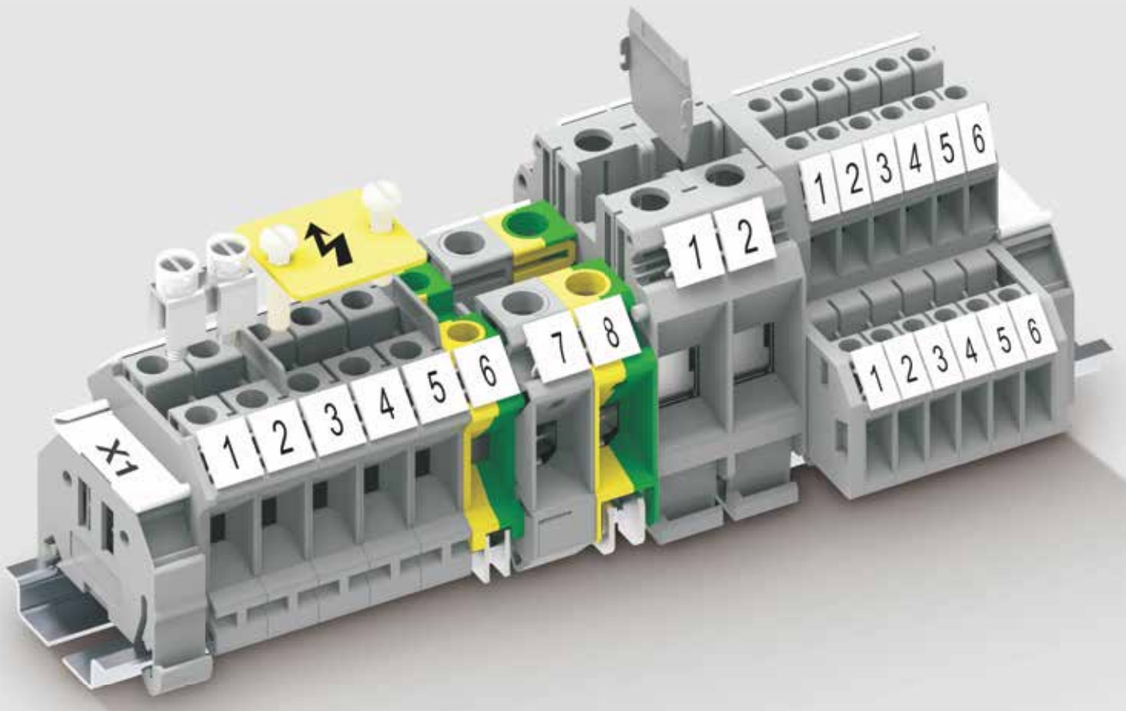


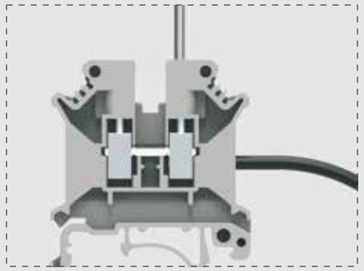

螺钉接线　Screw Connection

▲具有稳定优良的接触特性，连接可靠，接触应用广泛

▲ It has stable contact characteristics, reliable connection and widely used

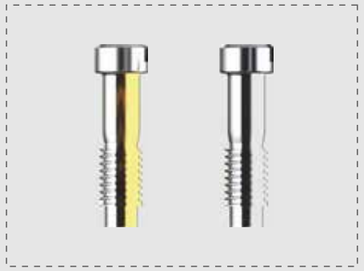

螺钉材料　Screw Material

▲具有铜/钢两种材料的螺钉，为客户提供多种选择


▲ Material option: Brass or steel



标识　Marking

▲清晰的标记可为端子的安装提供安全、快速的保障

▲ Clear marking can provide safety and fast guarantee for terminal installation

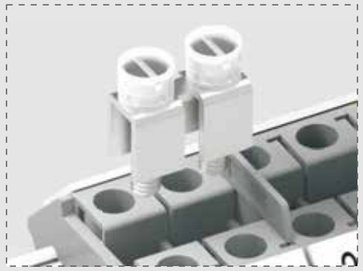

跨接系统　Jumper Connector System

▲使用螺钉固定的跨接件

▲ Use the jumper fixed with screws



警告标识　Warning Marker

▲大片的标识，明显的标识出警告位置

▲ Big maker, clearly indicate the warning position



端子挡板　Terminal Board

▲可对端子进行清晰的分组


▲ Terminal blocks can be grouped clearly



双层端子　Double Deck Terminal Block

▲上下两层采用错开设计：便于螺丝刀对于下层的操作，可看清下层的标记和导线


▲Staggered design for upper and lower layer: Easy for the screwdriver to operate the lower layer, and can see the marking and wire clearly in lower layer

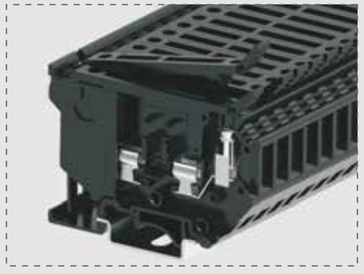

保险管端子　Terminal Block With Fuse

▲内部安装保险管， 可满足相应电路设计

▲ Install the fuse inside, to meet the corresponding circuit design

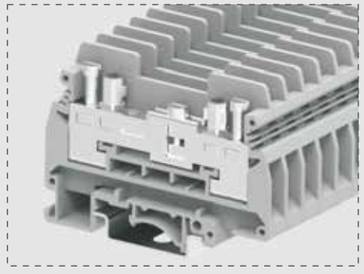

分断测试端子　Disconnect Test Terminal Block

▲可实现电流互感器二次回路的各种测试连接

▲ Can achieve the various testing connect of secondary circuit of current transformer











	1.5mm² UK接线端子 UK Terminal Block			2.5mm² UK接线端子 UK Terminal Block			2.5mm² UK接线端子 UK Terminal Block			4mm² UK接线端子 UK Terminal Block			6mm² UK接线端子 UK Terminal Block		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
	4.2	42.5	42	6.1	42.2	42	5.1	42.2	46.8	6.1	42.2	46.8	8.1	42.2	46.8
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	500	300		800	300		800	600		800	600		800	600	
额定电流Rated Current [A]	17.5	15		24	20		24	20		32	30		41	50	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-1.5	0.2-1.5	0.2-1.5	0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.25-2.5	0.2-10	0.2-6	0.25-6
[AWG]	30-14	30-14	30-14	30-12	30-12	30-12	28-12	28-12	28-12	30-10	30-10	30-10	26-8	26-8	26-8
螺钉类型Screw Type [*]	M2			M3			M3			M3			M4		
扭矩Torque [N.m]	0.2-0.25			0.6-0.8			0.6-0.8			0.6-0.8			1.2-1.5		
其余参数Other Parameters															
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0			V0			V0		
剥线长度Strip length [mm]	7			7-8			8-9			8-9			10-11		
	订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
灰Gray	301901			302901			303901			305901			306901		
橙Orange	301904			302904			303904			305904			306904		
蓝Blue	301902			302902			303902			305902			306902		
	配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
端板Cover Plate 灰Gray	302101			302101			303101			303101			303101		
橙Orange	302102			302102			303102			303102			303102		
隔板Intermediate Plate 灰Gray	*			*			302151			302151			302151		
跨接件Jumper															
位数Poles No.	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	*			302302			303302			302302			306302		
3	*			302303			303303			302303			306303		
4	*			302304			303304			302304			306304		
...	.....			.....			.....			.....			.....		
9	*			302309			303309			302309			306309		
10	*			302310			303310			302310			306310		
安全警告标记 Protective Warning Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
	*			*			*			*			306701		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	*			306801			305801			306801			308801		

UK系列螺钉接线端子 UK Rail-mounted terminal blocks with screw clamp












		10mm² UK接线端子 UK Terminal Block			16mm² UK接线端子 UK Terminal Block			35mm² UK接线端子 UK Terminal Block			50mm² UK接线端子 UK Terminal Block			70mm² UK接线端子 UK Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	10	42.2	46.8	12	42.2	53.7	15	50.3	62.3	20.4	70.7	76.1	20.4	70.5	79.5
额定参数Rated Parameters		IEC	UL		IEC	UL			UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	600		800	600		1000	600		1000	600		1000	600	
额定电流Rated Current	[A]	57	65		76	85		125	150		150	150		192	150	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.5-16	0.5-10	0.5-6	2.5-25	4-16	1.5-16	0.75-50	0.75-35	0.75-35	16-70	25-70	25-50	16-70	16-70	25-70
	[AWG]	24-6	24-6	24-6	22-4	22-4	22-4	18-1/0	18-1/0	18-1/0	6-2/0	6-2/0	6-2/0	22-6	22-6	22-6
螺钉类型Screw Type	[*]		M4			M4			M6			M6			M8	
扭矩Torque	[N.m]		1.2-1.5			1.2-1.5			3.0-3.5			6-8			12	
其余参数Other Parameters																
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0			V0		
剥线长度Strip length	[mm]	10-11			11-12			16-17			24			22		
		订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	灰Gray	310901			316901			335901			350901			370901		
	橙Orange	310904			316904			335904			*					
	蓝Blue	310902			316902			335902			*					
		配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
端板Cover Plate	灰Gray	303101			316101			*			*			*		
	橙Orange	303102			316102			*			*			*		
隔板Intermediate Plate	灰Gray	302151			302151			302151			*			*		
跨接件Jumper																
位数Poles No.		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2		310302			316302			335302			*			*		
3		310303			316303			335303			*			*		
4		310304			316304			335304			*			*		
...		.....			.....			.....			.....			.....		
9		310309			316309			335309			*			*		
10		310310			316310			335310			*			*		
安全警告标记 **Protective Warning Marker**		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
		310701			316701			*			*			*		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		310801			312801			315801			310801			TMB10.2-10		

UK系列螺钉接线端子 UK Rail-mounted terminal blocks with screw clamp

新品 NEW










		95mm² UK接线端子 UK Terminal Block		
尺寸Size		技术参数Technical Parameter		
		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	25	82.9	89.9
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	1000	600	
额定电流Rated Current	[A]	232	230	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	29-95	29-95	29-95
	[AWG]	2-4/0	2-4/0	2-4/0
螺钉类型Screw Type	[*]		M8	
扭矩Torque	[N.m]		15-18	
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0	
剥线长度Strip length	[mm]		33	
		订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	灰Gray	395901		
	橙Orange			
	蓝Blue			
		配套附件Accessory		
端板Cover Plate	颜色Colour	订货号Order NO.		
端板Cover Plate	灰Gray	*		
	橙Orange	*		
隔板Intermediate Plate	灰Gray	*		
跨接件Jumper				
位数Poles No.		订货号Order NO.		
2		*		
3		*		
4		*		
...		.....		
9		*		
10		*		
安全警告标记 Protective Warning Marker		订货号Order NO.		
		*		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
可提供印字服务Printing Service		316801		


		2.5mm²,UK二进二出接线端子 2-2 Feed Through Terminal Block			4mm²,UK二进二出接线端子 2-2 Feed Through Terminal Block		
尺寸Size					技术参数Technical Parameter		
					厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	5.2	58	45.9	6.2	58	45.9
额定参数Rated Parameters					IEC	UL	
额定电压Rated Voltage	[V]	500	300		630	600	
额定电流Rated Current	[A]	24	20		32	30	
接线容量Wire Range					刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4
	[AWG]	24-12	24-12	24-12	30-10	30-10	30-10
螺钉类型Screw Type	[*]		M3			M3	
扭矩Torque	[N.m]		0.5-0.6			0.5-0.6	
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		8-9			8-9	
					订货信息Order Information		
产品Product	颜色Colour				订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	灰Gray		303941		305941		
	橙Orange		303944		305944		
	蓝Blue		303942		305942		
					配套附件Accessory		
端板Cover Plate	颜色Colour				订货号Order NO.		
端板Cover Plate	灰Gray		303141		303141		
	橙Orange		303142		303142		
隔板Intermediate Plate	灰Gray		*		*		
跨接件Jumper							
位数Poles No.					订货号Order NO.		
2			303302		302302		
3			303303		302303		
4			303304		302304		
...			.....		.....		
9			303309		302309		
10			303310		302310		
安全警告标记 Protective Warning Marker					订货号Order NO.		
			*		*		
正面标记和侧面标记Front And Side Marker					订货号Order NO.		
可提供印字服务Printing Service			315801		316801		













		1.5mm² UK接地端子 UK Ground Terminal Block			2.5mm² UK接地端子 UK Ground Terminal Block			4mm² UK接地端子 UK Ground Terminal Block			6mm² UK接地端子 UK Ground Terminal Block			10mm² UK接地端子 UK Ground Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	6.1	42.9	41.85	5.1	42.9	47.25	6.1	42.9	47.2	8.1	42.9	47.2	10.2	42.8	47.2
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*		*	*		*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*		*	*		*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-2.5	0.25-2.5	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.25-2.5	0.2-10	0.2-6	0.25-6	0.5-16	0.5-10	0.5-6
	[AWG]	30-12	30-12	30-12	28-12	28-12	28-12	30-10	30-10	30-10	26-8	26-8	26-8	24-6	24-6	24-6
螺钉类型Screw Type	[*]	M3			M3			M3			M4			M4		
扭矩Torque	[N.m]	0.6-0.8			0.6-0.8			0.6-0.8			1.2-1.5			1.2-1.5		
其余参数Other Parameters																
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0			V0		
剥线长度Strip length	[mm]	7-8			8-9			8-9			10-11			10-11		
		订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail	黄绿Yellow green	302903			303903			305903			306903			310903		
	*	*			*			*			*			*		
NS 35/7.5	*	*			*			*			*			*		
		配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
端板Cover Plate	灰Gray	*			*			*			*			*		
	橙Orange	*			*			*			*			*		
隔板Intermediate Plate	灰Gray	*			302151			302151			302151			302151		
跨接件Jumper																
位数Poles No.		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2		*			*			*			*			*		
3		*			*			*			*			*		
4		*			*			*			*			*		
...		.....			.....			.....			.....			.....		
9		*			*			*			*			*		
10		*			*			*			*			*		
安全警告标记 Protective Warning Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
		*			*			*			306701			310701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		306801			305801			306801			308801			310801		







	16mm² UK接地端子 UK Ground Terminal Block			35mm² UK接地端子 UK Ground Terminal Block			50mm² UK接地端子 UK Ground Terminal Block		
尺寸Size	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5 [mm]	12	43	54.3	15	50.4	62.45	20	70.7	76.2
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	*	*		*	*		*	*	
额定电流Rated Current [A]	*	*		*	*		*	*	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	2.5-25	4-16	1.5-16	0.75-50	0.75-35	0.75-35	16-70	25-70	25-50
[AWG]	22-4	22-4	22-4	18-1/0	18-1/0	18-1/0	6-2/0	6-2/0	6-2/0
螺钉类型Screw Type [*]		M4			M6				
扭矩Torque [N.m]		1.2-1.5			3.0-3.5				
其余参数Other Parameters									
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0		
剥线长度Strip length [mm]	11-12			15-16					
	订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 黄绿Yellow green	316903			335903			350903		
Can Be Used For DIN Rail *	*			*			*		
NS 35/7.5 *	*			*			*		
	配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
端板Cover Plate 灰Gray	*			*			*		
橙Orange	*			*			*		
隔板Intermediate Plate 灰Gray	302151			302151			*		
跨接件Jumper									
位数Poles No.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	*			*			*		
3	*			*			*		
4	*			*			*		
...	.....			.....			.....		
9	*			*			*		
10	*			*			*		
安全警告标记 Protective Warning Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.		
	316701			*			*		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	312801			315801			310801		













		2.5mm² SUK接线端子 SUK Terminal Block			2.5mm² SUK接线端子 SUK Terminal Block			4mm² SUK接线端子 SUK Terminal Block			6mm² SUK接线端子 SUK Terminal Block			10mm² SUK接线端子 SUK Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	6.1	42.2	42	5.1	42.2	46.8	6	42.2	46.8	8.1	42.2	46.8	10	42.2	46.8
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	300		800	600		800	600		800	600		800	600	
额定电流Rated Current	[A]	24	20		24	20		32	30		41	50		57	65	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-2.5	0.25-2.5	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.25-4	0.2-10	0.2-6	0.25-6	1.5-16	1.5-10	1.5-6
	[AWG]	30-12	30-12	30-12	28-12	28-12	28-12	30-10	30-10	30-10	26-8	26-8	26-8	16-6	16-6	16-6
螺钉类型Screw Type	[*]		M3			M3			M3			M4			M4	
扭矩Torque	[N.m]		0.6-0.8			0.6-0.8			0.6-0.8			1.2-1.5			1.2-1.5	
其余参数Other Parameters																
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0			V0		
剥线长度Strip length	[mm]	8-9			8-9			8-9			10-11			10-11		
		订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	灰Gray	302991			303991			305991			306991			310991		
	橙Orange	302994			303994			305994			306994			310994		
	蓝Blue	302992			303992			305992			306992			310992		
		配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
端板Cover Plate	灰Gray	302101			303101			303101			303101			303101		
	橙Orange	302102			303102			303102			303102			303102		
隔板Intermediate Plate	灰Gray	*			302151			302151			302151			302151		
跨接件Jumper																
位数Poles No.		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2		302302			303302			302302			306302			310302		
3		302303			303303			302303			306303			310303		
4		302304			303304			302304			306304			310304		
...		.....			.....			.....			.....			.....		
9		302309			303309			302309			306309			310309		
10		302310			303310			302310			306310			310310		
安全警告标记 **Protective Warning Marker**		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
		*			*			*			306701			310701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		306801			305801			306801			308801			310801		













		16mm² SUK接线端子 SUK Terminal Block			35mm² SUK接线端子 SUK Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	12.2	50.5	50.8	16	53.5	62.5
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	600		1000	600	
额定电流Rated Current	[A]	76	85		125	150	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	6-16	6-16	6-16	10-35	10-35	10-35
	[AWG]	10-4	10-4	10-4	8-1/0	8-1/0	8-1/0
螺钉类型Screw Type	[*]		M5			M6	
扭矩Torque	[N.m]		2.0-2.5			3.0-3.5	
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	12-13			16-17		
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	316991			335991		
	橙Orange	316994			335994		
	蓝Blue	316992			335992		
		配套附件Accessory			配套附件Accessory		
端板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.		
端板Cover Plate	灰Gray	*			*		
	橙Orange	*			*		
隔板Intermediate Plate	灰Gray	302151			302151		
跨接件Jumper							
位数Poles No.		订货号Order NO.			订货号Order NO.		
2		316302			335302		
3		316303			*		
4		316304			*		
...		.....			*		
9		316309			*		
10		316310			*		
安全警告标记 Protective Warning Marker		订货号Order NO.			订货号Order NO.		
		316701			*		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		310801			310801		


		2.5mm² SUK接地端子 SUK Ground Terminal Block			2.5mm² SUK接地端子 SUK Ground Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	6.1	42.9	41.85	5.1	42.9	47.25
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-2.5	0.25-2.5	0.2-4	0.2-2.5	0.25-2.5
	[AWG]	30-12	30-12	30-12	28-12	28-12	28-12
螺钉类型Screw Type	[*]		M3			M3	
扭矩Torque	[N.m]		0.6-0.8			0.6-0.8	
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	7-8			8-9		
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green	302993			303993		
	*	*			*		
	*	*			*		
		配套附件Accessory			配套附件Accessory		
端板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.		
端板Cover Plate	灰Gray	*			*		
	橙Orange	*			*		
隔板Intermediate Plate	灰Gray	*			302151		
跨接件Jumper							
位数Poles No.		订货号Order NO.			订货号Order NO.		
2		*			*		
3		*			*		
4		*			*		
...		.....			.....		
9		*			*		
10		*			*		
安全警告标记 Protective Warning Marker		订货号Order NO.			订货号Order NO.		
		*			*		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		310801			310801		












		4mm² SUK接地端子 SUK Ground Terminal Block			6mm² SUK接地端子 SUK Ground Terminal Block			10mm² SUK接地端子 SUK Ground Terminal Block			16mm² SUK接地端子 SUK Ground Terminal Block			35mm² SUK接地端子 SUK Ground Terminal Block		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	6.1	42.9	47.2	8.1	42.9	47.2	10.2	42.8	47.2	12.2	50.5	50.3	16	53.2	62.2
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*		*	*		*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*		*	*		*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-6	0.2-4	0.25-2.5	0.2-10	0.2-6	0.25-6	0.2-16	0.2-10	0.5-6	0.2-25	0.2-16	0.5-16	0.5-35	0.5-35	0.75-35
	[AWG]	30-10	30-10	30-10	26-8	26-8	26-8	16-6	16-6	16-6	10-4	10-4	10-4	8-1/0	8-1/0	18-1/0
螺钉类型Screw Type	[*]	M3			M4			M4			M5			M6		
扭矩Torque	[N.m]	0.6-0.8			1.2-1.5			1.2-1.5			2.0-2.5			3.0-3.5		
其余参数Other Parameters																
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0			V0		
剥线长度Strip length	[mm]	8-9			10-11			10-11			12-13			16-17		
		订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green	305993			306993			310993			316993			335993		
		*			*			*			*			*		
		*			*			*			*			*		
		配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
端板Cover Plate	灰Gray	*			*			*			*			*		
	橙Orange	*			*			*			*			*		
隔板Intermediate Plate	灰Gray	302151			302151			302151			302151			302151		
跨接件Jumper																
位数Poles No.		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2		*			*			*			*			*		
3		*			*			*			*			*		
4		*			*			*			*			*		
...		.....			.....			.....			.....			.....		
9		*			*			*			*			*		
10		*			*			*			*			*		
安全警告标记 Protective Warning Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
		*			306701			310701			316701			*		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		306801			308801			310801			310801			310801		











		2.5mm² UKD接线端子 UKD Double Lever Terminal Block			4mm² UKD接线端子 UKD Double Level Terminal Block			4mm² UKD上下导通接线端子 UKD Double Level with Equipotential Bonder Terminal Block			10mm² UKD接线端子 UKD Double Level Terminal Block			10mm² UKD上下导通接线端子 UKD Double Level with Equipotential Bonder Terminal Blovk		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	5.2	67.2	62.2	6.2	67.2	62.2	6.2	67.2	62.2	10.2	77.5	73	10.2	77.5	73
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	500	600		500	600		500	600		500	600		500	600	
额定电流Rated Current	[A]	24	20		32	30		32	30		57	65		57	65	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-4	0.25-4	0.2-4	0.2-4	0.25-4	0.5-10	0.5-10	0.5-10	0.5-10	0.5-10	0.5-10
	[AWG]	28-12	28-12	28-12	26-10	26-10	26-10	26-10	26-10	26-10	24-6	24-6	24-6	24-6	24-6	24-6
螺钉类型Screw Type	[*]		M3			M3			M3			M4			M4	
扭矩Torque	[N.m]		0.6-0.8			0.6-0.8			0.6-0.8			1.2-1.5			1.2-1.5	
其余参数Other Parameters																
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0			V0		
剥线长度Strip length	[mm]	8-9			8-9			8-9			11-12			11-12		
		订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	303921			305921			305921-PV			310921			310921-PV		
	蓝Blue	303922			305922			*			*			*		
		配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
端板Cover Plate	灰Gray	303121			303121			303121			310121			310121		
	橙Orange	*			*			*			*			*		
隔板Intermediate Plate	灰Gray	*			*			302151			*			*		
补偿盖板 Compensatory Cover Plate	灰Gray	305121			305121			*			*			*		
跨接件Jumper																
位数Poles No.		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2		303302			302302			302302			310302			310302		
3		303303			302303			302303			310303			310303		
4		303304			302304			302304			310304			310304		
...		.....			.....			.....			.....			.....		
9		303309			302309			302309			310309			310309		
10		303310			302310			302310			310310			310310		
安全警告标记 Protective Warning Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
		*			*			*			*			*		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		305801			306801			306801			310801			310801		









不提供保险管，图片只供参考使用
No fuse is provided. The picture is for reference only

		6mm² 普通分断测试连接器 General test terminal block			6mm² 带导电柱分断测试连接器 Test terminal block with conductive column		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	8.2	72.4	50.6	8.2	72.4	50.6
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	630	300		630	300	
额定电流Rated Current	[A]	41	50		41	50	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.5-10	0.5-6	0.5-6	0.5-10	0.5-6	0.5-6
	[AWG]	26-8	26-8	26-8	26-8	26-8	26-8
螺钉类型Screw Type	[*]		M4			M4	
扭矩Torque	[N.m]		1.2-1.6			1.2-1.6	
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	13-14			13-14		
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	SUK6-T-GY			SUK6-T-JP-GY		
	蓝Blue	*			*		
		配套附件Accessory			配套附件Accessory		
端板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.		
端板Cover Plate	灰Gray	306101			306101		
	橙Orange	*			*		
隔板Intermediate Plate	灰Gray	306151			306151		
补偿盖板 Compensatory Cover Plate	灰Gray	*			*		
跨接件Jumper							
位数Poles No.		订货号Order NO.			订货号Order NO.		
2		*	*		SB8.2-2	SB8.2-10	
3							
4							
...							
9							
10							
安全警告标记 Protective Warning Marker		订货号Order NO.			订货号Order NO.		
		*			*		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		308801			308801		


		6mm² URTK/S分断测试端子 URTK/S General Test Terminal Block			4mm² UK5/HESI(带保险管) UK5/HESI Terminal Block With Fuse		
		技术参数Technical Parameter			技术参数Technical Parameter		
		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
		8.2	72.4	51.7	8	72.6	50.4
		IEC	UL		IEC	UL	
		400	300		500	600	
		41	50		6.3	12	
		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
		0.5-10	0.5-6	0.5-4	0.2-4	0.2-4	0.25-4
		26-8	26-8	26-8	26-10	26-10	26-10
			M4			M3	
			1.2-1.5			0.6-0.8	
		V0			V0		
		13-14			8-9		
		订货信息Order Information			订货信息Order Information		
		订货号Order NO.			订货号Order NO.		
		306911			灰Gray 305972		
		*			黑Black 305971		
		配套附件Accessory			配套附件Accessory		
		订货号Order NO.			订货号Order NO.		
		306101			*		
		*			*		
		306151			*		
		*			*		
		订货号Order NO.			订货号Order NO.		
		306322	306320		*		
					*		
					*		
					.....		
					*		
					*		
		订货号Order NO.			订货号Order NO.		
		*			*		
		订货号Order NO.			订货号Order NO.		
		308801			308801		


TB系列微型弹簧接线端子

TB Rail-mounted Terminal Blocks With Spring-cage Clamp

TB系列微型弹簧接线端子采用笼式弹簧接线技术，产品精巧，拼装灵活。能够满足客户更加苛刻的使用空间要求。提供了螺钉固定、销钉固定、小导轨卡接固定、大导轨卡接固定和组合固定等多种固定方式，便于客户将产品固定在各种各样的使用空间中。产品设计制造符合IEC/EN60947、UL1059等国际标准，并通过TUV、CE、CQC、UL、CB认证。

TB series rail-mounted spring cage clamp terminal blocks use spring cage connection technology. The product is compact and can be flexible assembled. Can meet customer requirement for the space saving, fixing ways can be with screws , with snap-in mounting feet, on small Din rail, on big Din rail or certain combination ways. Product design and manufacturing is in line with the international standard IEC60947, UL1059, UL486E. and have the certificates CQC, UL, VDE, CE, ROHS etc.

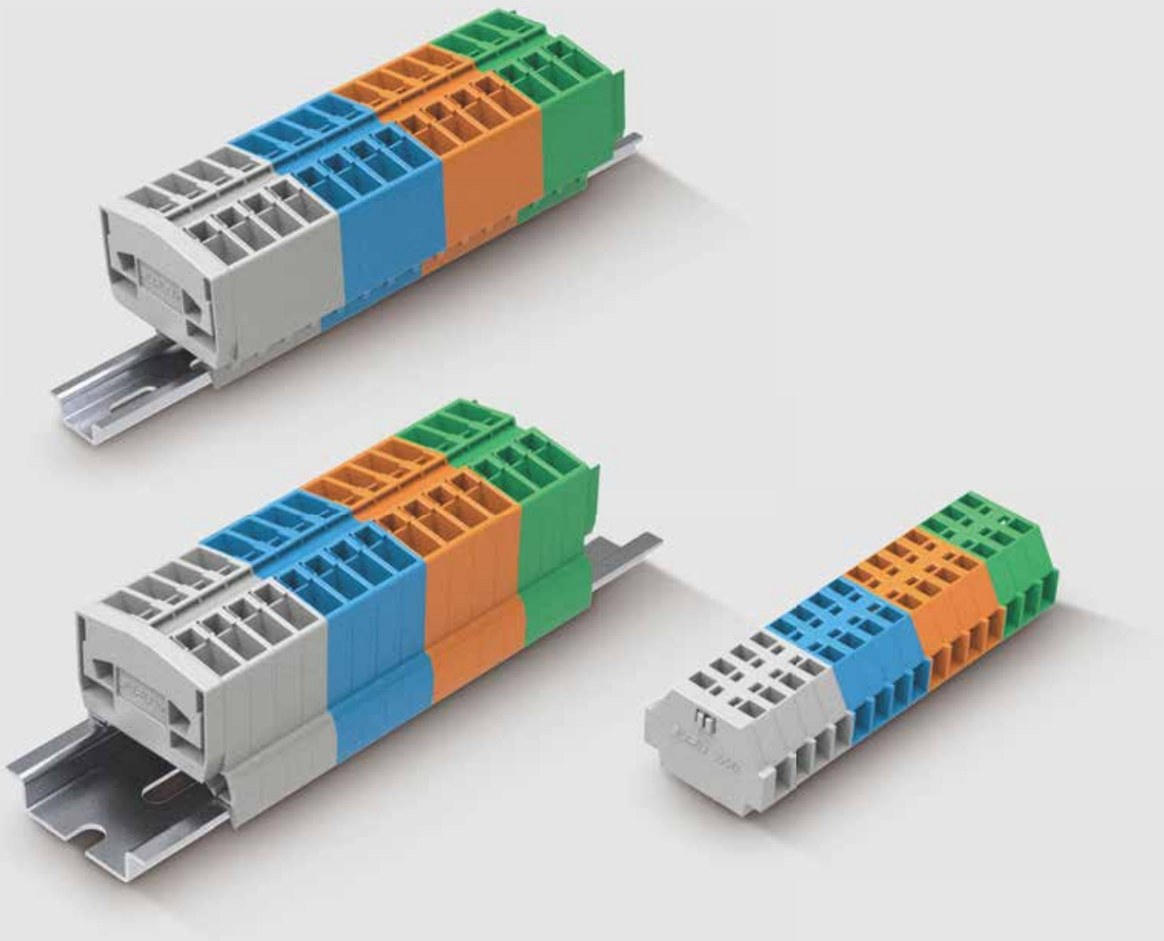


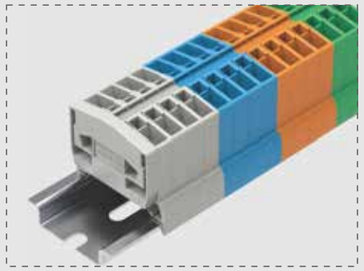

小型化　Miniaturization

▲ 小型的体积满足客户的特殊需求，可适用于小型电机和小电源的接线、布线


▲ The compacted space can reach customers' special demand, especially used for mini motor, low current wire connections.

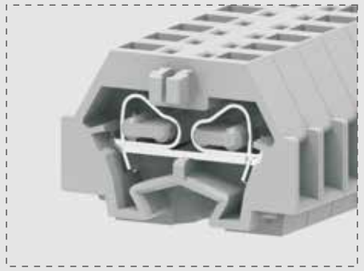

连接方式　Connection Method

▲ 通过榫头接合相互卡接形成端子条


▲ By section and slot, the terminal blocks can be formed into decked.

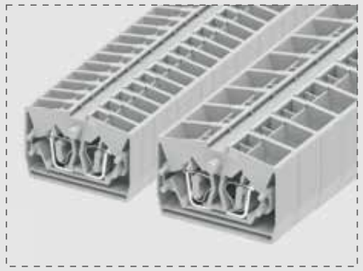

接线　Wiring

▲ 具有一进一出和两进两出两种接线方式

▲ 1-1 or 2-2 feed through connection option.

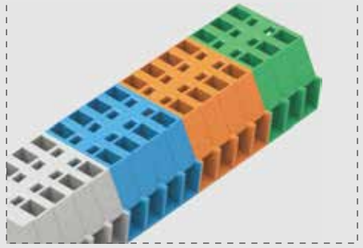

颜色　Color

▲ 具有多种颜色可供选择，满足多样化的线路布线

▲ Different colors are optional for customers' special requirements.



跨接系统　Jumper System

▲ 相邻跨接桥可桥接相邻的端子

▲ Jumper can get the adjacent terminal blocks connected.



导轨　DIN Rail

▲ 拥有两种规格卡脚，可安装至TS15或TS35两种导轨上

▲ 2 kinds of fixing feet where can connect to the TS15 or TS35 din rail.



按键　Press Button

▲ 按键可以直接方便导线的安装

▲ It's easy to connect the wires by press buttons.



端板　End cover

▲ 具有带固定器、带销钉多种固定方式的端板

▲ The plate can have fixing flanges or snap-in mounting feet.



固定支架　Fixed Support

▲ 可将端子通过固定支架安装到导轨上

▲ The terminal blocks can be assembled to din rails through fixed support.












	240系列一进一出带固定器侧面接线端子 240 Series 1-1 Feed Through Terminal Block With Fixing Flanges of Side-entry			240系列两进两出带固定器侧面接线端子 240 Series 2-2 Feed Through Terminal Block With Fixing Flanges of Side-entry			240系列一进一出带销钉侧面接线端子 240 Series 1-1 Feed Through Terminal Block With Snap-in Mounting Feet of Side-entry			240系列两进两出带销钉侧面接线端子 240 Series 2-2 Feed Through Terminal Block With Snap-in Mounting Feet of Side-entry			240系列一进一出侧面接线终端用端子 240 Series 1-1 Feed Through End Terminal Block With Snap-in Mounting Feet of Side-entry		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
[mm]	8	25.1	17.2	8	25.1	17.2	5	25.1	17.2	8	25.1	17.2	5	25.1	17.2
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	400	300		400	300		400	300		400	300		400	300	
额定电流Rated Current [A]	18	10		18	10		18	10		18	10		18	10	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm^2]	0.2-1.5	0.2-1.5	0.2-1	0.2-1.5	0.2-1.5	0.2-1	0.2-1.5	0.2-1.5	0.2-1	0.2-1.5	0.2-1.5	0.2-1	0.2-1.5	0.2-1.5	0.2-1
[AWG]	28-16	28-16	28-16	28-16	28-16	28-16	28-16	28-16	28-16	28-16	28-16	28-16	28-16	28-16	28-16
其余参数Other Parameters															
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0			V0			V0		
剥线长度Strip length [mm]	8-9			8-9			8-9			8-9			8-9		
	订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
灰Gray	240301			240331			240311			240341			240321		
橙Orange	240302			240332			240312			240342			240322		
白灰Light gray	240303			240333			240313			240343			240323		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5** 蓝Blue	240304			240334			240314			240344			240324		
黄Yellow	240305			240335			240315			240345			240325		
绿Green	240306			240336			240316			240346			240326		
黄绿Yellow green	240307			240337			240317			240347			240327		
粉Pink	240309			240339			240319			240349			240329		
	配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
平板Plate 灰Gray	*			*			240641			240641			240641		
橙Orange	*			*			240642			240642			240642		
带固定器With Fixing Flanges 灰Gray	240621			240621			*			*			*		
橙Orange	240622			240622			*			*			*		
带销钉 灰Gray	*			*			240631			240631			240631		
With Snap-in Mounting Feet 橙Orange	*			*			240632			240632			240632		
按键Press Button 白White	*			*			*			*			*		
固定支架Fixed Support 灰Gray	241019			241019			241019			241019			241019		
跨接件Jumper															
位数Poles No. 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2 灰Gray	240601			240601			240601			240601			240601		





240系列两进两出侧面接线终端用端子
240 Series 2-2 Feed Through End Terminal Block With Snap-in Mounting Feet of Side-entry

尺寸Size		技术参数Technical Parameter 厚度Thickness	宽度Width	高度Height
	[mm]	8	25.1	17.2
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	400	300	
额定电流Rated Current	[A]	18	10	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-1.5	0.2-1.5	0.2-1
	[AWG]	28-16	28-16	28-16
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	8-9		

产品Product	颜色Colour	订货信息Order Information 订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	240351
	橙Orange	240352
	白灰Light gray	240353
	蓝Blue	240354
	黄Yellow	240355
	绿Green	240356
	黄绿Yellow green	240357
	粉Pink	240359

端板Cover Plate		配套附件Accessory 订货号Order NO.
平板Plate	灰Gray	240641
	橙Orange	240642
带固定器With Fixing Flanges	灰Gray	*
	橙Orange	*
带销钉 With Snap-in Mounting Feet	灰Gray	240631
	橙Orange	240632
按键Press Button	白White	*
固定支架Fixed Support	灰Gray	241019
跨接件Jumper		
位数Poles No.	颜色Colour	订货号Order NO.
2	灰Gray	240601






241系列一进一出带固定器侧面接线端子
241 Series 1-1 Feed Through Terminal Block With Fixing Flanges of Side-entry

尺寸Size		技术参数Technical Parameter 厚度Thickness	宽度Width	高度Height
	[mm]	6	28.1	18
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	500	300	
额定电流Rated Current	[A]	24	15	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-2.5	0.2-2.5	0.2-1.5
	[AWG]	28-14	28-14	28-14
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	8-9		

产品Product	颜色Colour	订货信息Order Information 订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	241301
	橙Orange	241302
	白灰Light gray	241303
	蓝Blue	241304
	黄Yellow	241305
	绿Green	241306
	黄绿Yellow green	241307
	粉Pink	241309

端板Cover Plate		配套附件Accessory 订货号Order NO.
平板Plate	灰Gray	*
	橙Orange	*
带固定器With Fixing Flanges	灰Gray	241621
	橙Orange	241622
带销钉 With Snap-in Mounting Feet	灰Gray	*
	橙Orange	*
按键Press Button	白White	241221
固定支架Fixed Support	灰Gray	241019
跨接件Jumper		
位数Poles No.	颜色Colour	订货号Order NO.
2	灰Gray	241601






241系列两进两出带固定器侧面接线端子
241 Series 2-2 Feed Through Terminal Block With Fixing Flanges of Side-entry

尺寸Size		技术参数Technical Parameter 厚度Thickness	宽度Width	高度Height
	[mm]	10	28.1	18
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	500	300	
额定电流Rated Current	[A]	24	15	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-2.5	0.2-2.5	0.2-1.5
	[AWG]	28-14	28-14	28-14
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	8-9		

产品Product	颜色Colour	订货信息Order Information 订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	241331
	橙Orange	241332
	白灰Light gray	241333
	蓝Blue	241334
	黄Yellow	241335
	绿Green	241336
	黄绿Yellow green	241337
	粉Pink	241339

端板Cover Plate		配套附件Accessory 订货号Order NO.
平板Plate	灰Gray	*
	橙Orange	*
带固定器With Fixing Flanges	灰Gray	241621
	橙Orange	241622
带销钉 With Snap-in Mounting Feet	灰Gray	*
	橙Orange	*
按键Press Button	白White	241221
固定支架Fixed Support	灰Gray	241019
跨接件Jumper		
位数Poles No.	颜色Colour	订货号Order NO.
2	灰Gray	241601






241系列一进一出带销钉侧面接线端子
241 Series 1-1 Feed Through Terminal Block With Snap-in Mounting Feet of Side-entry

241系列两进两出带销钉侧面接线端子
241 Series 2-2 Feed Through Terminal Block With Snap-in Mounting Feet of Side-entry





241系列一进一出侧面接线终端用端子
241 Series 1-1 Feed Through End Terminal Block With Snap-in Mounting Feet of Side-entry

241系列两进两出侧面接线终端用端子
241 Series 2-2 Feed Through End Terminal Block With Snap-in Mounting Feet of Side-entry

		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
	[mm]	6	28.1	18	10	28.1	18	6	28.1	18	6	28.1	18
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	500	300		500	300		500	300		500	300	
额定电流Rated Current	[A]	24	15		24	15		24	15		24	15	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm^2]	0.2-2.5	0.2-2.5	0.2-1.5	0.2-2.5	0.2-2.5	0.2-1.5	0.2-2.5	0.2-2.5	0.2-1.5	0.2-2.5	0.2-2.5	0.2-1.5
	[AWG]	28-14	28-14	28-14	28-14	28-14	28-14	28-14	28-14	28-14	28-14	28-14	28-14
其余参数Other Parameters													
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0		
剥线长度Strip length	[mm]	8-9			8-9			8-9			8-9		
		订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	灰Gray	241311			241341			241321			241351		
	橙Orange	241312			241342			241322			241352		
	白灰Light gray	241313			241343			241323			241353		
	蓝Blue	241314			241344			241324			241354		
	黄Yellow	241315			241345			241325			241355		
	绿Green	241316			241346			241326			241356		
	黄绿Yellow green	241317			241347			241327			241357		
	粉Pink	241319			241349			241329			241359		
		配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
平板Plate	灰Gray	241641			241641			241641			241641		
	橙Orange	241642			241642			241642			241642		
带固定器With Fixing Flanges	灰Gray	*			*			*			*		
	橙Orange	*			*			*			*		
带销钉 With Snap-in Mounting Feet	灰Gray	241631			241631			241631			241631		
	橙Orange	241632			241632			241632			241632		
按键Press Button	白White	241221			241221			241221			241221		
固定支架Fixed Support	灰Gray	241019			241019			241019			241019		
跨接件Jumper													
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	灰Gray	241601			241601			241601			241601		






242系列一进一出带固定器侧面接线端子
242 Series 1-1 Feed Through Terminal Block With Fixing Flanges of Side-entry

242系列两进两出带固定器侧面接线端子
242 Series 2-2 Feed Through Terminal Block With Fixing Flanges of Side-entry

		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
	[mm]	7	33.6	23.1	12	33.6	23.1
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	630	300		630	300	
额定电流Rated Current	[A]	24	20		32	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-4	0.2-0.5	0.2-4	0.2-4	0.2-0.5
	[AWG]	28-12	28-12	28-12	28-12	28-12	28-12
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	9-10			9-10		
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	灰Gray	242301			242331		
	橙Orange	242302			242332		
	白灰Light gray	242303			242333		
	蓝Blue	242304			242334		
	黄Yellow	242305			242335		
	绿Green	242306			242336		
	黄绿Yellow green	242307			242337		
	粉Pink	242309			242339		
		配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.		
平板Plate	灰Gray	*			*		
	橙Orange	*			*		
带固定器With Fixing Flanges	灰Gray	242621			242621		
	橙Orange	242622			242622		
带销钉 With Snap-in Mounting Feet	灰Gray	*			*		
	橙Orange	*			*		
按键Press Button	白White	*			*		
固定支架Fixed Support	灰Gray	241019			241019		
跨接件Jumper							
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.		
2	灰Gray	242601			242601		








242系列一进一出带销钉侧面接线端子
242 Series 1-1 Feed Through Terminal Block With Snap-in Mounting Feet of Side-entry

242系列两进两出带销钉侧面接线端子
242 Series 2-2 Feed Through Terminal Block With Snap-in Mounting Feet of Side-entry

242系列一进一出侧面接线终端用端子
242 Series 1-1 Feed Through End Terminal Block With Snap-in Mounting Feet of Side-entry

技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
7	33.6	23.1	12	33.6	23.1	7	33.6	23.1
IEC	UL		IEC	UL		IEC	UL	
630	300		630	300		630	300	
24	20		32	20		24	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-4	0.2-2.5	0.2-4	0.2-4	0.2-2.5	0.2-4	0.2-4	0.2-2.5
28-12	28-12	28-12	28-12	28-12	28-12	28-12	28-12	28-12
V0			V0			V0		
9-10			9-10			9-10		
订货信息Order Information			订货信息Order Information			订货信息Order Information		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
242311			242341			242321		
242312			242342			242322		
242313			242343			242323		
242314			242344			242324		
242315			242345			242325		
242316			242346			242326		
242317			242347			242327		
242319			242349			242329		
配套附件Accessory			配套附件Accessory			配套附件Accessory		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
242641			242641			242641		
242642			242642			242642		
*			*			*		
*			*			*		
242631			242631			242631		
242632			242632			242632		
*			*			*		
241019			241019			241019		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
242601			242601			242601		



242系列两进两出侧面接线终端用端子
242 Series 2-2 Feed Through End Terminal Block With Snap-in Mounting Feet of Side-entry

尺寸Size		技术参数Technical Parameter 厚度Thickness	宽度Width	高度Height
	[mm]	12	33.6	23.1
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	630	300	
额定电流Rated Current	[A]	32	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-4	0.2-2.5
	[AWG]	28-12	28-12	28-12
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	9-10		

产品Product	颜色Colour	订货信息Order Information 订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	242351
	橙Orange	242352
	白灰Light gray	242353
	蓝Blue	242354
	黄Yellow	242355
	绿Green	242356
	黄绿Yellow green	242357
	粉Pink	242359

端板Cover Plate		配套附件Accessory 订货号Order NO.
平板Plate	灰Gray	242641
	橙Orange	242642
带固定器With Fixing Flanges	灰Gray	*
	橙Orange	*
带销钉 With Snap-in Mounting Feet	灰Gray	242631
	橙Orange	242632
按键Press Button	白White	*
固定支架Fixed Support	灰Gray	241019
跨接件Jumper		
位数Poles No.	颜色Colour	订货号Order NO.
2	灰Gray	242601




254系列一进一出带固定器正面接线端子
254 Series 1-1 Feed Through Terminal Block With Fixing Flanges of Front-entry

尺寸Size		技术参数Technical Parameter 厚度Thickness	宽度Width	高度Height
	[mm]	6	32	22.2
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	800	600	
额定电流Rated Current	[A]	24	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-2.5	0.2-2.5	0.2-1.5
	[AWG]	28-12	28-12	28-12
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	8-9		

产品Product	颜色Colour	订货信息Order Information 订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	254301
	橙Orange	254302
	白灰Light gray	254303
	蓝Blue	254304
	黄Yellow	254305
	绿Green	254306
	黄绿Yellow green	254307
	粉Pink	*

端板Cover Plate		配套附件Accessory 订货号Order NO.
平板Plate	灰Gray	254625
	橙Orange	254626
带固定器With Fixing Flanges	灰Gray	254621
	橙Orange	254622
带销钉 With Snap-in Mounting Feet	灰Gray	*
	橙Orange	*
按键Press Button	白White	*
固定支架Fixed Support	灰Gray	*
跨接件Jumper		
位数Poles No.	颜色Colour	订货号Order NO.
2	灰Gray	*




254系列两进两出带固定器正面接线端子
254 Series 2-2 Feed Through Terminal Block With Fixing Flanges of Front-entry


尺寸Size		技术参数Technical Parameter 厚度Thickness	宽度Width	高度Height
	[mm]	10	32	22.2
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	800	600	
额定电流Rated Current	[A]	24	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-2.5	0.2-2.5	0.2-1.5
	[AWG]	28-12	28-12	28-12
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	8-9		


产品Product	颜色Colour	订货信息Order Information 订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	254331
	橙Orange	254332
	白灰Light gray	254333
	蓝Blue	254334
	黄Yellow	254335
	绿Green	254336
	黄绿Yellow green	254337
	粉Pink	*

端板Cover Plate		配套附件Accessory 订货号Order NO.
平板Plate	灰Gray	254625
	橙Orange	254626
带固定器With Fixing Flanges	灰Gray	254621
	橙Orange	254622
带销钉 With Snap-in Mounting Feet	灰Gray	*
	橙Orange	*
按键Press Button	白White	*
固定支架Fixed Support	灰Gray	*
跨接件Jumper		
位数Poles No.	颜色Colour	订货号Order NO.
2	灰Gray	*













	254系列一进一出带销钉正面接线端子 254 Series 1-1 Feed Through Terminal Block With Snap-in Mounting Feet of Front-entry			254系列两进两出带销钉正面接线端子 254 Series 2-2 Feed Through Terminal Block With Snap-in Mounting Feet of Front-entry			254系列一进一出正面接线中间端子 254 Series 1-1 Feed Through Middle Terminal Block of Front-entry			254系列两进两出正面接线中间端子 254 Series 2-2 Feed Through Middle Terminal Block of Front-entry		
尺寸Size	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
[mm]	6	32	22.2	10	32	22.2	6	32	22.2	10	37	22.2
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	800	600		800	600		800	600		800	600	
额定电流Rated Current [A]	24	20		24	20		24	20		24	20	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm^2]	0.2-2.5	0.2-2.5	0.2-1.5	0.2-2.5	0.2-2.5	0.2-1.5	0.2-2.5	0.2-2.5	0.2-1.5	0.2-2.5	0.2-2.5	0.2-1.5
[AWG]	28-12	28-12	28-12	28-12	28-12	28-12	28-12	28-12	28-12	28-12	28-12	28-12
其余参数Other Parameters												
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0			V0		
剥线长度Strip length [mm]	8-9			8-9			8-9			8-9		
	订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
灰Gray	254311			254341			254321			254351		
橙Orange	254312			254342			254322			254352		
白灰Light gray	254313			254343			254323			254353		
适配NS 35/7.5导轨 蓝Blue	254314			254344			254324			254354		
Can Be Used For DIN Rail 黄Yellow	254315			254345			254325			254355		
NS 35/7.5 绿Green	254316			254346			254326			254356		
黄绿Yellow green	254317			254347			254327			254357		
粉Pink	*			*			*			*		
	配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
平板Plate 灰Gray	254625			254625			254625			254625		
橙Orange	254626			254626			254626			254626		
带固定器With Fixing Flanges 灰Gray	254621			254621			254621			254621		
橙Orange	254622			254622			254622			254622		
带销钉 灰Gray	*			*			*			*		
With Snap-in Mounting Feet 橙Orange	*			*			*			*		
按键Press Button 白White	*			*			*			*		
固定支架Fixed Support 灰Gray	*			*			*			*		
跨接件Jumper												
位数Poles No. 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2 灰Gray	*			*			*			*		

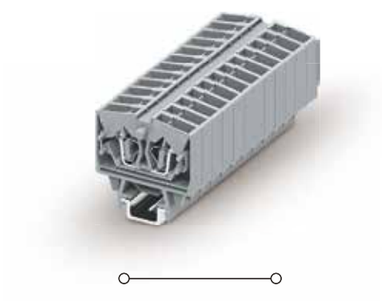

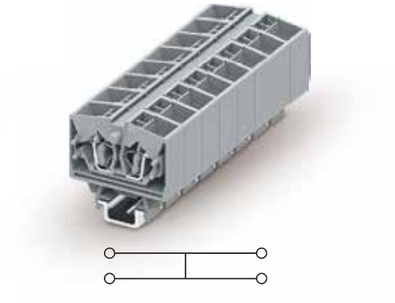



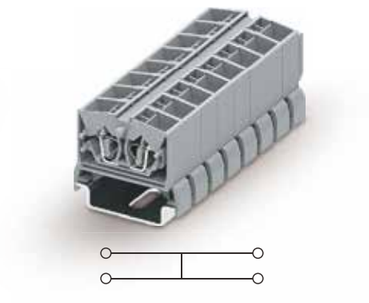


	254系列一进一出正面接线端子(小导轨15) 254 Series 1-1 Feed Through Terminal Block of Front-entry(SP15X7.5)			254系列一进一出正面接线端子(小导轨35) 254 Series 1-1 Feed Through Terminal Block of Front-entry(SP35X7.5)			254系列一进一出正面接线端子(大导轨35) 254 Series 1-1 Feed Through Terminal Block of Front-entry(SP35X7.5)			254系列两进两出正面接线端子(大导轨35) 254 Series 2-2 Feed Through Terminal Block of Front-entry(SP35X7.5)		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
[mm]	6	32	32.1	10	32	32.1	6	32	32.1	10	37	31.6
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	800	600		800	600		800	600		800	600	
额定电流Rated Current [A]	24	20		24	20		24	20		24	20	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm^2]	0.2-2.5	0.2-2.5	0.2-1.5	0.2-2.5	0.2-2.5	0.2-1.5	0.2-2.5	0.2-2.5	0.2-1.5	0.2-2.5	0.2-2.5	0.2-1.5
[AWG]	28-12	28-12	28-12	28-12	28-12	28-12	28-12	28-12	28-12	28-12	28-12	28-12
其余参数Other Parameters												
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0			V0		
剥线长度Strip length [mm]	8-9			8-9			8-9			8-9		
	订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
灰Gray	254361			254391			254371			254381		
橙Orange	254362			254392			254372			254382		
白灰Light gray	254363			254393			254373			254383		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5** 蓝Blue	254364			254394			254374			254384		
黄Yellow	254365			254395			254375			254385		
绿Green	254366			254396			254376			254386		
黄绿Yellow green	254367			254397			254377			254387		
粉Pink	*			*			*			*		
	配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
平板Plate 灰Gray	254625			254625			254625			254625		
橙Orange	254626			254626			254626			254626		
带固定器With Fixing Flanges 灰Gray	254621			254621			254621			254621		
橙Orange	254622			254622			254622			254622		
带销钉 With Snap-in Mounting Feet 灰Gray	*			*			*			*		
橙Orange	*			*			*			*		
按键Press Button 白White	*			*			*			*		
固定支架Fixed Support 灰Gray	*			*			*			*		
跨接件Jumper												
位数Poles No. 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2 灰Gray	*			*			*			*		





		254系列一进一出正面接地端子(小导轨15) 254 Series 1-1 Feed Through Ground Terminal Block of Front-entry(SP15X7.5)			254系列一进一出正面接地端子(小导轨35) 254 Series 1-1 Feed Through Ground Terminal Block of Front-entry(SP35X7.5)		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
	[mm]	6	32	32.9	6	42.6	33.5
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm^2]	0.2-2.5	0.2-2.5	0.2-1.5	0.2-2.5	0.2-2.5	0.2-1.5
	[AWG]	28-12	28-12	28-12	28-12	28-12	28-12
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	8-9			8-9		
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
	黄绿Yellow green	254507			254607		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5							
		配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.		
平板Plate	灰Gray	254625			254625		
	橙Orange	254626			254626		
带固定器With Fixing Flanges	灰Gray	254621			254621		
	橙Orange	254622			254622		
带销钉 With Snap-in Mounting Feet	灰Gray	*			*		
	橙Orange	*			*		
按键Press Button	白White	*			*		
固定支架Fixed Support	灰Gray	*			*		
跨接件Jumper							
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.		
2	灰Gray	*			*		

附件
Accessory

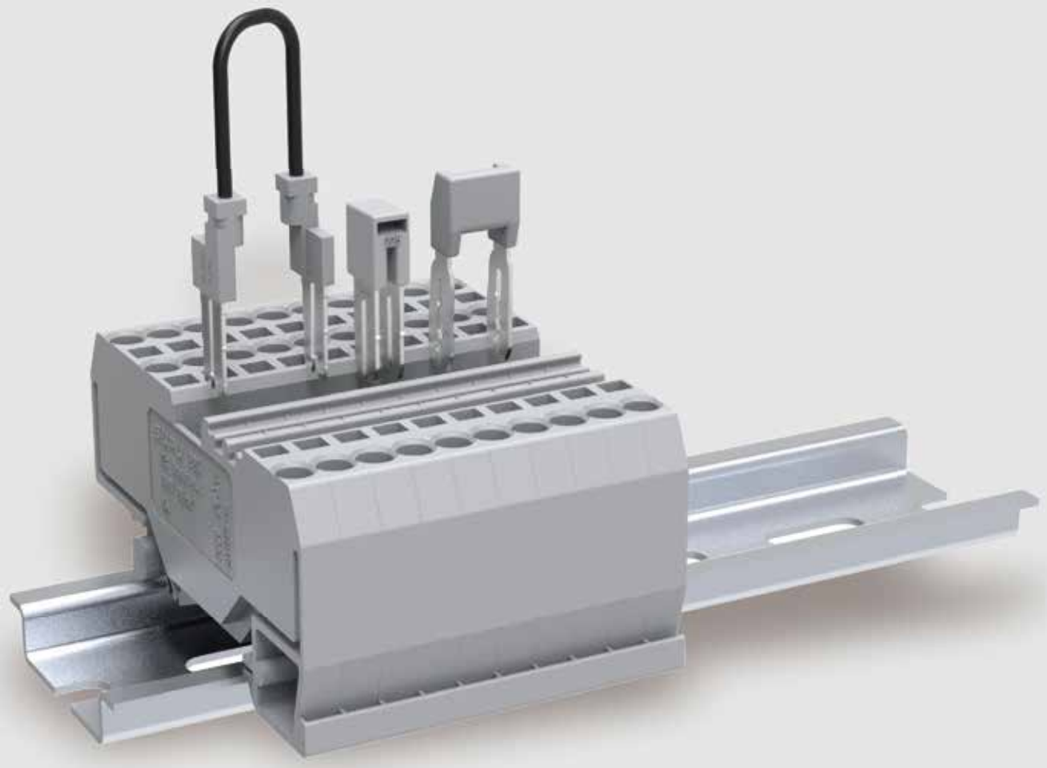

终端固定器 End Clamp







	SPD35螺钉 SPD35 Screw	SPD35卡式 T=10mm SPD35 Clip T=10mm	双层弹端子终端固定器 Double level terminal blcok end Clamp
	技术参数Technical Parameter	技术参数Technical Parameter	技术参数Technical Parameter
尺寸Size 注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	厚度Thickness / 宽度Width / 高度Height 9.5 / 46.1 / 35.1	厚度Thickness / 宽度Width / 高度Height 10 / 43.7 / 28	厚度Thickness / 宽度Width / 高度Height 10 / 55.5 / 50
其余参数Other Parameters			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	V0	V0
	订货信息Order Information	订货信息Order Information	订货信息Order Information
适配NS 35/7.5导轨 颜色Colour **Can Be Used For DIN Rail NS 35/7.5** 灰Gray	订货号Order NO. 215201	订货号Order NO. 215202	订货号Order NO. 215207
包装数量Package quantity	100	100	100
适用轨道/型号 **Can Be Used For DIN Rail/Product**	订货号Order NO. 900421/011 900421/031 900401/001 900421/021 900431/001	订货号Order NO. 900421/011 900421/031 900401/001 900421/021 900431/001	订货号Order NO. 900421/011 900421/031 900401/001 900421/021 900431/001
标记Marker	订货号Order NO.	订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service	*	215210 225801	TMB10.2-10



	SPD15卡式 T=5.2mm SPD15 Clip T=5.2mm
	技术参数Technical Parameter
尺寸Size 注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	厚度Thickness / 宽度Width / 高度Height 5.2 / 22.7 / 22.1
其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
	订货信息Order Information
适配NS 35/7.5导轨 颜色Colour **Can Be Used For DIN Rail NS 35/7.5** 灰Gray	订货号Order NO. 215208
包装数量Package quantity	100
适用轨道/型号 **Can Be Used For DIN Rail/Product**	订货号Order NO. 900421/061
标记Marker	订货号Order NO.
可提供印字服务Printing Service	305801

终端标识牌 End Clamp marking







	SPD35卡式 T=6mm SPD35 Clip T=6mm	SPD35螺钉 SPD35 Screw	Sp15 导轨固定器 SP15 Screw
	技术参数Technical Parameter	技术参数Technical Parameter	技术参数Technical Parameter
尺寸Size 注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	厚度Thickness / 宽度Width / 高度Height 6 / 43.7 / 28	厚度Thickness / 宽度Width / 高度Height 9.4 / 44.1 / 33	厚度Thickness / 宽度Width / 高度Height 6 / 22 / 11.6
其余参数Other Parameters			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	V0	V0
	订货信息Order Information	订货信息Order Information	订货信息Order Information
适配NS 35/7.5导轨 颜色Colour **Can Be Used For DIN Rail NS 35/7.5** 灰Gray	订货号Order NO. 215203	订货号Order NO. 215204	订货号Order NO. 215206
包装数量Package quantity	100	100	100
适用轨道/型号 **Can Be Used For DIN Rail/Product**	订货号Order NO. 900421/011 900421/031 900401/001 900421/021 900431/001	订货号Order NO. 900421/011 900421/031 900401/001 900421/021 900431/001 215214	订货号Order NO. 900421/061
标记Marker	订货号Order NO.	订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service	TP1.5;TPD1.5系列	308801	*









	铭牌支持件 Nameplate holder	透明标记牌 Transparent Narker card	铭牌固定器 Nameplate Clamp
	技术参数Technical Parameter	技术参数Technical Parameter	技术参数Technical Parameter
尺寸Size 注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	厚度Thickness / 宽度Width / 高度Height 1.0 / 30.5 / 10	厚度Thickness / 宽度Width / 高度Height 9.4 / 46 / 36.8	厚度Thickness / 宽度Width / 高度Height 11.5 / 48.6 / 40.3
其余参数Other Parameters			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	V0	V0
	订货信息Order Information	订货信息Order Information	订货信息Order Information
适配NS 35/7.5导轨 颜色Colour **Can Be Used For DIN Rail NS 35/7.5** 灰Gray	订货号Order NO. 215210	订货号Order NO. 215214	订货号Order NO. 215224
包装数量Package quantity	100	100	100
适用轨道/型号 **Can Be Used For DIN Rail/Product**	订货号Order NO. 215202	订货号Order NO. 215204	订货号Order NO. *
标记Marker	订货号Order NO.	订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service	*	*	*

导轨转换器 Rail transfer



	导轨转换器[用于254端子带销钉] 254 Rail transfer		
	技术参数Technical Parameter		
尺寸Size 注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	厚度Thickness	宽度Width	高度Height
	6	38	12.7
其余参数Other Parameters			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0		
	订货信息Order Information		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5** 颜色Colour 灰Gray	订货号Order NO.		
	254611		
包装数量Package quantity	100		
	订货号Order NO.		
适用轨道/型号 **Can Be Used For DIN Rail/Product**	适用于SP254微型端子 (带销钉) Apply to SP 254 miniature terminal block (with snap in mounting feet)		
标记Marker	订货号Order NO.		
可提供印字服务Printing Service	*		



	450导轨转换器 450 Rail transfer		
	技术参数Technical Parameter		
尺寸Size 注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	厚度Thickness	宽度Width	高度Height
	6.4	41.7	10.6
其余参数Other Parameters			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0		
	订货信息Order Information		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5** 颜色Colour 灰Gray	订货号Order NO.		
	450018		
包装数量Package quantity	100		
	订货号Order NO.		
适用轨道/型号 **Can Be Used For DIN Rail/Product**	适用于SP450/475连接器； SP240/241/242微型端子 (带销钉) Apply to SP 450/475 connector SP240/241/242 miniature terminal block (with snap in mounting feet)		
标记Marker	订货号Order NO.		
可提供印字服务Printing Service	*		



	450导轨转换器(适用于继电器模块) 450 Rail transfer		
	技术参数Technical Parameter		
尺寸Size 注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	厚度Thickness	宽度Width	高度Height
	4.9	42.8	14.3
其余参数Other Parameters			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0		
	订货信息Order Information		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5** 颜色Colour 灰Gray	订货号Order NO.		
	450017		
包装数量Package quantity	100		
	订货号Order NO.		
适用轨道/型号 **Can Be Used For DIN Rail/Product**	适用于继电器模块 Apply to relay module		
标记Marker	订货号Order NO.		
可提供印字服务Printing Service	*		



	241 导轨转换器 241 Rail transfer		
	技术参数Technical Parameter		
尺寸Size 注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	厚度Thickness	宽度Width	高度Height
	6.3	43.3	10.5
其余参数Other Parameters			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0		
	订货信息Order Information		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5** 颜色Colour 灰Gray	订货号Order NO.		
	24101		
包装数量Package quantity	100		
	订货号Order NO.		
适用轨道/型号 **Can Be Used For DIN Rail/Product**	适用于SP241微型端子 (带固定器) Apply to SP 241 miniature terminal block (with end stop)		
标记Marker	订货号Order NO.		
可提供印字服务Printing Service	*		

分组隔片 Partition plate



	TU隔板 TP Partition plate		
	技术参数Technical Parameter		
尺寸Size 注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	厚度Thickness	宽度Width	高度Height
其余参数Other Parameters			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0		
	订货信息Order Information		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5** 颜色Colour 灰Gray	订货号Order NO.		
	ATP-TU		
包装数量Package quantity	100		
	订货号Order NO.		
适用轨道/型号 **Can Be Used For DIN Rail/Product**	TUXX-2系列		
标记Marker	订货号Order NO.		
可提供印字服务Printing Service	*		



	TP隔板 TP Partition plate		
	技术参数Technical Parameter		
尺寸Size 注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	厚度Thickness	宽度Width	高度Height
其余参数Other Parameters			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0		
	订货信息Order Information		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5** 颜色Colour 灰Gray	订货号Order NO.		
	ATP-TP		
包装数量Package quantity	100		
	订货号Order NO.		
适用轨道/型号 **Can Be Used For DIN Rail/Product**	TPXX-2系列		
标记Marker	订货号Order NO.		
可提供印字服务Printing Service	*		



	TS-K隔板 TS-K Partition plate		
	技术参数Technical Parameter		
尺寸Size 注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	厚度Thickness	宽度Width	高度Height
	1	22.1	22.15
其余参数Other Parameters			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0		
	订货信息Order Information		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5** 颜色Colour 灰Gray	订货号Order NO.		
	302151		
包装数量Package quantity	100		
	订货号Order NO.		
适用轨道/型号 **Can Be Used For DIN Rail/Product**	UK系列		
标记Marker	订货号Order NO.		
可提供印字服务Printing Service	*		



	UK35隔板 Nameplate Clamp		
	技术参数Technical Parameter		
尺寸Size 注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	厚度Thickness	宽度Width	高度Height
	7.5	50.1	52
其余参数Other Parameters			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0		
	订货信息Order Information		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5** 颜色Colour 灰Gray	订货号Order NO.		
	ATP-UK 35		
包装数量Package quantity	订货号Order NO.		
适用轨道/型号 **Can Be Used For DIN Rail/Product**	335系列		
标记Marker	订货号Order NO.		
可提供印字服务Printing Service	*		

保护盖板 Protection cover





	塑料/透明保护罩 Transparent rail cover			透明保护罩支架 Support plate			透明保护罩支架(带塑料滚花螺母 Support palte(With screw)		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size 注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
	2	94	44.8	2.2	91.65	72.7	2.2	91.65	89
其余参数Other Parameters									
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0		
	订货信息Order Information			订货信息Order Information			订货信息Order Information		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5 颜色Colour 灰Gray	订货号Order NO.			订货号Order NO.			订货号Order NO.		
	900601			900611			900612		
包装数量Package quantity	100			100			100		
适用轨道/型号 Can Be Used For DIN Rail/Product	订货号Order NO.			订货号Order NO.			订货号Order NO.		
	900611			900421/011			900421/011		
	900612			900421/031			900421/031		
				900401/001			900401/001		
				900421/021			900421/021		
				900431/001			900431/001		
				900601			900601		
标记Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	*			*			*		

TP/TU/TC系列跨接桥 TP/TU/TC Jumper







	TJA3.5			TJA4.2			TJA5.2		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
其余参数Other Parameters									
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0		
	订货信息Order Information			订货信息Order Information			订货信息Order Information		
位数Poles No.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	TJA3.5-2			TJA4.2-2			TJA5.2-2		
3	TJA3.5-3			TJA4.2-3			TJA5.2-3		
.....	.....			.....			.....		
9	TJA3.5-9			TJA4.2-9			TJA5.2-9		
10	TJA3.5-10			TJA4.2-10			TJA5.2-10		
.....									
20									
包装数量Package quantity	50			50			50		
适用轨道/型号 Can Be Used For DIN Rail/Product	订货号Order NO.			订货号Order NO.			订货号Order NO.		
	TP1.5;TPD1.5系列			TC1.5系列			TP2.5;TC2.5;TU2.5系列		
标记Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	*			*			*		

TP/TU/TC系列跨接桥 TP/TU/TC Jumper







	TJA6.2			TJA8.2			TJA10.2		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
其余参数Other Parameters									
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0		
	订货信息Order Information			订货信息Order Information			订货信息Order Information		
位数Poles No.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	TJA6.2-2			TJA8.2-2			TJA10.2-2		
3	TJA6.2-3			TJA8.2-3					
.....	.....			.....					
9	TJA6.2-9			TJA8.2-9					
10	TJA6.2-10			TJA8.2-10					
.....									
20									
包装数量Package quantity	50			50			50		
适用轨道/型号 Can Be Used For DIN Rail/Product	订货号Order NO.			订货号Order NO.			订货号Order NO.		
	TP4;TC4;TU4系列			TP6;TC6;TU6系列			TP10;TC10;TU10系列		
标记Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	*			*			*		







	TJA12.2			TJA16.2			TJB5.2		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
其余参数Other Parameters									
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0		
	订货信息Order Information			订货信息Order Information			订货信息Order Information		
位数Poles No.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	TJA12.2-2			TJA16.2-2			TJB5.2-2		
3							TJB5.2-3		
.....							.....		
9							TJB5.2-9		
10							TJB5.2-10		
.....									
20									
包装数量Package quantity	50			50			50		
适用轨道/型号 Can Be Used For DIN Rail/Product	订货号Order NO.			订货号Order NO.			订货号Order NO.		
	TP16;TC16;TU16系列			TC35;TU35系列			TP2.5;TC2.5;TU2.5系列		
标记Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	*			*			*		

TA系列跨接桥　TA Jumper



	215轨装端子相邻跨接桥 215 Adjacent Jumper
	技术参数Technical Parameter
尺寸Size	厚度Thickness / 宽度Width / 高度Height
	4 / 22.45 / 8
其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
	订货信息Order Information
位数Poles No. / 颜色Colour	订货号Order NO.
2 / 灰Gray	215301
包装数量Package quantity	100
适用轨道/型号 **Can Be Used For DIN Rail/Product**	订货号Order NO. SP215系列
标记Marker	订货号Order NO.
可提供印字服务Printing Service	*



	225轨装端子相邻跨接桥 225 Adjacent Jumper
	技术参数Technical Parameter
尺寸Size	厚度Thickness / 宽度Width / 高度Height
	4.9 / 21.9 / 7.8
其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
	订货信息Order Information
位数Poles No. / 颜色Colour	订货号Order NO.
2 / 灰Gray	225301
包装数量Package quantity	100
适用轨道/型号 **Can Be Used For DIN Rail/Product**	订货号Order NO. SP225系列
标记Marker	订货号Order NO.
可提供印字服务Printing Service	*



	204 轨装端子相邻跨接桥 204 Adjacent Jumper
	技术参数Technical Parameter
尺寸Size	厚度Thickness / 宽度Width / 高度Height
	11 / 32 / 13.5
其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
	订货信息Order Information
位数Poles No. / 颜色Colour	订货号Order NO.
2 / 灰Gray	216301
包装数量Package quantity	100
适用轨道/型号 **Can Be Used For DIN Rail/Product**	订货号Order NO. SP204系列
标记Marker	订货号Order NO.
可提供印字服务Printing Service	*



	206轨装端子相邻跨接桥 206 Adjacent Jumper
	技术参数Technical Parameter
尺寸Size	厚度Thickness / 宽度Width / 高度Height
	8 / 25.5 / 8
其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
	订货信息Order Information
位数Poles No. / 颜色Colour	订货号Order NO.
2 / 灰Gray	216301
包装数量Package quantity	100
适用轨道/型号 **Can Be Used For DIN Rail/Product**	订货号Order NO. SP206系列
标记Marker	订货号Order NO.
可提供印字服务Printing Service	*



	210轨装端子相邻跨接桥 210 Adjacent Jumper
	技术参数Technical Parameter
尺寸Size	厚度Thickness / 宽度Width / 高度Height
	9.7 / 26.5 / 9
其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
	订货信息Order Information
位数Poles No. / 颜色Colour	订货号Order NO.
2 / 灰Gray	210301
包装数量Package quantity	100
适用轨道/型号 **Can Be Used For DIN Rail/Product**	订货号Order NO. SP210系列
标记Marker	订货号Order NO.
可提供印字服务Printing Service	*



	216轨装端子相邻跨接桥 216 Adjacent Jumper
	技术参数Technical Parameter
尺寸Size	厚度Thickness / 宽度Width / 高度Height
	11 / 32 / 13.5
其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
	订货信息Order Information
位数Poles No. / 颜色Colour	订货号Order NO.
2 / 灰Gray	216301
包装数量Package quantity	100
适用轨道/型号 **Can Be Used For DIN Rail/Product**	订货号Order NO. SP216系列
标记Marker	订货号Order NO.
可提供印字服务Printing Service	*

TA系列跨接桥　TA Jumper



	225系列3位灰色交错跨接桥 225 Adjacent Jumper
	技术参数Technical Parameter
尺寸Size	厚度Thickness / 宽度Width / 高度Height
	9.7 / 25.4 / 5.75
其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
	订货信息Order Information
位数Poles No. / 颜色Colour	订货号Order NO.
2 / 灰Gray	225321-3
包装数量Package quantity	100
适用轨道/型号 **Can Be Used For DIN Rail/Product**	订货号Order NO. SP225系列
标记Marker	订货号Order NO.
可提供印字服务Printing Service	*



	导线跨接器 Wire Jumper
	技术参数Technical Parameter
尺寸Size	厚度Thickness / 宽度Width / 高度Height
	3.8 / 24.7 / 8.1
其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
	订货信息Order Information
位数Poles No. / 颜色Colour	订货号Order NO.
2 / 灰Gray	225311(L=60mm) 225312(L=110mm) 225313(L=250mm)
包装数量Package quantity	100
适用轨道/型号 **Can Be Used For DIN Rail/Product**	订货号Order NO. SP225系列
标记Marker	订货号Order NO.
可提供印字服务Printing Service	*

UK系列跨接桥　UK Jumper



	302 固定式带绝缘全螺钉跨接件 302 Fixed screw with insulating ring- jumper
	技术参数Technical Parameter
尺寸Size	厚度Thickness / 宽度Width / 高度Height
	1 / 6.15 / 5.55
其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
	订货信息Order Information
位数Poles No.	订货号Order NO.
2	302302
3	302303
.....	.....
9	302309
10	302310
包装数量Package quantity	100
适用轨道/型号 **Can Be Used For DIN Rail/Product**	订货号Order NO. SP302系列；305系列
标记Marker	订货号Order NO.
可提供印字服务Printing Service	*



	303 固定式带绝缘全螺钉跨接件 303 Fixed screw with insulating ring- jumper
	技术参数Technical Parameter
尺寸Size	厚度Thickness / 宽度Width / 高度Height
	1 / 5.2 / 5.2
其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
	订货信息Order Information
位数Poles No.	订货号Order NO.
2	303302
3	303303
.....	.....
9	303309
10	303310
包装数量Package quantity	100
适用轨道/型号 **Can Be Used For DIN Rail/Product**	订货号Order NO. SP303系列
标记Marker	订货号Order NO.
可提供印字服务Printing Service	*



	306 固定式带绝缘全螺钉跨接件 306 Fixed screw with insulating ring- jumper
	技术参数Technical Parameter
尺寸Size	厚度Thickness / 宽度Width / 高度Height
	1 / 8.2 / 6.4
其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
	订货信息Order Information
位数Poles No.	订货号Order NO.
2	306302
3	306303
.....	.....
9	306309
10	306310
包装数量Package quantity	100
适用轨道/型号 **Can Be Used For DIN Rail/Product**	订货号Order NO. SP306系列
标记Marker	订货号Order NO.
可提供印字服务Printing Service	*

UK系列跨接桥　UK Jumper







	310 固定式带绝缘圈螺钉跨接件 310 Fixed screw with insulating ring-jumper			316 固定式带绝缘圈螺钉跨接件 316 Fixed screw with insulating ring-jumper			335 固定式带绝缘圈螺钉跨接件 335 Fixed screw with insulating ring-jumper		
尺寸Size	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
	1.5	10.2	7.6	1.5	12.6	7.6	1.5	16	7.6
其余参数Other Parameters									
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0		
	订货信息Order Information			订货信息Order Information			订货信息Order Information		
位数Poles No.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	310302			316302			335302		
3	310303			316303			335303		
.....	.....			.....			.....		
9	310309			316309			335309		
10	310310			316310			335310		
包装数量Package quantity				100			100		
适用轨道/型号 **Can Be Used For DIN Rail/Product**	SP310系列			订货号Order NO. SP316系列			订货号Order NO. SP335系列		
标记Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	*			*			*		





	开关桥接件 Contact bridge			固定边插式-跨接件 Fixed side insert-jumper		
尺寸Size	技术参数Technical Parameter			技术参数Technical Parameter		
	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
	1.2	14.5	20	1	79.7	10.2
其余参数Other Parameters						
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0		
	订货信息Order Information			订货信息Order Information		
位数Poles No.	订货号Order NO.			订货号Order NO.		
2	306322			306320		
3						
.....						
9						
10						
包装数量Package quantity	100			100		
适用轨道/型号 **Can Be Used For DIN Rail/Product**	订货号Order NO. SUK6-T;306911			订货号Order NO. SUK6-T;306911		
标记Marker	订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	*			*		

TB系列跨接桥　TB Jumper







	240跨接桥 240 Adjacent Jumper			241跨接桥 241 Adjacent Jumper			242跨接桥 242 Adjacent Jumper		
尺寸Size	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
	3.3	12.15	8	3.3	13.1	10	3.6	15	11.8
其余参数Other Parameters									
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0		
	订货信息Order Information			订货信息Order Information			订货信息Order Information		
位数Poles No.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	240601			241601			242601		
包装数量Package quantity									
适用轨道/型号 **Can Be Used For DIN Rail/Product**	订货号Order NO. SP240系列			订货号Order NO. Sp241系列			订货号Order NO. Sp242系列		
标记Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	*			*			*		

导轨终端固定件　Rail end cap



	7.5*35导轨终端保护件 7.5*35 Rail end cap
尺寸Size 注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	技术参数Technical Parameter
	厚度Thickness　宽度Width　高度Height
	3.7　38　7
其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
	订货信息Order Information
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5** 颜色Colour	订货号Order NO.
黑Black	920001
包装数量Package quantity	100
适用轨道/型号 **Can Be Used For DIN Rail/Product**	订货号Order NO. 900421/011 900421/031 900421/001 900421/021
标记Marker	订货号Order NO.
可提供印字服务Printing Service	*

测试插头 Test Plug



新品 NEW



新品 NEW

	1.5mm²，测试插头空 1.5mm² Test Plug	1.5mm²，测试插头带电阻 1.5mm² Test Plugwith resistance
	技术参数Technical Parameter	技术参数Technical Parameter
尺寸Size 注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	厚度Thickness 宽度Width 高度Height 3.5 30 37.9	厚度Thickness 宽度Width 高度Height 3.5 30 37.9
其余参数Other Parameters		
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	V0
	订货信息Order Information	订货信息Order Information
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5** 颜色Colour 黑Black	订货号Order NO. TP1.5-DP	订货号Order NO. TP1.5-DPR120
包装数量Package quantity		
	订货号Order NO. TP1.5系列	订货号Order NO. TP1.5系列
适用轨道/型号 **Can Be Used For DIN Rail/Product**		
标记Marker 可提供印字服务Printing Service	订货号Order NO. *	订货号Order NO. *

导轨 Rails







	钢轨-7.5*35(5.2X15X10) Steel-7.5*35(5.2X15X10)	钢轨-7.5*35(5.2X25X11) Steel-7.5*35(5.2X25X11)	钢轨-7.5*35(无孔) Steel-7.5*35(无孔)
	技术参数Technical Parameter	技术参数Technical Parameter	技术参数Technical Parameter
尺寸Size 注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	厚度Thickness 宽度Width 高度Height 1 35 7.5	厚度Thickness 宽度Width 高度Height 1 35 7.5	厚度Thickness 宽度Width 高度Height 1 35 7.5
	订货信息Order Information	订货信息Order Information	订货信息Order Information
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5** 颜色Colour 灰Gray	订货号Order NO. 900421/011	订货号Order NO. 900421/031	订货号Order NO. 900401/001
包装数量Package quantity			
	订货号Order NO.	订货号Order NO.	订货号Order NO.
适用轨道/型号 **Can Be Used For DIN Rail/Product**	适用于SP35尺寸产品	适用于SP35尺寸产品	适用于SP35尺寸产品
标记Marker 可提供印字服务Printing Service	订货号Order NO. *	订货号Order NO. *	订货号Order NO. *

导轨 Rails





	铝轨-7.5*35(4.8X25X10.5 Aluminum-7.5*35(4.8X25X10.5)	小导轨(钢轨)-5.5*15(4.2*12.2) Steel-5.5*15(2.2X12.2)
	技术参数Technical Parameter	技术参数Technical Parameter
尺寸Size 注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	厚度Thickness 宽度Width 高度Height 1 35 7.5	厚度Thickness 宽度Width 高度Height 1 15 5.5
	订货信息Order Information	订货信息Order Information
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5** 颜色Colour 灰Gray	订货号Order NO. 900431/001	订货号Order NO. 900421/061
包装数量Package quantity		
	订货号Order NO.	订货号Order NO.
适用轨道/型号 **Can Be Used For DIN Rail/Product**	适用于SP35尺寸产品	适用于SP15尺寸产品
标记Marker 可提供印字服务Printing Service	订货号Order NO. *	订货号Order NO. *

弹簧接线端子专用工具 Special tools for spring terminal blocks







	1A型单脚插棒-5.0mm 1A type 1 way connect bar-5.0mm	2A型双脚插棒-5.0mm 2A type 2 way connect bar-5.0mm	10A型十脚插棒-5.0mm 10 way connect bar-5.0mm
	订货信息Order Information	订货信息Order Information	订货信息Order Information
	订货号Order NO. 910111	订货号Order NO. 910112	订货号Order NO. 910120
包装数量Package quantity			
	订货号Order NO.	订货号Order NO.	订货号Order NO.
适用轨道/型号 **Can Be Used For DIN Rail/Product**	SP240系列	SP240系列	SP240系列
标记Marker 可提供印字服务Printing Service	订货号Order NO. *	订货号Order NO. *	订货号Order NO. *

弹簧接线端子专用工具 Special tools for spring terminal blocks









	一字螺丝刀 screw diver（刀口 edge：2.5x0.4mm）	一字螺丝刀 screw diver（刀口 edge：3.5x0.5mm）	一字螺丝刀 screw diver（刀口 edge：5.5x0.8mm）
	订货信息Order Information	订货信息Order Information	订货信息Order Information
	订货号Order NO.	订货号Order NO.	订货号Order NO.
	910024	910025	910026
包装数量Package quantity			
	订货号Order NO.	订货号Order NO.	订货号Order NO.
适用轨道/型号 Can Be Used For DIN Rail	适用于1.5平方端子 1.5mm² Terminal block	适用于2.5,4平方端子 2.5/4mm² Terminal block	适用于6,10,16平方端子 6/10/16mm² Terminal block
标记Marker	订货号Order NO.	订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service	*	*	*


标记牌 Marker card




254801




215801




225801




2150-801




620-801




TMB3.5-100




TMB4.2-100




TMB5.2-120




TMB6.2-100




TMB8.2-50




TMB10.2-10




305801




306801




308801




310801




TMBW5.2-96




TMC5.2-96




TMZ9.6-50




SP-WMC0.75




SP-WMC2.5



312801



315801



316801

	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	间距 Pitch	长度 Length	每张卡片上数量（行x列）Number	间距 Pitch	长度 Length	每张卡片上数量（行x列）Number	间距 Pitch	长度 Length	每张卡片上数量（行x列）Number	间距 Pitch	长度 Length	每张卡片上数量（行x列）Number
	5.0	5.0	10X10=100	4.0	10.1	10X10=100	5.0	10.2	10X10=100	3.5	10.2	10X8=80
其余参数Other Parameters												
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0			V0		
	订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
白White	254801			215801			225801			2150-801		
包装数量Package quantity	5			5			5			5		

	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	间距 Pitch	长度 Length	每张卡片上数量（行x列）Number	间距 Pitch	长度 Length	每张卡片上数量（行x列）Number	间距 Pitch	长度 Length	每张卡片上数量（行x列）Number	间距 Pitch	长度 Length	每张卡片上数量（行x列）Number
	7.5	3.6	6X10=60	3.5	6.5	10X10=100	4.2	6.5	10X10=100	5.2	6.5	12X10=120
其余参数Other Parameters												
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0			V0		
	订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
白White	620-801			TMB3.5-100			TMB4.2-100			TMB5.2-120		
包装数量Package quantity	5			5			5			5		

	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	间距 Pitch	长度 Length	每张卡片上数量（行x列）Number	间距 Pitch	长度 Length	每张卡片上数量（行x列）Number	间距 Pitch	长度 Length	每张卡片上数量（行x列）Number	间距 Pitch	长度 Length	每张卡片上数量（行x列）Number
	6.2	6.5	10X10=100	8.2	6.5	5X10=50	10.2	10.7	10X1=10	5.3	10.6	10X1=10
其余参数Other Parameters												
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0			V0		
	订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
白White	TMB6.2-100			TMB8.2-50			TMB10.2-10			305801		
包装数量Package quantity	5			5			5			5		

	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	间距 Pitch	长度 Length	每张卡片上数量（行x列）Number	间距 Pitch	长度 Length	每张卡片上数量（行x列）Number	间距 Pitch	长度 Length	每张卡片上数量（行x列）Number	间距 Pitch	长度 Length	每张卡片上数量（行x列）Number
	6.3	10.6	10X1=10	8.0	10.6	10X1=10	10.0	10.6	10X1=10	5.2	6.5	12X8=96
其余参数Other Parameters												
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0			V0		
	订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
白White	306801			308801			310801			TMBW5.2-96		
包装数量Package quantity	5			5			5			5		