DORABO 地博 • 为世界创造连接

CREATING CONNECTIONS FOR THE WORLD

宁波地博电气有限公司

NINGBO DORABO ELECTRIC CO., LTD

国内事业部（Domestic Business Division）：

电话（Tel ） ：+86-400-860-0988

网址（Web ）：www.terminalblock.net

邮箱（E-mail）：steven.lu@terminalblock.net

地址（Add） ：No. 869 Changxing Road, Changhe Town, Cixi City, Ningbo City, Zhejiang Province, P.R.China

中国浙江省宁波市慈溪市长河镇长兴路 869 号

国际事业部（International Business Division）：

电话（Tel ） ：+86-15988827951 +86-13185980275

网址（Web ）：www.terminalblock.net

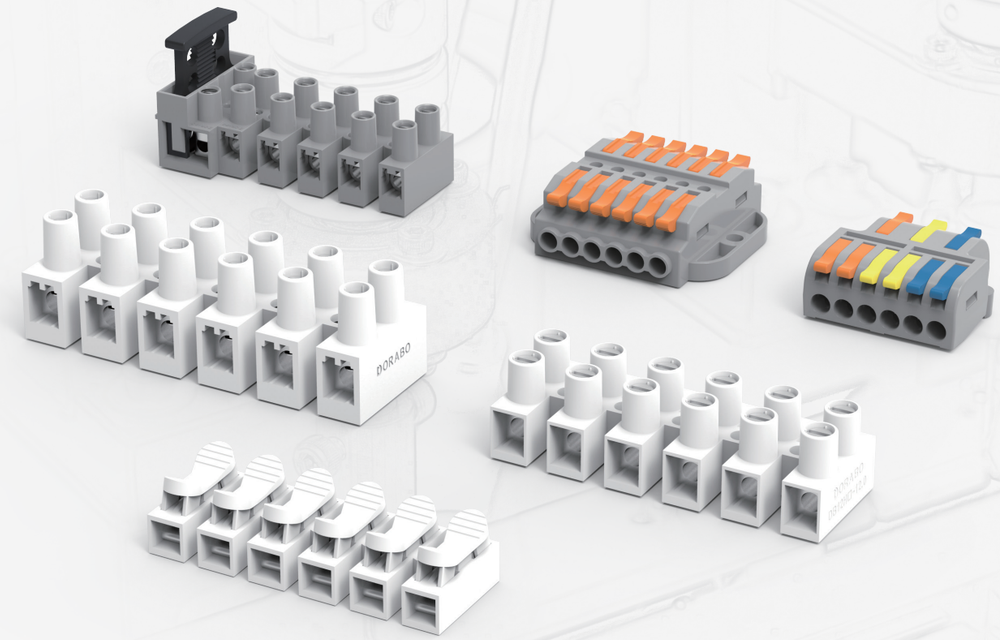
邮箱（E-mail）：info@terminalblock.net

微信二维码 WeChat QR Code

微信公众号 WeChat Official Account

微信视频号 WeChat Channels

DORABO



布线式接线端子目录

Catalog of Wiring Terminal Blocks

宁波地博电气有限公司

NINGBO DORABO ELECTRIC CO., LTD

ISO9001
ISO14001

Company Introduction


Founded in 2013, DORABO Electric is a well-recognized supplier for offering a comprehensive solution of industrial connectors. Since its inception, DORABO has prospered globally in the field of terminal blocks and industrial electrical connections, ranking among the leading players. Meanwhile, we carry out the concept of survival by quality, and our products are well received in more than 100 countries and regions such as China, the United States, Germany, the United Kingdom, Turkey, Japan, Singapore, etc. DORABO always strives to provide superior services for worldwide industries such as industrial automation, instrumentation, electric power, rail transportation, shipping, new energy, lift, lighting, security, aerospace and so on. Currently, all kinds of our products have been approved by CQC, UL, VDE, CE, etc. and our product also aligns with the standards of various management systems such as ISO9001, ISO14001 as well as environmental protection requirements of ROSH and REACH.











Certification Display













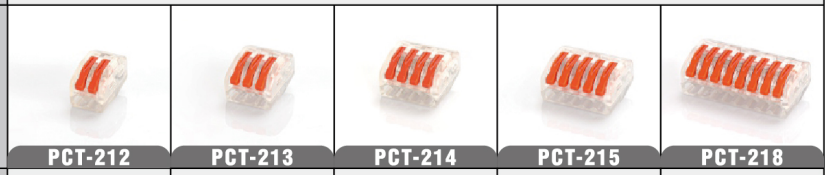




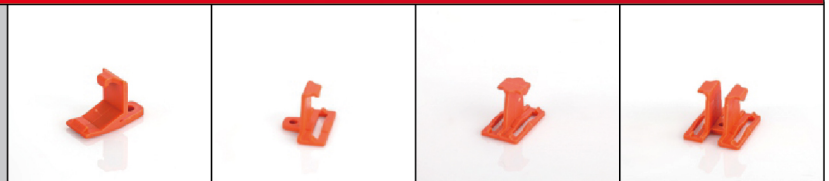
21系列 常规款 尼龙材质 21 Series regular type–Nylon material

接线范围 Wire Range	硬线Solid wire:0.2-4mm² 软线Strand wire:0.2-2.5mm² 电压Voltage：250V 电流Current：32A UL TÜV CQC				
产品 Product					
	PCT-212	PCT-213	PCT-214	PCT-215	PCT-218
尺寸 Size (LxWxH)	12.5X21X14.4mm	17.1X21X14.4mm	21.7X21X14.4mm	26.3X21X14.4mm	40.4X21X14.4mm

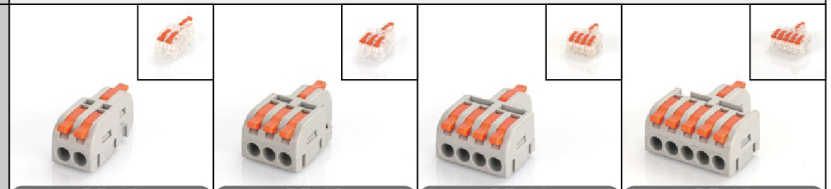
21系列 透明款 PC材质 21 Series Transparent type–PC material

接线范围 Wire Range	硬线Solid wire:0.2-4mm² 软线Strand wire:0.2-2.5mm² 电压Voltage：250V 电流Current：32A				
产品 Product					
	PCT-212	PCT-213	PCT-214	PCT-215	PCT-218
尺寸 Size (LxWxH)	12.5X21X14.4mm	17.1X21X14.4mm	21.7X21X14.4mm	26.3X21X14.4mm	40.4X21X14.4mm

固定支架&拼接支架 Mounting clip&Splicing bracket

产品 Product				
	DF-21	DF-22	DF-23	DF-24
尺寸 Size (LxWxH)	10X22.66X15.5mm	18.5X25X17.5mm	14.9X25X17.5mm	22.4X25X17.5mm
安装效果 Installation effect				
	固定支架 Mounting clip	固定支架 Mounting clip	拼接支架 Splicing bracket	带孔拼接支架 Splicing bracket whole
可搭配产品 Can match with below	PCT-212 PCT-213 PCT-214 PCT-215 PCT-218	PCT-2-2 PCT-2-2M PCT-2-3 PCT-2-3M PCT-2-4 PCT-2-5		

可拼接式一分多分线器 Splicing type –1 to more design
常规款尼龙材质 Regular type–Nylon material

接线范围 Wire Range	硬线Solid wire:0.2-4mm² 软线Strand wire:0.2-2.5mm² 电压Voltage：250V 电流Current：32A TÜV CQC			
产品 Product				
	DF-12	DF-13	DF-14	DF-15
尺寸 Size (LxWxH)	13.9X31.5X13.5mm	18.9X31.5X13.5mm	23.9X31.5X13.5mm	28.94X31.5X13.5mm

4mm²分线器 透明PC材质 4mm²Splitter Transparent PC Material

接线范围 Wire Range	硬线Solid wire:0.2-4mm² 软线Strand wire:0.2-2.5mm² 电压Voltage：250V 电流Current：32A UL TÜV CQC			
产品 Product				
	DF-42	DF-62	DF-63	DF-93

4mm²分线器 尼龙材质 4mm²Splitter nylon material

产品 Product				
	DF-42	DF-62	DF-63	DF-93
尺寸 Size (LxWxH)	24.55X31.5X13.5mm	33X31.5X13.5mm	33X31.5X13.5mm	48X31.5X13.5mm
产品 Product				
	DF-82	DF-102	DF-84	
尺寸 Size (LxWxH)	43.2X30X13.5mm	53.2X30X13.5mm	43.2X30X13.5mm	

常规款尼龙材质 Regular type-Nylon material

接线范围 Wire Range	硬线Solid wire:0.2-4mm² 电压Voltage: 250V 软线Strand wire:0.2-2.5mm² 电流Current: 32A

产品 Product				
	PCT-2-2	PCT-2-3	PCT-2-4	PCT-2-5
	PCT-2-2	PCT-2-3	PCT-2-4	PCT-2-5

透明款-PC材质 Transparent - PC material

产品 Product	PCT-2-2	PCT-2-3	PCT-2-4	PCT-2-5
尺寸 Size (LxWxH)	13.6X40.3X14.5mm	18.6X40.3X14.5mm	23.6X40.3X14.5mm	28.6X40.3X14.5mm

迷你款 尼龙/PC材质 Mini type nylon /PC material

产品 Product	PCT-2-1M	PCT-2-2M	PCT-2-3M	尺寸对比 Size omparison PCT-2-2 PCT-2-2M
产品 Product	PCT-2-1M	PCT-2-2M	PCT-2-3M	可拼接式 Splicing type
尺寸 Size (LxWxH)	8X31.5X13.5mm	13X31.5X13.5mm	18X31.5X13.5mm	

DF-2-Y 系列区别 The dif ferences of DF-2-Y series

- 中间带测试孔 With testing holes in the middle
- 位数1-40位可选 1-40 poles are optional
- 它有三大类款式可选 There are 3 types A款常规无耳 B款固定款带耳 D款轨道款
- A:Regular type no ear B:fixed type with ear D:Din-rail type

DF-2-Y系列固定式连接器 DF-2-Y series fixed type connectors

接线范围 Wire Range	硬线Solid wire:0.2-4mm² 电压Voltage: 250V 软线Strand wire:0.2-2.5mm² 电流Current: 32A

产品 Product	DF-2-1B	DF-2-2B	DF-2-3B	DF-2-4B	DF-2-5B
尺寸 Size (LxWxH)	39X8.6X14.5mm	30X13.2X13.5mm	30X18.2X13.5mm	30X23.2X13.5mm	30X28.2X13.5mm
产品 Product	DF-2-6B	DF-2-8B	DF-2-10B	DF-2-12B	DF-2-20B
尺寸 Size (LxWxH)	30X33.2X13.5mm	30X43.2X13.5mm	30X53.2X13.5mm	30X63.2X13.5mm	39X103.6X14.5mm

DF-2-Y系列轨道式连接器 DF-2-Y series Din-rail type connectors

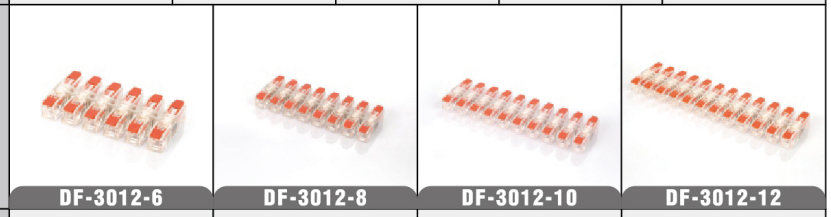
产品 Product	DF-2-1D	DF-2-2D	DF-2-3D	DF-2-12D

1位可拼接式端子 1pole splicing type wire connectors

接线范围 Wire Range	硬线Solid wire:0.2-4mm² 电压Voltage: 250V 软线Strand wire:0.2-2.5mm² 电流Current: 32A

产品 Product	迷你款 mini size PCT-2-1MD	PCT-2-1D	PCT-2-1
尺寸 Size (LxWxH)	30X8.2X22.5mm	39X8.6X23.5mm	39X8.6X14.5mm

带螺丝固定孔位1-24位可选 With screw holes to fix-1 to 24 poles

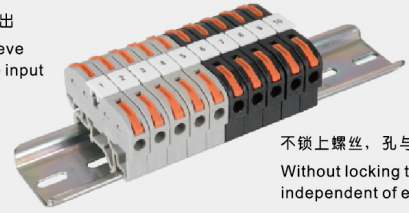
接线范围 Wire Range	0.2-4.0mm²	电压Voltage：450V 电流Current：32A			
产品 Product					
	DF-3012-1	DF-3012-2	DF-3012-3	DF-3012-4	DF-3012-5
尺寸 Size (LxWxH)	8.2X35.8X10mm	20.2X35.8X10mm	32.2X35.8X10mm	44.2X35.8X10mm	56.2X35.8X10mm
产品 Product					
	DF-3012-6	DF-3012-8	DF-3012-10	DF-3012-12	
尺寸 Size (LxWxH)	68.2X35.8X10mm	92.2X35.8X10mm	116.2X35.8X10mm	140.2X35.8X10mm	

1位轨道式接线端子 1 Pole Din-rail terminal block

接线范围 Wire Range	硬线Solid wire:0.08-4mm² 软线Strand wire:0.08-2.5mm²	电压Voltage：250V 电流Current：32A		
产品 Product				
	PCT-211	E/UK	配件	配件
尺寸 Size (LxWxH)	8X48X30.6mm	42.5X9.2X36mm	并联条（紫铜） 数字标记条	铜螺丝

锁上螺丝可实现并联，一进多出

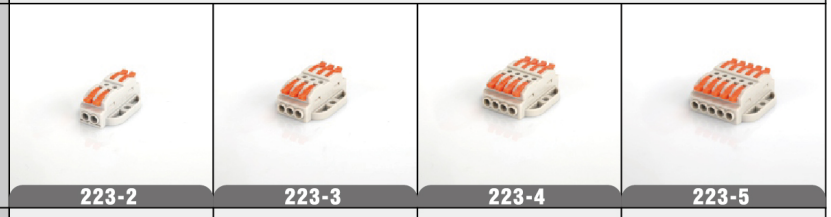
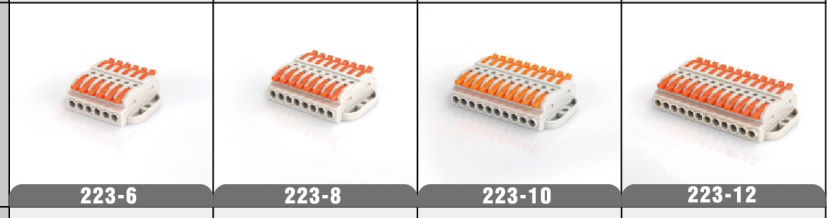
Locking the screws can achieve parallel connection, with one input and multiple outputs



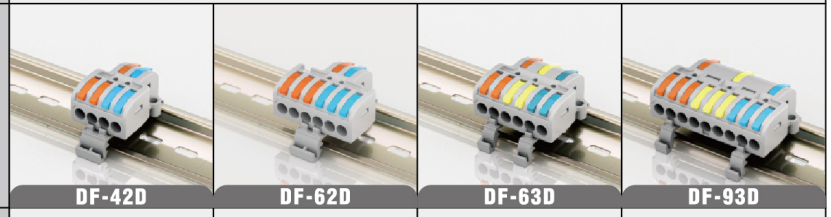
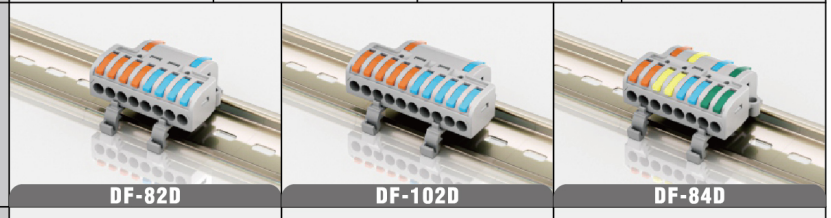
不锁上螺丝，孔与孔之间相互独立，一进一出

Without locking the screws, the holes are independent of each other, one in and one out

固定式连接器 223系列 Fixed connector 223 series

接线范围 Wire Range	硬线Solid wire:0.2-4mm² 软线Strand wire:0.2-2.5mm²	电压Voltage：250V 电流Current：32A		
产品 Product				
	223-2	223-3	223-4	223-5
尺寸 Size (LxWxH)	25.5X41.5X14.5mm	30.5X41.5X14.5mm	35.5X41.5X14.5mm	40.5X41.5X14.5mm
产品 Product				
	223-6	223-8	223-10	223-12
尺寸 Size (LxWxH)	45.5X41.5X14.5mm	55.5X41.5X14.5mm	65.5X41.5X14.5mm	75.5X41.5X14.5mm

轨道式分线连接器 Din-rail type Splitter


接线范围 Wire Range	硬线Solid wire:0.2-4mm² 软线Strand wire:0.2-2.5mm²	电压Voltage：250V 电流Current：32A		
产品 Product				
	DF-42D	DF-62D	DF-63D	DF-93D
尺寸 Size (LxWxH)	23.2X30X22.5mm	33.2X30X22.5mm	33.2X30X22.5mm	48.2X30X22.5mm
产品 Product				
	DF-82D	DF-102D	DF-84D	
尺寸 Size (LxWxH)	43.2X30X22.5mm	53.2X30X22.5mm	43.2X30x22.5mm	

ISO9001 ISO14001 REACH cULus CE

免破线快速接头 No-stripping type terminal block

接线范围 Wire Range	T端 T part	分线 Branch		
	A: 0.5-1.5mm² B: 1.5-2.5mm² C: 2.5-4.0mm²	硬线Solid wire:0.2-4mm² 软线Strand wire:0.2-2.5mm²	电压Voltage: 250V 电流Current: 32A	

产品 Product	DF-T11	DF-T12	DF-T22	DF-T24
尺寸 Size (LxWxH)	10X37.17X13.4mm	13X37.17X13.4mm	13X43.1X13.4mm	23X43.1X13.4mm



安装效果图 Installation rendering



A: 0.5-1.5mm² Y型

B: 1.5-2.5mm² 鼻型

C: 2.5-4.0mm² U型

T部主线范围选择 Wire range options for T part(Main line)

可零火主线同时免破线，实现二进二出或者二进四出。分线快速接线端子设计，只需开合手柄快速插拔电线

It can make main lines of zero & fire not broken ,which realize 2 in 2 out or 2 in 4 out.The design of quick wire connector for branch line only needs to open and close the handles to plug in and out the wire quickly.

新品简介 New design instruction

新型快卡式电源线接头 New power cord Connector with quick lever design

接线范围 Wire Range	0.2-1.5mm²	电压Voltage: 250V 电流Current: 10A	尺寸 Size (LxWxH)	公端Male:HJ-25-T2 22.5x84.8x18.1mm 母端Female:HJ-25-T1 29x88.5x20.5mm

产品 Product

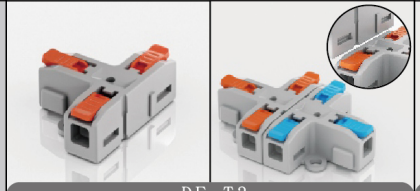


T型可拼接式连接器 T type splicing connector

圆形迷你快速接头 Round shape mini connector

接线范围 Wire Range	0.2-4mm²	电压Voltage: 250V 电流Current: 32A	0.2-1.5mm²	电压Voltage: 300V 电流Current: 16A

产品 Product



DF-T3



DF-M33

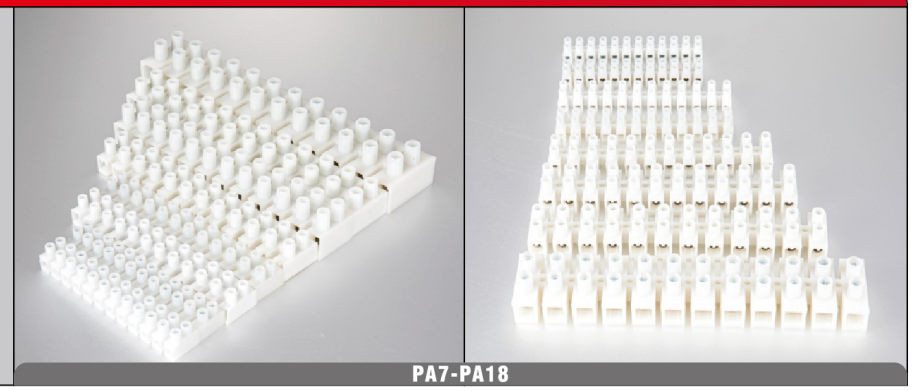
迷你款推拉杆接线，解决防爆灯杆子等需要紧凑型端子需求。

Mini type by push-pull handles to connect.

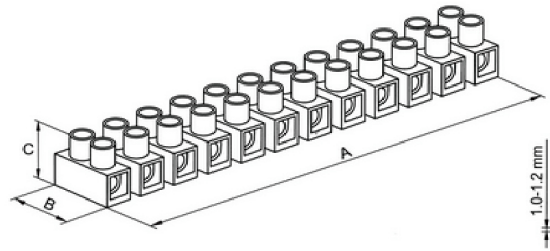
尺寸 Size (Lx(W)xΦ)	30X23.1X11mm	46.2X30X11mm	尺寸直径Φ: 15X32mm


端子台 Terminal block


产品 Product




PA7-PA18









规格尺寸(Dimensions)

型号 Product modle	电压 Voltage	电流 Amp	适用电线/Wire Range		螺丝 Screw	尺寸/Dimensions(mm)					
			Cross-Sec.	(Cu.AWG)		A	B	C	D	E	F
PA7	450	17.5	1.5-2.5mm²	22-12 SOL/STR	M2.6x5	97	17	14	8	2.9	2.8
PA8	400-450	17.5	1.5-2.5mm²	22-12 SOL/STR	M3x5.5	13.5	18	15.2	8	2.95	2.85
PA9	450	24	2.5-4mm²	22-12 SOL/STR	M3x6	116	20.2	16.2	10	3.6	3.4
PA10	450	24	2.5-4mm²	22-10 SOL14-10STR	M3x5.5	16.5	20	16	10	3.5	3.3
PA12	500	41	6.0mm²	22-12 SOL/STR	M3.5x7	32	24.5	19	12	4	3.9
PA14	500	57	10.0mm²	22-12 SOL/STR	M4x8	157	25.5	25	13.5	4.5	4.8
PA16	500	76	16.0mm²	22-12 SOL/STR	M4x9	170	28.10	23.30	14.50	4.20	6.0±0. 1
PA18	500	101	25.0mm²	22-12 SOL/STR	M5x11	194	37	28.70	16.50	4.20	7. 5±0. 1

10系列 10 Series

接线范围 Wire Range	硬线Solid wire：0.75-2.5mm² 电压Voltage：400V 电流Current：24A CQC			
产品 Product	 PCT-102	 PCT-104	 PCT-106	 PCT-108
尺寸 Size (LxWxH)	9.3X19.4X13.4mm	13X19.4X13.4mm	18.6X19.4X13.4mm	24.1X19.4X13.4mm

25系列 25 Series

接线范围 Wire Range	硬线Solid wire：0.75-2.5mm² 电压Voltage：450V 电流Current：24A CQC			
产品 Product	 PC-252	 PC-253	 PC-254	 PC-255
尺寸 Size (LxWxH)	10.5X19.4X9.6mm	13.7X19.4X9.6mm	17.4X19.4X9.6mm	21.0X19.4X9.6mm

60系列 60 Series

接线范围 Wire Range	硬线Solid wire：0.75-4.0mm² 电压Voltage：400V 电流Current：24A			
产品 Product	 PCT-602	 PCT-604	 PCT-606	 PCT-608
尺寸 Size (LxWxH)	9.3X19.4X13.4mm	13X19.4X13.4mm	18.6X19.4X13.4mm	24.1X19.4X13.4mm

迷你款2273系列 Mini type 2273 Series

接线范围 Wire Range	硬线Solid wire：0.75-2.5mm² 电压Voltage：400V 电流Current：24A			
产品 Product	 2273-2	 2273-3	 2273-4	 2273-5
尺寸 Size (LxWxH)	11.2X15.3X6.7mm	15.1X15.3X6.7mm	19.2X15.3X6.7mm	23.2X15.3X6.7mm

硬线6mm² Solid wire 6mm²

产品 Product


PCT-103D


PCT-104D

接线范围 Wire range CQC
硬线Solid wire：2.5-6mm²
软线Strand wire：2.5-4mm²
电压Voltage：400V
电流Current：41A
尺寸 size：25.8x20.2x14.3mm
(LxWxH) 33.8x20.2x14.3mm

灯具系列 Lighting Serise

产品 Product


PCT-111


PCT-201

接线范围 Wire range
方孔侧（照明侧）软硬线Square hole：0.5-2.5mm²
圆孔侧（供电侧）硬线Round hole：1-2.5mm²
电压Voltage：400V
电流Current：24A
尺寸 size：8.5x20.5x15.5mm
(LxWxH) 42x8.5x15.5mm

对插式接线端子 Plug-in type terminal block

产品 Product


DF-222


DF-223

接线范围 Wire range
0.5-1.5mm²
软线加锡 Strand wire add tin
电压 Voltage：250V
电流 Current：6A
尺寸 size：15x40x10mm
(LxWxH) 21.5x40x10mm

41系列 41 Series

接线范围 Wire Range	硬线Solid wire:0.2-4mm² 软线Strand wire:0.14-4mm² 电压Voltage：450V 电流Current：32A CQC			
产品 Product				
	PCT-412	PCT-413	PCT-414	PCT-415
产品 Product				
	PCT-412	PCT-413	PCT-414	PCT-415
尺寸 Size (LxWxH)	13X19.4X9.6mm	18.6X19.4X9.6mm	24.2X19.4X9.6mm	29.8X19.4X9.6mm

61系列 61 Series



接线范围 Wire Range	硬线Solid wire:0.5-6mm² 软线Strand wire:0.4-4mm² 电压Voltage：450V 电流Current：40A			
产品 Product				
	PCT-612	PCT-613	PCT-614	PCT-615
尺寸 Size (LxWxH)	16.8X25.07X11.3mm	23.9X25.07X11.3mm	31X25.07X11.3mm	38.1X25.07X11.3mm



手柄颜色多色可选，接受定制

All handles can have more color options,or can be customized

20系列 20 Series

接线范围 Wire Range	硬线Solid wire：0.5-2.5mm² 电压Voltage：450V 电流Current：24A CQC			
产品 Product				
	PCT-202	PCT-203	PCT-204	PCT-205
尺寸 Size (LxWxH)	9.8X16.35X5.4mm	13.8X16.35X5.4mm	17.8X16.35X5.4mm	21.8X16.35X5.4mm
产品 Product			通用紧凑型接线端子，产品尺寸更小，在接线盒中能容纳更多接线端子 Compact Splicimg connector,smaller size,can make junctionbox owns mor connector	
	PCT-206	PCT-208		
尺寸 Size (LxWxH)	13.8X16.35X10.3mm	17.8X16.35X10.3mm		

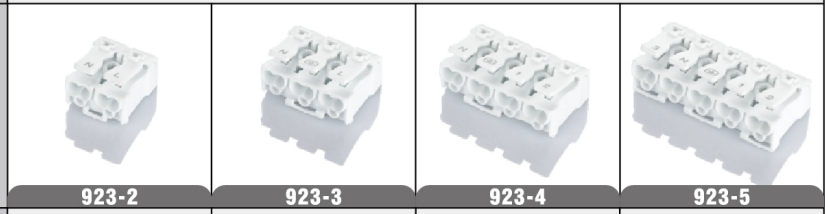
LED贴片端子 LED terminal block

接线范围 Wire Range	硬线Solid wire:0.3-0.5mm² 电压Voltage：130V 电流Current：7A CQC		
产品 Product			
	2060-1	2060-2	2060-3
尺寸 Size (LxWxH)	4X13.1X4.4mm	8X13.1X4.4mm	12X13.1X4.4mm

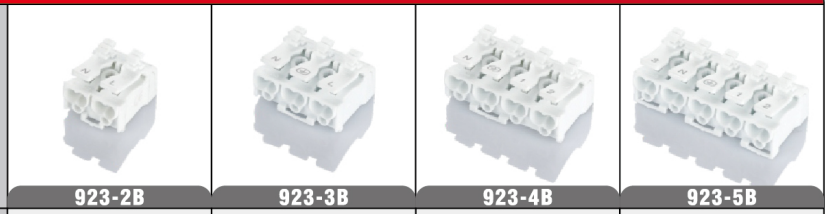
2060针 2060 Needle

产品 Product				
	2060 1位针	2060 2位针	2060 3位针	
尺寸 Size (LxWxH)	3.8X26X2.6mm	7.8X26X2.6mm	11.8X26X2.6mm	组合图

常规款（不带按钮，底部带钩）Regular style(w/o buttons,w/hook on bottom)

接线范围 Wire Range	软线需加锡Strand wire need add tin:0.5-2.5mm²	电压Voltage：450V 电流Current：16A TÜV CQC		
产品 Product				
	923-2	923-3	923-4	923-5
尺寸 Size (LxWxH)	19.7X25.4X21.65mm带钩	29.7X25.4X21.65mm带钩	39.7X25.4X21.65mm带钩	49.7X25.4X21.65mm带钩

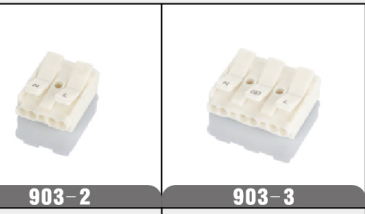
按钮款（带按钮，底部带钩） With buttons(w/buttons, w/hook on bottom)

产品 Product				
	923-2B	923-3B	923-4B	923-5B
尺寸 Size (LxWxH)	19.7X25.4X23.12mm带钩	29.7X25.4X23.12mm带钩	39.7X25.4X23.12mm带钩	49.7X25.4X23.12mm带钩

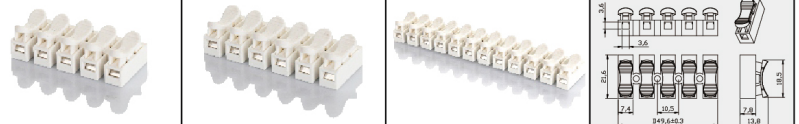
其他款式 Other style

产品 Product				
	923-2 带针		923-3 带针	923-4 带针
尺寸 Size (LxWxH)	19.7X25.35X20.8mm		29.7X25.35X20.8mm	39.7X25.35X20.8mm
产品 Product				
	接地片	有钩 W/Hook 无钩 W/O Hook	B-602	B-603
尺寸 Size (LxWxH)	7.8X28.5X3.9mm	对比图 Comparison chart	27.92X76.03X30mm	39.35X76.03X30mm

903薄款系列 903 thin style

接线范围 Wire Range	软线需加锡Strand wire need add tin:0.5-1.5mm²	电压Voltage：400V 电流Current：10A	
产品 Product			
	903-2	903-3	
尺寸 Size (LxWxH)	18.1X16.4X5.95mm	21.85X16.4X5.95mm	对比图 Comparison chart

012系列 尼龙材质 012 Series nylon material

接线范围 Wire Range	0.5-2.5mm²	电压Voltage：250V 电流Current：5A		
产品 Product				
	012-1	012-2	012-3	012-4
产品 Product				
	012-5	012-6	012-12	

CH系列 PP材质 CH Series PP material

ZQ系列端子 ZQ Series terminals

接线范围 Wire Range	0.5-2.5mm²	电压Voltage：250V 电流Current：5A	进线Incoming line:2.5-6.0mm 出线Outgoing line:0.3-1.5mm	电压Voltage：250V 电流Current：6A	
产品 Product					
	CH-2	CH-3	ZQ-201	ZQ-202	ZQ-203
尺寸 Size (LxWxH)	17.5X19.5X13.5mm	22X19.5X13.5mm	9.6X32.5X14.65mm	22.4X32.5X14.65mm	35.2X32.5X14.65mm


无痛手柄端子VS笼式弹簧端子 painless handles terminal VS cage spring terminal

介绍 introduce

无痛手柄系列是地博率先研发设计的新型端子。设计的初衷是为了解决客戶使用传统的笼式弹簧接线端子，长时间打开手柄痛手的诉求。

The painless handles series is a new terminal designed by Defa. The original intention of the design is to solve the customer hands hurt demand.When they use the traditional cage spring terminal for a long time to open handles which will cause hands hurts.

对比 comparison



VS

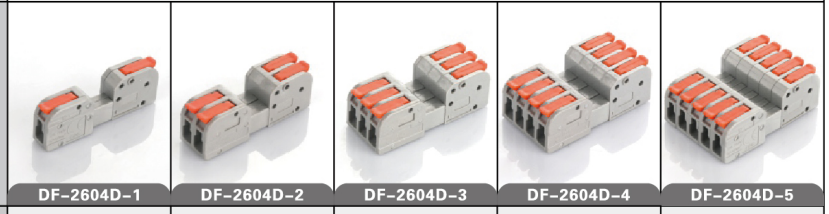


无痛手柄端子 Painless handles terminal	笼式弹簧端子 Cage spring terminal
1.轻松开柄不痛手。 Open handles easy with no pain for the hands 2.拉力大:比如2.5mm²硬线拉力200N 左右。 Large tensile force.solid wire(2.5mm²) tensile force is around 200N. 3.位数可按要求定制，不受模具限制。1-N位可按需拼装。 1-N poles can be assembled without open the mould. 4.接线范围增大，软线最大4mm²。 The wire range is increased,the max of strand wire is 4mm².	1.需用力开柄，长时间开痛手。 Open handles hard.Hands hurt for long time open. 2.2.5mm²硬线拉力100N 左右。 Solid wire(2.5mm²) tensile force is around 100N. 3.非常规位数需要开模。 Non-conventional poles need to open the mould 4.接线范围软线最大只能2.5mm²。 The max of strand wire is 2.5mm².

对插式接线端子 Pluggable type terminal block

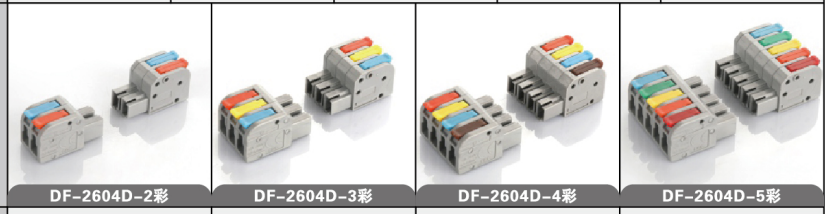
接线范围 Wire Range: 0.2-4mm² 电压Voltage：250V 电流Current：32A 间距Pitch：5.5mm TÜV

产品 Product



DF-2604D-1	DF-2604D-2	DF-2604D-3	DF-2604D-4	DF-2604D-5
7X43.5X15mm	12X43.5X15mm	17X43.5X15mm	22X43.5X15mm	27X43.5X15mm

产品 Product



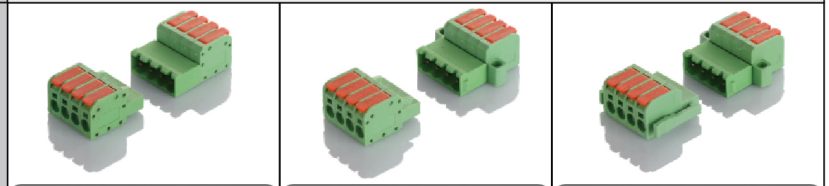
DF-2604D-2彩	DF-2604D-3彩	DF-2604D-4彩	DF-2604D-5彩
12X43.5X15mm	17X43.5X15mm	22X43.5X15mm	27X43.5X15mm

ISO9001 ISO14001 REACH cULus CE CQC

KC2EDG系列-对插款(侧边进线) KC2EDG series-Pluggable type（Insert wire by side ）

接线范围 Wire Range: 0.2-4mm² 电压Voltage：250V 电流Current：32A

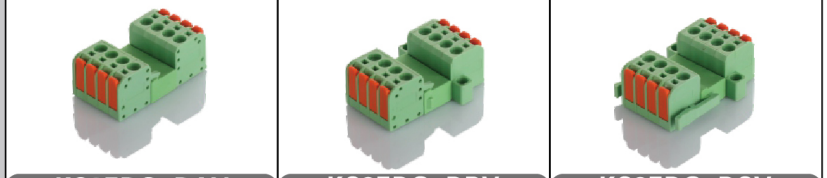
产品 Product



KC2EDG-DAR	KC2EDG-DBR	KC2EDG-DCR
常规款regular type	固定款fixed type	自锁款 self-locking type

KC2EDG系列-对插款(垂直进线) KC2EDG series-Pluggable type（Insert wire vertically ）


产品 Product



KC2EDG-DAV	KC2EDG-DBV	KC2EDG-DCV
常规款regular type	固定款fixed type	自锁款 self-locking type


KC2EDG系列-带针款 KC2EDG series-with pin

接线端子分类 Connector part




A:常规款无耳 Regular type no ear
B:锁螺丝款带耳 Screw type with ear
C:自锁款 self-locking type

进线方式分类 Incoming way



1:垂直进线 By side
2:侧边进线 Vertical

针柱部分分类 Feet part





V:直针 V pin
R:弯针 R pin

ISO9001 ISO14001 REACH cULus CE CQC

DF-2604系列：单边进线/一进多出 DF-2604 Series：1 in more out

接线范围 Wire Range	0.2-4mm² 电压Voltage：250V 电流Current：32A TÜV CQC			
产品 Product		 1进1出 1 in 1 out	 1进2出 1 in 2 out	 1进3出 1 in 3 out
	DF-2604-1	DF-2604-2	DF-2604-3	DF-2604-4
尺寸 Size (LxWxH)	7X18.5X15mm	12X18.5X15mm	17X18.5X15mm	22X18.5X15mm
产品 Product	 1进4出 1 in 4 out	 1进5出 1 in 5 out	 1进6出 1 in 6 out	 1进7出 1 in 7 out
	DF-2604-5	DF-2604-6	DF-2604-7	DF-2604-8
尺寸 Size (LxWxH)	27X18.5X15mm	32X18.5X15mm	42X18.5X15mm	52X18.5X15mm


DF-2604系列：组合款分线器功能，多进多出 DF-2604 Series：more in more out

特点介绍 Special design	按需组装、分线器功能可按需把独立的2位或者3位等两对或者N对组装一起，实现同方向进出线的分线功能。 比如可以把2个2位和1个3位组装 Assemble on demand.If need splitter function, can assemble 2 poles (1 in 1 out)+3 poles(1 in 2out) together.			
产品 Product	 2进2出 2 in 2 out	 2进2出 2 in 2 out	 2进4出 2 in 4 out	 2进6出 2 in 6 out
	DF-2604-1x1	DF-2604-2x2	DF-2604-3x2	DF-2604-4x2
尺寸 Size (LxWxH)	12X18.5X15mm	22X18.5X15mm	32X18.5X15mm	42X18.5X15mm
产品 Product	 3进3出 3 in 3 out	 3进3出 3 in 3 out	 3进6出 3 in 6 out	
	DF-2604-1x3	DF-2604-2x3	DF-2604-3x3	DF-31
尺寸 Size (LxWxH)	17X18.5X15mm	32X18.5X15mm	47X18.5X15mm	固定支架 Mounting clip


DF-2604P系列:带针款-PCB类型 DF-2604P series:with pin -PCB type

接线范围 Wire Range	0.2-4mm² 电压Voltage：250V 电流Current：32A TÜV CQC			
产品 Product				
	DF-2604P-5.0-2P	DF-2604P-5.0-3P	DF-2604P-5.0-4P	DF-2604P-5.0-5P
尺寸 Size (LxWxH)	12X18.5X15mm	17X18.5X15mm	22X18.5X15mm	27X18.5X15mm
产品 Product	 间距7.5	 间距9.5	 间距10.0	常规款间距5.0,还有7.5/9.5/10.0间距可选,位数1-N位可选。默认针脚双排针,可以定制单排针。 Regular pitch is 5.0mm. We have other pitch:7.5/9.5 /10.0 mm.Poles:2-24P or more.The default feet pins are double -rowed, which can be customized a single row.
	DF-2604-7.5-2P	DF-2604-9.5-3P	DF-2604-10.0-4P	
尺寸 Size (LxWxH)	14.5X18.5X15mm	26X18.5X15mm	37X18.5X15mm	

DF-2604P-V直脚带针系列 DF-2604P-V series-vertical pin

接线范围 Wire Range	0.2-4mm² 电压Voltage：250V 电流Current：32A			
产品 Product				
	DF-2604P-V5.0-2P	DF-2604P-V5.0-3P	DF-2604P-V5.0-4P	DF-2604P-V5.0-5P
尺寸 Size (LxWxH)	12X18.5X15mm	17X18.5X15mm	22X18.5X15mm	27X18.5X15mm
定制款 Customization	 手柄颜色可定制 Handles color can be customized	 可激光印字 Can print by laser	 壳体手柄整体一色 Handles & shell in same color	

DF-2608系列：常规款 DF-2608 Series：Regular type





接线范围 Wire Range	0.2-4mm² 电压Voltage：250V 电流Current：32A TÜV CQC				
产品 Product	 DF-2608-1	 DF-2608-2	 DF-2608-3	 DF-2608-4	 DF-2608-5
尺寸 Size (LxWxH)	6.7X32.9X15mm	11.7X32.9X15mm	16.7X32.9X15mm	21.7X32.9X15mm	26.7X32.9X15mm
产品 Product	 DF-2608-6	 DF-2608-8	 DF-2608-10	 DF-2608-12	
尺寸 Size (LxWxH)	31.7X32.9X15mm	41.7X32.9X15Xmm	51.7X32.9X15mm	61.7X32.9X15mm	
产品 Product	 DF-2608-1透橙	 DF-2608-2透彩	 DF-2608-3彩	手柄颜色可定制，塑件材质可选透明PC材料 Handles color can be customized，Plastic material can choose PC transparent type.	
尺寸 Size (LxWxH)	6.7X32.9X15mm	11.7X32.9X15mm	16.7X32.9X15mm		

DF-2608B款固定款 DF-2608 B type fixed type


产品 Product	 DF-2608-1B	 DF-2608-2B	 DF-2608-3B	 DF-2608-4B	 DF-2608-5B
尺寸 Size (LxWxH)	20.2X32.9X16.2mm	25.2X32.9X16.2mm	30.2X32.9X16.2mm	35.2X32.9X16.2mm	40.2X32.9X16.2mm
产品 Product	 DF-2608-6B	 DF-2608-8B	 DF-2608-10B	 DF-2608-12B	
尺寸 Size (LxWxH)	45.2X32.9X16.2mm	55.2X32.9X16.2mm	65.2X32.9X16.2mm	75.2X32.9X16.2mm	

ISO9001 ISO14001 REACH cULus CE CQC

DF-2608C款 轨道款 Din-rail type

接线范围 Wire Range	0.2-4mm² 电压Voltage：250V 电流Current：32A TÜV CQC				
产品 Product	 DF-2608-1C	 DF-2608-2C	 DF-2608-3C	 DF-2608-4C	 DF-2608-5C
尺寸 Size (LxWxH)	6.7X43.44X26mm	11.7X43.44X26mm	16.7X43.44X26mm	21.7X43.44X26mm	26.7X43.44X26mm
产品 Product	 DF-2608-6C	 DF-2608-8C	 DF-2608-10C	 DF-2608-12C	
尺寸 Size (LxWxH)	31.7X43.44X26mm	41.7X43.44X26mm	51.7X43.44X26mm	61.7X43.44X26mm	

DF-2608 常规款和并联款组合 DF-2608 customized combination type



可内置并联条，让邻近的2-N位短接。可按需定制：相邻的孔位短接，再和其他照常一进一出的孔位拼接一起。

DF-2608:can add copper bar which can make 2-N pins in short circuit.Cuostomized design: we can make close poles in short circuit other poles as usual,1 line in 1 line out.

产品 Product	 DF-2608-2DX2	 DF-2608-1-2D-1	 DF-2608-2D-1-2D	 DF-2608-2DX3
接线说明 Instruction	2进6出 2 in 6 out 火线1分3 L line:1 in 3 out 零线1分3 N line:1 in 3 out	火线对接 L line:1in 1 out 地线1分3 E line:1 in 3 out 零线对接 N line:1in 1 out	火线1分3 L line:1 in 3 out 地线对接 E line:1in 1 out 零线1分3 N line:1 in 3 out	3进9出 3 in 9 out 火线1分3 L line:1 in 3 out 地线1分3 E line:1 in 3 out 零线1分3 N line:1 in 3 out

ISO9001 ISO14001 REACH cULus CE CQC

KC-6604系列：常规款 KC-6604 Series：Regular type


接线范围 Wire Range	0.5-6mm²	电压Voltage：450V 电流Current：40A		
产品 Product	 KC-6604-1	 KC-6604-2	 KC-6604-3	 KC-6604-4
尺寸 Size (LxWxH)	7.5X24X21.6Xmm	15X24X21.6mm	22.5X24X21.6mm	30X24X21.6mm
产品 Product	 KC-6604-5	 KC-6604-6	 KC-6604-8	 KC-6604-10
尺寸 Size (LxWxH)	37.5X24X21.6mm	45X24X21.6mm	60X24X21.6mm	75X24X21.6mm

KC-6604B款固定款 KC-6604B series: fixed type

接线范围 Wire Range	0.5-6mm²	电压Voltage：450V 电流Current：40A		
产品 Product	 KC-6604-1B	 KC-6604-2B	 KC-6604-3B	 KC-6604-4B
尺寸 Size (LxWxH)	22.5X24X21.6mm	30X24X21.6mm	37.5X24X21.6mm	45X24X21.6mm
产品 Product	 KC-6604-5B	 KC-6604-6B	 KC-6604-8B	 KC-6604-10B
尺寸 Size (LxWxH)	52.5X24X21.6mm	60X24X21.6mm	75X24X21.6mm	90X24X21.6mm

ISO9001 ISO14001 REACH cULus CE SEV SIR CQC

KC-6604系列：组合款分线器功能，多进多出 KC-6604 Series：more in more out

接线范围 Wire Range	0.5-6mm²	电压Voltage：450V 电流Current：40A				
产品 Product	 2进2出 2 in 2 out KC-6604-1x1	 2进2出 2 in 2 out KC-6604-2x2	 2进4出 2 in 4 out KC-6604-3x2	 2进6出 2 in 6 out KC-6604-4x2	 2进8出 2 in 8 out KC-6604-5x2	
尺寸 Size (LxWxH)	15X24X21.6mm	30X24X21.6mm	45X24X21.6mm	60X24X21.6mm	75X24X21.6mm	
产品 Product	 3进3出 3 in 3 out KC-6604-1x3	 3进3出 3 in 3 out KC-6604-2x3	 3进6出 3 in 6 out KC-6604-3x3	 3进9出 3 in 9 out KC-6604-4x3	 3进12出 3 in 12 out KC-6604-5x3	
尺寸 Size (LxWxH)	22.5X24X21.6mm	45X24X21.6mm	67.5X24X21.6mm	90X24X21.6mm	112.5X24X21.6mm	

DF-6604P系列:带针款-PCB类型 DF-6604P series:with pin -PCB type

接线范围 Wire Range	0.5-6mm²	电压Voltage：450V 电流Current：40A		
产品 Product	 KC-6604P-2	 KC-6604P-3	 KC-6604P-4	 KC-6604P-5
尺寸 Size (LxWxH)	15X24X26.1mm	22.5X24X26.1mm	30X24X26.1mm	37.5X24X26.1mm


6平方无痛手柄延续4平方无痛手柄的所有优点：
6mm² Painless handles connector keep all advantages of 4mm² Painless handles connector

1.无痛开柄
2.拉力大
3.位数可按要求定制，不受模具限制。
4.6604系列和6608系列可内置并联条短接，实现1进多出.
6平方无痛手柄额外优势：
1.接线范围增大到6平方
2.拼缝间牢固度增强










1.Open handles easy with no pain for the hands
2.Large tensile force.s
3.1-N poles can be assembled without open the mould.
4.6604 and 6608 series can insert parallel bar for short circuit,which can make 1 in more out.
The extra advantages for 6mm2 painless handles
1.The wire range increased to 6mm².
2.Enhanced firmness between seams

ISO9001 ISO14001 REACH cULus CE SEV SIR CQC


KC-6608系列：常规款 KC-6608 Series：Regular type

接线范围 Wire Range	0.5-6mm²	电压Voltage：450V 电流Current：40A			
产品 Product	 KC-6608-1	 KC-6608-2	 KC-6608-3	 KC-6608-4	 KC-6608-5
尺寸 Size (LxWxH)	7.5X48X21.6mm	15X48X21.6mm	22.5X48X21.6mm	30X48X21.6mm	37.5X48X21.6mm
产品 Product	 KC-6608-6	 KC-6608-8	 KC-6608-10	 KC-6608-12	
尺寸 Size (LxWxH)	45X48X21.6mm	60X48X21.6mm	75X48X21.6mm	90X48X21.6mm	


KC-6608C款 轨道款 KC-6608C Series：Din-rail type

接线范围 Wire Range	0.5-6mm²	电压Voltage：450V 电流Current：40A			
产品 Product	 KC-6608-1C	 KC-6608-2C	 KC-6608-3C	 KC-6608-4C	 KC-6608-5C
尺寸 Size (LxWxH)	7.5X48X32.6mm	15X48X32.6mm	22.5X48X32.6mm	30X48X32.6mm	37.5X48X32.6mm
产品 Product	 KC-6608-6C	 KC-6608-8C	 KC-6608-10C	 KC-6608-12C	
尺寸 Size (LxWxH)	45X48X32.6mm	60X48X32.6mm	75X48X32.6mm	90X48X32.6mm	

KC-6608B款固定款 KC-6608B series: fixed type

接线范围 Wire Range	0.5-6mm²	电压Voltage：450V 电流Current：40A			
产品 Product	 KC-6608-1B	 KC-6608-2B	 KC-6608-3B	 KC-6608-4B	 KC-6608-5B
尺寸 Size (LxWxH)	22.5X48X21.6mm	30X48X21.6mm	37.5X48X21.6mm	45X48X21.6mm	52.5X48X21.6mm
产品 Product	 KC-6608-6B	 KC-6608-8B	 KC-6608-10	 KC-6608-12	
尺寸 Size (LxWxH)	60X48X21.6mm	75X48X21.6mm	90X48X21.6mm	105X48X21.6mm	

KC-6601系列分线器 KC-6601 Series splitter terminal

接线范围 Wire Range	0.5-6mm²	电压Voltage：450V 电流Current：40A			
产品 Product	 KC-6601-1-2	 KC-6601-1-3	 KC-6601-1-4	 KC-6601-1-5	 KC-6601-1-6
尺寸 Size (LxWxH)	15X48X21.6mm	22.5X48X21.6mm	30X48X21.6mm	37.5X48X21.6mm	45X48X21.6mm

在左右两侧可按需增加孔位，比如KC-6601-1-3在右侧加三片孔位，可以变成KC-6601-1-6


It can add poles at left or right side,like KC-6601-1-3 ,we can add 3 poles at right side ,which turn to kc-6601-1-6.









分线器自定义组合设计：KC-6608和KC-6601系列可以自由按需组合一起。
比如可以把多个KC-6601系列组合。它可以在左右两侧按需增加孔位。
Custom combination design of splitters:KC-6608& KC-6601 series can combine.
For example:we can combine several KC-6601 series .As photo 2 pcs KC-6601-1-2 combined into KC-6601-2-4.



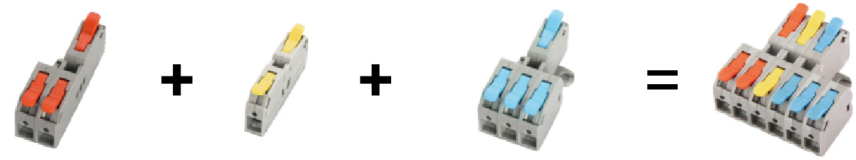
带耳固定款分线器 With fixed ears splitter terminal




左右两边有固定孔位，可以定制无耳或者单耳。
There are fixed holes on the left and right sides, which can be customized without ears or single ears

接线范围 Wire Range	0.5-6mm²	电压Voltage：450V 电流Current：40A		
产品 Product	 KC-6601-2-4	 KC-6601-2-6	 KC-6601-2-8	 KC-6601-2-10
尺寸 Size (LxWxH)	30X48X21.6mm	45X48X21.6mm	60X48X21.6mm	75X48X21.6mm
产品 Product	 KC-6601-3-6	 KC-6601-3-9	 KC-6601-3-12	 KC-6601-3-15
尺寸 Size (LxWxH)	45X48X21.6mm	67.5X48X21.6mm	90X48X21.6mm	112.5X48X21.6mm
产品 Product	 KC-6601-4-8	 KC-6601-4-12	 KC-6601-5-10	 KC-6601-5-15
尺寸 Size (LxWxH)	60X48X21.6mm	90X48X21.6mm	75X48X21.6mm	112.5X48X21.6mm











也可以KC-6601系列和KC-6608系列组合
we also can combine KC-6601& KC-6608 series.As photo,KC-6601-1-2 + KC-6608-1 + KC-6601-1-3 =KC-6601-3-6.



轨道款分线器 Din-rail type splitter terminal



底部带轨道脚，可按需安装1到多个轨道脚。
There are din-rai feets on bottom,which can be installed 1 to more feets on demand

接线范围 Wire Range	0.5-6mm²	电压Voltage：450V 电流Current：40A		
产品 Product	 KC-6601-2-4D	 KC-6601-2-6D	 KC-6601-2-8D	 KC-6601-2-10D
尺寸 Size (LxWxH)	30X48X32.6mm	45X48X32.6mm	60X48X32.6mm	75X48X32.6mm
产品 Product	 KC-6601-3-6D	 KC-6601-3-9D	 KC-6601-3-12D	 KC-6601-3-15D
尺寸 Size (LxWxH)	45X48X32.6mm	67.5X48X32.6mm	90X48X32.6mm	112.5X48X32.6mm
产品 Product	 KC-6601-4-8D	 KC-6601-4-12D	 KC-6601-5-10D	 KC-6601-5-15D
尺寸 Size (LxWxH)	60X48X32.6mm	90X48X32.6mm	75X48X32.6mm	112.5X48X32.6mm

直通型防水连接器 I type waterproof connector

接线范围 Wire Range	硬线Solid wire:0.2-4mm² 软线Strand wire:0.2-2.5mm² 电压Voltage：250V 电流Current：32A	0.5-4mm² 电压Voltage：450V 电流Current：32A	硬线Solid wire:0.2-1.5mm² 软线Strand wire:0.2-1.5mm² 电压Voltage：250V 电流Current：16A
产品 Product	 2 poles 3 poles CDF-200/3配快速接头	 3 poles 5 poles CDF-200/3配螺丝结构冷压端子	 CDF-200/3配五芯快接款
尺寸 Size (Lxϕ)	85Xϕ29mm	电缆直径 Cable diameter	ϕ4-6mm(小圈 Small O-ring size) ϕ6-8mm(常规圈 Default O-ring size) ϕ8-10mm(大圈 Big O-ring size)

T型和迷你型防水连接器 T type & Mini type waterproof connector




接线范围 Wire Range	0.5-4mm² 电压Voltage：450V 电流Current：32A	电缆直径 Cable Diameter	ϕ4-6mm ϕ6-8mm ϕ8-10mm	接线范围 Wire Range	2芯：0.5-2.5mm² 3芯:0.5-2mm² 电压Voltage：300V 电流Current：16A	电缆直径 Cable Diameter	默认尺寸：ϕ5-7mm 其他尺寸：ϕ4-6mm ϕ2-4mm
产品 Product	 5 poles 3 poles CDF-200/3T				 2 poles 3 poles CDF-M3		
尺寸 Size (Lx(W)xϕ)	79X80Xϕ29mm				51Xϕ15mm		

新型免螺丝设计防水连接器 New screwless type waterproof connector


	0.2-1.5mm² 250V/24A 电缆直径Cable Diameter: ϕ4- ϕ10		0.5-1.5mm² 250V/10A 电缆直径Cable Diameter: ϕ7- ϕ10, ϕ4- ϕ7
产品 Product	 CDF-M20	 双胞胎内芯 普通三芯 内芯	 CDF-100/3
	快卡式	常规普通三芯，可选配双胞胎内芯	按压式

ISO9001 ISO14001 REACH cULus CE SEV SIR CQC

Ip68免破线防水连接器 Ip68 No-stripping waterproof connector

接线范围 Wire Range	0.5-2.5mm²	电压Voltage：250V 电流Current：32A	·无需工具 ·无需压线帽 ·无需剥线 ·No tools ·No wire nut ·No wire stripping
产品 Product	 CDF-R3	 转动手柄，使之完全分离超过90度  按住电线，合上手柄，卡扣闭合	 末剥皮电线插入接线孔  接线完成图

新款灌胶防水连接器 Gel-filled waterproof connector

接线范围 Wire Range	硬线Solid wire:0.5-4mm² 软线Strand wire:0.5-2.5mm²	电压Voltage：250V 电流Current：32A		
产品 Product	 CDF-B12	 CDF-B13	 CDF-B22	 CDF-B33
尺寸 Size (LxWxH)	45X22X11.5mm	45X29X11.5mm	45X22X11.5mm	45X29X11.5mm

面板式防水连接器 Panel type waterproof connector

产品 Product	 CDF-PM16	 CDF-PM20	 HTD-M16P-2P/3P
尺寸 Size (LxWxH)	新型免螺丝款New screwless type		锁螺丝款screw type

ISO9001 ISO14001 REACH cULus CE SEV SIR CQC



KJS-PG9-2P/3P

电压/电流Rated:250V 10A
接线范围Wire range:0.5 ~ 1.5 mm²
电缆直径Cable diameter:4-8.5mm
芯数Poles:2/3Pin
防水等级IP Code:IP68



HTD-LM16-2P/3P

电压/电流Rated:300V 10A
接线范围Wire range:0.5 ~ 1.5 mm²
电缆直径Cable diameter:4-8.5mm
芯数Poles:2/3Pin
防水等级IP Code:IP68



HTD-M20

电压/电流Rated:450V 13A
接线范围Wire range:0.5 ~ 1.5 mm²
电缆直径Cable diameter:7-10mm
芯数Poles:2Pin
防水等级IP Code:IP68



HTD-LM20

电压/电流Rated:300V 10A
接线范围Wire range:0.5 ~ 1.5 mm²
电缆直径Cable diameter:7-10.5mm
芯数Poles:2/3/4Pin



KJS-M20S

电压/电流Rated:450V 13A
接线范围Wire range:0.5 ~ 1.5 mm²
电缆直径Cable diameter:7-10.5mm
芯数Poles:2/3/4/5Pin
防水等级IP Code:IP68



4T-M20

电压/电流Rated:480V 20A
接线范围Wire range:0.5 ~ 2.5 mm²
电缆直径Cable diameter:7-10.5mm
芯数Poles:2/3Pin



3T-M20

电压/电流Rated:480V 20A
接线范围Wire range:0.5 ~ 2.5 mm²
电缆直径Cable diameter:7-10.5mm
芯数Poles:2/3Pin



3T-M25

电压/电流Rated:500V 32A
接线范围Wire range:0.5 ~ 4.0mm²
电缆直径Cable diameter:10-14mm
芯数Poles:2/3/4/5Pin
防水等级IP Code:IP68



3T-M20-1006H2

电压/电流Rated:480V 20A
接线范围Wire range:0.5 ~ 1.5 mm²
电缆直径Cable diameter:
2xM20:7-10.5mm
2 poles:4-7mm
芯数Poles:2/3/4Pin



3T-M25-1008H2

电压/电流Rated:600V 40A
接线范围Wire range:0.5 ~ 1.5 mm²
电缆直径Cable diameter:
2xM25 :7-10.5mm
2 poles:5-8.5mm
芯数Poles:2/3/4Pin



4T-M25-1008H3

电压/电流Rated:600V 40A
接线范围Wire range:0.5 ~ 2.5 mm²
电缆直径Cable diameter:
2xM25:7-10.5mm
3poles:5-8.5mm
芯数Poles:2/3/4Pin
防水等级IP Code:IP68



HTD-M19/自动锁

电压/电流Rated:480V 20A
接线范围Wire range:0.5 ~ 2.5 mm²
电缆直径Cable diameter:7-10.5mm
芯数Poles:2/3Pin
防水等级IP Code:IP68

IP68方形防水盒 IP68 square waterproof box

接线范围 Wire Range	0.5-0.4mm²	电缆直径 Cable diameter	M20:5-9mm/9-12mm M16:3.5-7mm/7-10mm

产品 Product




M2068-2T



M2068-3T



M2068-4TA



产品 Product



M2068-4TB



M2068-5T



M2068-6T

FSH系列防水盒 FSH Series Waterproof Box

线缆直径 Cable diameter	φ3-6.5mm 电压Voltage：450V 电流Current：17.5A		φ4-8mm φ6-10mm 电压Voltage：450V 电流Current：41A	
产品 Product	 FSH100-2P	FSH100-3P	 FSH710-2P	 FSH710-3P
尺寸 Size (LxWxH)	96X35X23mm		114X42X29mm	
线缆直径 Cable diameter	φ5-9mm φ9-12mm φ12-15mm 电压Voltage：450V 电流Current：41A		φ5-9mm φ9-12mm φ12-15mm 电压Voltage：450V 电流Current：41A	φ4-8mm φ9-12mm φ12-15mm 电压Voltage：450V 电流Current：41A
产品 Product	 FSH711	 FSH712	 FSH714	
尺寸 Size (LxWxH)	115X54X35mm	114X72X37mm	99X87X45mm	

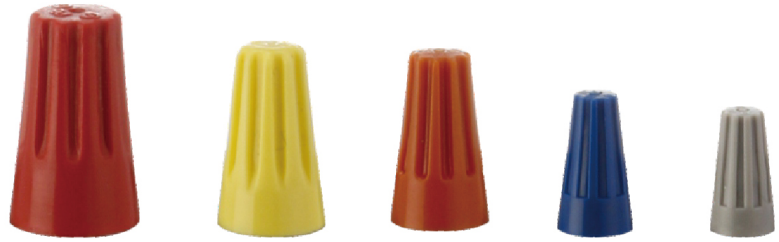
M68系列防水盒 M68 Series Waterproof Box

线缆直径 Cable diameter	φ3-5.5mm 7-10mm 电压Voltage：450V 电流Current：41A	φ5-8mm 7-12mm 电压Voltage：450V 电流Current：41A	φ5-8mm 7-12mm 10-14mm 电压Voltage：450V 电流Current：41A
产品 Product	 M68SS-H2/H3	 M68S-H2/H3/H4/H5/H6	 M68-H2/H3/H4
尺寸 Size (LxWxH)	107.4X46X 36.8mm	131.2X68.8X36.9mm	160X91.2X47.9mm

大功率连接器 High Power Connector



螺式接线帽 Twist Nut Connector



P6 P4 P3 P2 P1


双翼旋转端子 Winged Wire Connector




W5 W4 W3 W2 W1


PCB免螺丝接线端子 PCB Screwless terminal blocks

接线范围 Wire Range	0.2-4mm²	电压Voltage：300V 电流Current：20A	
产品 Product	 KC-635	 KC-825	 KC-950
尺寸 Size (LxWxH)	16x14.8x(6.35间距孔位+1.45)mm	16x14.8x(8.25间距孔位+1.45)mm	16x14.8x(9.5间距孔位+1.45)mm





U Type



H Type

型号 Model	孔数 Number of holes	工作温度 Operating temperature	瞬时可达温度 Instantaneous temperature reachable	外壳材料 Material	类型 Type	触点材质 Contact material	导体 Conductor
PE端子	12孔 12 holes	-40°C-65°C	80°C	聚乙烯 PE	H型/U型 H type/U type	镀锡螺丝 Tin-plated screws	铜件 Brass parts
PP端子	12孔 12 holes	-30°C-90°C	110°C	聚丙烯 PP			
PA端子	12孔 12 holes	-35°C-120°C	140°C	尼龙 PA			

型号 Model	线路范围 wire range	电流 A	电压 V	L	W	H	B	F		螺丝尺寸 Screw size	装箱数 PCS/CTN
				MM							
U/H-3A	4mm²	3A	380V	92.3	16.8	12.3	7.8	2.4	3.0	M2.5	1000
U/H-6A	6mm²	6A		107	17.8	13	7.8	2.7	3.3	M3.0	
U/H-10A	6mm²	10A		128	20.7	14.5	9.6	2.8	4.2		1000
U/H-16A	6mm²	15A		133	20.7	16.9	11.0	3.1	4.5	M3.5	
U/H-20A	6mm²	20A		140.2	22.8	17.2	11.7	3.2	4.7		
U/H-30A	6mm²	30A		162	25.3	20	12.0	3.4	5.5	M4.0	300
U/H-60A	6mm²	60A		185	29	23.5	13.7	3.5	6.5		200
U/H-80A	6mm²	80A	400V	186	29	25.5	15.7	4.0	8.0	M5.0	150
U/H-100A	6mm²	100A	450V	234	38.5	31.2	19.2	4.2	9.0	M6.0	100
U/H-150A	6mm²	150A	450V	256	45	35	20.5	5.5	10.5	M7.0	50

UKK单极分线盒 UKK UNIPOLAR JUNCTION BOX



Item No.	Current (Amp)	Conductor connection range (mm²)	Quantity of hole (pcs)	Dimensions (L×W×H) (mm)
UKK80	80A	6 to 16 2.5 to 6 2.5 to 16	x1 x4 x2	28×65×47
UKK125	125A	10 to 35 2.5 to 16	x1 x7	28×74×48
UKK160	160A	10 to 70 2.5 to 16	x1 x7	28×74×48
UKK250	250A	35 to 120 6 to 35 2.5 to 16 2.5 to 10	x1 x2 x5 x4	47×95×50
UKK400	400A	95 to 185 6 to 35 2.5 to 16 2.5 to 10	x1 x2 x5 x4	47×95×50
UKK500	500A	4x15.5x0.8 to 8x24 6 to 35 2.5 to 16 2.5 to 10	x1 x2 x5 x4	47×95×50

