DORABO 地博 • 为世界创造连接

CREATING CONNECTIONS FOR THE WORLD

宁波地博电气有限公司

NINGBO DORABO ELECTRIC CO., LTD

国内事业部（Domestic Business Division）：

电话（Tel ） ：+86-400-860-0988

网址（Web ） ：www.terminalblock.net

邮箱（E-mail）：steven.lu@terminalblock.net

地址（Add） ：No. 869 Changxing Road, Changhe Town, Cixi City, Ningbo City, Zhejiang Province, P.R.China

中国浙江省宁波市慈溪市长河镇长兴路 869 号

国际事业部（International Business Division）：

电话（Tel ） ：+86-15988827951 +86-13185980275

网址（Web ） ：www.terminalblock.net


邮箱（E-mail）：info@terminalblock.net

微信二维码 WeChat QR Code

微信公众号 WeChat Official Account

微信视频号 WeChat Channels

DORABO

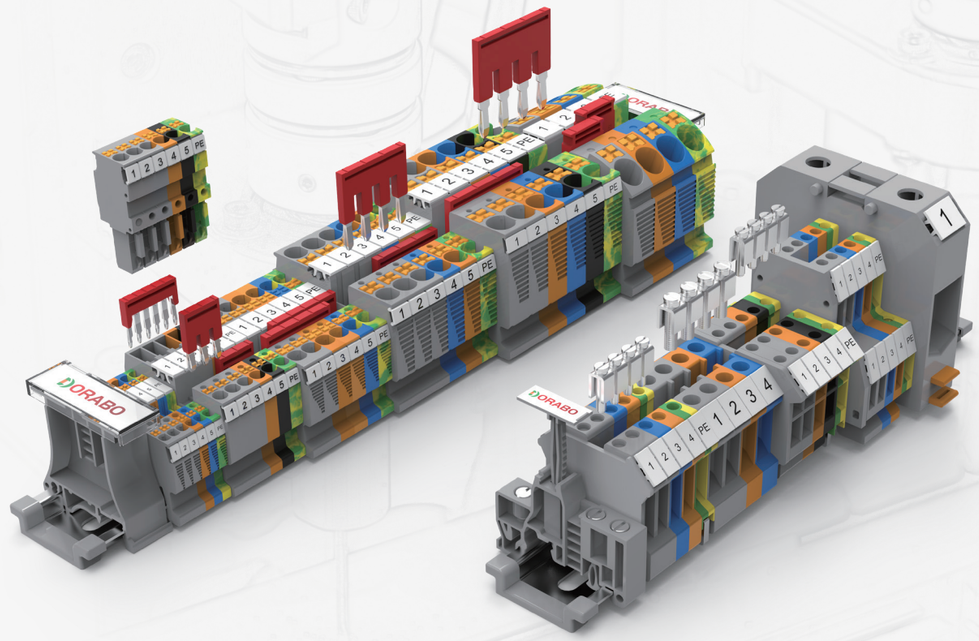

轨装式接线端子目录 1

Catalog of Rail mounted Wiring Terminals 1

宁波地博电气有限公司

NINGBO DORABO ELECTRIC CO., LTD

公司简介 Company Profile



宁波地博电气有限公司是全球知名的工业连接器整体解决方案提供商、是一家全球瞩目的接线端子和工业电气连接领域顶级制造商，产品畅销中国、美国、德国、英国、意大利、西班牙、日本、新加坡等100 多个国家和地区，为全球工业自动化、仪器仪表、电力电气、轨道交通、船舶、新能源、电梯、照明、安防、航空航天等行业提供优质服务，现各类产品均已通过CQC，UL，VDE，CE等多项安规认证和ISO9001、ISO14001等质量管理体系认证。

Ningbo Dorabo Electric Co., Ltd. is a globally renowned provider of integrated solutions for industrial connectors A globally renowned top manufacturer of wiring terminals and industrial electrical connections, with best-selling products in China, the United States, and Germany More than 100 countries and regions including China, the United Kingdom, Italy, Spain, Japan, Singapore, and others, providing global industrial automation Chemical, instrumentation, power and electrical, rail transit, ships, new energy, elevators, lighting, security, aerospace, etc The industry provides high-quality services, and all types of products have passed multiple safety regulations certifications such as CQC, UL, VDE, CE, etc ISO9001, ISO14001 and other quality management system certifications.

企业文化 Enterprise Culture

使命 Mission

追求全体员工物质和精神两方面的幸福，提升企业价值，
为人类和社会进步与发展做出贡献
Pursuit happiness of all staff in material & spiritual,
promote the enterprise value, contribute to the progress
& development for human & society





愿景 Corporation Vision

成为全球电气产业经营典范
To be the model of the global electric industry



核心价值观 Core Values

勤奋、创新、内求、利他
Diligence, Innovative, Self-seeking, Altruism

质量方针 Quality Policy

追求全程精益品质 持续改进 超越顾客期望 打造行业品牌
To pursuit full lean quality Continuous improvement Exceed
customers expectations Build industry brand





2024新启航 New sail in 2024

开启新征程，共创新辉煌
New journey, New success.
——系统性目标管理，数字化高效运营，打造坚实经营体质
—— Systematic target management,
Digital and efficient operation,
To create a solid management constitution.



产品目录 Product Catalogue

TP系列弹簧接线端子 TP Rail-mounted Terminal Blocks With Spring-cage Clamp

P10-P12 一进一出接线端子 1-1 Feed Through Terminal Block	 TP1.5-2 TP2.5-2 TP4-2 TP6-2 TP10-2 TP16-2
P12-P14 一进两出接线端子 1-2 Feed Through Terminal Block	 TP1.5-3 TP2.5-3 TP4-3 TP6-3 TP10-3 TP16-3
P15-P16 两进两出接线端子 2-2 Feed Through Terminal Block	 TP1.5-4 TP2.5-4 TP4-4 TP6-4
P17-P19 一进一出接地端子 1-1 Through Ground Terminal Block	 TP1.5-2-PE TP2.5-2-PE TP4-2-PE TP6-2-PE TP10-2-PE TP16-2-PE
P19-P21 一进两出接线端子 1-2 Through Ground Terminal Block	 TP1.5-3-PE TP2.5-3-PE TP4-3-PE TP6-3-PE TP10-3-PE TP16-3-PE
P22-P23 两进两出接线端子 2-2 Through Ground Terminal Block	 TP1.5-4-PE TP2.5-4-PE TP4-4-PE TP6-4-PE
P24-P26 2.5mm² 斜面 Angled	 TPS2.5-2 TPS2.5-3 TPS2.5-4 TPS2.5-2-PE TPS2.5-3-PE TPS2.5-4-PE
P27-P30 双层接线端子 Double Level Terminal Block	 TPD1.5-2 TPD1.5-2-PV TPD2.5-2 TPD2.5-2-PV TPD4-2 TPD4-2-PV TPD2.5-3 TPD2.5-3-PV
P31-32 双层接地端子 Double Level Ground Terminal Block	 TPD1.5-2-PE TPD2.5-2-PE TPD4-2-PE TPD2.5-3-PE
P33-P34 斜面双层八线 Double level angled type 8-wire	 TPDS2.5-4 TPDS2.5-4-PV TPDS2.5-4-PE
P35-P37 2.5mm² 三层接线端子 Triple Level Terminal Block	 TPT2.5-2 TPT2.5-2-PV TPTS2.5-2 TPTS2.5-2T TPTS2.5-2-PV TPTS2.5-2T-PV
P37-P38 2.5mm² 四层斜面接线端子 Quadruple level angled type terminal block	 TPFS2.5-2 TPFS2.5-2T
P39-P41 2.5mm² 三层接地端子 Triple Level Ground Terminal Block	 TPT2.5-2-PL TPT2.5-2-PE TPTS2.5-2-PET TPTS2.5-2T-PET TPTS2.5-2-PE TPTS2.5-2T-PE
P42-P43 针脚式接线端子 Pin type wiring terminal blocks	 TP2.5-2-1 TPD2.5-2-1 TPD2.5-2-1-PV
P44 针脚式接地端子 Pin type Ground Terminal Block	 TP2.5-2-1-PE TPD2.5-2-1-PE
P45 插头 Plug	 TPP2.5-1
P47-P48 一进一出直插式微型 1-1 Push-in mini-type	 TPM1.5-2 TPM2.5-2 TPM1.5-2-PE TPM2.5-2-PE
P49-P50 TPIO 系列 TPIO Series	 TPIO1.5-S-3 TPIO1.5-S-3-PE TPIO1.5-S-4 TPIO1.5-S-4-PE
P51-P56 功能型接线端子 Functional terminal blocks	 TPK2.5-2 TPK2.5-3 TPK2.5-4 TPME6-2 TPME6-2-JP TP4-FSI/F-BK TP4-FSI/F-LED TP6-FSI/F-BK TP6-FSI/F-LED TP4-HEDI TP4-HESI(5x20) TP4-HESI(5X20)-LED24 TP4-MT TP4-TG TP2.5-4R/L
P57 35 mm² 电位分配接线端子 Potential distribution terminal block	 TPU35/6/2.5-11
P58 直插式配电块 Push-in Type Power Distribution Block	 TPA1.5 TPA2.5
P59 直插式带输入配电块 Push-in Type Power Distribution Block Terminal Points	 TPA4/1.5 TPA6/2.5

产品目录 Product Catalogue

P61 一进一出侧面接线端子 1-1 Feed Through Terminal Block of Side-entry	TPV2.5-2 TPV4-2 TPV6-2
P62 一进一出侧面接地端子 1-1 Feed Through Ground Terminal Block of Side-entry	TPV2.5-2-PE TPV4-2-PE TPV6-2-PE

TAPO 大电流系列 TAPO High Current Series

P64-P66 大电流系列 High Current Series	TAPO35-2 TAPO50-2 TAPO95-2 TAPO35-2-PE TAPO50-2-PE TAPO95-2-PE

TC系列弹簧接线端子 TC Rail-mounted Terminal Blocks With Spring-cage Clamp

P69-P71 一进一出接线端子 1-1 Feed Through Terminal Block	TC1.5-2 TC2.5-2 TC4-2 TC6-2 TC10-2 TC16-2 TC35-2
P72-P74 一进一出接地端子 1-1 Feed Through Ground Terminal Block	TC1.5-2-PE TC2.5-2-PE TC4-2-PE TC6-2-PE TC10-2-PE TC16-2-PE TC35-2-PE
P75-P76 一进两出接线端子 1-2 Feed Through Terminal Block	TC1.5-3 TC2.5-3 TC4-3 TC6-3 TC10-3
P77-P78 一进两出接地端子 1-2 Feed Through Ground Terminal Block	TC1.5-3-PE TC2.5-3-PE TC4-3-PE TC6-3-PE TC10-3-PE
P79-P80 两进两出接线端子 2-2 Feed Through Terminal Block	TC1.5-4 TC2.5-4 TC4-4
P81-P82 两进两出接地端子 2-2 Feed Through Ground Terminal Block	TC1.5-4-PE TC2.5-4-PE TC4-4-PE
P83-P84 两进两出分断式接线端子 2×2 Feed Through Disconnect Terminal Block	TC1.5-2X2 TC2.5-2X2 TC4-2X2
P85-P86 双层接线端子 Double Level Terminal Blcok	TCD1.5-2 TCD1.5-2-PV TCD2.5-2 TCD2.5-2-PV
P87 双层等电位接地端子 Double Level With Equipotential Bonder Ground Terminal Block	TCD1.5-2-PE TCD2.5-2-PE
P88-P89 2.5mm² 插拔接线端子 Plug-in Terminal Block	TC2.5-2-1 TCD2.5-2-1 TCD2.5-2-1-PV
P89-P90 2.5mm² 插拔接地端子 Ground Plug-in Terminal Block	TC2.5-2-1-PE TCD2.5-2-1-PE
P91 2.5mm² 插头 Plug	TCP2.5-1 TCPB2.5-1 TCPDB2.5-1
P92 功能型接线端子 Functional terminal blocks	TC4-FUSE-BK TC4-FUSELED24-BK TC4-SPLIT

TU系列螺钉接线端子 TU Rail-mounted Terminal Blocks With Screw Clamp

P95-P99 一进一出接线端子 1-1 Feed Through Terminal Block	TU2.5-2 TU4-2 TU6-2 TU10-2 TU16-2 TU35-2 TU50-2 TU70-2 TU95-2 TU150-2 TU240-2
P99-P100 一进两出接线端子 1-2 Feed Through Terminal Block	TU2.5-3 TU4-3
P100 两进两出接线端子 2-2 Feed Through Terminal Block	TU2.5-4 TU4-4
P101-P104 一进一出接地端子 1-1 Feed Through Ground Terminal Block	TU2.5-2-PE TU4-2-PE TU6-2-PE TU10-2-PE TU16-2-PE TU35-2-PE TU50-2-PE TU70-2-PE TU95-2-PE

产品目录 Product Catalogue

P104-105 一进两出接地端子 1-2 Feed Through Ground Terminal Block	 TU2.5-3-PE  TU4-3-PE
P105-106 两进两出接地端子 2-2 Feed Through Ground Terminal Block	 TU2.5-4-PE  TU4-4-PE
P107-P108 双层接线端子 Double Level Terminal Blcok	 TUD2.5-2  TUD2.5-2-PV  TUD4-2  TUD4-2-PV
P109 双层接地端子 Double Level Ground Terminal Block	 TUD2.5-2-PE  TUD4-2-PE
P110 带保险管接线端子 Terminal block with protective tube	 TU4-HESI  TU4-HESILED24-GY  TU10-NF(5X20)
P111 4mm²悬臂式保险管接线端子 4mm² Lever-type fuse terminal block	 TU4-FUSE-BK  TU4-FUSELED24-BK
P112 4mm²分断式接线端子 4mm² Disconnect terminal block	 TU4-MT  TU4-TG  TU4-SPLIT

TA系列弹簧接线端子 TA Rail-mounted Terminal Blocks With Spring-cage Clamp

P115-P117 一进一出接线端子 1-1 Feed Through Terminal Block	 215921  225921  204921  206921  210921  216921
P118-P120 一进一出接地端子 1-1 Feed Through Ground Terminal Block	 215927  225927  204927  206927  210927  216927
P121-P122 一进一出接线端子（侧面标记） 1-1 Feed Through Terminal Block (Side Marking)	 206911  210911  216911
P123-P124 一进一出接地端子（侧面标记） 1-1 Feed Through Ground Terminal Block (Side Marking)	 206917  210917  216917

P125-P126 一进一出侧面接线端子 1-1 Feed Through Terminal Block of Side-entry	 225915  204901  206901  210901 216901
P1270-P128 一进一出侧面接地端子 1-1 Feed Through Ground Terminal Block of Side-entry	225917 204907 206907 210907 216907
P129-P131 一进两出接线端子 1-2 Feed Through Terminal Block	215951 225951 204951 206951 210951 216951
P132-P134 一进两出接地端子 1-2Feed Through Ground Terminal Block	215957 225957 204957 206957 210957 216957
P135-P136 两进两出接线端子 2-2 Feed Through Terminal Block	215931 225931 204931 215901 225901
P137-P138 两进两出接地端子 2-2 Feed Through Ground erminal Block	215947 225947 204947

P139-P141 两进两出分断式接线端子 2-2 Feed Through Terminal Block With Interrupted Power Rail	215936 225936 204936 215903 225903 225908
P142-P143 一进两出斜面接线端子 1-2 Feed Through Angled Type Terminal Block	225961 204961 225965
P144 一进两出斜面接地端子 1-2 Feed Through Ground Angled Type Terminal Block	225964 204964
P145-P148 一针一线插拔式端子 1-1 Feed Through Pluggable Terminal Block	2150-1201 225981 2150-1401 2150-1207 225987 2150-1407
P148 插头 Plug	2150-101

UK系列螺钉接线端子 UK Rail-mounted Terminal Blocks With Screw Clamp

P151-P155 UK接线端子 UK Terminal Block	 301901 302901 303901 305901 306901 310901 316901 335901 350901 370901 395901
P156 UK二进二出接线端子 1-1 Feed Through Terminal Block	 303941 305941
P157-P160 UK接地端子 UK Ground Terminal Block	 302903 303903 305903 306903 310903 316903 335903 350903
P161-P163 SUK接线端子 SUK Terminal Block	 302991 303991 305991 306991 310991 316991 335991
P164-P166 SUK接地端子 SUK Ground Terminal Block	 306993 306993 310993 316993 335993 302993 303993
P167-P168 UKD 接线端子 UKD Terminal Block	 303921 305921 305921-PV 310921 310921-PV
P169-P170 分断测试 test terminal	 SUK6-T SUK6-T-JP 306911 305972

TB系列微型弹簧接线端子 TB Rail-mounted Miniature Terminal Blocks

P173-P175 240系列侧面接线端子 240 With Fixing Flanges of Side-entry	 240301 240331 240311 240341 240321 240351
P176-P178 241系列侧面接线端子 241 With Fixing Flanges of Side-entry	 241301 241331 241311 241341 241321 241351

P179-P181 242系列侧面接线端子 242 With Fixing Flanges of Side-entry	 242301 242331 242311 242341 242321 242351
P182-P184 254 系列正面接线端子 254 With Fixing Flanges of Front-entry	 254301 254331 254311 254341 254321 254351
P185-P187 254系列正面端子 254 Serie Front-entry	 254361 254391 254371 254381 254507 254607

附件 Accessory

P189-P190 终端固定器 End Clamp	 215201
P190 终端标识牌 End clamp marking	 215214
P191 导轨转换器 Rail transf	 254611
P192 分组隔片 Partition plate	 ATP-TU
P193 保护盖板 Protection cover	 900611
P193-P194 TP/TU/TC系列跨接桥 TP/TU/TC Jumper	 TJA3.5
P195-P196 TA系列跨接桥 TA Jumper	 215301
P196-P197 UK系列跨接桥 UK Jumper	 302302


P198 TB系列跨接桥 TB Jumper	 240601
P198 导轨终端固定件 Rail end cap	 920001
P199 测试插头 Test Plug	 TP1.5-DP
P199-P200 导轨 Rails	 900421/011
P200-P201 弹簧接线端子专用工具 Special tools for spring terminal blocks	 910111
P201-P203 标记牌 Marker card	 TMBW5.2-96

TP系列弹簧接线端子

TP Rail-mounted Terminal Blocks With Spring-cage Clamp

TP系列弹簧接线端子采用直插式弹簧接线技术，无需借助特定工具即可完成导线的快速连接，适于各种操作场合。该产品最突出的优点在于操作简便，无需使用特定接线工具，大大减小插入力。产品设计制造符合IEC/EN60947、UL1059等相关国际标准。


TP series adopt the push-in type spring cage connection technology, can finish the quick wiring without any special tool, can be operated in different environments. The most advantage for this series is convenient operation, on need to use wiring tool, also greatly deduct the insert force. The products have the international standards including IEC/EN60947, UL1059 ect.

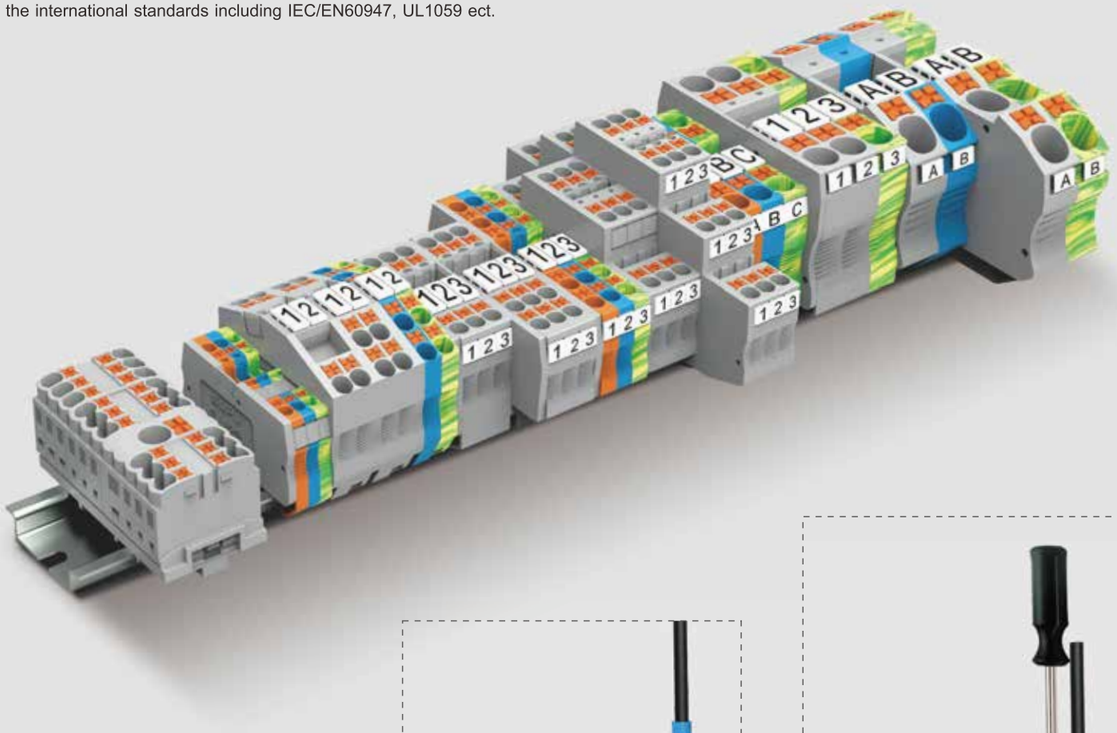




▲ 带辅助按键，无需特定工具，不接触带电部件

▲ With the press key, no special tools are required and no live parts are touched

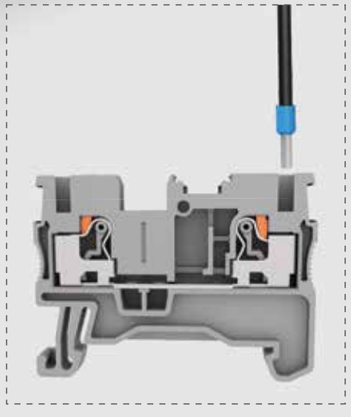

▲ 线径0.2mm²以上的刚性导线或带0.34mm²以上冷压头的导线可直接接入

▲ The solid wire ⩾0.25mm² and the wire with ferrule ⩾0.34mm² can be inserted directly

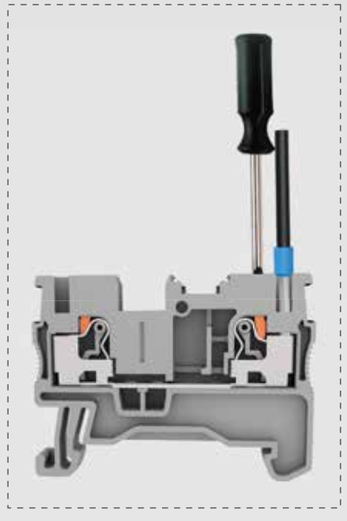

▲ 按下辅助按键，即可退线






▲ Removing the conductor via the press key

TP系列弹簧接线端子 TP Rail-mounted terminal blocks with spring-cage clamp







		1.5mm² 一进一出接线端子 1-1 Feed Through Terminal Block			2.5mm² 一进一出接线端子 1-1 Feed Through Terminal Block		
尺寸Size		技术参数Technical Parameter			技术参数Technical Parameter		
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	厚度Thickness 3.5	宽度Width 48	高度Height 30.5	厚度Thickness 5.2	宽度Width 48.2	高度Height 35.2
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	500	300		800	600	
额定电流Rated Current	[A]	17.5	15		24	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-1.5	0.2-1.5	0.2-1.0	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	26-14	26-14	26-14	26-12	26-12	26-12
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	8-10			8-10		
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TP1.5-2-GY			TP2.5-2-GY		
	橙Orange	TP1.5-2-OG			TP2.5-2-OG		
	蓝Blue	TP1.5-2-BU			TP2.5-2-BU		
		配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TP1.5-2-GY-EA			TP2.5-2-GY-EA		
	橙Orange	TP1.5-2-OG-EA			TP2.5-2-OG-EA		
	蓝Blue	TP1.5-2-BU-EA			TP2.5-2-BU-EA		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*		
跨接件Jumper							
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA3.5-2			TJA5.2-2		
3	黄Yellow	TJA3.5-3			TJA5.2-3		
...	黄Yellow	...			...		
10	.....	TJA3.5-10			TJA5.2-10		
...（10位以上整数位）	黄Yellow	...			*		
50	黄Yellow	TJA3.5-50			*		
闪电标记Front Marker		订货号Order NO.			订货号Order NO.		
5PCS 5片一条		WS-TP1.5-5			WS-TP2.5-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.		
10位PCS		*			305801		
卷带标记（50米一卷）Winding marking （50 meters/roll)		TMZ9.6-50			TMZ9.6-50		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB3.5-100			TMB5.2-120		









		4mm² 一进一出接线端子 1-1 Feed Through Terminal Block			6mm² 一进一出接线端子 1-1 Feed Through Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	6.2	54.9	35.5	8.2	58	42.2
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	600		1000	600	
额定电流Rated Current	[A]	32	30		41	40	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-6	0.2-4	0.2-4	0.5-10	0.5-6	0.5-6
	[AWG]	24-10	24-10	24-10	20-8	20-8	20-8
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		10-12			10-12	
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TP4-2-GY			TP6-2-GY		
	橙Orange	TP4-2-OG			TP6-2-OG		
	蓝Blue	TP4-2-BU			TP6-2-BU		
		配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TC4-2-GY-EA			TP6-2-GY-EA		
	橙Orange	TC4-2-OG-EA			TP6-2-OG-EA		
	蓝Blue	TC4-2-BU-EA			TP6-2-BU-EA		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*		
跨接件Jumper							
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA6.2-2			TJA8.2-2		
3	黄Yellow	TJA6.2-3			TJA8.2-3		
...	黄Yellow	.....			.....		
10	.....	TJA6.2-10			TJA8.2-10		
...（10位以上整数位）	黄Yellow	*			*		
50	黄Yellow	*			*		
闪电标记Front Marker		订货号Order NO.			订货号Order NO.		
5PCS 5片一条		WS-TP4-5			WS-TP6-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.		
10位PCS		306801			308801		
卷带标记（50米一卷） Winding marking (50 meters/roll)		TMZ9.6-50			TMZ9.6-50		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB6.2-100			TMB8.2-50		


		10mm² 一进一出接线端子 1-1 Feed Through Terminal Block			16mm² 一进一出接线端子 1-1 Feed Through Terminal Block			1.5mm² 一进两出接线端子 1-2 Feed Through Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	10.2	67.7	49.6	12.2	75.4	52.6	3.5	57.1	30.5
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	1000	600		1000	600		500	300	
额定电流Rated Current	[A]	57	60		76	85		17.5	15	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.5-16	0.5-10	0.5-10	0.5-25	0.5-16	0.5-16	0.2-1.5	0.2-1.5	0.2-1.0
	[AWG]	20-6	20-6	20-6	20-4	20-04	20-4	26-14	26-14	26-14
其余参数Other Parameters										
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0			V0	
剥线长度Strip length	[mm]		18			18			8-10	
		订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TP10-2-GY			TP16-2-GY			TP1.5-3-GY		
	橙Orange	TP10-2-OG			TP16-2-OG			TP1.5-3-OG		
	蓝Blue	TP10-2-BU			TP16-2-BU			TP1.5-3-BU		
		配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TP10-2-GY-EA			TP16-2-GY-EA			TP1.5-3-GY-EA		
	橙Orange	TP10-2-OG-EA			TP16-2-OG-EA			TP1.5-3-OG-EA		
	蓝Blue	TP10-2-BU-EA			TP16-2-BU-EA			TP1.5-3-BU-EA		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*			*		
跨接件Jumper										
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA10.2-2			TJA12.2-2			TJA3.5-2		
3	黄Yellow	*			*			TJA3.5-3		
...	黄Yellow	*			*			...		
10	.....	*			*			TJA3.5-10		
...（10位以上整数位）	黄Yellow	*			*			...		
50	黄Yellow	*			*			TJA3.5-50		
闪电标记Front Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
5PCS 5片一条		WS-TP10-5			WS-TP16-5			WS-TP1.5-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS		TMB10.2-10			312801			*		
卷带标记（50米一卷） Winding marking (50 meters/roll)		TMZ9.6-50			TMZ9.6-50			TMZ9.6-50		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB8.2-50			TMB8.2-50			TMB3.5-100		















		2.5mm² 一进两出接线端子 1-2 Feed Through Terminal Block			4mm² 一进两出接线端子 1-2 Feed Through Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	5.2	60.2	35.2	6.2	66.3	35.5
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	600		800	600	
额定电流Rated Current	[A]	24	20		32	30	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4
	[AWG]	26-12	26-12	26-12	24-10	24-10	24-10
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		8-10			10-12	
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TP2.5-3-GY			TP4-3-GY		
	橙Orange	TP2.5-3-OG			TP4-3-OG		
	蓝Blue	TP2.5-3-BU			TP4-3-BU		
		配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TC1.5-3-GY-EA			TP4-3-GY-EA		
	橙Orange	TC1.5-3-OG-EA			TP4-3-OG-EA		
	蓝Blue	TC1.5-3-BU-EA			TP4-3-BU-EA		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*		
跨接件Jumper							
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA5.2-2			TJA6.2-2		
3	黄Yellow	TJA5.2-3			TJA6.2-3		
...	黄Yellow	.....			.....		
10	.....	TJA5.2-10			TJA6.2-10		
...（10位以上整数位）	黄Yellow	*			*		
50	黄Yellow	*			*		
闪电标记Front Marker		订货号Order NO.			订货号Order NO.		
5PCS 5片一条		WS-TP2.5-5			WS-TP4-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.		
10位PCS		305801			306801		
卷带标记（50米一卷） Winding marking （50 meters/roll)		TMZ9.6-50			TMZ9.6-50		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB5.2-120			TMB6.2-100		

		6mm² 一进两出接线端子 1-2 Feed Through Terminal Block			10mm² 一进两出接线端子 1-2 Feed Through Terminal Block			16mm² 一进两出接线端子 1-2 Feed Through Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	8.2	74.5	42.2	10.2	88.9	49.6	12.2	100.4	52.6
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	1000	600		1000	600		1000	600	
额定电流Rated Current	[A]	41	40		57	60		76	85	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.5-10	0.5-6	0.5-6	0.5-16	0.5-10	0.5-10	0.5-25	0.5-16	0.5-16
	[AWG]	20-8	20-8	20-8	20-6	20-6	20-6	20-4	20-4	20-4
其余参数Other Parameters										
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0			V0	
剥线长度Strip length	[mm]		10-12			18			18	
		订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TP6-3-GY			TP10-3-GY			TP16-3-GY		
	橙Orange	TP6-3-OG			TP10-3-OG			TP16-3-OG		
	蓝Blue	TP6-3-BU			TP10-3-BU			TP16-3-BU		
		配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TP6-3-GY-EA			TP10-3-GY-EA			TP16-3-GY-EA		
	橙Orange	TP6-3-OG-EA			TP10-3-OG-EA			TP10-3-OG-EA		
	蓝Blue	TP6-3-BU-EA			TP10-3-BU-EA			TP10-3-BU-EA		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*			*		
跨接件Jumper										
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA8.2-2			TJA10.2-2			TJA12.2-2		
3	黄Yellow	TJA8.2-3			*			*		
...	黄Yellow	.....			*			*		
10	.....	TJA8.2-10			*			*		
...（10位以上整数位）	黄Yellow	*			*			*		
50	黄Yellow	*			*			*		
闪电标记Front Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
5PCS 5片一条		WS-TP6-5			WS-TP10-5			WS-TP16-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS		308801			TMB10.2-10			312801		
卷带标记（50米一卷） Winding marking （50 meters/roll)		TMZ9.6-50			TMZ9.6-50			TMZ9.6-50		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB8.2-50			TMB8.2-50			TMB8.2-50		










		1.5mm² 两进两出接线端子 2-2 Feed Through Terminal Block			2.5mm² 两进两出接线端子 2-2 Feed Through Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	3.5	65.2	30.5	5.2	72.2	35.3
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	500	300		800	600	
额定电流Rated Current	[A]	17.5	15		24	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-1.5	0.2-1.5	0.2-1.0	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	26-14	26-14	26-14	26-12	26-12	26-12
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		8-10			8-10	


			订货信息Order Information	订货信息Order Information
产品Product	颜色Colour		订货号Order NO.	订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	灰Gray		TP1.5-4-GY	TP2.5-4-GY
	橙Orange		TP1.5-4-OG	TP2.5-4-OG
	蓝Blue		TP1.5-4-BU	TP2.5-4-BU
			配套附件Accessory	配套附件Accessory
端板Cover Plate			订货号Order NO.	订货号Order NO.
厚度2.2mm Thickness2.2mm	灰Gray		TP1.5-4-GY-EA	TC1.5-4-GY-EA
	橙Orange		TP1.5-4-OG-EA	TC1.5-4-OG-EA
	蓝Blue		TP1.5-4-BU-EA	TC1.5-4-BU-EA
补偿端板Compensatory Plate			订货号Order NO.	订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray		*	*
跨接件Jumper				
位数Poles No.	颜色Colour		订货号Order NO.	订货号Order NO.
2	黄Yellow		TJA3.5-2	TJA5.2-2
3	黄Yellow		TJA3.5-3	TJA5.2-3
...	黄Yellow		.....	.....
10	.....		TJA3.5-10	TJA5.2-10
...（10位以上整数位）	黄Yellow		.....	*
50	黄Yellow		TJA3.5-50	*
闪电标记Front Marker			订货号Order NO.	订货号Order NO.
5PCS 5片一条			WS-TP1.5-5	WS-TP2.5-5
正面标记Front Marker			订货号Order NO.	订货号Order NO.
10位PCS			*	305801
卷带标记（50米一卷）Winding marking （50 meters/roll)			TMZ9.6-50	TMZ9.6-50
正面标记和侧面标记Front And Side Marker			订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service			TMB3.5-100	TMB5.2-120


		4mm² 两进两出接线端子 2-2 Feed Through Terminal Block			6mm² 两进两出接线端子 2-2 Feed Through Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	6.2	77.7	35.5	8.2	91	42.2
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	600		1000	600	
额定电流Rated Current	[A]	32	30		41	40	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-6	0.2-4	0.2-4	0.5-10	0.5-6	0.5-6
	[AWG]	24-10	24-10	24-10	20-8	20-8	20-8
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		10-12			10-12	


			订货信息Order Information	订货信息Order Information
产品Product	颜色Colour		订货号Order NO.	订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	灰Gray		TP4-4-GY	TP6-4-GY
	橙Orange		TP4-4-OG	TP6-4-OG
	蓝Blue		TP4-4-BU	TP6-4-BU
			配套附件Accessory	配套附件Accessory
端板Cover Plate			订货号Order NO.	订货号Order NO.
厚度2.2mm Thickness2.2mm	灰Gray		TP4-4-GY-EA	TP6-4-GY-EA
	橙Orange		TP4-4-OG-EA	TP6-4-OG-EA
	蓝Blue		TP4-4-BU-EA	TP6-4-BU-EA
补偿端板Compensatory Plate			订货号Order NO.	订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray		*	*
跨接件Jumper				
位数Poles No.	颜色Colour		订货号Order NO.	订货号Order NO.
2	黄Yellow		TJA6.2-2	TJA8.2-2
3	黄Yellow		TJA6.2-3	TJA8.2-3
...	黄Yellow		.....	.....
10	.....		TJA6.2-10	TJA8.2-10
...（10位以上整数位）	黄Yellow		*	*
50	黄Yellow		*	*
闪电标记Front Marker			订货号Order NO.	订货号Order NO.
5PCS 5片一条			WS-TP4-5	WS-TP6-5
正面标记Front Marker			订货号Order NO.	订货号Order NO.
10位PCS			306801	308801
卷带标记（50米一卷）Winding marking （50 meters/roll)			TMZ9.6-50	TMZ9.6-50
正面标记和侧面标记Front And Side Marker			订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service			TMB6.2-100	TMB8.2-50


TP系列弹簧接线端子 TP Rail-mounted terminal blocks with spring-cage clamp
















	1.5mm² 一进一出接地端子 1-1 Feed Through Ground Terminal Block			2.5mm² 一进一出接地端子 1-1 Feed Through Ground Terminal Block			4mm² 一进一出接地端子 1-1 Feed Through Ground Terminal Block			6mm² 一进一出接地端子 1-1 Feed Through Ground Terminal Block			10mm² 一进一出接地端子 1-1 Feed Through Ground Terminal Block		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5 [mm]	3.5	48	30.5	5.2	48.2	35.2	6.2	54.9	35.5	8.2	58	42.2	10.2	67.7	49.6
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	*	*		*	*		*	*		*	*		*	*	
额定电流Rated Current [A]	*	*		*	*		*	*		*	*		*	*	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-1.5	0.2-1.5	0.2-1.0	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4	0.5-10	0.5-6	0.5-6	0.5-16	0.5-10	0.5-10
[AWG]	26-14	26-14	26-14	26-12	26-12	26-12	24-10	24-10	24-10	20-8	20-8	20-8	20-6	20-6	20-6
其余参数Other Parameters															
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0			V0	
剥线长度Strip length [mm]		8-10			8-10			10-12			10-12			18	
产品Product 颜色Colour	订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5 黄绿Yellow green	TP1.5-2-PE			TP2.5-2-PE			TP4-2-PE			TP6-2-PE			TP10-2-PE		
*	*			*			*			*			*		
*	*			*			*			*			*		
	配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm 灰Gray	TP1.5-2-GY-EA			TP2.5-2-GY-EA			TC4-2-GY-EA			TP6-2-GY-EA			TP10-2-GY-EA		
橙Orange	TP1.5-2-OG-EA			TP2.5-2-OG-EA			TC4-2-OG-EA			TP6-2-OG-EA			TP10-2-OG-EA		
蓝Blue	TP1.5-2-BU-EA			TP2.5-2-BU-EA			TC4-2-BU-EA			TP6-2-BU-EA			TP10-2-BU-EA		
补偿端板Compensatory Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm 灰Gray	*			*			*			*			*		
跨接件Jumper															
位数Poles No. 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2 黄Yellow	TJA3.5-2			TJA5.2-2			TJA6.2-2			TJA8.2-2			TJA10.2-2		
3 黄Yellow	TJA3.5-3			TJA5.2-3			TJA6.2-3			TJA8.2-3			*		
... 黄Yellow	.....			.....			.....			.....			*		
10	TJA3.5-10			TJA5.2-10			TJA6.2-10			TJA8.2-10			*		
...（10位以上整数位） 黄Yellow	.....			*			*			*			*		
50 黄Yellow	TJA3.5-50			*			*			*			*		
闪电标记Front Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5PCS 5片一条	WS-TP1.5-5			WS-TP2.5-5			WS-TP4-5			WS-TP6-5			WS-TP10-5		
正面标记Front Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS	*			305801			306801			308801			TMB10.2-10		
卷带标记（50米一卷） Winding marking （50 meters/roll）	TMZ9.6-50			TMZ9.6-50			TMZ9.6-50			TMZ9.6-50			TMZ9.6-50		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	TMB3.5-100			TMB5.2-120			TMB6.2-100			TMB8.2-50			TMB8.2-50		

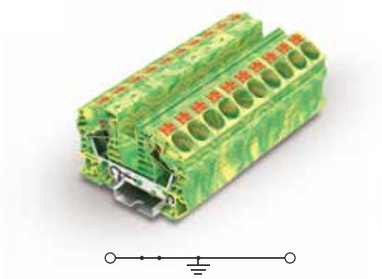

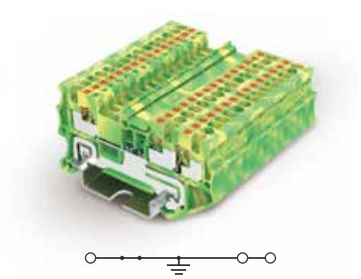


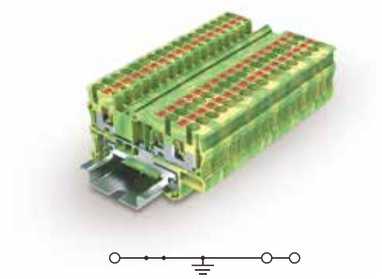


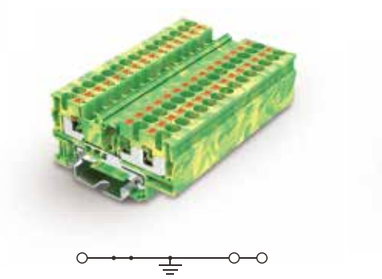



		16mm² 一进一出接地端子 1-1 Feed Through Ground Terminal Block			1.5mm² 一进两出接地端子 1-2 Feed Through Ground Terminal Block			2.5mm² 一进两出接地端子 1-2 Feed Through Ground Terminal Block			4mm² 一进两出接地端子 1-2 Feed Through Ground Terminal Block			6mm² 一进两出接地端子 1-2 Feed Through Ground Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	12.2	75.4	52.6	3.5	57.1	30.5	5.2	60.2	35.2	6.2	66.3	35.5	8.2	74.5	42.2
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*		*	*		*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*		*	*		*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.5-25	0.5-16	0.5-16	0.2-1.5	0.2-1.5	0.2-1.0	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4	0.5-10	0.5-6	0.5-6
	[AWG]	20-4	20-4	20-4	26-14	26-14	26-14	26-12	26-12	26-12	24-10	24-10	24-10	20-8	20-8	20-8
其余参数Other Parameters																
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0			V0			V0			V0	
剥线长度Strip length	[mm]		18			8-10			8-10			10-12			10-12	
		订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green	TP16-2-PE			TP1.5-3-PE			TP2.5-3-PE			TP4-3-PE			TP6-3-PE		
	*	*			*			*			*			*		
	*	*			*			*			*			*		
		配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TP16-2-GY-EA			TP1.5-3-GY-EA			TC1.5-3-GY-EA			TP4-3-GY-EA			TP6-3-GY-EA		
	橙Orange	TP16-2-OG-EA			TP1.5-3-OG-EA			TC1.5-3-OG-EA			TP4-3-OG-EA			TP6-3-OG-EA		
	蓝Blue	TP16-2-BU-EA			TP1.5-3-BU-EA			TC1.5-3-BU-EA			TP4-3-BU-EA			TP6-3-BU-EA		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*			*			*			*		
跨接件Jumper																
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA12.2-2			TJA3.5-2			TJA5.2-2			TJA6.2-2			TJA8.2-2		
3	黄Yellow	*			TJA3.5-3			TJA5.2-3			TJA6.2-3			TJA8.2-3		
...	黄Yellow	*			.....			.....			.....			.....		
10	.....	*			TJA3.5-10			TJA5.2-10			TJA6.2-10			TJA8.2-10		
...（10位以上整数位）	黄Yellow	*			.....			*			*			*		
50	黄Yellow	*			TJA3.5-50			*			*			*		
闪电标记Front Marker		订货号Order NO.			订货号Order NO.											
5PCS 5片一条		WS-TP16-5			WS-TP1.5-5			WS-TP2.5-5			WS-TP4-5			WS-TP6-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS		312801			*			305801			306801			308801		
卷带标记（50米一卷） Winding marking （50 meters/roll)		TMZ9.6-50			TMZ9.6-50			TMZ9.6-50			TMZ9.6-50			TMZ9.6-50		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB8.2-50			TMB3.5-100			TMB5.2-120			TMB6.2-100			TMB8.2-50		

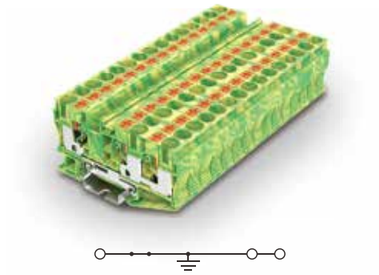

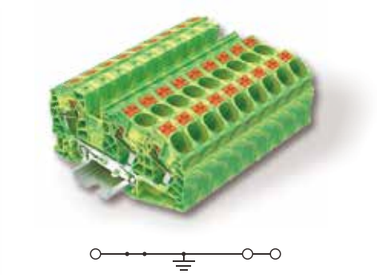



10mm² 一进两出接地端子 1-2 Feed Through Ground Terminal Block


16mm² 一进两出接地端子 1-2 Feed Through Ground Terminal Block

		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	10.2	88.9	49.6	12.2	100.4	52.6
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.5-16	0.5-10	0.5-10	0.5-25	0.5-16	0.5-16
	[AWG]	20-6	20-6	20-6	20-4	20-4	20-4
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		18			18	

		订货信息Order Information	订货信息Order Information
产品Product	颜色Colour	订货号Order NO.	订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green	TP10-3-PE	TP16-3-PE
	*	*	*
	*	*	*
		配套附件Accessory	配套附件Accessory
端板Cover Plate		订货号Order NO.	订货号Order NO.
厚度2.2mm Thickness2.2mm	灰Gray	TP10-3-GY-EA	TP16-3-GY-EA
	橙Orange	TP10-3-OG-EA	TP16-3-OG-EA
	蓝Blue	TP10-3-BU-EA	TP16-3-BU-EA
补偿端板Compensatory Plate		订货号Order NO.	订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray	*	*
跨接件Jumper			
位数Poles No.	颜色Colour	订货号Order NO.	订货号Order NO.
2	黄Yellow	TJA10.2-2	TJA12.2-2
3	黄Yellow	*	*
...	黄Yellow	*	*
10	.....	*	*
...（10位以上整数位）	黄Yellow	*	*
50	黄Yellow	*	*
闪电标记Front Marker		订货号Order NO.	订货号Order NO.
5PCS 5片一条		WS-TP10-5	WS-TP16-5
正面标记Front Marker		订货号Order NO.	订货号Order NO.
10位PCS		TMB10.2-10	312801
卷带标记（50米一卷）Winding marking (50 meters/roll)		TMZ9.6-50	TMZ9.6-50
正面标记和侧面标记Front And Side Marker		订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service		TMB8.2-50	TMB8.2-50

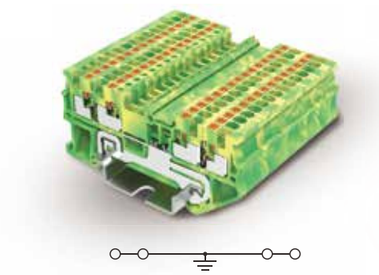

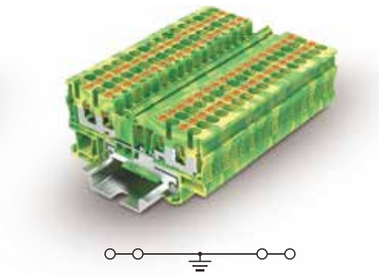

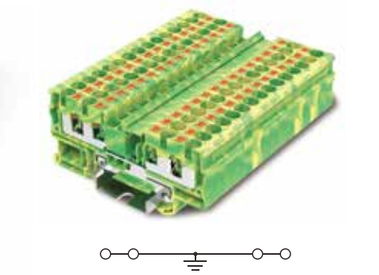

1.5mm² 两进两出接地端子 2-2 Feed Through Ground Terminal Block

2.5mm² 两进两出接地端子 2-2 Feed Through Ground Terminal Block

4mm² 两进两出接地端子 2-2 Feed Through Ground Terminal Block

技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
3.5	65.2	30.5	5.2	72.2	35.3	6.2	77.7	35.5
IEC	UL		IEC	UL		IEC	UL	
*	*		*	*		*	*	
*	*		*	*		*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1.0	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4
26-14	26-14	26-14	26-12	26-12	26-12	24-10	24-10	24-10
	V0			V0			V0	
	8-10			8-10			10-12	

订货信息Order Information	订货信息Order Information	订货信息Order Information
订货号Order NO.	订货号Order NO.	订货号Order NO.
TP1.5-4-PE	TP2.5-4-PE	TP4-4-PE
*	*	*
*	*	*
配套附件Accessory	配套附件Accessory	配套附件Accessory
订货号Order NO.	订货号Order NO.	订货号Order NO.
TP1.5-4-GY-EA	TC1.5-4-GY-EA	TP4-4-GY-EA
TP1.5-4-OG-EA	TC1.5-4-OG-EA	TP4-4-OG-EA
TP1.5-4-BU-EA	TC1.5-4-BU-EA	TP4-4-BU-EA
订货号Order NO.	订货号Order NO.	订货号Order NO.
*	*	*
订货号Order NO.	订货号Order NO.	订货号Order NO.
TJA3.5-2	TJA5.2-2	TJA6.2-2
TJA3.5-3	TJA5.2-3	TJA6.2-3
.....	.....	.....
TJA3.5-10	TJA5.2-10	TJA6.2-10
.....	*	*
TJA3.5-50	*	*
订货号Order NO.	订货号Order NO.	订货号Order NO.
WS-TP1.5-5	WS-TP2.5-5	WS-TP4-5
订货号Order NO.	订货号Order NO.	订货号Order NO.
*	305801	306801
TMZ9.6-50	TMZ9.6-50	TMZ9.6-50
订货号Order NO.	订货号Order NO.	订货号Order NO.
TMB3.5-100	TMB5.2-120	TMB6.2-100



6mm² 两进两出接地端子 2-2 Feed Through Ground Terminal Block

技术参数Technical Parameter			
尺寸Size			
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5 [mm]	8.2	91	42.2
额定参数Rated Parameters			
额定电压Rated Voltage [V]	*	*	
额定电流Rated Current [A]	*	*	
接线容量Wire Range			
[mm²]	0.5-10	0.5-6	0.5-6
[AWG]	20-8	20-8	20-8
其余参数Other Parameters			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0		
剥线长度Strip length [mm]	10-12		

订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green	TP6-4-PE
	*	*
	*	*

配套附件Accessory		
端板Cover Plate		订货号Order NO.
厚度2.2mm Thickness2.2mm	灰Gray	TP6-4-GY-EA
	橙Orange	TP6-4-OG-EA
	蓝Blue	TP6-4-BU-EA
补偿端板Compensatory Plate		订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray	*
跨接件Jumper		
位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	TJA8.2-2
3	黄Yellow	TJA8.2-3
...	黄Yellow	.....
10	.....	TJA8.2-10
...（10位以上整数位）	黄Yellow	*
50	黄Yellow	*
闪电标记Front Marker		订货号Order NO.
5PCS 5片一条		WS-TP6-5
正面标记Front Marker		订货号Order NO.
10位PCS		308801
卷带标记（50米一卷） Winding marking （50 meters/roll）		TMZ9.6-50
正面标记和侧面标记Front And Side Marker		订货号Order NO.
可提供印字服务Printing Service		TMB8.2-50

技术参数Technical Parameter			
尺寸Size			
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5 [mm]	8.2	91	42.2
额定参数Rated Parameters			
额定电压Rated Voltage [V]	*	*	
额定电流Rated Current [A]	*	*	
接线容量Wire Range			
[mm²]	0.5-10	0.5-6	0.5-6
[AWG]	20-8	20-8	20-8
其余参数Other Parameters			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0		
剥线长度Strip length [mm]	10-12		

订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TP6-4-GY
	橙Orange	TP6-4-OG
	蓝Blue	TP6-4-BU

配套附件Accessory		
端板Cover Plate		订货号Order NO.
厚度2.2mm Thickness2.2mm	灰Gray	TP6-4-GY-EA
	橙Orange	TP6-4-OG-EA
	蓝Blue	TP6-4-BU-EA
补偿端板Compensatory Plate		订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray	*
跨接件Jumper		
位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	TJA8.2-2
3	黄Yellow	TJA8.2-3
4	黄Yellow	TJA8.2-4
...	.....	TJA8.2-10
9	黄Yellow	*
10	黄Yellow	*
闪电标记Front Marker		订货号Order NO.
5PCS—条		WS-TP6-5
正面标记Front Marker		订货号Order NO.
10位PCS		308801
卷带标记（50米一卷）		TMZ9.6-50
正面标记和侧面标记Front And Side Marker		订货号Order NO.
可提供印字服务Printing Service		TMB8.2-50



2.5mm² 斜面一进一出接线端子 1-1 Feed Through Angled Terminal Block

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	50.9	41.4
IEC	UL	
800	600	
24	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-14	26-14
V0		
8-10		

订货信息Order Information
订货号Order NO.
TPS2.5-2-GY
TPS2.5-2-OG
TPS2.5-2-BU

配套附件Accessory
订货号Order NO.
TPS2.5-2-GY-EA
TPS2.5-2-OG-EA
TPS2.5-2-BU-EA
订货号Order NO.
*
订货号Order NO.
TJA5.2-2
TJA5.2-3
TJA5.2-4
.....
TJA5.2-9
TJA5.2-10
订货号Order NO.
WS-TP2.5-5
订货号Order NO.
305801
TMZ9.6-50
订货号Order NO.
TMB5.2-120



2.5mm² 斜面一进二出接线端子 1-2 Feed Through Angled Terminal Block

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	50.9	41.4
IEC	UL	
800	600	
24	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-14	26-14
V0		
8-10		

订货信息Order Information
订货号Order NO.
TPS2.5-3-GY
TPS2.5-3-OG
TPS2.5-3-BU

配套附件Accessory
订货号Order NO.
TPS2.5-2-GY-EA
TPS2.5-2-OG-EA
TPS2.5-2-BU-EA
订货号Order NO.
*
订货号Order NO.
TJA5.2-2
TJA5.2-3
TJA5.2-4
.....
TJA5.2-9
TJA5.2-10
订货号Order NO.
WS-TP2.5-5
订货号Order NO.
305801
TMZ9.6-50
订货号Order NO.
TMB5.2-120




2.5mm² 斜面二进二出接线端子 2-2 Feed Through Angled Terminal Block


技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	50.9	41.4
IEC	UL	
800	600	
24	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-14	26-14
V0		
8-10		

订货信息Order Information
订货号Order NO.
TPS2.5-4-GY
TPS2.5-4-OG
TPS2.5-4-BU


配套附件Accessory
订货号Order NO.
TPS2.5-2-GY-EA
TPS2.5-2-OG-EA
TPS2.5-2-BU-EA
订货号Order NO.
*
订货号Order NO.
*
*
*
.....
*
*
订货号Order NO.
305801
TMZ9.6-50
订货号Order NO.
TMB5.2-120

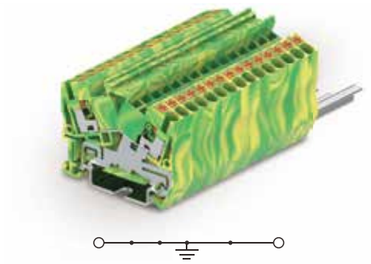

2.5mm² 斜面一进一接地端子
1-1 Feed Through Angled Ground Terminal Block

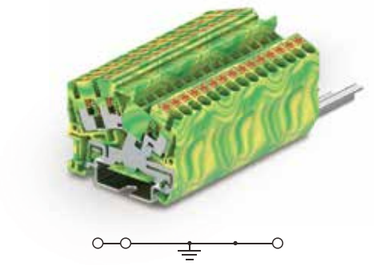


2.5mm² 斜面一进二出接地端子
1-2 Feed Through Angled Ground Terminal Block





2.5mm² 斜面二进二出接地端子
2-2 Feed Through Angled Ground Terminal Block


		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	5.2	50.9	41.4	5.2	50.9	41.4	5.2	50.9	41.4
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	26-12	26-14	26-14	26-12	26-14	26-14	26-12	26-14	26-14
其余参数Other Parameters										
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0			V0	
剥线长度Strip length	[mm]		8-10			8-10			8-10	

		订货信息Order Information	订货信息Order Information	订货信息Order Information
产品Product	颜色Colour	订货号Order NO.	订货号Order NO.	订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	黄绿Yellow green	TPS2.5-2-PE	TPS2.5-3-PE	TPS2.5-4-PE
		*	*	*
		*	*	*
		配套附件Accessory	配套附件Accessory	配套附件Accessory
端板Cover Plate		订货号Order NO.	订货号Order NO.	订货号Order NO.
厚度2.2mm Thickness2.2mm	灰Gray	TPS2.5-2-GY-EA	TPS2.5-2-GY-EA	TPS2.5-2-GY-EA
	橙Orange	TPS2.5-2-OG-EA	TPS2.5-2-OG-EA	TPS2.5-2-OG-EA
	蓝Blue	TPS2.5-2-BU-EA	TPS2.5-2-BU-EA	TPS2.5-2-BU-EA
补偿端板Compensatory Plate		订货号Order NO.	订货号Order NO.	订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray	*	*	*
跨接件Jumper				
位数Poles No.	颜色Colour	订货号Order NO.	订货号Order NO.	订货号Order NO.
2	黄Yellow	*	*	*
3	黄Yellow	*	*	*
4	黄Yellow	*	*	*
...	.....	.....	.....	.....
9	黄Yellow	*	*	*
10	黄Yellow	*	*	*
闪电标记Front Marker		订货号Order NO.	订货号Order NO.	订货号Order NO.
5PCS 5片一条		WS-TP2.5-5	WS-TP2.5-5	WS-TP2.5-5
正面标记Front Marker		订货号Order NO.	订货号Order NO.	订货号Order NO.
10位PCS		305801	305801	305801
卷带标记（50米一卷）Winding marking （50 meters/roll)		TMZ9.6-50	TMZ9.6-50	TMZ9.6-50
正面标记和侧面标记Front And Side Marker		订货号Order NO.	订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service		TMB5.2-120	TMB5.2-120	TMB5.2-120




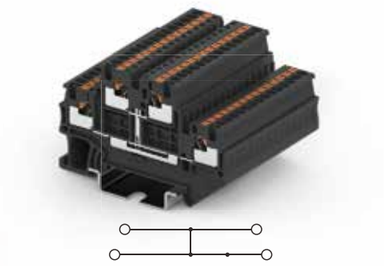






		1.5mm² 双层接线端子 Double Level Terminal Block			1.5mm² 双层等电位接线端子 Double Level Terminal Block			2.5mm² 双层接线端子 Double Level Terminal Block			2.5mm² 双层等电位接线端子 Double Level With Equipotential Bonder Terminal Block		
技术参数Technical Parameter													
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	3.5	65.4	41.1	3.5	65.4	41.1	5.2	68.2	45.8	5.2	68.2	45.8
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	500	300		500	300		500	600		500	600	
额定电流Rated Current	[A]	16	15		16	15		22	20		22	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-1.5	0.2-1.5	0.2-1.0	0.2-1.5	0.2-1.5	0.2-1.0	0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	26-14	26-14	26-14	26-14	26-14	26-14	26-12	26-14	26-14	26-12	26-14	26-14
其余参数Other Parameters													
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0		
剥线长度Strip length	[mm]	8-10			8-10			8-10			8-10		
订货信息Order Information													
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	灰Gray	TPD1.5-2-GY			TPD1.5-2-PV(黑色)			TPD2.5-2-GY			TPD2.5-2-PV（黑色）		
	橙Orange	TPD1.5-2-OG			*			TPD2.5-2-OG			*		
	蓝Blue	TPD1.5-2-BU			*			TPD2.5-2-BU			*		
配套附件Accessory													
端板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TPD1.5-2-GY-EA			TPD1.5-2-GY-EA			TPD2.5-2-GY-EA			TPD2.5-2-GY-EA		
	橙Orange	TPD1.5-2-OG-EA			TPD1.5-2-OG-EA			TPD2.5-2-OG-EA			TPD2.5-2-OG-EA		
	蓝Blue	TPD1.5-2-BU-EA			TPD1.5-2-BU-EA			TPD2.5-2-BU-EA			TPD2.5-2-BU-EA		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*			*			*		
标记支架Marker Stents		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
	灰Gray	*			*			TPZJ2.5-2			TPZJ2.5-2		
跨接件Jumper													
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA3.5-2			TJA3.5-2			TJA5.2-2			TJA5.2-2		
3	黄Yellow	TJA3.5-3			TJA3.5-3			TJA5.2-3			TJA5.2-3		
...	黄Yellow	.....			.....			.....			.....		
10	.....	TJA3.5-10			TJA3.5-10			TJA5.2-10			TJA5.2-10		
...（10位以上整数位）	黄Yellow	.....			.....			*			*		
50	黄Yellow	TJA3.5-50			TJA3.5-50			*			*		
闪电标记Front Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5PCS 5片一条		WS-TP1.5-5			WS-TP1.5-5			WS-TP2.5-5			WS-TP2.5-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS		*			*			*			*		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB3.5-100			TMB3.5-100			TMB5.2-120			TMB5.2-120		













	4mm² 双层接线端子 Double Level Terminal Block			4mm² 双层等电位接线端子 Double Level With Equipotential Bonder Terminal Block			2.5mm² 双层接线端子 每层3个接线位 Double level Terminal Block, 3 connection poles on each level			2.5mm² 双层等电位接线端子 每层3个接线位 Double level With Equipotential Bonder Terminal Block,3 connection poles on each level		
技术参数Technical Parameter												
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5 [mm]	6.2	84	46.2	6.2	84	46.2	5.2	88.65	45.8	5.2	88.65	45.8
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	500	600		500	600		500	600		500	600	
额定电流Rated Current [A]	28	28		28	28		22	20		22	20	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-6	0.2-4	0.2-4	0.2-6	0.2-4	0.2-4	0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5
[AWG]	24-10	24-10	24-10	24-10	24-10	24-10	28-12	28-12	28-12	28-12	28-12	28-12
其余参数Other Parameters												
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0	
剥线长度Strip length [mm]		12			12			8-10			8-10	
订货信息Order Information												
产品Product 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5 灰Gray	TPD4-2-GY			TPD4-2-PV(黑色)			TPD2.5-3-GY			TPD2.5-3-PV(黑色)		
橙Orange	TPD4-2-OG						TPD2.5-3-OG					
蓝Blue	TPD4-2-BU						TPD2.5-3-BU					
配套附件Accessory												
端板Cover Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm 灰Gray	TPD4-2-GY-EA			TPD4-2-GY-EA			TPD2.5-3-GY-EA			TPD2.5-3-GY-EA		
橙Orange	TPD4-2-OG-EA			TPD4-2-OG-EA			TPD2.5-3-OG-EA			TPD2.5-3-OG-EA		
蓝Blue	TPD4-2-BU-EA			TPD4-2-BU-EA			TPD2.5-3-BU-EA			TPD2.5-3-BU-EA		
补偿端板Compensatory Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm 灰Gray	*			*			*			*		
标记支架Marker Stents	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
灰Gray	*			*			TPZJ2.5-2			TPZJ2.5-2		
跨接件Jumper												
位数Poles No. 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2 黄Yellow	TJA6.2-2			TJA6.2-2			TJA5.2-2			TJA5.2-2		
3 黄Yellow	TJA6.2-3			TJA6.2-3			TJA5.2-3			TJA5.2-3		
... 黄Yellow	.....			.....			.....			.....		
10	TJA6.2-10			TJA6.2-10			TJA5.2-10			TJA5.2-10		
...（10位以上整数位） 黄Yellow	*			*			*			*		
50 黄Yellow	*			*			*			*		
闪电标记Front Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5PCS 5片一条	WS-TP4-5			WS-TP4-5			WS-TP2.5-5			WS-TP2.5-5		
正面标记Lightning Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
10PCS一条	*			*			*			*		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	TMB6.2-100			TMB6.2-100			TMB5.2-120			TMB5.2-120		










	1.5mm² 双层接地端子 Double Level Ground Terminal Block			2.5mm² 双层接地端子 Double Level Ground Terminal Block			4mm² 双层接地端子 Double Level Ground Terminal Block			2.5mm² 双层接地端子 每层3个接线位 Double level Ground Terminal Block, 3 connection poles on each level		
尺寸Size	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5 [mm]	厚度Thickness 3.5	宽度Width 65.4	高度Height 41.1	厚度Thickness 5.2	宽度Width 68.2	高度Height 45.8	厚度Thickness 6.2	宽度Width 84	高度Height 46.2	厚度Thickness 5.2	宽度Width 88.65	高度Height 45.8
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	*	*		*	*		*	*		*	*	
额定电流Rated Current [A]	*	*		*	*		*	*		*	*	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-1.5	0.2-1.5	0.2-1.0	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4	0.2-4	0.2-2.5	0.2-2.5
[AWG]	26-14	26-14	26-14	26-12	26-14	26-14	24-10	24-10	24-10	28-12	28-12	28-12
其余参数Other Parameters												
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0			V0		
剥线长度Strip length [mm]	8-10			8-10			12			8-10		
产品Product 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5 黄绿Yellow green	TPD1.5-2-PE			TPD2.5-2-PE			TPD4-2-PE			TPD2.5-3-PE		
*	*			*			*			*		
*	*			*			*			*		
	配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
灰Gray	TPD1.5-2-GY-EA			TPD2.5-2-GY-EA			TPD4-2-GY-EA			TPD2.5-3-GY-EA		
厚度2.2mm Thickness2.2mm 橙Orange	TPD1.5-2-OG-EA			TPD2.5-2-OG-EA			TPD4-2-OG-EA			TPD2.5-3-OG-EA		
蓝Blue	TPD1.5-2-BU-EA			TPD2.5-2-BU-EA			TPD4-2-BU-EA			TPD2.5-3-BU-EA		
补偿端板Compensatory Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm 灰Gray	*			*			*			*		
标记支架Marker Stents	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
灰Gray	*			TPZJ2.5-2			*			TPZJ2.5-2		
跨接件Jumper												
位数Poles No. 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2 黄Yellow	TJA3.5-2			TJA5.2-2			TJA6.2-2			TJA5.2-2		
3 黄Yellow	TJA3.5-3			TJA5.2-3			TJA6.2-3			TJA5.2-3		
... 黄Yellow	.....			.....			.....			.....		
10	TJA3.5-10			TJA5.2-10			TJA6.2-10			TJA5.2-10		
...（10位以上整数位） 黄Yellow	.....			*			*			*		
50 黄Yellow	TJA3.5-50			*			*			*		
闪电标记Front Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5PCS 5片一条	WS-TP1.5-5			WS-TP2.5-5			WS-TP4-5			WS-TP2.5-5		
正面标记Front Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS	*			*			*			*		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	TMB3.5-100			TMB5.2-120			TMB6.2-100			TMB5.2-120		





斜面双层八线接线端子
Double level angled type terminal block 8-wire






斜面双层八线等电位接线端子
Double level angled type terminal block with equipotential bonder 8-wire

		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	5.2	115.2	53	5.2	115.2	53
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	600		800	600	
额定电流Rated Current	[A]	20	20		20	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm^2]	0.2-4.0	0.2-2.5	0.2-2.5	0.2-4.0	0.2-2.5	0.2-2.5
	[AWG]	26-12	26-12	26-12	26-12	26-12	26-12
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		8-10			8-10	

		订货信息Order Information	订货信息Order Information
产品Product	颜色Colour	订货号Order NO.	订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	灰Gray	TPDS2.5-4-GY	TPDS2.5-4-PV(黑色)
	橙Orange	TPDS2.5-4-OG	
	蓝Blue	TPDS2.5-4-BU	
		配套附件Accessory	配套附件Accessory
端板Cover Plate		订货号Order NO.	订货号Order NO.
厚度2.2mm Thickness2.2mm	灰Gray	TPDS2.5-4-GY-EC	TPDS2.5-4-GY-EC
	橙Orange	TPDS2.5-4-OG-EC	TPDS2.5-4-OG-EC
	蓝Blue	*	*
补偿端板Compensatory Plate		订货号Order NO.	订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray	*	*
跨接件Jumper			
位数Poles No.	颜色Colour	订货号Order NO.	订货号Order NO.
2	黄Yellow	TJA5.2-2	TJA5.2-2
3	黄Yellow	TJA5.2-3	TJA5.2-3
4	黄Yellow	TJA5.2-4	TJA5.2-4
...	.....	.....	.....
9	黄Yellow	TJA5.2-9	TJA5.2-9
10	黄Yellow	TJA5.2-10	TJA5.2-10
闪电标记Front Marker		订货号Order NO.	订货号Order NO.
5PCS 5片一条		WS-TP2.5-5	WS-TP2.5-5
正面标记Lightning Marker		订货号Order NO.	订货号Order NO.
10PCS一条		305801	305801
卷带标记（50米一卷）Winding marking （50 meters/roll)		TMZ9.6-50	TMZ9.6-50
正面标记和侧面标记Front And Side Marker		订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service		TMB5.2-120	TMB5.2-120





斜面双层八线接地端子
Double level angled type ground terminal block 8-wire

		技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	5.2	115.2	53
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]			
额定电流Rated Current	[A]			
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm^2]	0.2-4.0	0.2-2.5	0.2-2.5
	[AWG]	26-12	26-12	26-12
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0	
剥线长度Strip length	[mm]		8-10	

		订货信息Order Information
产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	灰Gray	TPDS2.5-4-PE
	橙Orange	
	蓝Blue	
		配套附件Accessory
端板Cover Plate		订货号Order NO.
厚度2.2mm Thickness2.2mm	灰Gray	TPDS2.5-4-GY-EC
	橙Orange	TPDS2.5-4-OG-EC
	蓝Blue	*
补偿端板Compensatory Plate		订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray	*
跨接件Jumper		
位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10
闪电标记Front Marker		订货号Order NO.
5PCS 5片一条		WS-TP2.5-5
正面标记Lightning Marker		订货号Order NO.
10PCS一条		305801
卷带标记（50米一卷）Winding marking （50 meters/roll)		TMZ9.6-50
正面标记和侧面标记Front And Side Marker		订货号Order NO.
可提供印字服务Printing Service		TMB5.2-120

TP系列弹簧接线端子 TP Rail-mounted terminal blocks with spring-cage clamp





2.5mm² 三层接线端子
Triple Level Terminal Block





2.5mm² 三层等电位接线端子
Triple Level With Equipotential Bonder Terminal Block






2.5mm² 三层斜面接线端子
Triple level angled type terminal block





2.5mm² 三层斜面接线端子带支架
Triple level angled type terminal block with marker carrier







2.5mm² 三层斜面等电位接线端子
Triple level angled type terminal block with equipotential bonder

		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	5.2	100.7	56.4	5.2	100.7	56.4
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	500	300		500	300	
额定电流Rated Current	[A]	20	20		20	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	26-12	26-12	26-12	26-12	26-12	26-12
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		8-10			8-10	
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	灰Gray	TPT2.5-2-GY			TPT2.5-2-PV		
	橙Orange	TPT2.5-2-OG			*		
	蓝Blue	TPT2.5-2-BU			*		
		配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TPT2.5-2-GY-EA			TPT2.5-2-GY-EA		
	橙Orange	TPT2.5-2-OG-EA			TPT2.5-2-OG-EA		
	蓝Blue	TPT2.5-2-BU-EA			TPT2.5-2-BU-EA		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*		
标记支架Marker Stents		订货号Order NO.			订货号Order NO.		
	灰Gray	TPZJ2.5-2			TPZJ2.5-2		
跨接件Jumper							
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA5.2-2			TJA5.2-2		
3	黄Yellow	TJA5.2-3			TJA5.2-3		
4	黄Yellow	TJA5.2-4			TJA5.2-4		
...	.....	.....			.....		
9	黄Yellow	TJA5.2-9			TJA5.2-9		
10	黄Yellow	TJA5.2-10			TJA5.2-10		
闪电标记Front Marker		订货号Order NO.			订货号Order NO.		
5PCS 5片一条		WS-TP2.5-5			WS-TP2.5-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.		
10位PCS		*			*		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB5.2-120			TMB5.2-120		


		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	5.2	89.4	91	5.2	89.4	91
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	600		800	600	
额定电流Rated Current	[A]	20	20		20	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-2.5	0.2-2.5	0.2-2.5	0.2-2.5	0.2-2.5	0.2-2.5
	[AWG]	26-12	26-12	26-12	26-12	26-12	26-12
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		8-10			8-10	
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	灰Gray	TPTS2.5-2-GY			TPTS2.5-2T-GY		
	橙Orange	TPTS2.5-2-OG			TPTS2.5-2T-OG		
	蓝Blue	TPTS2.5-2-BU			TPTS2.5-2T-BU		
		配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TPTS2.5-2-GY-EC			TPTS2.5-2-GY-EC		
	橙Orange	TPTS2.5-2-OG-EC			TPTS2.5-2-OG-EC		
	蓝Blue						
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*		
标记支架Marker Stents		订货号Order NO.			订货号Order NO.		
	灰Gray	TPZJ2.5-3			*		
跨接件Jumper							
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA5.2-2			TJA5.2-2		
3	黄Yellow	TJA5.2-3			TJA5.2-3		
4	黄Yellow	TJA5.2-4			TJA5.2-4		
...	.....	.....			.....		
9	黄Yellow	TJA5.2-9			TJA5.2-9		
10	黄Yellow	TJA5.2-10			TJA5.2-10		
闪电标记Front Marker		订货号Order NO.			订货号Order NO.		
5PCS 5片一条		WS-TP2.5-5			WS-TP2.5-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.		
10位PCS		305801			305801		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB5.2-120			TMB5.2-120		



2.5mm² 三层斜面等电位接线端子带支架
Triple level angled type terminal block with equipotential bonder and marker carrier





2.5mm² 四层斜面接线端子，带PE支脚
Quadruple level angled type terminal block with grounding foot





2.5mm² 四层斜面接线端子，带PE支脚带支架
Quadruple level angled type terminal block with grounding foot and marker carrier


		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	5.2	89.4	91	5.2	99.4	91	5.2	99.4	91
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	600		800	600		800	600	
额定电流Rated Current	[A]	20	20		20	20		20	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.14-2.5	0.14-2.5	0.14-2.5	0.2-2.5	0.2-2.5	0.2-2.5	0.2-2.5	0.2-2.5	0.2-2.5
	[AWG]	26-12	26-12	26-12	26-12	26-12	26-12	26-12	26-12	26-12
其余参数Other Parameters										
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0		
剥线长度Strip length	[mm]	8-10			8-10			8-10		
		订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	灰Gray	TPTS2.5-2T-PV(黑色)			TPFS2.5-2-GY			TPFS2.5-2T-GY		
	橙Orange	*			TPFS2.5-2-OG			TPFS2.5-2T-OG		
	蓝Blue	*			TPFS2.5-2-BU			TPFS2.5-2T-BU		
		配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TPTS2.5-2-GY-EC			TPFS2.5-2-GY-EC			TPFS2.5-2-GY-EC		
	橙Orange	TPTS2.5-2-OG-EC			TPFS2.5-2-OG-EC			TPFS2.5-2-OG-EC		
	蓝Blue									
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*			*		
标记支架Marker Stents		订货号Order NO.			订货号Order NO.			订货号Order NO.		
		*			TPZJ2.5-3			*		
跨接件Jumper										
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA5.2-2			TJA5.2-2			TJA5.2-2		
3	黄Yellow	TJA5.2-3			TJA5.2-3			TJA5.2-3		
4	黄Yellow	TJA5.2-4			TJA5.2-4			TJA5.2-4		
...	.....	.....			.....			.....		
9	黄Yellow	TJA5.2-9			TJA5.2-9			TJA5.2-9		
10	黄Yellow	TJA5.2-10			TJA5.2-10			TJA5.2-10		
闪电标记Front Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
5PCS 5片一条		WS-TP2.5-5			WS-TP2.5-5			WS-TP2.5-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS		305801			305801			305801		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB5.2-120			TMB5.2-120			TMB5.2-120		

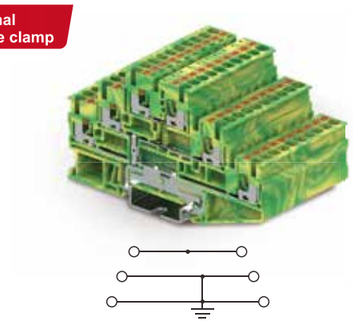



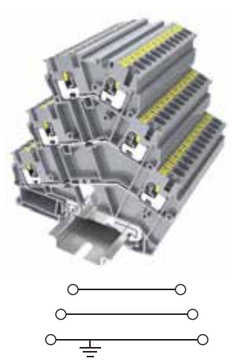





		2.5mm² 三层接地端子 Triple Level Ground Terminal Block			2.5mm² 三层等电位接地端子 Triple Level With Equipotential Bonder Ground Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	5.2	100.7	56.4	5.2	100.7	56.4
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	26-12	26-12	26-12	26-12	26-12	26-12
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		8-10			8-10	
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green	TPT2.5-2-PL			TPT2.5-2-PE		
		*			*		
		*			*		
		配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TPT2.5-2-GY-EA			TPT2.5-2-GY-EA		
	橙Orange	TPT2.5-2-OG-EA			TPT2.5-2-OG-EA		
	蓝Blue	TPT2.5-2-BU-EA			TPT2.5-2-BU-EA		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*		
标记支架Marker Stents		订货号Order NO.			订货号Order NO.		
	灰Gray	TPZJ2.5-2			TPZJ2.5-2		
跨接件Jumper							
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA5.2-2			TJA5.2-2		
3	黄Yellow	TJA5.2-3			TJA5.2-3		
4	黄Yellow	TJA5.2-4			TJA5.2-4		
...	.....	.....			.....		
9	黄Yellow	TJA5.2-9			TJA5.2-9		
10	黄Yellow	TJA5.2-10			TJA5.2-10		
闪电标记Front Marker		订货号Order NO.			订货号Order NO.		
5PCS 5片一条		WS-TP2.5-5			WS-TP2.5-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.		
10位PCS		*			*		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
		TMB5.2-120			TMB5.2-120		

	2.5mm² 三层斜面接地端子 Tripe level angled type ground terminal block			2.5mm² 三层斜面接地端子带支架 Tripe level angled type ground terminal block with marker carrier			2.5mm² 三层斜面等电位接地端子 Tripe level angled type ground terminal block with equipotential bonder		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
5.2	89.4	91	5.2	89.4	91	5.2	89.4	91
IEC	UL		IEC	UL		IEC	UL	
*	*		*	*		*	*	
*	*		*	*		*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-2.5	0.2-2.5	0.2-2.5	0.2-2.5	0.2-2.5	0.2-2.5	0.2-2.5
26-12	26-12	26-12	26-12	26-12	26-12	26-12	26-12	26-12
	V0			V0			V0	
	8-10			8-10			8-10	
订货信息Order Information			订货信息Order Information			订货信息Order Information		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
TPTS2.5-2-PET			TPTS2.5-2T-PET			TPTS2.5-2-PE		
配套附件Accessory			配套附件Accessory			配套附件Accessory		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
TPTS2.5-2-GY-EC			TPTS2.5-2-GY-EC			TPTS2.5-2-GY-EC		
TPTS2.5-2-OG-EC			TPTS2.5-2-OG-EC			TPTS2.5-2-OG-EC		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
*			*			*		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
TPZJ2.5-3			*			TPZJ2.5-3		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
TJA5.2-2			TJA5.2-2			TJA5.2-2		
TJA5.2-3			TJA5.2-3			TJA5.2-3		
TJA5.2-4			TJA5.2-4			TJA5.2-4		
.....			.....			.....		
TJA5.2-9			TJA5.2-9			TJA5.2-9		
TJA5.2-10			TJA5.2-10			TJA5.2-10		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
WS-TP2.5-5			WS-TP2.5-5			WS-TP2.5-5		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
305801			305801			305801		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
TMB5.2-120			TMB5.2-120			TMB5.2-120		





2.5mm² 三层斜面等电位接地端子带支架
Tripe level angled type ground terminal block with equipotential bonder and marker carrier

		技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	5.2	89.4	91
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.14-2.5	0.14-2.5	0.14-2.5
	[AWG]	26-12	26-12	26-12
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0	
剥线长度Strip length	[mm]		8-10	

		订货信息Order Information
产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	黄绿Yellow green	TPTS2.5-2T-PE
		*
		*

		配套附件Accessory
端板Cover Plate		订货号Order NO.
厚度2.2mm Thickness2.2mm	灰Gray	TPTS2.5-2-GY-EC
	橙Orange	TPTS2.5-2-OG-EC
	蓝Blue	
补偿端板Compensatory Plate		订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray	*
标记支架Marker Stents		订货号Order NO.
	灰Gray	*
跨接件Jumper		
位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	TJA5.2-9
9	黄Yellow	TJA5.2-10
10	黄Yellow	
闪电标记Front Marker		订货号Order NO.
5PCS 5片一条		WS-TP2.5-5
正面标记Front Marker		订货号Order NO.
10位PCS		305801
正面标记和侧面标记Front And Side Marker		订货号Order NO.
可提供印字服务Printing Service		TMB5.2-120





2.5mm² 一针一线接线端子
Carrier terminal block

2.5mm² 双层一针一线接线端子
Double carrier terminal block

		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	5.2	48.5	36.5	5.2	72	45.8
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	500	600		500	300	
额定电流Rated Current	[A]	24	20		22	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	26-12	26-12	26-12	26-12	26-12	26-12
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		8-10			8-10	

		订货信息Order Information	订货信息Order Information
产品Product	颜色Colour	订货号Order NO.	订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	灰Gray	TP2.5-2-1-GY	TPD2.5-2-1-GY
	橙Orange	TP2.5-2-1-OG	TPD2.5-2-1-OG
	蓝Blue	TP2.5-2-1-BU	TPD2.5-2-1-BU


		配套附件Accessory	配套附件Accessory
端板Cover Plate		订货号Order NO.	订货号Order NO.
厚度2.2mm Thickness2.2mm	灰Gray	TP2.5-2-1-GY-EA	TPD2.5-2-1-GY-EA
	橙Orange	TP2.5-2-1-OG-EA	TPD2.5-2-1-OG-EA
	蓝Blue	TP2.5-2-1-BU-EA	TPD2.5-2-1-BU-EA
补偿端板Compensatory Plate		订货号Order NO.	订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray	*	*
跨接件Jumper			
位数Poles No.	颜色Colour	订货号Order NO.	订货号Order NO.
2	黄Yellow	TJA5.2-2	TJA5.2-2
3	黄Yellow	TJA5.2-3	TJA5.2-3
4	黄Yellow	TJA5.2-4	TJA5.2-4
...	.....	.....	.....
9	黄Yellow	TJA5.2-9	TJA5.2-9
10	黄Yellow	TJA5.2-10	TJA5.2-10
闪电标记Front Marker		订货号Order NO.	订货号Order NO.
5PCS 5片一条		WS-TP2.5-5	WS-TP2.5-5
正面标记Front Marker		订货号Order NO.	订货号Order NO.
10位PCS		305801	*
卷带标记（50米一卷）Winding marking (50 meters/roll)		TMZ9.6-50	*
正面标记和侧面标记Front And Side Marker		订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service		TMB5.2-120	TMB5.2-120



2.5mm² 双层等电位一针一线接线端子
Double level with equipotential bonder carrier terminal block

技术参数Technical Parameter			
尺寸Size	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5 [mm]	5.2	72	45.8
额定参数Rated Parameters	IEC	UL	
额定电压Rated Voltage [V]	500	300	
额定电流Rated Current [A]	22	20	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-4	0.2-2.5	0.2-2.5
[AWG]	26-12	26-12	26-12
其余参数Other Parameters			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0	
剥线长度Strip length [mm]		8-10	


订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TPD2.5-2-1-PV（黑色）
	橙Orange	*
	蓝Blue	*
配套附件Accessory		
端板Cover Plate		订货号Order NO.
厚度2.2mm Thickness2.2mm	灰Gray	TPD2.5-2-1-GY-EA
	橙Orange	TPD2.5-2-1-OG-EA
	蓝Blue	TPD2.5-2-1-BU-EA
补偿端板Compensatory Plate		订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray	*
跨接件Jumper		
位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10
闪电标记Front Marker		订货号Order NO.
5PCS 5片一条		WS-TP2.5-5
正面标记Front Marker		订货号Order NO.
10位PCS		*
卷带标记（50米一卷）Winding marking （50 meters/roll)		*
正面标记和侧面标记Front And Side Marker		订货号Order NO.
可提供印字服务Printing Service		TMB5.2-120



2.5mm² 一针一线接地端子
Carrier ground terminal block

技术参数Technical Parameter			
尺寸Size	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5 [mm]	5.2	48.5	36.5
额定参数Rated Parameters	IEC	UL	
额定电压Rated Voltage [V]	*	*	
额定电流Rated Current [A]	*	*	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-4	0.2-2.5	0.2-2.5
[AWG]	26-12	26-12	26-12
其余参数Other Parameters			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0	
剥线长度Strip length [mm]		8-10	

订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green	TP2.5-2-1-PE
	*	*
	*	*
配套附件Accessory		
端板Cover Plate		订货号Order NO.
厚度2.2mm Thickness2.2mm	灰Gray	TP2.5-2-1-GY-EA
	橙Orange	TP2.5-2-1-OG-EA
	蓝Blue	TP2.5-2-1-BU-EA
补偿端板Compensatory Plate		订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray	*
跨接件Jumper		
位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10
闪电标记Front Marker		订货号Order NO.
5PCS 5片一条		WS-TP2.5-5
正面标记Front Marker		订货号Order NO.
10位PCS		305801
卷带标记（50米一卷）Winding marking （50 meters/roll)		TMZ9.6-50
正面标记和侧面标记Front And Side Marker		订货号Order NO.
可提供印字服务Printing Service		TMB5.2-120



2.5mm² 双层一针一线接地端子
Double level carrier ground terminal block

技术参数Technical Parameter			
尺寸Size	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5 [mm]	5.2	72	45.8
额定参数Rated Parameters	IEC	UL	
额定电压Rated Voltage [V]	*	*	
额定电流Rated Current [A]	*	*	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-4	0.2-2.5	0.2-2.5
[AWG]	26-12	26-12	26-12
其余参数Other Parameters			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0	
剥线长度Strip length [mm]		8-10	

订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green	TPD2.5-2-1-PE
	*	*
	*	*
配套附件Accessory		
端板Cover Plate		订货号Order NO.
厚度2.2mm Thickness2.2mm	灰Gray	TPD2.5-2-1-GY-EA
	橙Orange	TPD2.5-2-1-OG-EA
	蓝Blue	TPD2.5-2-1-BU-EA
补偿端板Compensatory Plate		订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray	*
跨接件Jumper		
位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10
闪电标记Front Marker		订货号Order NO.
5PCS 5片一条		WS-TP2.5-5
正面标记Front Marker		订货号Order NO.
10位PCS		*
卷带标记（50米一卷）Winding marking （50 meters/roll)		*
正面标记和侧面标记Front And Side Marker		订货号Order NO.
可提供印字服务Printing Service		TMB5.2-120

TP系列弹簧接线端子 TP Rail-mounted terminal blocks with spring-cage clamp



2.5mm² 插头
Plug

技术参数Technical Parameter			
尺寸Size	厚度Thickness	宽度Width	高度Height
[mm]	5.2	39.4	16.1
额定参数Rated Parameters	IEC	UL	
额定电压Rated Voltage [V]	500	300	
额定电流Rated Current [A]	24	20	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm^2]	0.2-4	0.2-2.5	0.2-2.5
[AWG]	26-12	26-12	26-12
其余参数Other Parameters			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0	
剥线长度Strip length [mm]		8-10	

订货信息Order Information		
位数Poles No.	颜色Colour	订货号Order NO.
1	灰	TPP2.5-1-GY
2	灰	TPP2.5-2-GY
...	...	...
17	灰	TPP2.5-17-GY
18	灰	TPP2.5-18-GY
1	橙Orange	TPP2.5-1-OG
1	蓝Blue	TPP2.5-1-BU
1	黄绿Yellow green	TPP2.5-1-PE
锁扣Lock Catch		订货号Order NO.
	橙Orange	TPP2.5-PR
跨接件Jumper		
位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	*
3	黄Yellow	*
4	黄Yellow	*
...	.....	.....
9	黄Yellow	*
10	黄Yellow	*
闪电标记Lightning Marker		订货号Order NO.
5PCS 5片一条		*
正面标记Front Marker		订货号Order NO.
10位PCS		*
正面标记和侧面标记Front And Side Marker		订货号Order NO.
可提供印字服务Printing Service		TMB5.2-120

TP系列弹簧接线端子 TP Rail-mounted terminal blocks with spring-cage clamp





新品 NEW






	1.5mm² 一进一出直插式微型接线端子 1.5mm² Conductor push-in mini terminal block			2.5mm² 一进一出直插式微型接线端子 2.5mm² Mini 1-1 feed-through terminal block		
	技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS15/5.5导轨后的高度 [mm] Note：Height With DIN Rail NS 35/7.5	3.5	31	26.4	5.2	36	32.1
额定参数Rated Parameters	IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	500	300		500	300	
额定电流Rated Current [A]	17.5	15		24	20	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-1.5	0.2-1.5	0.2-1.0	0.2-2.5	0.2-2.5	0.2-2.5
[AWG]	26-14	26-14	26-14	26-12	26-12	26-12
其余参数Other Parameters						
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0	
剥线长度Strip length [mm]		8-10			8-10	

		订货信息Order Information	订货信息Order Information
产品Product	颜色Colour	订货号Order NO.	订货号Order NO.
适配NS 15/5.5导轨 **Can Be Used For DIN Rail** **NS 15/5.5**	灰Gray	TPM1.5-2-GY	TPM2.5-2-GY
	橙Orange	TPM1.5-2-OG	TPM2.5-2-OG
	蓝Blue	TPM1.5-2-BU	TPM2.5-2-BU
		配套附件Accessory	配套附件Accessory
端板Cover Plate		订货号Order NO.	订货号Order NO.
	灰Gray	TPM1.5-2-GY-EA	TPM2.5-2-GY-EA
厚度2.2mm Thickness2.2mm	橙Orange	TPM1.5-2-OG-EA	TPM2.5-2-OG-EA
	蓝Blue	TPM1.5-2-BU-EA	TPM2.5-2-BU-EA
补偿端板Compensatory Plate		订货号Order NO.	订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray	*	*
跨接件Jumper			
位数Poles No.	颜色Colour	订货号Order NO.	订货号Order NO.
2	黄Yellow	TJA3.5-2	TJA5.2-2
3	黄Yellow	TJA3.5-3	TJA5.2-3
...	黄Yellow	.....	.....
10	.....	TJA3.5-10	TJA5.2-10
...（10位以上整数位）	黄Yellow	.....	.....
50	黄Yellow	TJA3.5-50	*
闪电标记Front Marker		订货号Order NO.	订货号Order NO.
5PCS 5片一条		*	WS-TP2.5-5
正面标记Front Marker		订货号Order NO.	订货号Order NO.
10位PCS		*	*
正面标记和侧面标记Front And Side Marker		订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service		TMB3.5-100	TMB5.2-120






新品 NEW








	1.5mm² 一进一出直插式微型接地端子 1.5mm²Mini ground terminal block			2.5mm² 一进一出直插式微型接地端子 2.5mm²Mini ground terminal block		
	技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS15/5.5导轨后的高度 [mm] Note：Height With DIN Rail NS 15/5.5	3.5	31	26.4	5.2	36	31.1
额定参数Rated Parameters	IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	500	600		500		
额定电流Rated Current [A]						
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-1.5	0.2-1.5	0.2-1.0	0.2-2.5	0.2-2.5	0.2-2.5
[AWG]	26-14	26-14	26-14	26-12	26-12	26-12
其余参数Other Parameters						
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0	
剥线长度Strip length [mm]		8-10			8-10	

		订货信息Order Information	订货信息Order Information
产品Product	颜色Colour	订货号Order NO.	订货号Order NO.
适配NS 15/5.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	黄绿Yellow green	TPM1.5-2-PE	TPM2.5-2-PE
	*	*	*
	*	*	*
	*	*	*
		配套附件Accessory	配套附件Accessory
端板Cover Plate		订货号Order NO.	订货号Order NO.
	灰Gray	TPM1.5-2-GY-EA	TPM2.5-2-GY-EA
厚度2.2mm Thickness2.2mm	橙Orange	TPM1.5-2-OG-EA	TPM2.5-2-OG-EA
	蓝Blue	TPM1.5-2-BU-EA	TPM2.5-2-BU-EA
补偿端板Compensatory Plate		订货号Order NO.	订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray	*	*
跨接件Jumper			
位数Poles No.	颜色Colour	订货号Order NO.	订货号Order NO.
2	黄Yellow	*	*
3	黄Yellow	*	*
...	黄Yellow	.....	.....
10	.....	*	*
...（10位以上整数位）	黄Yellow	.....	.....
50	黄Yellow	*	*
闪电标记Front Marker		订货号Order NO.	订货号Order NO.
5PCS 5片一条		*	WS-TP2.5-5
正面标记Front Marker		订货号Order NO.	订货号Order NO.
10位PCS		*	*
正面标记和侧面标记Front And Side Marker		订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service		TMB3.5-100	TMB5.2-120










	1.5mm² 三线制传感器与执行器端子 3-wire Sensor /Actuator terminal block			1.5mm² 三线制传感器与执行器端子 带接地保护 3-wire Sensor /Actuator terminal block with PE protection		
	技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5 [mm]	3.5	74.5	41.5	3.5	74.5	41.5
额定参数Rated Parameters	IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	250	*		250	*	
额定电流Rated Current [A]	13.5	*		13.5	*	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-1.5	0.2-1.5	0.2-1.0	0.2-1.5	0.2-1.5	0.2-1.0
[AWG]	26-14	26-14	26-14	26-14	26-14	26-14
其余参数Other Parameters						
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0		
剥线长度Strip length [mm]	8-10			8-10		
产品Product 颜色Colour	订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.		
灰Gray	TPIO1.5-S-3			TPIO1.5-S-3-PE		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5 灰，带红灯With red light	TPIO1.5-S-3-LR24			*		
灰，带绿灯With green light	TPIO1.5-S-3-LG24			*		
橙Orange	*					
	配套附件Accessory			配套附件Accessory		
端板Cover Plate	订货号Order NO.			订货号Order NO.		
灰Gray	TPIO1.5-S-3-GY-EA			TPIO1.5-S-3-GY-EA		
厚度2.2mm Thickness2.2mm 橙Orange	TPIO1.5-S-3-OG-EA			TPIO1.5-S-3-OG-EA		
蓝Blue	TPIO1.5-S-3-BU-EA			TPIO1.5-S-3-BU-EA		
补偿端板Compensatory Plate	订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm 灰Gray	*			*		
跨接件Jumper						
位数Poles No. 颜色Colour	订货号Order NO.			订货号Order NO.		
2 黄Yellow	TJA3.5-2			TJA3.5-2		
3 黄Yellow	TJA3.5-3			TJA3.5-3		
... 黄Yellow	.....			.....		
10	TJA3.5-10			TJA3.5-10		
...（10位以上整数位） 黄Yellow	.....			.....		
50 黄Yellow	TJA3.5-50			TJA3.5-50		
闪电标记Front Marker	订货号Order NO.			订货号Order NO.		
5PCS 5片一条	WS-TP1.5-5			WS-TP1.5-5		
正面标记Front Marker	订货号Order NO.			订货号Order NO.		
10位PCS	*			*		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	TMB3.5-100			TMB3.5-100		

	1.5mm² 四线制传感器与执行器端子 4-wire Sensor /Actuator terminal block			1.5mm² 四线制传感器与执行器端子 带接地保护 4-wire Sensor /Actuator terminal block with PE protection		
	技术参数Technical Parameter			技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	
3.5	90.8	41.5	3.5	90.8	41.5	
IEC	UL		IEC	UL		
250	*		250	*		
13.5	*		13.5	*		
刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	
0.2-1.5	0.2-1.5	0.2-1.0	0.2-1.5	0.2-1.5	0.2-1.0	
26-14	26-14	26-14	26-14	26-14	26-14	
V0			V0			
8-10			8-10			
订货信息Order Information			订货信息Order Information			
订货号Order NO.			订货号Order NO.			
TPIO1.5-S-4			TPIO1.5-S-4-PE			
TPIO1.5-S-4-LR24			*			
TPIO1.5-S-4-LG24			*			
*			*			
配套附件Accessory			配套附件Accessory			
订货号Order NO.			订货号Order NO.			
TPIO1.5-S-4-GY-EA			TPIO1.5-S-4-GY-EA			
TPIO1.5-S-4-OG-EA			TPIO1.5-S-4-OG-EA			
TPIO1.5-S-4-BU-EA			TPIO1.5-S-4-BU-EA			
订货号Order NO.			订货号Order NO.			
*			*			
订货号Order NO.			订货号Order NO.			
TJA3.5-2			TJA3.5-2			
TJA3.5-3			TJA3.5-3			
.....			.....			
TJA3.5-10			TJA3.5-10			
.....			.....			
TJA3.5-50			TJA3.5-50			
订货号Order NO.			订货号Order NO.			
WS-TP1.5-5			WS-TP1.5-5			
订货号Order NO.			订货号Order NO.			
*			*			
订货号Order NO.			订货号Order NO.			
TMB3.5-100			TMB3.5-100			




		2.5mm²一进一出带刀闸正面接线 1-1 feed through knife disconnect terminal blocks			2.5mm²两进一出带刀闸正面接线 2-1 feed through knife disconnect terminal blocks			2.5mm²两进两出带刀闸正面接线 2-2 feed through knife disconnect terminal blocks			6mm²闸刀试验端子 Disconnect test terminal			6mm²闸刀试验端子带测试柱 Disconnect test terminal with test tube		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	5.2	61.7	33.5	5.2	71.9	33.5	5.2	82.2	33.5	8.2	103.2	48.5	8.2	103.2	48.5
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	400	300		400	300		400	300		1000	600		1000	600	
额定电流Rated Current	[A]	20	20		20	20		20	20		30	30		30	30	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5	0.5-10	0.5-6	0.5-6	0.5-10	0.5-6	0.5-6
	[AWG]	26-12	26-12	26-12	26-12	26-12	26-12	26-12	26-12	26-12	20-8	20-8	20-8	20-8	20-8	20-8
其余参数Other Parameters																
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0			V0		
剥线长度Strip length	[mm]	8-10			8-10			8-10			12			12		
		订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	灰Gray	TPK2.5-2-GY			TPK2.5-3-GY			TPK2.5-4-GY			TPME6-2-GY			TPME6-2-JP-GY		
	橙Orange	TPK2.5-2-OG			TPK2.5-3-OG			TPK2.5-4-OG								
	蓝Blue	TPK2.5-2-BU			TPK2.5-3-BU			TPK2.5-4-BU								
		配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
盖板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TPK2.5-2-GY-EA			TPK2.5-3-GY-EA			TPK2.5-4-GY-EA			TPME6-2-JP-GY-EA			TPME6-2-JP-GY-EA		
	橙Orange	TPK2.5-2-OG-EA			TPK2.5-3-OG-EA			TPK2.5-4-OG-EA			*			*		
	蓝Blue	TPK2.5-2-BU-EA			TPK2.5-3-BU-EA			TPK2.5-4-BU-EA			*			*		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*			*			*			*		
跨接件Jumper																
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA5.2-2			TJA5.2-2			TJA5.2-2			TJA8.2-2			TJA8.2-2		
3	黄Yellow	TJA5.2-3			TJA5.2-3			TJA5.2-3			TJA8.2-3			TJA8.2-3		
4	黄Yellow	TJA5.2-4			TJA5.2-4			TJA5.2-4			TJA8.2-4			TJA8.2-4		
...	.....	.....			.....			.....			.....			.....		
9	黄Yellow	TJA5.2-9			TJA5.2-9			TJA5.2-9			TJA8.2-9			TJA8.2-9		
10	黄Yellow	TJA5.2-10			TJA5.2-10			TJA5.2-10			TJA8.2-10			TJA8.2-10		
闪电标记Lightning Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5PCS 5片一条		WS-TP2.5-5			WS-TP2.5-5			WS-TP2.5-5			WS-TP6-5			WS-TP6-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS		305801			305801			305801			308801			308801		
卷带标记（50米一卷）Winding marking （50 meters/roll)		TMZ9.6-50			TMZ9.6-50			TMZ9.6-50			TMZ9.6-50			TMZ9.6-50		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB5.2-120			TMB5.2-120			TMB5.2-120			TMB8.2-50			TMB8.2-50		

TP系列弹簧接线端子 TP Rail-mounted terminal blocks with spring-cage clamp




不提供保险管，图片只供参考使用
No fuse is provided. The picture is for reference only



不提供保险管，图片只供参考使用
No fuse is provided. The picture is for reference only



不提供保险管，图片只供参考使用
No fuse is provided. The picture is for reference only



不提供保险管，图片只供参考使用
No fuse is provided. The picture is for reference only



新品 NEW


		4mm²F型扁平保险丝端子 Terminal block with flat F-fuse			4mm²F型扁平带LED灯保险丝端子 Terminal block with led and flat F-fuse		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	6.2	55.9	35.25	6.2	55.9	35.25
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	400	300		12-250	12-250	
额定电流Rated Current	[A]	10	10		10	10	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-6	0.2-4	0.2-4	0.2-6	0.2-4	0.2-4
	[AWG]	24-10	24-10	24-10	24-10	24-10	24-10
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	10-12			10-12		
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黑Black	TP4-FSI/F-BK			TP4-FSI/F-LED12-L/R		
		*			TP4-FSI/F-LED24-L/R		
		*			TP4-FSI/F-LED48-L/R		
		*			TP4-FSI/F-LED250-L/R		
		配套附件Accessory			配套附件Accessory		
盖板Cover Plate		订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TP4-FSI/F-GY-EA			TP4-FSI/F-GY-EA		
	橙Orange	TP4-FSI/F-OG-EA			TP4-FSI/F-OG-EA		
	蓝Blue	TP4-FSI/F-BU-EA			TP4-FSI/F-BU-EA		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*		
跨接件Jumper							
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA6.2-2			TJA6.2-2		
3	黄Yellow	TJA6.2-3			TJA6.2-3		
4	黄Yellow	TJA6.2-4			TJA6.2-4		
...	.....	.....			.....		
9	黄Yellow	TJA6.2-9			TJA6.2-9		
10	黄Yellow	TJA6.2-10			TJA6.2-10		
闪电标记Lightning Marker		订货号Order NO.			订货号Order NO.		
5PCS 5片一条		*			*		
正面标记Front Marker		订货号Order NO.			订货号Order NO.		
10位PCS		*			*		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB6.2-100			TMB6.2-100		

		6mm²C型扁平保险丝端子 Terminal block with flat C-fuse			6mm²C型扁平带LED灯保险丝端子 Terminal block with led and flat C-fuse			4mm² 悬臂式分断端子 4mm² Lever-type disconnect terminal block		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	8.2	74.1	42.2	8.2	74.1	42.2	6.2	55.9	35.25
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	400	300		12-250	12-250		500	300	
额定电流Rated Current	[A]	25	25		25	25		20	16	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.5-10	0.5-6	0.5-6	0.5-10	0.5-6	0.5-6	0.2-4	0.2-4	0.2-4
	[AWG]	20-8	20-8	20-8	20-8	20-8	20-8	24-10	24-10	24-10
其余参数Other Parameters										
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0		
剥线长度Strip length	[mm]	10-12			12			10-12		
		订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黑Black	TP6-FSI/F-BK			TP6-FSI/F-LED12-L/R			TP4-HEDI		
		*			TP6-FSI/F-LED24-L/R					
		*			TP6-FSI/F-LED48-L/R					
		*			TP6-FSI/F-LED220-L/R					
		配套附件Accessory			配套附件Accessory			配套附件Accessory		
盖板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	*			*			TP4-FSI/F-GY-EA		
	橙Orange	*			*			*		
	蓝Blue	*			*			*		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*			*		
跨接件Jumper										
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA8.2-2			TJA8.2-2			TJA6.2-2		
3	黄Yellow	TJA8.2-3			TJA8.2-3			TJA6.2-3		
4	黄Yellow	TJA8.2-4			TJA8.2-4			TJA6.2-4		
...	.....	.....			.....			.....		
9	黄Yellow	TJA8.2-9			TJA8.2-9			TJA6.2-9		
10	黄Yellow	TJA8.2-10			TJA8.2-10			TJA6.2-10		
闪电标记Lightning Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
5PCS 5片一条		WS-TP6-5			WS-TP6-5			*		
正面标记Front Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS		*			*			*		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB8.2-50			TMB8.2-50			TMB6.2-100		


TP系列弹簧接线端子 TP Rail-mounted terminal blocks with spring-cage clamp



不提供保险管，图片只供参考使用
No fuse is provided. The picture is for reference only



不提供保险管，图片只供参考使用
No fuse is provided. The picture is for reference only







不提供保险管，图片只供参考使用
No fuse is provided. The picture is for reference only

		4mm² 悬臂式分断端子,可接5x20mmG型保险丝 4mm² Lever-type disconnect terminal block for 5×20mm G fuse			4mm² 悬臂式带发光二极管分断端子,可接5x20mmG型保险丝 4mm² Lever-type disconnect terminal block for 5×20mm G fuse with LED		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	6.2	55.9	35.25	6.2	55.9	35.25
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	400	300		24-220	24-220	
额定电流Rated Current	[A]	6.3	6.3		6.3	6.3	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-4	0.2-4	0.2-4	0.2-4	0.2-4
	[AWG]	24-10	24-10	24-10	24-10	24-10	24-10
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	10-12			10-12		
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	黑Black	TP4-HESI(5X20)-BK(黑色)			TP4-HESI(5x20)-LED24-BK		
		TP4-HESI(5X20)-GY(灰色)			TP4-HESI(5x20)-LED220-BK		
		配套附件Accessory			配套附件Accessory		
盖板Cover Plate		订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TP4-FSI/F-GY-EA			TP4-FSI/F-GY-EA		
	橙Orange	*			*		
	蓝Blue	*			*		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*		
跨接件Jumper							
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA6.2-2			TJA6.2-2		
3	黄Yellow	TJA6.2-3			TJA6.2-3		
4	黄Yellow	TJA6.2-4			TJA6.2-4		
...	.....	.....			.....		
9	黄Yellow	TJA6.2-9			TJA6.2-9		
10	黄Yellow	TJA6.2-10			TJA6.2-10		
闪电标记Lightning Marker		订货号Order NO.			订货号Order NO.		
5PCS 5片一条		*			*		
正面标记Front Marker		订货号Order NO.			订货号Order NO.		
10位PCS		*			*		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB6.2-100			TMB6.2-100		

	4mm²刀闸分断接线端子 4mm² Knife-disconnect terminal block			4mm²分断接线端子 4mm² Disconnect terminal block			2.5mm²二进二出带二极管端子 2.5mm² 2-2 feed terminal block with Diode		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	6.2	55.9	36.95	6.2	55.9	35.25	5.2	72.2	35.3
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	500	300		500	300		800	300	
额定电流Rated Current	20	20		20	20		0.5	0.5	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	0.2-4	0.2-4	0.2-4	0.2-4	0.2-4	0.2-4	0.2-2.5	0.2-2.5	0.2-2.5
	21-10	21-10	21-10	21-10	21-10	21-10	26-12	26-12	26-12
其余参数Other Parameters									
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0		
剥线长度Strip length	10-12			10-12			8-10		
	订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	TP4-MT-GY			TP4-TG-GY			TP2.5-4R/L-GY		
	TP4-MT-OG			TP4-TG-OG			TP2.5-4L/R-GY		
	TP4-MT-BU			TP4-TG-BU					
	配套附件Accessory			配套附件Accessory			配套附件Accessory		
盖板Cover Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	TP4-FSI/F-GY-EA			TP4-FSI/F-GY-EA			TC1.5-4-GY-EA		
	TP4-FSI/F-OG-EA			TP4-FSI/F-OG-EA			*		
	TP4-FSI/F-BU-EA			TP4-FSI/F-BU-EA			*		
补偿端板Compensatory Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	*			*			*		
跨接件Jumper									
位数Poles No.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	TJA6.2-2			TJA6.2-2			TJA5.2-2		
3	TJA6.2-3			TJA6.2-3			TJA5.2-3		
4	TJA6.2-4			TJA6.2-4			TJA5.2-4		
...	.....			.....			.....		
9	TJA6.2-9			TJA6.2-9			TJA5.2-9		
10	TJA6.2-10			TJA6.2-10			TJA5.2-10		
闪电标记Lightning Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.		
5PCS 5片一条	*			*			WS-TP2.5-5		
正面标记Front Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS	*			*			*		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	TMB6.2-100			TMB6.2-100			TMB5.2-120		


TP系列弹簧接线端子 TP Rail-mounted terminal blocks with spring-cage clamp



35 mm² 电位分配接线端子
Potential distribution terminal block

		技术参数Technical Parameter	技术参数Technical Parameter	技术参数Technical Parameter
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	16.3	110.37	50.3
		螺钉连接	4个直插自锁接线位，6 mm²	6个直插自锁接线位，2.5 mm²
额定参数Rated Parameters		IEC / UL	IEC / UL	IEC / UL
额定电压Rated Voltage	[V]	1000 / *	1000 / *	1000 / *
额定电流Rated Current	[A]	105 / *	41 / *	24 / *
接线容量Wire Range		刚性Solid / 柔性Fine Stranded / 带冷压头Furrule	刚性Solid / 柔性Fine Stranded / 带冷压头Furrule	刚性Solid / 柔性Fine Stranded / 带冷压头Furrule
	[mm²]	1.5-50 / 1.5-50 / 1.5-35	0.5-10 / 0.5-6 / 0.5-6	0.2-4 / 0.2-2.5 / 0.2-2.5
	[AWG]	16-1/0 / 16-1/0 / 16-1/0	20-8 / 20-10 / 20-10	26-12 / 26-14 / 26-14
螺钉类型Screws Type		M6	*	
扭矩Torque		2.5N·m	*	
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0	V0	V0
剥线长度Strip length	[mm]	18	12	8-10

		订货信息Order Information
产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	灰Gray	TPU35/6/2.5-11-GY
	蓝Blue	TPU35/6/2.5-11-BU
		*
跨接件Jumper		
位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	TJA8.2-2
3	黄Yellow	TJA8.2-3
4	黄Yellow	TJA8.2-4
...	.....	.....
9	黄Yellow	TJA8.2-9
10	黄Yellow	TJA8.2-10
闪电标记Lightning Marker		订货号Order NO.
5PCS 5片一条		*
正面标记Front Marker		订货号Order NO.
10位PCS		316801
卷带标记（50米一卷）Winding marking （50 meters/roll)		TMZ9.6-50
正面标记和侧面标记Front And Side Marker		订货号Order NO.
可提供印字服务Printing Service		TMB5.2-120

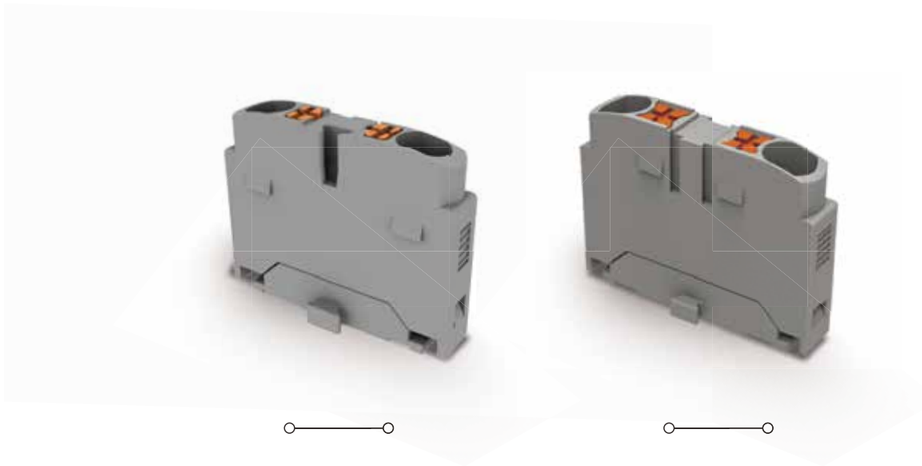

1.5mm²直插式配电块
Push-in Type Power Distribution Block
1.5mm² Terminal Points

2.5mm²直插式配电块
Push-in Type Power Distribution Block
2.5mm² Terminal Points


		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	长度Length	高度Height	厚度Thickness	长度Length	高度Height
	[mm]	4.2	21.6	17.7	5.2	28.6	21.7
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	450	300		450	300	
额定电流Rated Current	[A]	17.5	15		24	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-2.5	0.2-1.5	0.2-1.5	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	26-14	26-14	26-14	26-12	26-12	26-12
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	8-10			8-10		

		订货信息Order Information	订货信息Order Information
产品Product	颜色Colour	订货号Order NO.	订货号Order NO.
2个接线点	灰Gray	TPA1.5-2-GY	TPA2.5-2-GY
4个接线点	灰Gray	TPA1.5-4-GY	*
6个接线点	灰Gray	TPA1.5-6-GY	TPA2.5-6-GY
12个接线点	灰Gray	TPA1.5-12-GY	TPA2.5-12-GY
18个接线点	灰Gray	TPA1.5-18-GY	TPA2.5-18-GY
2个接线点	橙Orange	TPA1.5-2-OG	TPA2.5-2-OG
4个接线点	橙Orange	TPA1.5-4-OG	*
6个接线点	橙Orange	TPA1.5-6-OG	TPA2.5-6-OG
12个接线点	橙Orange	TPA1.5-12-OG	TPA2.5-12-OG
18个接线点	橙Orange	TPA1.5-18-OG	TPA2.5-18-OG
2个接线点	蓝Blue	TPA1.5-2-BU	TPA2.5-2-BU
4个接线点	蓝Blue	TPA1.5-4-BU	*
6个接线点	蓝Blue	TPA1.5-6-BU	TPA2.5-6-BU
12个接线点	蓝Blue	TPA1.5-12-BU	TPA2.5-12-BU
18个接线点	蓝Blue	TPA1.5-18-BU	TPA2.5-18-BU

		配套附件Accessory	配套附件Accessory
		订货号Order NO.	订货号Order NO.
大导轨转换器 Din rail adapter for NS35	灰Gray	TPA1.5 NS 35	TPA NS35
小导轨转换器 Din rail adapter for NS15	灰Gray	TPA1.5 NS 15	TPA NS15
导轨卡板 Din rail bracket	灰Gray	TPA1.5 NS35T	TPA NS35T
螺钉法兰 Flange for screw mounting	灰Gray	TPA1.5 NF	TPA2.5 NF
法兰标记支架 Marking carrier	灰Gray	TPA-KLM3	TPA-KLM3

TP系列弹簧接线端子 TP Rail-mounted terminal blocks with spring-cage clamp






		1.5mm²直插式带输入配电块 Push-in Type Power Distribution Block 1.5mm² Terminal Points			2.5mm²直插式带输入配电块 Push-in Type Power Distribution Block 2.5mm² Terminal Points		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	长度Length	高度Height	厚度Thickness	长度Length	高度Height
	[mm]	19.2	21.6	17.7	25.6	28.6	21.7
额定参数Rated Parameters		IEC	UL		IEC	UL	
输入端Input							
额定电压Rated Voltage	[V]	450	300		450	300	
额定电流Rated Current	[A]	32	30		41	50	
输出端Output							
额定电压Rated Voltage	[V]	450	300		450	300	
额定电流Rated Current	[A]	17.5	20		24	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
输入端Input							
	[mm²]	0.2-6	0.2-4	0.2-4	0.5-10	0.5-6	0.5-6
	[AWG]	24-10	24-10	24-10	20-8	20-8	20-8
输出端Output							
	[mm²]	0.2-2.5	0.2-1.5	0.2-1.5	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	26-14	26-14	26-14	26-12	26-12	26-12
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
输入端Input							
剥线长度Strip length	[mm]		10-12			10-12	
输出端Output							
剥线长度Strip length	[mm]		8-10			8-10	

		订货信息Order Information	订货信息Order Information
产品Product	颜色Colour	订货号Order NO.	订货号Order NO.
7个接线点	灰Gray	TPA4/1.5-7-GY	TPA6/2.5-7-GY
13个接线点	灰Gray	TPA4/1.5-13-GY	TPA6/2.5-13-GY
19个接线点	灰Gray	TPA4/1.5-19-GY	TPA6/2.5-19-GY
7个接线点	橙Orange	TPA4/1.5-7-OG	TPA6/2.5-7-OG
13个接线点	橙Orange	TPA4/1.5-13-OG	TPA6/2.5-13-OG
19个接线点	橙Orange	TPA4/1.5-19-OG	TPA6/2.5-19-OG
7个接线点	蓝Blue	TPA4/1.5-7-BU	TPA6/2.5-7-BU
13个接线点	蓝Blue	TPA4/1.5-13-BU	TPA6/2.5-13-BU
19个接线点	蓝Blue	TPA4/1.5-19-BU	TPA6/2.5-19-BU
		配套附件Accessory	配套附件Accessory
		订货号Order NO.	订货号Order NO.
大导轨转换器 Din rail adapter for NS35	灰Gray	TPA1.5 NS 35	TPA NS 35
小导轨转换器 Din rail adapter for NS15	灰Gray	TPA1.5 NS 15	TPA NS 15
导轨卡板 Din rail bracket	灰Gray	TPA1.5 NS35T	TPA NS 35T
螺钉法兰 Flange for screw mounting	灰Gray	TPA1.5 NF	TPA2.5 NF
法兰标记支架 Marking carrier	灰Gray	TPA-KLM3	TPA-KLM3



导轨卡板
Din rail bracket

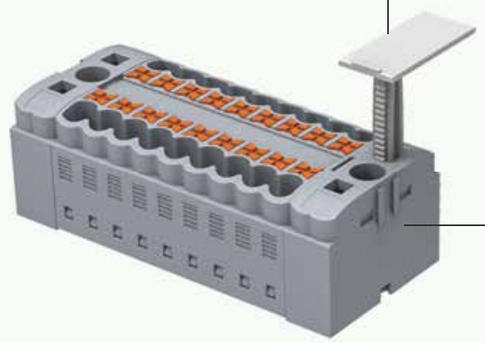

法兰标记支架
Marking carrier





螺钉法兰
Flange for screw mounting


大导轨转换器
Din rail adapter for Ns35




小导轨转换器
Din rail adapter for Ns15









		2.5mm², 一进一出侧面接线端子 1-1 Feed Through 2.5mm² Terminal Block of Side-entry			4mm², 一进一出侧面接线端子 1-1 Feed Through 4mm² Terminal Block of Side-entry			6mm², 一进一出侧面接线端子 1-1 Feed Through 6mm² Terminal Block of Side-entry		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	5.2	50.5	35.2	6.2	50.5	35.2	8.2	61	42.2
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	1000	600		1000	600		1000	600	
额定电流Rated Current	[A]	24	20		32	30		41	40	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4	0.5-10	0.5-6	0.5-6
	[AWG]	26-12	26-12	26-12	26-10	26-10	26-10	20-8	20-8	20-8
其余参数Other Parameters										
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0		
剥线长度Strip length	[mm]	8-10			9-11			10-12		
		订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TPV2.5-2-GY			TPV4-2-GY			TPV6-2-GY		
	橙Orange	TPV2.5-2-OG			TPV4-2-OG			TPV6-2-OG		
	蓝Blue	TPV2.5-2-BU			TPV4-2-BU			TPV6-2-BU		
		配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TPV2.5-2-GY-EA			TPV2.5-2-GY-EA			TPV6-2-GY-EA		
	橙Orange	TPV2.5-2-OG-EA			TPV2.5-2-OG-EA			TPV6-2-OG-EA		
	蓝Blue	TPV2.5-2-BU-EA			TPV2.5-2-BU-EA			TPV6-2-BU-EA		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*			*		
跨接件Jumper										
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA5.2-2			TJA6.2-2			TJA8.2-2		
3	黄Yellow	TJA5.2-3			TJA6.2-3			TJA8.2-3		
4	黄Yellow	TJA5.2-4			TJA6.2-4			TJA8.2-4		
...	.....	.....			.....			.....		
9	黄Yellow	TJA5.2-9			TJA6.2-9			TJA8.2-9		
10	黄Yellow	TJA5.2-10			TJA6.2-10			TJA8.2-10		
闪电标记Front Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
5PCS 5片一条		*			*			*		
正面标记Front Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS		305801			306801			308801		
卷带标记（50米一卷）Winding marking (50 meters/roll)		TMZ9.6-50			TMZ9.6-50			TMZ9.6-50		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB5.2-120			TMB6.2-100			TMB8.2-50		








		2.5mm², 一进一出侧面接地端子 1-1 Feed Through 2.5mm² GROUND Terminal Block of Side-entry			4mm², 一进一出侧面接地端子 1-1 Feed Through 4mm² GROUND Terminal Block of Side-entry			6mm², 一进一出侧面接地端子 1-1 Feed Through 6mm² GROUND Terminal Block of Side-entry		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	5.2	50.5	35.2	6.2	50.5	35.2	8.2	61	42.2
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4	0.5-10	0.5-6	0.5-6
	[AWG]	26-12	26-12	26-12	26-10	26-10	26-10	20-8	20-8	20-8
其余参数Other Parameters										
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0		
剥线长度Strip length	[mm]	8-10			9-11			10-12		
		订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green	TPV2.5-2-PE			TPV4-2-PE			TPV6-2-PE		
		*			*			*		
		*			*			*		
		配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TPV2.5-2-GY-EA			TPV2.5-2-GY-EA			TPV6-2-GY-EA		
	橙Orange	TPV2.5-2-OG-EA			TPV2.5-2-OG-EA			TPV6-2-OG-EA		
	蓝Blue	TPV2.5-2-BU-EA			TPV2.5-2-BU-EA			TPV6-2-BU-EA		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*			*		
跨接件Jumper										
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA5.2-2			TJA6.2-2			TJA8.2-2		
3	黄Yellow	TJA5.2-3			TJA6.2-3			TJA8.2-3		
4	黄Yellow	TJA5.2-4			TJA6.2-4			TJA8.2-4		
...	.....	.....			.....			.....		
9	黄Yellow	TJA5.2-9			TJA6.2-9			TJA8.2-9		
10	黄Yellow	TJA5.2-10			TJA6.2-10			TJA8.2-10		
闪电标记Front Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
5PCS 5片一条		*			*			*		
正面标记Front Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS		305801			306801			308801		
卷带标记（50米一卷）Winding marking (50 meters/roll)		TMZ9.6-50			TMZ9.6-50			TMZ9.6-50		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB5.2-120			TMB6.2-100			TMB8.2-50		

TAPO系列大电流弹簧端子

TAPO high current spring terminal

地博TAPO系列大电流弹簧端子，工作电压高达1000V（IEC），最大额定电流232A；采用全不锈钢和紫铜金属材料，能够满足大电流负载连接的应用行业如铁路、风电、机械设备等。

DORABO TAPO series high current spring terminals, operating voltage up to 1000V (IEC), maximum rated current 232A; stainless steel and red copper metal materials are used, which can meet the severe application industries of high current load connection, such as railway, wind power, mechanical equipment, etc.

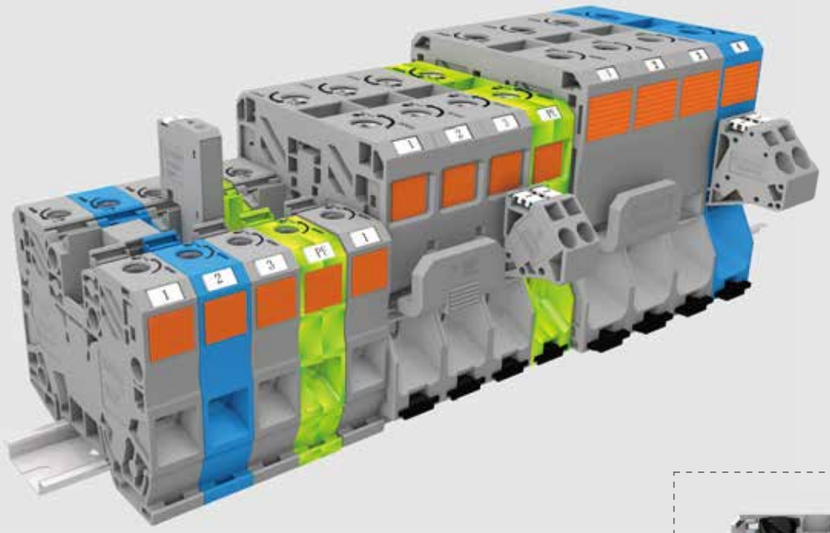



▲ 节省大量的接线成本和时间：得益于弹簧连接优异的抗振性和免维护性能，导线接入前无需做大量的预处理工作，单股硬导线、多股软导线都可以轻松接入。

▲ Save a lot of wiring costs and time：Benefit from the excellent vibration resistance and Maintenance-free function of the spring connection, there is no need to do a lot of pre-treatment before the wire is connected, and single strand hard wire and multi strand soft wire can be easily connected.

▲ 连接更快速更稳定可靠：使用8mm内六方扳手逆时针旋转打开进线孔完成导线安装；也可利用按压插锁，将进线孔维持弹簧打开状态，快速完成整条端子排导线安装。得益于弹簧连接强大的夹持力，导线锁紧程度不受操作人员的接线技术影响。

▲ Quick and safe connection: use an 8mm hexagonal wrench to rotate counterclockwise to open the incoming hole to complete the wire installation; also can press the plug-in lock to keep the inlet hole open state and quickly complete the installation of the entire terminal strip.Benefit from the strong clamping force, the wire locking tight is not affected by the operator's wiring technology.

▲ 模块化分线功能：使用等电位分线插头提前预制导线，轻松插入TAPO产品，实现大电流分线功能。

▲ Modular distribution function: use equipotential wiring plugs to prefabricate wires in advance, and easily insert TAPO products to realize high current distribution function.





		35mm²,大电流接线端子 High current terminal block			50mm²,大电流接线端子 High current terminal block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	16	86	70.8	20	94	93
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	1000	600		1000	600	
额定电流Rated Current	[A]	125	115		150	150	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	6-35	6-35	6-35	10-70	10-50	10-50
	[AWG]	10-2	10-2	10-2	8-1/0	8-1/0	8-1/0
螺钉类型Screw Type	[*]		*				
扭矩Torque	[N.m]		*				
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		25			30	
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TAPO35-2-GY			TAPO50-2-GY		
	橙Orange	TAPO35-2-OG			TAPO50-2-OG		
	蓝Blue	TAPO35-2-BU			TAPO50-2-BU		
		配套附件Accessory			配套附件Accessory		
端板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.		
分线插头Branching plug	灰Gray	TAAG6-1-GY			TAAG6-2-GY		
		*			*		
跨接件Jumper							
位数Poles No.		订货号Order NO.			订货号Order NO.		
2		TJEB16-2			TJEB20-2		
3		*			*		
4		*			*		
...		.....			.....		
9		*			*		
10		*			*		
闪电标记Front Marker		订货号Order NO.			订货号Order NO.		
1PCS 1片一条		WS-TAPO35			WS-TAPO50		
正面标记(小)Front Marker(Small)		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		254801			*		
正面标记(大)Front Marker(Big)		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		225801			225801		

备注：（所有连接导线的总电流不得超过产品的额定电流）

Mark: (Total current which connects to all the wires, cannot be over rated current).




95mm²,大电流接线端子
High current terminal block

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
25	91	101.3
IEC	UL	
1000	600	
232	200	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
25-95	25-95	25-95
4-4/0	4-4/0	4-4/0
	*	
	*	
V0		
35		

订货信息Order Information
订货号Order NO.
TAPO95-2-GY
TAPO95-2-OG
TAPO95-2-BU

配套附件Accessory
订货号Order NO.
TAAG10-2-GY
*
订货号Order NO.
TJEB25-2
*
*
.....
*
*
订货号Order NO.
WS-TAPO95
订货号Order NO.
*
订货号Order NO.
225801



35mm²,大电流接地端子
High current ground terminal block

技术参数Technical Parameter				
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	16	86	70.8
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	6-35	6-35	6-35
	[AWG]	10-2	10-2	10-2
螺钉类型Screw Type	[*]		*	
扭矩Torque	[N.m]		*	
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	25		

订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	黄绿Yellow green	TAPO35-2-PE
	*	*
	*	*

配套附件Accessory		
端板Cover Plate	颜色Colour	订货号Order NO.
分线插头Branching plug	灰Gray	TAAG6-1-GY
		*
跨接件Jumper		
位数Poles No.		订货号Order NO.
2		*
3		*
4		*
...		.....
9		*
10		*
闪电标记Front Marker		订货号Order NO.
1PCS 1片一条		WS-TAPO35
正面标记(小)Front Marker(Small)		订货号Order NO.
可提供印字服务Printing Service		254801
正面标记(大)Front Marker(Big)		订货号Order NO.
可提供印字服务Printing Service		225801



50mm²,大电流接地端子
High current ground terminal block

技术参数Technical Parameter				
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	20	94	93
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	10-70	10-50	10-50
	[AWG]	8-1/0	8-1/0	8-1/0
螺钉类型Screw Type	[*]		*	
扭矩Torque	[N.m]		*	
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		* V0		
剥线长度Strip length	[mm]	30		

订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 **Can Be Used For DIN Rail** **NS 35/7.5**	黄绿Yellow green	TAPO50-2-PE
	*	*
	*	*

* 配套附件Accessory		
端板Cover Plate	颜色Colour	订货号Order NO.
分线插头Branching plug	灰Gray	TAAG6-2-GY
		*
跨接件Jumper		
位数Poles No.		订货号Order NO.
2	*	TJEB20-2
3		*
4		*
...		*
9		.....
10		*
闪电标记Front Marker		订货号Order NO.
1PCS 1片一条		WS-TAPO50
正面标记(小)Front Marker(Small)		订货号Order NO.
可提供印字服务Printing Service		*
正面标记(大)Front Marker(Big)		订货号Order NO.
可提供印字服务Printing Service		225801



95mm²,大电流接地端子
High current ground terminal block

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
25	91	101.3
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
25-95	25-95	25-95
4-4/0	4-4/0	4-4/0
	*	
	*	
V0		
35		

订货信息Order Information
订货号Order NO.
TAPO95-2-PE
*
*

配套附件Accessory
订货号Order NO.
TAAG10-2-GY
*
订货号Order NO.
TJEB25-2
*
*
.....
*
*
订货号Order NO.
WS-TAPO95
订货号Order NO.
*
订货号Order NO.
225801

备注：（所有连接导线的总电流不得超过产品的额定电流）


Mark: (Total current which connects to all the wires, cannot be over rated current).

TC系列弹簧接线端子


TC Rail-mounted Terminal Blocks With Spring-cage Clamp

TC系列弹簧接线端子采用笼式弹簧接线技术，具有节约空间的设计和最优接线方案两大特点。产品广泛应用于电梯、轨道交通、船舶、楼宇智能、重型设备及工业自动化等领域。产品设计制造符合IEC/EN60947、UL1059等相关国际标准。

TC series spring-cage terminal blocks adopt spring cage technology, which have 2 advantages, one is saving design space and the other one is best wire connection solution. The products can be widely used in elevator, rail way industry, ship building, building wire, heavy duty equipment, automation industry etc. The product design and manufacturing in line with relevant international standards such as IEC60947, UL1059.

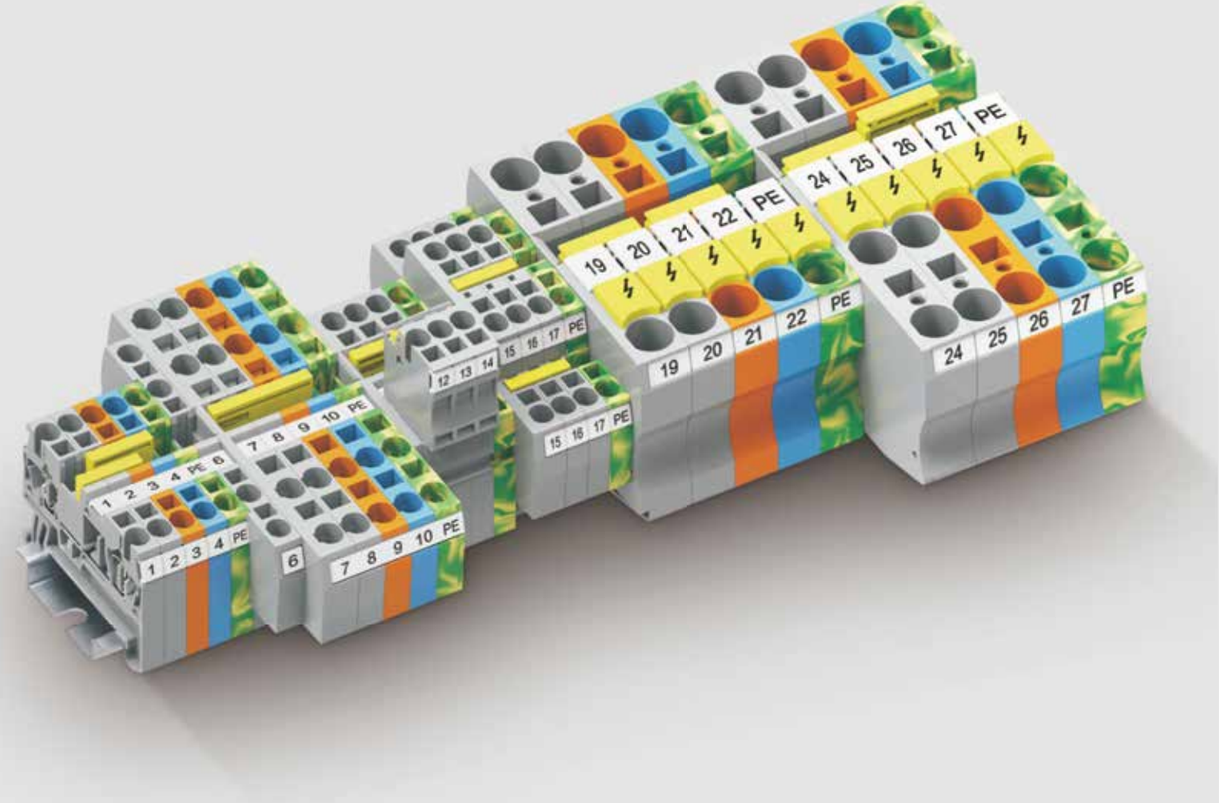


产品技术 Product Technology

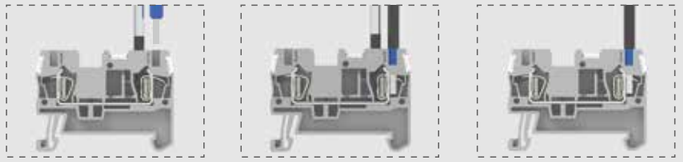

▲ 采用笼式弹簧接线技术，拥有更大的锁线力，能保证端子在震动环境中长期稳定的工作。
▲ 使用标准螺丝刀打开弹簧后将导线插入接线孔内，移除螺丝刀口即完成接线工作。
▲ 产品不单可接额定接线范围的软硬线，也可接额定接线范围带绝缘管套冷压头，最大接线容量可达35mm²。

▲ Spring-cage connection technology has more locking force, which makes sure steady working in vibration surrounding.
▲ Easy operation: open the spring by screwdriver, insert wire. It' s done when removing the screw driver.
▲ It' s workable not only for solid or flexible wire by the rated cross section, but also for wire with furrule by the rated cross section. Max wire cross section is 35mm².



标识 Marking

▲ 采用三侧标识位设计，可在多个角度位置观察到端子标识，方便操作。


▲The marker are designed by 3 sides to make it easy to be observed, which makes operation easier.



接地端子 Ground Terminal Block

▲ 使用黄绿色绝缘外壳，尺寸外形与接线端子相同。
▲ 端子满足IEC60947-7-2标准中的要求。

▲Used the green-yellow insulation shell, the dimension is same as terminal blocks.
▲Approval for IEC 60947-7-2.



跨接系统 Jumper System

▲ 采用双排跨接槽设计，跨接件最多可达10极，可实现多种复杂的电路设计。

▲Adopting double row jumper slot design, the jumper can reach up to 10 pins at most, can achieve many kinds of complicated circuit design.



跳接 Staggered Jumper

▲ 折断跨接间的金属齿，可实现不相邻端子间的跨接


▲The adjacent poles can be connected by breaking down the comb's pin.



补偿端板 Compensatory Plate

▲ 不同位数端子并排拼接时，补偿端板可封闭裸露的载流体与夹紧件。


▲The compensatory plates can be used to pretend from conductor parts when different poles terminal blocks assemble.



双层接线端子 Double-level Feed Through Terminal Block

▲ 双层端子上下两层即可实现独立工作也可实现两层间相互连接，其优点在于的空间内相比较传统两进两出端子长度大大节省。
▲ 双层端子的标识系统、跨接系统等附件可与TC系列产品共用。

▲The up or down level can work separately or connected. It can connect more wires in same length than 2-2 terminal blocks.
▲It shares the accessory like markers jumpers with TC series.



两进两出分段式接线端子 2-2 Feed Through Terminal Block With Interrupted Power Rail

▲ 两进两出分断式端子相较两进两出接线端子其载流体为中间断开结构，在同一端子的两侧实现两个独立的电位。
▲ 一侧电位可使用跨接桥进行多位置桥接件与夹紧件。


▲The conduction part is divided in middle compared to normal 2-2 terminal blocks. Which can get 2 individual circuits on a terminal block both sides.
▲And bridges can connected at random on one side.





插拔式接线端子 Pluggable Terminal Block


▲ 带插拔功能接线端子将TC回拉式弹簧接线端子与插头相结合，提供了灵活的连接方式。
▲ 插头与插座都带有防触摸保护，端子与插头都可接入电源。
▲ 插头可实现单根导线连接、两根导线连接，还可实现跨接件连通多位插头。
▲ 插头可按客户需求提供多位数，最高可达15位，并且提供灰、蓝、橙、黄绿多种颜色。

▲ It joins from TC spring-cage connection terminal blocks and plug. Which get flexible connection solution.
▲ Both Plug-in and plug parts are protection against electric shock. Both can be connected to electricity.
▲ Plug can be connected by single or double wires. Or multil plugs connected by bridges.
▲ Plug can be provided from 2-15 poles. And gray, blue, orange, yellow—green colors are available.













		1.5mm² 一进一出接线端子 1-1 Feed Through Terminal Block			2.5mm² 一进一出接线端子 1-1 Feed Through Terminal Block			4mm² 一进一出接线端子 1-1 Feed Through Terminal Block			6mm² 一进一出接线端子 1-1 Feed Through Terminal Block			10mm² 一进一出接线端子 1-1 Feed Through Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	4.2	48.2	36.8	5.2	48.2	36.8	6.2	56.2	36.8	8.2	69.5	43.5	10.2	71.5	49.6
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	500	300		800	600		800	600		1000	600		1000	600	
额定电流Rated Current	[A]	17.5	15		24	20		32	30		41	50		57	65	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm^2]	0.2-1.5	0.2-1.5	0.2-1.5	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4	0.2-10	0.2-6	0.2-6	0.2-16	0.2-10	0.2-10
	[AWG]	24-16	24-16	24-16	24-12	24-12	24-12	24-10	24-10	24-10	24-8	24-8	24-8	24-6	24-6	24-6
其余参数Other Parameters																
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0			V0			V0			V0	
剥线长度Strip length	[mm]		10			10			10			12			18	
		订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5 NS 35/15导轨 **Can Be Used For DIN Rail** **NS 35/7.5 NS35/15**	灰Gray	TC1.5-2-GY			TC2.5-2-GY			TC4-2-GY			TC6-2-GY			TC10-2-GY		
	橙Orange	TC1.5-2-OG			TC2.5-2-OG			TC4-2-OG			TC6-2-OG			TC10-2-OG		
	蓝Blue	TC1.5-2-BU			TC2.5-2-BU			TC4-2-BU			TC6-2-BU			TC10-2-BU		
		配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TC1.5-2-GY-EA			TC1.5-2-GY-EA			TC4-2-GY-EA			TC6-2-GY-EA			TC10-2-GY-EA		
	橙Orange	TC1.5-2-OG-EA			TC1.5-2-OG-EA			TC4-2-OG-EA			TC6-2-OG-EA			TC10-2-OG-EA		
	蓝Blue	TC1.5-2-BU-EA			TC1.5-2-BU-EA			TC4-2-BU-EA			TC6-2-BU-EA			TC10-2-BU-EA		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	TC1.5-4-GY-EB			TC1.5-4-GY-EB			TC4-4-GY-EB			*			*		
跨接件Jumper		**Imax/17.5A**			**Imax/24A**			**Imax/32A**			**Imax/41A**			**Imax/57A**		
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA4.2-2			TJA5.2-2			TJA6.2-2			TJA8.2-2			TJA10.2-2		
3	黄Yellow	TJA4.2-3			TJA5.2-3			TJA6.2-3			TJA8.2-3			*		
4	黄Yellow	TJA4.2-4			TJA5.2-4			TJA6.2-4			TJA8.2-4			*		
...	.....	.....			.....			.....			.....			.....		
9	黄Yellow	TJA4.2-9			TJA5.2-9			TJA6.2-9			TJA8.2-9			*		
10	黄Yellow	TJA4.2-10			TJA5.2-10			TJA6.2-10			TJA8.2-10			*		
安全警告标记 **Protective Warning Marker**		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5位PCS		TMD4.2-5			TMD5.2-5			TMD6.2-5			TMD8.2-5			TMD10.2-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS		*			305801			306801			308801			TMB10.2-10		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB4.2-100			TMB5.2-120			TMB6.2-100			TMB8.2-50			TMB8.2-50		


备注：（所有连接导线的总电流不得超过产品的额定电流）


Mark: (Total current which connects to all the wires, cannot be over rated current).

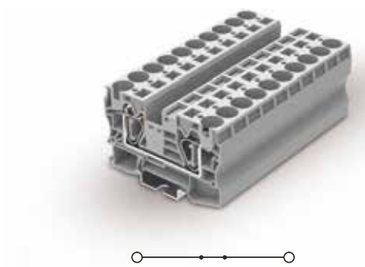



		16mm² 一进一出接线端子 1-1 Feed Through Terminal Block			35mm² 一进一出接线端子 1-1 Feed Through Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	12.2	80	51.5	16.1	100	59
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	1000	600		1000	600	
额定电流Rated Current	[A]	76	85		125	115	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-25	0.2-16	0.25-16	2.5-35	2.5-35	2.5-35
	[AWG]	24-4	24-4	24-4	14-2	14-2	14-2
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		18			25	
产品Product	颜色Colour	订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.		
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15	灰Gray	TC16-2-GY			TC35-2-GY		
	橙Orange	TC16-2-OG			TC35-2-OG		
	蓝Blue	TC16-2-BU			TC35-2-BU		
		配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TC16-2-GY-EA			*		
	橙Orange	TC16-2-OG-EA			*		
	蓝Blue	TC16-2-BU-EA			*		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*		
跨接件Jumper							
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA12.2-2			TJA16-2		
3	黄Yellow	*			*		
4	黄Yellow	*			*		
...	.....	.....			.....		
9	黄Yellow	*			*		
10	黄Yellow	*			*		
安全警告标记 Protective Warning Marker		订货号Order NO.			订货号Order NO.		
5位PCS		TMD10.2-5			TMD10.2-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.		
10位PCS		TMB10.2-10			TMB10.2-10		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB8.2-50			TMB8.2-50		








		1.5mm² 一进一出接地端子 1-1 Feed Through Ground Terminal Block			2.5mm² 一进一出接地端子 1-1 Feed Through Ground Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	4.2	48.2	36.8	5.2	48.2	36.8
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	500	300		800	600	
额定电流Rated Current	[A]	*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-1.5	0.2-1.5	0.2-1.5	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	24-16	24-16	24-16	24-12	24-12	24-12
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		10			10	
产品Product	颜色Colour	订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.		
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15	黄绿Yellow green	TC1.5-2-PE			TC2.5-2-PE		
	*	*			*		
	*	*			*		
		配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TC1.5-2-GY-EA			TC1.5-2-GY-EA		
	橙Orange	TC1.5-2-OG-EA			TC1.5-2-OG-EA		
	蓝Blue	TC1.5-2-BU-EA			TC1.5-2-BU-EA		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	TC1.5-4-GY-EB			TC1.5-4-GY-EB		
跨接件Jumper							
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.		
2	黄Yellow	*			*		
3	黄Yellow	*			*		
4	黄Yellow	*			*		
...	.....	.....			.....		
9	黄Yellow	*			*		
10	黄Yellow	*			*		
安全警告标记 Protective Warning Marker		订货号Order NO.			订货号Order NO.		
5位PCS		TMD4.2-5			TMD5.2-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.		
10位PCS		*			305801		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB4.2-100			TMB5.2-120		


备注：（所有连接导线的总电流不得超过产品的额定电流）


Mark: (Total current which connects to all the wires, cannot be over rated current).

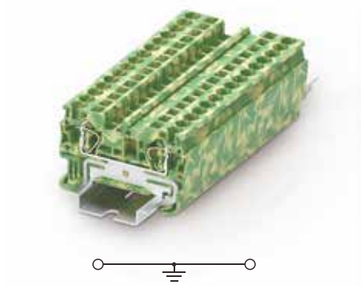

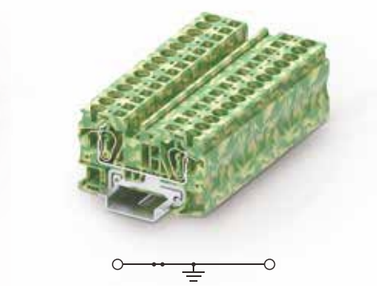



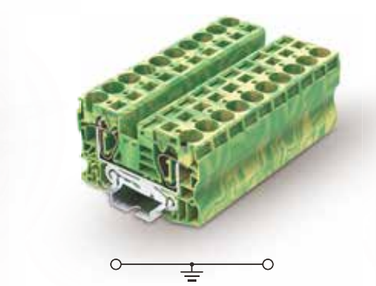

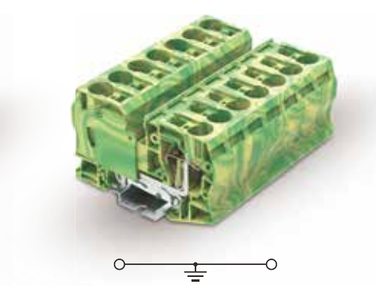



		4mm² 一进一出接地端子 1-1 Feed Through Ground Terminal Block			6mm² 一进一出接地端子 1-1 Feed Through Ground Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	6.2	56.2	36.8	8.2	69.5	43.5
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	600		1000	600	
额定电流Rated Current	[A]	*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-6	0.2-4	0.2-4	0.2-10	0.2-6	0.2-6
	[AWG]	24-10	24-10	24-10	24-8	24-8	24-8
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		10			12	
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail	黄绿Yellow green	TC4-2-PE			TC6-2-PE		
	*	*			*		
NS 35/7.5 NS35/15	*	*			*		
		配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TC4-2-GY-EA			TC6-2-GY-EA		
	橙Orange	TC4-2-OG-EA			TC6-2-OG-EA		
	蓝Blue	TC4-2-BU-EA			TC6-2-BU-EA		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	TC4-4-GY-EB			*		
跨接件Jumper							
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.		
2	黄Yellow	*			TJA8.2-2		
3	黄Yellow	*			TJA8.2-3		
4	黄Yellow	*			TJA8.2-4		
...	.....	.....			.....		
9	黄Yellow	*			TJA8.2-9		
10	黄Yellow	*			TJA8.2-10		
安全警告标记 Protective Warning Marker		订货号Order NO.			订货号Order NO.		
5位PCS		TMD6.2-5			TMD8.2-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.		
10位PCS		306801			308801		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB6.2-100			TMB8.2-50		


		10mm² 一进一出接地端子 1-1 Feed Through Ground Terminal Block			16mm² 一进一出接地端子 1-1 Feed Through Ground Terminal Block			35mm² 一进一出接地端子 1-1 Feed Through Ground Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	10.2	71.5	49.6	12.2	80	51.5	16.1	100	59
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	600		1000	600		1000	600	
额定电流Rated Current	[A]	*	*		*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-16	0.2-10	0.2-10	0.2-25	0.2-16	0.25-16	2.5-35	2.5-35	2.5-35
	[AWG]	24-6	24-6	24-6	24-4	24-4	24-4	14-2	14-2	14-2
其余参数Other Parameters										
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0			V0	
剥线长度Strip length	[mm]		18			18			25	
		订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail	黄绿Yellow green	TC10-2-PE			TC16-2-PE			TC35-2-PE		
	*	*			*			*		
NS 35/7.5 NS35/15	*	*			*			*		
		配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TC10-2-GY-EA			TC16-2-GY-EA			*		
	橙Orange	TC10-2-OG-EA			TC16-2-OG-EA			*		
	蓝Blue	TC10-2-BU-EA			TC16-2-BU-EA			*		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	TC10-4-GY-EB			*			*		
跨接件Jumper										
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	黄Yellow	*			*			*		
3	黄Yellow	*			*			*		
4	黄Yellow	*			*			*		
...	.....	.....			.....			.....		
9	黄Yellow	*			*			*		
10	黄Yellow	*			*			*		
安全警告标记 Protective Warning Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
5位PCS		TMD10.2-5			TMD10.2-5			TMD10.2-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS		310801			TMB10.2-10			TMB10.2-10		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB10.2-10			TMB8.2-50			TMB8.2-50		


备注：（所有连接导线的总电流不得超过产品的额定电流）


Mark: (Total current which connects to all the wires, cannot be over rated current).














	1.5mm² 一进两出接线端子 1.5mm² 1-2 Feed Through Terminal Block			2.5mm² 一进两出接线端子 2.5mm² 1-2 Feed Through Terminal Block			4mm² 一进两出接线端子 1-2 Feed Through Terminal Block			6mm² 一进两出接线端子 1-2 Feed Through Terminal Block			10mm² 一进两出接线端子 1-2 Feed Through Terminal Block		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5 [mm]	4.2	60.2	36.8	5.2	60.2	36.8	6.2	71.8	36.8	8.2	90.5	43.5	10.2	97	50.4
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	500	300		800	600		800	600		1000	600		1000	600	
额定电流Rated Current [A]	17.5	15		24	20		32	30		41	50		57	65	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-1.5	0.2-1.5	0.2-1.5	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4	0.2-10	0.2-6	0.2-6	0.2-16	0.2-10	0.2-10
[AWG]	24-16	24-16	24-16	24-12	24-12	24-12	24-10	24-10	24-10	24-8	24-8	24-8	24-6	24-6	24-6
其余参数Other Parameters															
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0			V0	
剥线长度Strip length [mm]		10			10			10			12			18	
产品Product 颜色Colour	订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.		
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15 灰Gray	TC1.5-3-GY			TC2.5-3-GY			TC4-3-GY			TC6-3-GY			TC10-3-GY		
橙Orange	TC1.5-3-OG			TC2.5-3-OG			TC4-3-OG			TC6-3-OG			TC10-3-OG		
蓝Blue	TC1.5-3-BU			TC2.5-3-BU			TC4-3-BU			TC6-3-BU			TC10-3-BU		
	配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
灰Gray	TC1.5-3-GY-EA			TC1.5-3-GY-EA			TC4-3-GY-EA			TC6-3-GY-EA			TC10-3-GY-EA		
厚度2.2mm Thickness2.2mm 橙Orange	TC1.5-3-OG-EA			TC1.5-3-OG-EA			TC4-3-OG-EA			TC6-3-OG-EA			TC10-3-OG-EA		
蓝Blue	TC1.5-3-BU-EA			TC1.5-3-BU-EA			TC4-3-BU-EA			TC6-3-BU-EA			TC10-3-BU-EA		
补偿端板Compensatory Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm 灰Gray	TC1.5-4-GY-EB			TC1.5-4-GY-EB			TC4-4-GY-EB			*			*		
跨接件Jumper	**Imax/17.5A**			**Imax/24A**			**Imax/32A**			**Imax/41A**			**Imax/57A**		
位数Poles No. 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2 黄Yellow	TJA4.2-2			TJA5.2-2			TJA6.2-2			TJA8.2-2			TJA10.2-2		
3 黄Yellow	TJA4.2-3			TJA5.2-3			TJA6.2-3			TJA8.2-3			*		
4 黄Yellow	TJA4.2-4			TJA5.2-4			TJA6.2-4			TJA8.2-4			*		
... .	.....			.....			.....			.....			.....		
9 黄Yellow	TJA4.2-9			TJA5.2-9			TJA6.2-9			TJA8.2-9			*		
10 黄Yellow	TJA4.2-10			TJA5.2-10			TJA6.2-10			TJA8.2-10			*		
安全警告标记 Protective Warning Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5位PCS	TMD4.2-5			TMD5.2-5			TMD6.2-5			TMD8.2-5			TMD10.2-5		
正面标记Front Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS	*			305801			306801			308801			TMB10.2-10		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	TMB4.2-100			TMB5.2-120			TMB6.2-100			TMB8.2-50			TMB8.2-50		


备注：（所有连接导线的总电流不得超过产品的额定电流）


Mark: (Total current which connects to all the wires, cannot be over rated current).







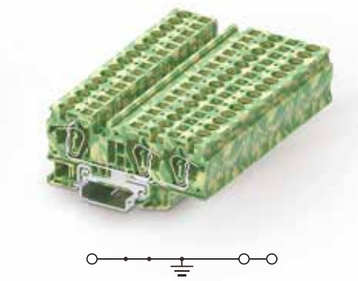






	1.5mm² 一进两出接地端子 1-2 Feed Through Ground Terminal Block			2.5mm² 一进两出接地端子 1-2 Feed Through Ground Terminal Block			4mm² 一进两出接地端子 1-2 Feed Through Ground Terminal Block			6mm² 一进两出接地端子 1-2 Feed Through Ground Terminal Block			10mm² 一进两出接地端子 1-2 Feed Through Ground Terminal Block		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5 [mm]	4.2	60.2	36.8	5.2	60.2	36.8	6.2	71.8	36.8	8.2	90.5	43.5	10.2	97	50.4
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	500	300		800	600		800	600		1000	600		1000	600	
额定电流Rated Current [A]	*	*		*	*		*	*		*	*		*	*	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-1.5	0.2-1.5	0.2-1.5	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4	0.2-10	0.2-6	0.2-6	0.2-16	0.2-10	0.2-10
[AWG]	24-16	24-16	24-16	24-12	24-12	24-12	24-10	24-10	24-10	24-8	24-8	24-8	24-6	24-6	24-6
其余参数Other Parameters															
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0			V0	
剥线长度Strip length [mm]		10			10			10			12			18	
产品Product 颜色Colour	订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.		
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail 黄绿Yellow green	TC1.5-3-PE			TC2.5-3-PE			TC4-3-PE			TC6-3-PE			TC10-3-PE		
NS 35/7.5 *	*			*			*			*			*		
NS35/15 *	*			*			*			*			*		
	配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm 灰Gray	TC1.5-3-GY-EA			TC1.5-3-GY-EA			TC4-3-GY-EA			TC6-3-GY-EA			TC10-3-GY-EA		
橙Orange	TC1.5-3-OG-EA			TC1.5-3-OG-EA			TC4-3-OG-EA			TC6-3-OG-EA			TC10-3-OG-EA		
蓝Blue	TC1.5-3-BU-EA			TC1.5-3-BU-EA			TC4-3-BU-EA			TC6-3-BU-EA			TC10-3-BU-EA		
补偿端板Compensatory Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm 灰Gray	TC1.5-4-GY-EB			TC1.5-4-GY-EB			TC4-4-GY-EB			*			*		
跨接件Jumper															
位数Poles No. 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2 黄Yellow	*			*			*			TJA8.2-2			TJA10.2-2		
3 黄Yellow	*			*			*			TJA8.2-3			*		
4 黄Yellow	*			*			*			TJA8.2-4			*		
... .	.....			.....			.....			.....			.....		
9 黄Yellow	*			*			*			TJA8.2-9			*		
10 黄Yellow	*			*			*			TJA8.2-10			*		
安全警告标记 Protective Warning Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5位PCS	TMD4.2-5			TMD5.2-5			TMD6.2-5			TMD8.2-5			TMD10.2-5		
正面标记Front Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS	*			305801			306801			308801			TMB10.2-10		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	TMB4.2-100			TMB5.2-120			TMB6.2-100			TMB8.2-50			TMB8.2-50		

备注：（所有连接导线的总电流不得超过产品的额定电流）

Mark: (Total current which connects to all the wires, cannot be over rated current).









		1.5mm² 两进两出接线端子 2-2 Feed Through Terminal Block			2.5mm² 两进两出接线端子 2-2 Feed Through Terminal Block			4mm² 两进两出接线端子 2-2 Feed Through Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	4.2	72.2	36.8	5.2	72.2	36.8	6.2	87.4	36.8
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	500	300		800	600		800	600	
额定电流Rated Current	[A]	17.5	15		24	20		32	30	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm^2]	0.2-1.5	0.2-1.5	0.2-1.5	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4
	[AWG]	24-16	24-16	24-16	24-12	24-12	24-12	24-10	24-10	24-10
其余参数Other Parameters										
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0			V0	
剥线长度Strip length	[mm]		10			10			10	


			订货信息Order Information	订货信息Order Information	订货信息Order Information
产品Product	颜色Colour		订货号Order NO.	订货号Order NO.	订货号Order NO.
适配NS 35/7.5 NS 35/15导轨 **Can Be Used For DIN Rail** **NS 35/7.5 NS35/15**	灰Gray		TC1.5-4-GY	TC2.5-4-GY	TC4-4-GY
	橙Orange		TC1.5-4-OG	TC2.5-4-OG	TC4-4-OG
	蓝Blue		TC1.5-4-BU	TC2.5-4-BU	TC4-4-BU
			配套附件Accessory	配套附件Accessory	配套附件Accessory
端板Cover Plate			订货号Order NO.	订货号Order NO.	订货号Order NO.
厚度2.2mm Thickness2.2mm	灰Gray		TC1.5-4-GY-EA	TC1.5-4-GY-EA	TC4-4-GY-EA
	橙Orange		TC1.5-4-OG-EA	TC1.5-4-OG-EA	TC4-4-OG-EA
	蓝Blue		TC1.5-4-BU-EA	TC1.5-4-BU-EA	TC4-4-BU-EA
补偿端板Compensatory Plate			订货号Order NO.	订货号Order NO.	订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray		TC1.5-4-GY-EB	TC1.5-4-GY-EB	TC4-4-GY-EB
跨接件Jumper			**Imax/17.5A**	**Imax/24A**	**Imax/32A**
位数Poles No.	颜色Colour		订货号Order NO.	订货号Order NO.	订货号Order NO.
2	黄Yellow		TJA4.2-2	TJA5.2-2	TJA6.2-2
3	黄Yellow		TJA4.2-3	TJA5.2-3	TJA6.2-3
4	黄Yellow		TJA4.2-4	TJA5.2-4	TJA6.2-4
...	—		.....	.....	.....
9	黄Yellow		TJA4.2-9	TJA5.2-9	TJA6.2-9
10	黄Yellow		TJA4.2-10	TJA5.2-10	TJA6.2-10
安全警告标记 **Protective Warning Marker**			订货号Order NO.	订货号Order NO.	订货号Order NO.
5位PCS			TMD4.2-5	TMD5.2-5	TMD6.2-5
正面标记Front Marker			订货号Order NO.	订货号Order NO.	订货号Order NO.
10位PCS			*	305801	306801
正面标记和侧面标记Front And Side Marker			订货号Order NO.	订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service			TMB4.2-100	TMB5.2-120	TMB6.2-100

备注：（所有连接导线的总电流不得超过产品的额定电流）

Mark: (Total current which connects to all the wires, cannot be over rated current).

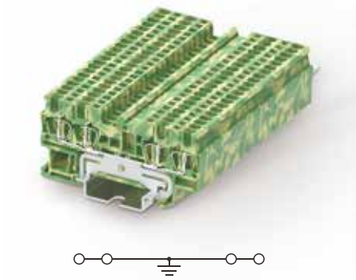






	1.5mm² 两进两出接地端子 2-2 Feed Through Ground Terminal Block			2.5mm² 两进两出接地端子 2-2 Feed Through Ground Terminal Block			4mm² 两进两出接地端子 2-2 Feed Through Ground Terminal Block		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5 [mm]	4.2	72.2	36.8	5.2	72.2	36.8	6.2	87.4	36.8
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	500	300		800	600		800	600	
额定电流Rated Current [A]	*	*		*	*		*	*	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm^2]	0.2-1.5	0.2-1.5	0.2-1.5	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4
[AWG]	24-16	24-16	24-16	24-12	24-12	24-12	24-10	24-10	24-10
其余参数Other Parameters									
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0	
剥线长度Strip length [mm]		10			10			10	


	订货信息Order Information	订货信息Order Information	订货信息Order Information
产品Product 颜色Colour	订货号Order NO.	订货号Order NO.	订货号Order NO.
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail 黄绿Yellow green	TC1.5-4-PE	TC2.5-4-PE	TC4-4-PE
NS 35/7.5 *	*	*	*
NS35/15 *	*	*	*


	配套附件Accessory	配套附件Accessory	配套附件Accessory
端板Cover Plate	订货号Order NO.	订货号Order NO.	订货号Order NO.
厚度2.2mm Thickness2.2mm 灰Gray	TC1.5-4-GY-EA	TC1.5-4-GY-EA	TC4-4-GY-EA
橙Orange	TC1.5-4-OG-EA	TC1.5-4-OG-EA	TC4-4-OG-EA
蓝Blue	TC1.5-4-BU-EA	TC1.5-4-BU-EA	TC4-4-BU-EA
补偿端板Compensatory Plate	订货号Order NO.	订货号Order NO.	订货号Order NO.
厚度1.00mm Thickness1.00mm 灰Gray	TC1.5-4-GY-EB	TC1.5-4-GY-EB	TC4-4-GY-EB
跨接件Jumper			
位数Poles No. 颜色Colour	订货号Order NO.	订货号Order NO.	订货号Order NO.
2 黄Yellow	*	*	*
3 黄Yellow	*	*	*
4 黄Yellow	*	*	*
... .	.....	.....	.....
9 黄Yellow	*	*	*
10 黄Yellow	*	*	*
安全警告标记 Protective Warning Marker	订货号Order NO.	订货号Order NO.	订货号Order NO.
5位PCS	TMD4.2-5	TMD5.2-5	TMD6.2-5
正面标记Front Marker	订货号Order NO.	订货号Order NO.	订货号Order NO.
10位PCS	*	305801	306801
正面标记和侧面标记Front And Side Marker	订货号Order NO.	订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service	TMB4.2-100	TMB5.2-120	TMB6.2-100

备注：（所有连接导线的总电流不得超过产品的额定电流）

Mark: (Total current which connects to all the wires, cannot be over rated current).










	1.5mm² 两进两出分断式接线端子 2×2 Feed Through Disconnect Terminal Block			2.5mm² 两进两出分断式接线端子 2×2 Feed Through Disconnect Terminal Block			4mm² 两进两出分断式接线端子 2×2 Feed Through Disconnect Terminal Block		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5 [mm]	4.2	72.2	36.8	5.2	72.2	36.8	6.2	87.4	36.8
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	500	300		800	600		800	600	
额定电流Rated Current [A]	17.5	15		24	20		32	30	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]	0.2-1.5	0.2-1.5	0.2-1.5	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4
[AWG]	24-16	24-16	24-16	24-12	24-12	24-12	24-10	24-10	24-10
其余参数Other Parameters									
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0	
剥线长度Strip length [mm]		10			10			10	
产品Product 颜色Colour	订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.		
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15 灰Gray	TC1.5-2X2-GY			TC2.5-2X2-GY			TC4-2X2-GY		
橙Orange	TC1.5-2X2-OG			TC2.5-2X2-OG			TC4-2X2-OG		
蓝Blue	TC1.5-2X2-BU			TC2.5-2X2-BU			TC4-2X2-BU		
	配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板**Cover Plate**	订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm 灰Gray	TC1.5-4-GY-EA			TC1.5-4-GY-EA			TC4-4-GY-EA		
橙Orange	TC1.5-4-OG-EA			TC1.5-4-OG-EA			TC4-4-OG-EA		
蓝Blue	TC1.5-4-BU-EA			TC1.5-4-BU-EA			TC4-4-BU-EA		
补偿端板**Compensatory Plate**	订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm 灰Gray	TC1.5-4-GY-EB			TC1.5-4-GY-EB			TC4-4-GY-EB		
跨接件**Jumper**	**Imax/17.5A**			**Imax/24A**			**Imax/32A**		
位数Poles No. 颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2 黄Yellow	TJA4.2-2			TJA5.2-2			TJA6.2-2		
3 黄Yellow	TJA4.2-3			TJA5.2-3			TJA6.2-3		
4 黄Yellow	TJA4.2-4			TJA5.2-4			TJA6.2-4		
... .	.....			.....			.....		
9 黄Yellow	TJA4.2-9			TJA5.2-9			TJA6.2-9		
10 黄Yellow	TJA4.2-10			TJA5.2-10			TJA6.2-10		
安全警告标记 Protective Warning Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.		
5位PCS	TMD4.2-5			TMD5.2-5			TMD6.2-5		
正面标记Front Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS	*			305801			306801		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	TMB4.2-100			TMB5.2-120			TMB6.2-100		


备注：（所有连接导线的总电流不得超过产品的额定电流）

Mark: (Total current which connects to all the wires, cannot be over rated current).



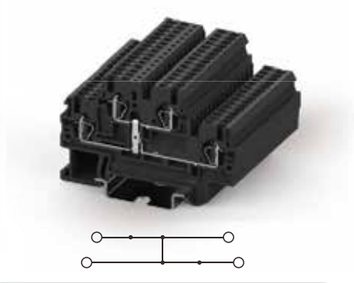



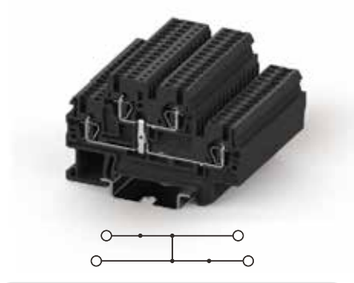



		1.5mm² 双层接线端子 Double Level Terminal Blcok			1.5mm² 双层等电位接线端子 Double Level With Equipotential Bonder Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	3.5	68	43.4	3.5	68	43.4
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	500	300		500	300	
额定电流Rated Current	[A]	16	15		16	15	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-1.5	0.2-1.5	0.2-1	0.2-1.5	0.2-1.5	0.2-1
	[AWG]	26-14	26-14	18-14	26-14	26-14	18-14
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		10			10	
产品Product	颜色Colour	订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.		
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15	灰Gray	TCD1.5-2-GY			TCD1.5-2-PV(黑色)		
	橙Orange	TCD1.5-2-OG			*		
	蓝Blue	TCD1.5-2-BU			*		
		配套附件Accessory			配套附件Accessory		
端板**Cover Plate**		订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TCD1.5-2-GY-EA			TCD1.5-2-GY-EA		
	橙Orange	TCD1.5-2-OG-EA			TCD1.5-2-OG-EA		
	蓝Blue	TCD1.5-2-BU-EA			TCD1.5-2-BU-EA		
补偿端板**Compensatory Plate**		订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*		
跨接件**Jumper**		**Imax/24A**			**Imax/24A**		
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.		
2	黄Yellow	2150-302			2150-302		
3	黄Yellow	2150-303			2150-303		
4	黄Yellow	2150-304			2150-304		
...	.....	.....			.....		
9	黄Yellow	2150-309			2150-309		
10	黄Yellow	2150-310			2150-310		
安全警告标记 Protective Warning Marker		订货号Order NO.			订货号Order NO.		
5位PCS		*			*		
正面标记Front Marker		订货号Order NO.			订货号Order NO.		
10位PCS		*			*		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB3.5-100			TMB3.5-100		

		2.5mm² 双层接线端子 Double Level Terminal Blcok			2.5mm² 双层等电位接线端子 Double Level With Equipotential Bonder Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
		5.2	68	47.5	5.2	68	47.5
		IEC	UL		IEC	UL	
		500	600		500	600	
		22	20		22	20	
		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
		0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5
		24-12	24-12	24-12	24-12	24-12	24-12
			V0			V0	
			10			10	
		订货信息Order Information			订货信息Order Information		
		订货号Order NO.			订货号Order NO.		
		TCD2.5-2-GY			TCD2.5-2-PV(黑色)		
		TCD2.5-2-OG			*		
		TCD2.5-2-BU			*		
		配套附件Accessory			配套附件Accessory		
		订货号Order NO.			订货号Order NO.		
		TCD2.5-2-GY-EA			TCD2.5-2-GY-EA		
		TCD2.5-2-OG-EA			TCD2.5-2-OG-EA		
		TCD2.5-2-BU-EA			TCD2.5-2-BU-EA		
		订货号Order NO.			订货号Order NO.		
		*			*		
		Imax/20A			**Imax/20A**		
		订货号Order NO.			订货号Order NO.		
		TJA5.2-2			TJA5.2-2		
		TJA5.2-3			TJA5.2-3		
		TJA5.2-4			TJA5.2-4		
		.....			.....		
		TJA5.2-9			TJA5.2-9		
		TJA5.2-10			TJA5.2-10		
		订货号Order NO.			订货号Order NO.		
		TMD5.2-5			TMD5.2-5		
		订货号Order NO.			订货号Order NO.		
		*			*		
		订货号Order NO.			订货号Order NO.		
		TMB5.2-120			TMB5.2-120		


备注：（所有连接导线的总电流不得超过产品的额定电流）


Mark: (Total current which connects to all the wires, cannot be over rated current).





		1.5mm² 双层等电位接地端子 Double Level With Equipotential Bonder Ground Terminal Block			2.5mm² 双层等电位接地端子 Double Level With Equipotential Bonder Ground Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	3.5	68	43.4	5.2	68	47.5
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	500	600		500	600	
额定电流Rated Current	[A]	*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-1.5	0.2-1.5	0.2-1	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	26-14	26-14	18-14	24-12	24-12	24-12
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		10			10	
产品Product	颜色Colour	订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.		
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15	黄绿Yellow green	TCD1.5-2-PE			TCD2.5-2-PE		
	*	*			*		
	*	*			*		
端板Cover Plate		配套附件Accessory 订货号Order NO.			配套附件Accessory 订货号Order NO.		
	灰Gray	TCD1.5-2-GY-EA			TCD2.5-2-GY-EA		
厚度2.2mm Thickness2.2mm	橙Orange	TCD1.5-2-OG-EA			TCD2.5-2-OG-EA		
	蓝Blue	TCD1.5-2-BU-EA			TCD2.5-2-BU-EA		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*		
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.		
2	黄Yellow	*			*		
3	黄Yellow	*			*		
4	黄Yellow	*			*		
...	.....	.....			.....		
9	黄Yellow	*			*		
10	黄Yellow	*			*		
安全警告标记 Protective Warning Marker		订货号Order NO.			订货号Order NO.		
5位PCS		*			TMD5.2-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.		
10位PCS		*			*		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB3.5-100			TMB5.2-120		






		2.5mm² 一进一出插拔接线端子 1-1 Feed Through Plug-in Terminal Block			2.5mm² 双层插拔接线端子 Double-level Pluggable Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	5.2	68	47.5	5.2	71.5	46
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	500	300		500	300	
额定电流Rated Current	[A]	24	20		22	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	24-12	24-12	24-12	24-12	24-12	24-12
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		10			10	
产品Product	颜色Colour	订货信息Order Information 订货号Order NO.			订货信息Order Information 订货号Order NO.		
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15	灰Gray	TC2.5-2-1-GY			TCD2.5-2-1-GY		
	橙Orange	TC2.5-2-1-OG			TCD2.5-2-1-OG		
	蓝Blue	TC2.5-2-1-BU			TCD2.5-2-1-BU		
端板Cover Plate		配套附件Accessory 订货号Order NO.			配套附件Accessory 订货号Order NO.		
	灰Gray	TC1.5-2-GY-EA			TCD2.5-2-1-GY-EA		
厚度2.2mm Thickness2.2mm	橙Orange	TC1.5-2-OG-EA			TCD2.5-2-1-OG-EA		
	蓝Blue	TC1.5-2-BU-EA			TCD2.5-2-1-BU-EA		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*		
跨接件Jumper		Imax/24A			Imax/24A		
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA5.2-2			TJA5.2-2		
3	黄Yellow	TJA5.2-3			TJA5.2-3		
4	黄Yellow	TJA5.2-4			TJA5.2-4		
...	.....	.....			.....		
9	黄Yellow	TJA5.2-9			TJA5.2-9		
10	黄Yellow	TJA5.2-10			TJA5.2-10		
安全警告标记 Protective Warning Marker		订货号Order NO.			订货号Order NO.		
5位PCS		TMD5.2-5			TMD5.2-5		
正面标记Front Marker		订货号Order NO.			订货号Order NO.		
10位PCS		305801			*		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB5.2-120			TMB5.2-120		

备注：（所有连接导线的总电流不得超过产品的额定电流）

Mark: (Total current which connects to all the wires, cannot be over rated current).

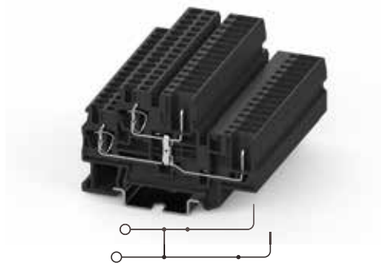


2.5mm² 双层等电位插拔接线端子
Double Level With Equipotential Bonder Plug-in Terminal Block

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	71.5	46
IEC	UL	
500	300	
22	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
24-12	24-12	24-12
	V0	
	10	

订货信息Order Information
订货号Order NO.
TCD2.5-2-1-PV(黑色)
*
*

配套附件Accessory
订货号Order NO.
TCD2.5-2-1-GY-EA
TCD2.5-2-1-OG-EA
TCD2.5-2-1-BU-EA
订货号Order NO.
*
Imax/24A
订货号Order NO.
TJA5.2-2
TJA5.2-3
TJA5.2-4
.....
TJA5.2-9
TJA5.2-10
订货号Order NO.
TMD5.2-5
订货号Order NO.
*
订货号Order NO.
TMB5.2-120

尺寸Size		
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	
额定参数Rated Parameters		
额定电压Rated Voltage	[V]	
额定电流Rated Current	[A]	
接线容量Wire Range		
	[mm²]	
	[AWG]	
其余参数Other Parameters		
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length	[mm]	
产品Product	颜色Colour	
适配NS 35/7.5 NS 35/15导轨 **Can Be Used For DIN Rail** **NS 35/7.5 NS35/15**	黄绿Yellow green	
	*	
	*	
端板Cover Plate		
厚度2.2mm Thickness2.2mm	灰Gray	
	橙Orange	
	蓝Blue	
补偿端板Compensatory Plate		
厚度1.00mm Thickness1.00mm	灰Gray	
跨接件Jumper		
位数Poles No.	颜色Colour	
2	黄Yellow	
3	黄Yellow	
4	黄Yellow	
...	.....	
9	黄Yellow	
10	黄Yellow	
安全警告标记 **Protective Warning Marker**		
5位PCS		
正面标记Front Marker		
10位PCS		
正面标记和侧面标记Front And Side Marker		
可提供印字服务Printing Service		




2.5mm² 一进一出插拔接地端子
1-1 Feed Through Ground Plug-in Terminal Block

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	68	47.5
IEC	UL	
500	300	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
24-12	24-12	24-12
	V0	
	10	

订货信息Order Information
订货号Order NO.
TC2.5-2-1-PE
*
*

配套附件Accessory
订货号Order NO.
TC1.5-2-GY-EA
TC1.5-2-OG-EA
TC1.5-2-BU-EA
订货号Order NO.
*
订货号Order NO.
*
*
*
.....
*
*
订货号Order NO.
TMD5.2-5
订货号Order NO.
305801
订货号Order NO.
TMB5.2-120

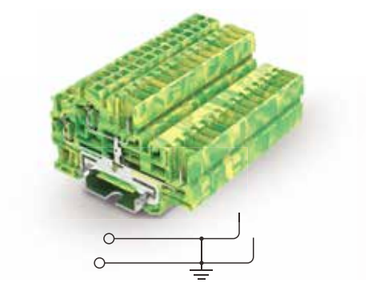

2.5mm² 双层插拔接地端子
Double-level Pluggable Ground Terminal Block

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	71.5	46
IEC	UL	
500	600	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
24-12	24-12	24-12
	V0	
	10	

订货信息Order Information
订货号Order NO.
TCD2.5-2-1-PE
*
*

配套附件Accessory
订货号Order NO.
TCD2.5-2-1-GY-EA
TCD2.5-2-1-OG-EA
TCD2.5-2-1-BU-EA
订货号Order NO.
*
Imax/24A
订货号Order NO.
*
*
*
.....
*
*
订货号Order NO.
TMD5.2-5
订货号Order NO.
*
订货号Order NO.
TMB5.2-120

尺寸Size		
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	
额定参数Rated Parameters		
额定电压Rated Voltage	[V]	
额定电流Rated Current	[A]	
接线容量Wire Range		
	[mm²]	
	[AWG]	
其余参数Other Parameters		
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length	[mm]	
产品Product	颜色Colour	
适配NS 35/7.5 NS 35/15导轨 **Can Be Used For DIN Rail** **NS 35/7.5 NS35/15**	黄绿Yellow green	
	*	
	*	
端板Cover Plate		
厚度2.2mm Thickness2.2mm	灰Gray	
	橙Orange	
	蓝Blue	
补偿端板Compensatory Plate		
厚度1.00mm Thickness1.00mm	灰Gray	
跨接件Jumper		
位数Poles No.	颜色Colour	
2	黄Yellow	
3	黄Yellow	
4	黄Yellow	
...	.....	
9	黄Yellow	
10	黄Yellow	
安全警告标记 **Protective Warning Marker**		
5位PCS		
正面标记Front Marker		
10位PCS		
正面标记和侧面标记Front And Side Marker		
可提供印字服务Printing Service		

备注：（所有连接导线的总电流不得超过产品的额定电流）

Mark: (Total current which connects to all the wires, cannot be over rated current).

TC系列弹簧接线端子 TC Rail-mounted terminal blocks with spring-cage clamp







	2.5mm² 插头 Plug	2.5mm² 可跨接插头 Transable Plug	2.5mm² 2位可跨接插头 Double-row Transable Plug
	技术参数Technical Parameter	技术参数Technical Parameter	技术参数Technical Parameter
尺寸Size	厚度Thickness / 宽度Width / 高度Height	厚度Thickness / 宽度Width / 高度Height	厚度Thickness / 宽度Width / 高度Height
[mm]	5.2 / 16.1 / 39.4	5.2 / 20.1 / 39.4	5.2 / 32.6 / 39.4
额定参数Rated Parameters	IEC / UL	IEC / UL	IEC / UL
额定电压Rated Voltage [V]	500 / 300	500 / 300	500 / 300
额定电流Rated Current [A]	24 / 20	24 / 20	24 / 20
接线容量Wire Range	刚性Solid / 柔性Fine Stranded / 带冷压头Furrule	刚性Solid / 柔性Fine Stranded / 带冷压头Furrule	刚性Solid / 柔性Fine Stranded / 带冷压头Furrule
[mm²]	0.2-4 / 0.2-2.5 / 0.2-2.5	0.2-4 / 0.2-2.5 / 0.2-2.5	0.2-4 / 0.2-2.5 / 0.2-2.5
[AWG]	24-12 / 24-12 / 24-12	24-12 / 24-12 / 24-12	24-12 / 24-12 / 24-12
其余参数Other Parameters			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	V0	V0
剥线长度Strip length [mm]	10	10	10
订货信息Order Information			
产品Product 位数 / 颜色Colour	订货号Order NO.	订货号Order NO.	订货号Order NO.
1 / 灰Gray	TCP2.5-1-GY	TCPB2.5-1-GY	TCPDB2.5-1-GY
2 / 灰Gray	TCP2.5-2-GY	TCPB2.5-2-GY	TCPDB2.5-2-GY
注：所有位数为1的插头皆为首位插头 ... / ...	.....	.....	.....
14 / 灰Gray	TCP2.5-14-GY	TCPB2.5-14-GY	TCPDB2.5-14-GY
15 / 灰Gray	TCP2.5-15-GY	TCPB2.5-15-GY	TCPDB2.5-15-GY
1 / 蓝Blue	TCP2.5-1-BU	TCPB2.5-1-BU	TCPDB2.5-1-BU
1 / 橙Orange	TCP2.5-1-OG	TCPB2.5-1-OG	TCPDB2.5-1-OG
1 / 黄绿Yellow green	TCP2.5-1-PE	TCPB2.5-1-PE	TCPDB2.5-1-PE
跨接件Jumper	**Imax/24A**	**Imax/24A**	**Imax/24A**
位数Poles No. / 颜色Colour	订货号Order NO.	订货号Order NO.	订货号Order NO.
2 / 黄Yellow	*	TJA5.2-2	TJA5.2-2
3 / 黄Yellow	*	TJA5.2-3	TJA5.2-3
4 / 黄Yellow	*	TJA5.2-4	TJA5.2-4
... /	.....	.....	.....
9 / 黄Yellow	*	TJA5.2-9	TJA5.2-9
10 / 黄Yellow	*	TJA5.2-10	TJA5.2-10
安全警告标记 Protective Warning Marker	订货号Order NO.	订货号Order NO.	订货号Order NO.
5位PCS	*	*	*
正面标记Front Marker	订货号Order NO.	订货号Order NO.	订货号Order NO.
10位PCS	*	*	*
正面标记和侧面标记Front And Side Marker	订货号Order NO.	订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service			






不提供保险管，图片只供参考使用
No fuse is provided. The picture is for reference only

4mm² 带保险管接线端子 Terminal Block With fuse	
技术参数Technical Parameter	
厚度Thickness / 宽度Width / 高度Height	
6.2 / 61.5 / 63.15	
IEC / UL	
500 / 300	
6.3 / 10	
刚性Solid / 柔性Fine Stranded / 带冷压头Furrule	
0.2-6 / 0.2-4 / 0.2-4	
24-10 / 24-10 / 24-10	
V0	
10	
订货信息Order Information	
订货号Order NO.	
TC4-FUSE-BK(黑色)	
TC4-FUSE-GY(灰色)	
*	
配套附件Accessory	
订货号Order NO.	
*	
*	
*	
订货号Order NO.	
*	
Imax/24A	
订货号Order NO.	
TJA6.2-2	
TJA6.2-3	
TJA6.2-4	
.....	
TJA6.2-9	
TJA6.2-10	
订货号Order NO.	
*	
订货号Order NO.	
*	
订货号Order NO.	
TMB6.2-100	






不提供保险管，图片只供参考使用
No fuse is provided. The picture is for reference only

4mm² 带发光二极管保险管接线端子 Terminal Block With LED and fuse	
技术参数Technical Parameter	
厚度Thickness / 宽度Width / 高度Height	
6.2 / 61.5 / 63.15	
IEC / UL	
500 / 300	
6.3 / 10	
刚性Solid / 柔性Fine Stranded / 带冷压头Furrule	
0.2-6 / 0.2-4 / 0.2-4	
24-10 / 24-10 / 24-10	
V0	
10	
订货信息Order Information	
订货号Order NO.	
TC4-FUSELED24-BK(黑色)	
TC4-FUSELED36-BK	
TC4-FUSELED220-BK	
配套附件Accessory	
订货号Order NO.	
*	
*	
*	
订货号Order NO.	
*	
Imax/24A	
订货号Order NO.	
TJA6.2-2	
TJA6.2-3	
TJA6.2-4	
.....	
TJA6.2-9	
TJA6.2-10	
订货号Order NO.	
*	
订货号Order NO.	
*	
订货号Order NO.	
TMB6.2-100	





4mm²断开式接线端子 Disconnected Terminal Block	
技术参数Technical Parameter	
厚度Thickness / 宽度Width / 高度Height	
6.2 / 61.5 / 63.15	
IEC / UL	
500 / 300	
6.3 / 10	
刚性Solid / 柔性Fine Stranded / 带冷压头Furrule	
0.2-6 / 0.2-4 / 0.2-4	
24-10 / 24-10 / 24-10	
V0	
10	
订货信息Order Information	
订货号Order NO.	
TC4-SPLIT	
*	
*	
配套附件Accessory	
订货号Order NO.	
*	
*	
*	
订货号Order NO.	
*	
Imax/24A	
订货号Order NO.	
TJA6.2-2	
TJA6.2-3	
TJA6.2-4	
.....	
TJA6.2-9	
TJA6.2-10	
订货号Order NO.	
*	
订货号Order NO.	
*	
订货号Order NO.	
TMB6.2-100	

备注：（所有连接导线的总电流不得超过产品的额定电流）
www.terminalblock.net


Mark: (Total current which connects to all the wires, cannot be over rated current).
+86-400-860-0988


TU系列螺钉接线端子

TU Rail-mounted terminal blocks with screw clamp

TU系列螺钉接线端子采用螺钉接线技术，适用于各种应用领域。该系列产品可实现多导线连接，使连接方式更加灵活。其防脱圈设计可有效防止螺钉松脱，保证端子的连接性能。产品设计制造符合IEC60947、UL1059等国际标准。

TU series screw terminals use screw wiring technology and are suitable for a variety of applications. This series of products can realize multiwire connection, making the connection mode more flexible. Its detachable coil design can effectively prevent screw loose and ensure the connection performance of terminals. The products are designed and manufactured in accordance with IEC60947, UL1059 and other international standards.

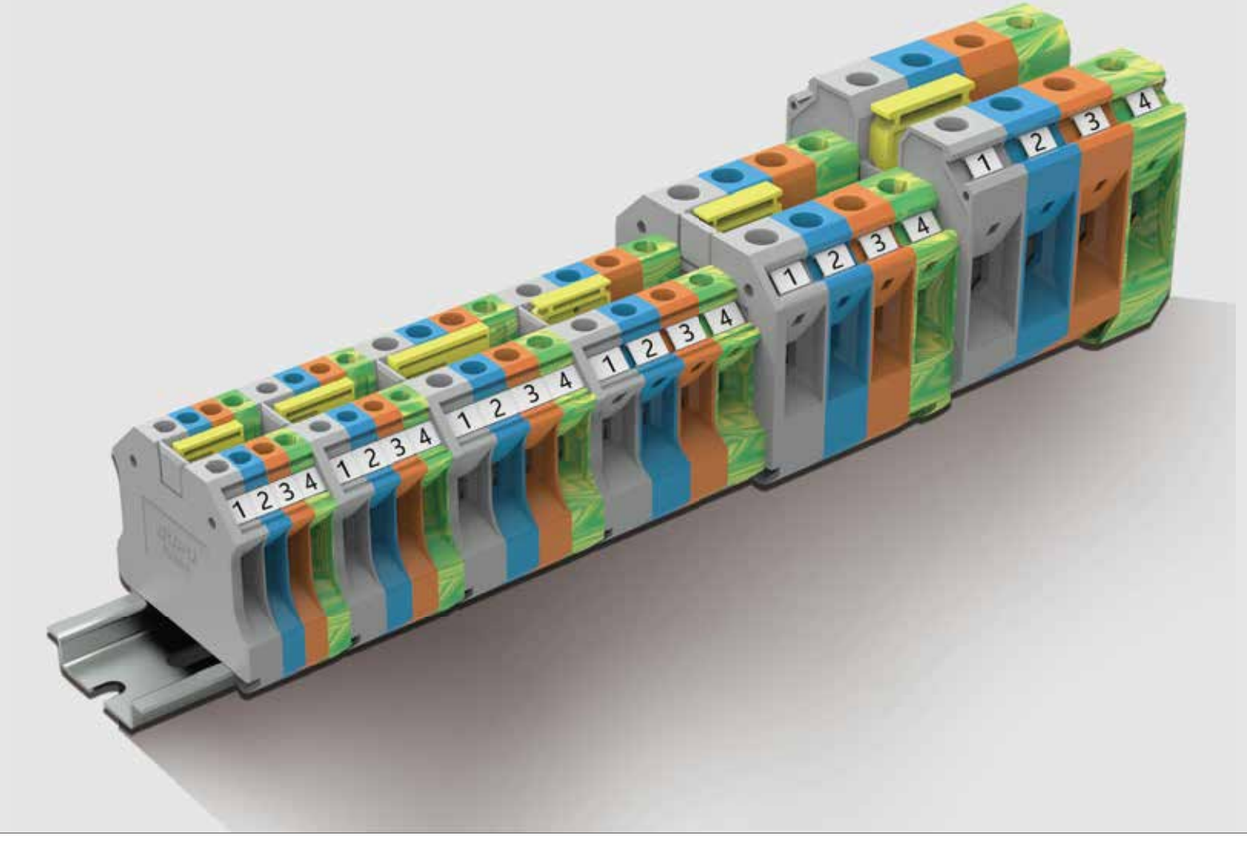

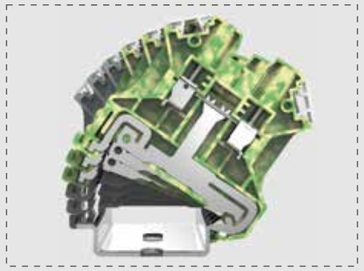

卡接式接地端子 Clamping ground terminal

▲ 与接线端子外形相同，无需工具，可快速的直接卡入DIN导轨。符合IEC60947-7-2标准，满足所有机械及电气性能。

▲ The same shape as the normal terminal block, can be quickly and directly stuck into DIN guide without any tools. Meet the IEC60947-7-2 standard, meet all mechanical and electrical performance.








标识 Marking

▲ 提供三种标记方案，可按需求自由选择。特别增加PVC标记牌，可标记复杂描述。

▲ Three marking schemes are provided, which can be freely selected according to requirements. Especially add PVC label, can mark complex description.

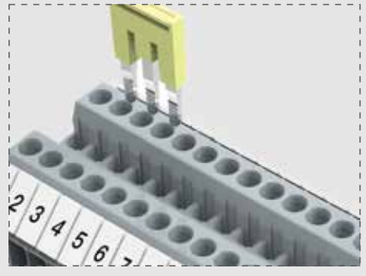

跨接 Jumper

▲ 跨接结构标准化，与其他系列端子共用跨接桥。双排跨接设计，提供更多的电路连接方案。

▲ The bridge structure is standardized, sharing the bridge with other series of the terminals. Double row jumper design, provide more circuit connection scheme.







		2.5mm²一进一出TU接线端子 1-1 Feed Through TU Terminal Block			4mm²一进一出TU接线端子 1-1 Feed Through TU Terminal Block			6mm²一进一出TU接线端子 1-1 Feed Through TU Terminal Block			10mm²一进一出TU接线端子 1-1 Feed Through TU Terminal Block			16mm²一进一出TU接线端子 1-1 Feed Through TU Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	5.2	47.3	46.2	6.2	47.3	46.2	8.2	47.3	46.2	10.2	47.3	46.2	12.2	52.8	54.35
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	1000	600		1000	600		1000	600		1000	600		1000	600	
额定电流Rated Current	[A]	24	20		32	30		41	50		57	65		76	85	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4	0.2-10	0.2-6	0.2-6	0.5-16	0.5-10	0.5-10	1.5-25	1.5-16	1.5-16
	[AWG]	26-12	26-12	26-12	26-10	26-10	26-10	24-8	24-8	24-8	20-6	20-6	20-6	16-4	16-4	16-4
螺钉类型Screw Type	[*]		M2.5			M3			M4			M4			M5	
扭矩Torque	[N.m]		0.4			0.5			1.2			1.2			2.0	
其余参数Other Parameters																
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0			V0			V0			V0	
剥线长度Strip length	[mm]		8-9			8-9			9-10			10-11			13-14	
		订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TU2.5-2-GY			TU4-2-GY			TU6-2-GY			TU10-2-GY			TU16-2-GY		
	橙Orange	TU2.5-2-OG			TU4-2-OG			TU6-2-OG			TU10-2-OG			TU16-2-OG		
	蓝Blue	TU2.5-2-BU			TU4-2-BU			TU6-2-BU			TU10-2-BU			TU16-2-BU		
		配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
盖板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
盖板Cover Plate	灰Gray	TU2.5-2-GY-EA			TU2.5-2-GY-EA			TU2.5-2-GY-EA			TU2.5-2-GY-EA			TU16-2-GY-EA		
	橙Orange	TU2.5-2-OG-EA			TU2.5-2-OG-EA			TU2.5-2-OG-EA			TU2.5-2-OG-EA			TU16-2-OG-EA		
测试插头Test Plug	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
	红Red	SP-5			SP-6			SP-8			SP-10			*		
跨接件Jumper																
极数Poles No.		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2		TJA5.2-2			TJA6.2-2			TJA8.2-2			TJA10.2-2			TJA12.2-2		
3		TJA5.2-3			TJA6.2-3			TJA8.2-3			*			*		
4		TJA5.2-4			TJA6.2-4			TJA8.2-4			*			*		
...		.....			.....			.....			*			*		
9		TJA5.2-9			TJA6.2-9			TJA8.2-9			*			*		
10		TJA5.2-10			TJA6.2-10			TJA8.2-10			*			*		
正面标记(小)Front Marker(Small)		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB5.2-120			TMB6.2-100			TMB8.2-50			TMB10.2-10			TMB10.2-10		
正面标记(大)Front Marker(Big)		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		305801			306801			308801			310801			312801		
卷带标记（50米一卷）Winding marking (50 meters/roll)		TMZ9.6-50			TMZ9.6-50			TMZ9.6-50			TMZ9.6-50			TMZ9.6-50		







		35mm²一进一出TU接线端子 1-1 Feed Through TU Terminal Block			50mm²一进一出TU接线端子 1-1 Feed Through TU Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	16	59.2	65.05	20.4	70.5	76.1
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	1000	600		1000	600	
额定电流Rated Current	[A]	125	150		150	150	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	1.5-50	1.5-35	1.5-35	16-70	25-70	25-50
	[AWG]	16-1/0	16-1/0	16-1/0	6-1/0	6-1/0	6-1/0
螺钉类型Screw Type	[*]	M6			M6（内六角 Inner hexagon）		
扭矩Torque	[N.m]	3.0			6		
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	17-18			24		
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TU35-2-GY			TU50-2-GY		
	橙Orange	TU35-2-OG			TU50-2-OG		
	蓝Blue	TU35-2-BU			TU50-2-BU		
		配套附件Accessory			配套附件Accessory		
盖板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.		
盖板Cover Plate	灰Gray	*			*		
	橙Orange	*			*		
测试插头Test Plug	颜色Colour	订货号Order NO.			订货号Order NO.		
	红Red	*			*		
跨接件Jumper							
极数Poles No.		订货号Order NO.			订货号Order NO.		
2		TJA16-2			*		
3		*			*		
4		*			*		
...		*			*		
9		*			*		
10		*			*		
正面标记(小)Front Marker(Small)		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB10.2-10			*		
正面标记(大)Front Marker(Big)		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		316801			TMB10.2-10		
卷带标记（50米一卷）Winding marking （50 meters/roll）		TMZ9.6-50			*		

		70mm²一进一出TU接线端子 1-1 Feed Through TU Terminal Block			95mm²一进一出TU接线端子 1-1 Feed Through TU Terminal Block			150mm²一进一出TU接线端子 1-1 Feed Through TU Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	20.4	70.5	79.5	25	83.2	90.1	31	100	107.3
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	1000	600		1000	600		1000	600	
额定电流Rated Current	[A]	192	150		232	230		309	285	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	16-95	25-70	16-70	25-95	35-95	35-95	35-150	50-150	50-150
	[AWG]	6-3/0	6-3/0	6-3/0	2-4/0	2-4/0	2-4/0	2-300kcmil		
螺钉类型Screw Type	[*]	M8（内六角 Inner hexagon）			M8（内六角 Inner hexagon）			M10（内六角 Inner hexagon）		
扭矩Torque	[N.m]	8-10			15-20			25-30		
其余参数Other Parameters										
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0		
剥线长度Strip length	[mm]	24			33			40		
		订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TU70-2-GY			TU95-2-GY			TU150-2-GY		
	橙Orange	TU70-2-OG			TU95-2-OG			TU150-2-OG		
	蓝Blue	TU70-2-BU			TU95-2-BU			TU150-2-BU		
		配套附件Accessory			配套附件Accessory			配套附件Accessory		
盖板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
盖板Cover Plate	灰Gray	*			*			*		
	橙Orange	*			*			*		
测试插头Test Plug	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
	红Red	*			*			*		
跨接件Jumper										
极数Poles No.		订货号Order NO.			订货号Order NO.			订货号Order NO.		
2		*			*			*		
3		*			*			*		
4		*			*			*		
...		*			*			*		
9		*			*			*		
10										
正面标记(小)Front Marker(Small)		订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		*			*			*		
正面标记(大)Front Marker(Big)		订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB10.2-10			316801			316801		
卷带标记（50米一卷）Winding marking （50 meters/roll）		*			*			*		















		240mm²一进一出TU接线端子 1-1 Feed Through TU Terminal Block			2.5mm²一进两出TU接线端子 1-2 Feed Through TU Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	36	100	123.6	5.2	56.8	46.2
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	1000	600		500	300	
额定电流Rated Current	[A]	415	380		24	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	70-240	70-240	70-185	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	2/0-500kcmil			26-12	26-12	26-12
螺钉类型Screw Type	[*]	M10（内六角 Inner hexagon）			M2.5		
扭矩Torque	[N.m]	25-30			0.4		
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	40			9-11		
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TU240-2-GY			TU2.5-3-GY		
	橙Orange	TU240-2-OG			TU2.5-3-OG		
	蓝Blue	TU240-2-BU			TU2.5-3-BU		
		配套附件Accessory			配套附件Accessory		
盖板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.		
盖板Cover Plate	灰Gray	*			TU2.5-3-GY-EA		
	橙Orange	*			TU2.5-3-OG-EA		
测试插头Test Plug	颜色Colour	订货号Order NO.			订货号Order NO.		
	红Red	*			SP-5		
跨接件Jumper							
位数Poles No.		订货号Order NO.			订货号Order NO.		
2		*			TJA5.2-2		
3		*			TJA5.2-3		
4		*			TJA5.2-4		
...		*			.....		
9		*			TJA5.2-9		
10		*			TJA5.2-10		
正面标记(小)Front Marker(Small)		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		*			TMB5.2-120		
正面标记(大)Front Marker(Big)		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		316801			305801		
卷带标记（50米一卷） Winding marking （50 meters/roll）		*			TMZ9.6-50		


		4mm²一进两出TU接线端子 1-2 Feed Through TU Terminal Block			2.5mm²两进两出TU接线端子 2-2 Feed Through TU Terminal Block			4mm²两进两出TU接线端子 2-2 Feed Through TU Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	6.2	56.8	46.2	5.2	64.2	46.2	6.2	64.2	46.2
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	500	300		500	300		500	300	
额定电流Rated Current	[A]	32	30		24	20		32	30	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-6	0.2-4	0.2-4	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4
	[AWG]	26-10	26-10	26-10	26-12	26-12	26-12	26-10	26-10	26-10
螺钉类型Screw Type	[*]	M3			M2.5			M3		
扭矩Torque	[N.m]	0.5			0.4			0.5		
其余参数Other Parameters										
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0		
剥线长度Strip length	[mm]	8-9			9-11			8-9		
		订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TU4-3-GY			TU2.5-4-GY			TU4-4-GY		
	橙Orange	TU4-3-OG			TU2.5-4-OG			TU4-4-OG		
	蓝Blue	TU4-3-BU			TU2.5-4-BU			TU4-4-BU		
		配套附件Accessory			配套附件Accessory			配套附件Accessory		
盖板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
盖板Cover Plate	灰Gray	TU2.5-3-GY-EA			TU2.5-4-GY-EA			TU2.5-4-GY-EA		
	橙Orange	TU2.5-3-OG-EA			TU2.5-4-OG-EA			TU2.5-4-OG-EA		
测试插头Test Plug	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
	红Red	SP-6			SP-5			SP-6		
跨接件Jumper										
位数Poles No.		订货号Order NO.			订货号Order NO.			订货号Order NO.		
2		TJA6.2-2			TJA5.2-2			TJA6.2-2		
3		TJA6.2-3			TJA5.2-3			TJA6.2-3		
4		TJA6.2-4			TJA5.2-4			TJA6.2-4		
...		.....			.....			.....		
9		TJA6.2-9			TJA5.2-9			TJA6.2-9		
10		TJA6.2-10			TJA5.2-10			TJA6.2-10		
正面标记(小)Front Marker(Small)		订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB6.2-100			TMB5.2-120			TMB6.2-100		
正面标记(大)Front Marker(Big)		订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		306801			305801			306801		
卷带标记（50米一卷） Winding marking （50 meters/roll）		TMZ9.6-50			TMZ9.6-50			TMZ9.6-50		













		2.5mm²一进一出TU接地端子 1-1 Feed Through TU Ground Terminal Block			4mm²一进一出TU接地端子 1-1 Feed Through TU Ground Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	5.2	47.3	46.2	6.2	47.3	46.2
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4
	[AWG]	26-12	26-12	26-12	26-10	26-10	26-10
螺钉类型Screw Type	[*]		M2.5			M3	
扭矩Torque	[N.m]		0.4			0.5	
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	8-9			8-9		
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	黄绿Yellow green	TU2.5-2-PE			TU4-2-PE		
		配套附件Accessory			配套附件Accessory		
盖板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.		
盖板Cover Plate	灰Gray	TU2.5-2-GY-EA			TU2.5-2-GY-EA		
	橙Orange	TU2.5-2-OG-EA			TU2.5-2-OG-EA		
测试插头Test Plug	颜色Colour	订货号Order NO.			订货号Order NO.		
	红Red	*			*		
跨接件Jumper							
极数Poles No.		订货号Order NO.			订货号Order NO.		
2		*			*		
3		*			*		
4		*			*		
...		*			*		
9		*			*		
10		*			*		
正面标记(小)Front Marker(Small)		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB5.2-120			TMB6.2-100		
正面标记(大)Front Marker(Big)		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		305801			306801		
卷带标记（50米一卷）Winding marking (50 meters/roll)		TMZ9.6-50			TMZ9.6-50		

		6mm²一进一出TU接地端子 1-1 Feed Through TU Ground Terminal Block			10mm²一进一出TU接地端子 1-1 Feed Through TU Ground Terminal Block			16mm²一进一出TU接地端子 1-1 Feed Through TU Ground Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	8.2	47.3	46.2	10.2	47.3	46.2	12.2	52.8	54.35
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-10	0.2-6	0.2-6	0.5-16	0.5-10	0.5-10	1.5-25	1.5-16	1.5-16
	[AWG]	24-8	24-8	24-8	20-6	20-6	20-6	16-4	16-4	16-4
螺钉类型Screw Type	[*]		M4			M4			M5	
扭矩Torque	[N.m]		1.2			1.2			2.0	
其余参数Other Parameters										
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0		
剥线长度Strip length	[mm]	9-10			10-11			13-14		
		订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	黄绿Yellow green	TU6-2-PE			TU10-2-PE			TU16-2-PE		
		配套附件Accessory			配套附件Accessory			配套附件Accessory		
盖板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
盖板Cover Plate	灰Gray	TU2.5-2-GY-EA			TU2.5-2-GY-EA			TU16-2-GY-EA		
	橙Orange	TU2.5-2-OG-EA			TU2.5-2-OG-EA			TU16-2-OG-EA		
测试插头Test Plug	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
	红Red	*			*			*		
跨接件Jumper										
极数Poles No.		订货号Order NO.			订货号Order NO.			订货号Order NO.		
2		*			*			*		
3		*			*			*		
4		*			*			*		
...		*			*			*		
9		*			*			*		
10		*			*			*		
正面标记(小)Front Marker(Small)		订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB8.2-50			TMB8.2-50			TMB8.2-50		
正面标记(大)Front Marker(Big)		订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		308801			TMB10.2-10			312801		
卷带标记（50米一卷）Winding marking (50 meters/roll)		TMZ9.6-50			TMZ9.6-50			TMZ9.6-50		


TU系列螺钉接线端子 TU Rail-mounted terminal blocks with screw clamp












		35mm²一进一出TU接地端子 1-1 Feed Through TU Ground Terminal Block			50mm²一进一出TU接地端子 1-1 Feed Through TU Ground Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	16	59.2	65.05	20.4	70.7	76.1
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	1.5-50	1.5-35	1.5-35	16-70	25-70	25-50
	[AWG]	16-1/0	16-1/0	16-1/0	6-1/0	6-1/0	6-1/0
螺钉类型Screw Type	[*]	M6			M6（内六角 Inner six angle）		
扭矩Torque	[N.m]	3.0			6		
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	17-18			24		
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	黄绿Yellow green	TU35-2-PE			TU50-2-PE		
		配套附件Accessory			配套附件Accessory		
盖板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.		
盖板Cover Plate	灰Gray	*			*		
	橙Orange	*			*		
测试插头Test Plug	颜色Colour	订货号Order NO.			订货号Order NO.		
	红Red	*			*		
跨接件Jumper							
极数Poles No.		订货号Order NO.			订货号Order NO.		
2		*			*		
3		*			*		
4		*			*		
...		*			*		
9		*			*		
10		*			*		
正面标记(小)Front Marker(Small)		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB8.2-50			*		
正面标记(大)Front Marker(Big)		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		316801			TMB10.2-10		
卷带标记（50米一卷）Winding marking (50 meters/roll)		TMZ9.6-50			*		

		70mm²一进一出TU接地端子 1-1 Feed Through TU Ground Terminal Block			95mm²一进一出TU接地端子 1-1 Feed Through TU Ground Terminal Block			2.5mm²一进两出TU接地端子 1-2 Feed Through TU Ground Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	20.4	70.5	79.5	25	83.2	90.1	5.2	56.8	46.2
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	16-95	25-70	16-70	25-95	35-95	35-95	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	6-3/0	6-3/0	6-3/0	2-4/0	2-4/0	2-4/0	26-12	26-12	26-12
螺钉类型Screw Type	[*]	M8（内六角 Inner six angle）			M8（内六角 Inner six angle）			M2.5		
扭矩Torque	[N.m]	8-10			15-20			0.4		
其余参数Other Parameters										
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0		
剥线长度Strip length	[mm]	24			33			9-11		
		订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 **Can Be Used For DIN Rail NS 35/7.5**	黄绿Yellow green	TU70-2-PE			TU95-2-PE			TU2.5-3-PE		
		配套附件Accessory			配套附件Accessory			配套附件Accessory		
盖板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
盖板Cover Plate	灰Gray	*			*			TU2.5-3-GY-EA		
	橙Orange	*			*			TU2.5-3-OG-EA		
测试插头Test Plug	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
	红Red	*			*			*		
跨接件Jumper										
极数Poles No.		订货号Order NO.			订货号Order NO.			订货号Order NO.		
2		*			*			*		
3		*			*			*		
4		*			*			*		
...		*			*			*		
9		*			*			*		
10		*			*			*		
正面标记(小)Front Marker(Small)		订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		*			*			TMB5.2-120		
正面标记(大)Front Marker(Big)		订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB10.2-10			316801			305801		
卷带标记（50米一卷）Winding marking (50 meters/roll)		*			*			TMZ9.6-50		









		4mm²一进两出TU接地端子 1-2 Feed Through TU Ground Terminal Block			2.5mm²两进两出TU接地端子 2-2 Feed Through TU Ground Terminal Block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	6.2	56.8	46.2	5.2	64.2	46.2
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-6	0.2-4	0.2-4	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	26-10	26-10	26-10	26-12	26-12	26-12
螺钉类型Screw Type	[*]		M3			M2.5	
扭矩Torque	[N.m]		0.5			0.4	
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	8-9			9-11		
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green	TU4-3-PE			TU2.5-4-PE		
		配套附件Accessory			配套附件Accessory		
盖板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.		
盖板Cover Plate	灰Gray	TU2.5-3-GY-EA			TU2.5-4-GY-EA		
	橙Orange	TU2.5-3-OG-EA			TU2.5-4-OG-EA		
测试插头Test Plug	颜色Colour	订货号Order NO.			订货号Order NO.		
	红Red	*			*		
跨接件Jumper							
极数Poles No.		订货号Order NO.			订货号Order NO.		
2		*			*		
3		*			*		
4		*			*		
...		*			*		
9		*			*		
10		*			*		
正面标记(小)Front Marker(Small)		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB6.2-100			TMB5.2-120		
正面标记(大)Front Marker(Big)		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		306801			305801		
卷带标记（50米一卷）Winding marking (50 meters/roll)		TMZ9.6-50			TMZ9.6-50		





		4mm²两进两出TU接地端子 2-2 Feed Through TU Ground Terminal Block		
		技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	6.2	64.2	46.2
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-6	0.2-4	0.2-4
	[AWG]	26-10	26-10	26-10
螺钉类型Screw Type	[*]		M3	
扭矩Torque	[N.m]		0.5	
其余参数Other Parameters				
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	8-9		
		订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green	TU4-4-PE		
		配套附件Accessory		
盖板Cover Plate	颜色Colour	订货号Order NO.		
盖板Cover Plate	灰Gray	TU2.5-4-GY-EA		
	橙Orange	TU2.5-4-OG-EA		
测试插头Test Plug	颜色Colour	订货号Order NO.		
	红Red	*		
跨接件Jumper				
极数Poles No.		订货号Order NO.		
2		*		
3		*		
4		*		
...		*		
9		*		
10		*		
正面标记(小)Front Marker(Small)		订货号Order NO.		
可提供印字服务Printing Service		TMB6.2-100		
正面标记(大)Front Marker(Big)		订货号Order NO.		
可提供印字服务Printing Service		306801		
TMZ9.6-50		TMZ9.6-50		





		2.5mm² 双层接线端子 Double level terminl block			2.5mm² 双层等电位接线端子 Double level terminl block with equipotential bonder		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	5.2	69.9	64.5	5.2	69.9	64.5
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	600		800	600	
额定电流Rated Current	[A]	24	20		24	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	26-12	26-12	26-12	26-12	26-12	26-12
螺钉类型Screw Type	[*]		M2.5			M2.5	
扭矩Torque	[N.m]		0.4			0.4	
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		9-11			9-11	
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TUD2.5-2-GY			TUD2.5-2-PV（黑色）		
	橙Orange	TUD2.5-2-OG					
	蓝Blue	TUD2.5-2-BU					
		配套附件Accessory			配套附件Accessory		
盖板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.		
盖板Cover Plate	灰Gray	TUD2.5-2-GY-EA			TUD2.5-2-GY-EA		
	橙Orange	TUD2.5-2-OG-EA			TUD2.5-2-OG-EA		
跨接件Jumper							
极数Poles No.		订货号Order NO.			订货号Order NO.		
2		TJA5.2-2			TJA5.2-2		
3		TJA5.2-3			TJA5.2-3		
4		TJA5.2-4			TJA5.2-4		
5		TJA5.2-5			TJA5.2-5		
6		TJA5.2-6			TJA5.2-6		
7		TJA5.2-7			TJA5.2-7		
8		TJA5.2-8			TJA5.2-8		
9		TJA5.2-9			TJA5.2-9		
10		TJA5.2-10			TJA5.2-10		
正面标记(小)Front Marker(Small)		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB5.2-120			TMB5.2-120		
正面标记(大)Front Marker(Big)		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		305801			305801		
卷带标记（50米一卷）Winding marking （50 meters/roll)		TMZ9.6-50			TMZ9.6-50		







		4mm² 双层接线端子 Double level terminl block			4mm² 双层等电位接线端子 Double level terminl block with equipotential bonder		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	6.2	69.9	64.5	6.2	69.9	64.5
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	600		800	600	
额定电流Rated Current	[A]	32	30		32	30	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-6	0.2-4	0.2-4	0.2-6	0.2-4	0.2-4
	[AWG]	26-10	26-10	26-10	26-10	26-10	26-10
螺钉类型Screw Type	[*]		M3			M3	
扭矩Torque	[N.m]		0.5			0.5	
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度Strip length	[mm]		9-11			9-11	
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TUD4-2-GY			TUD4-2-PV（黑色）		
	橙Orange	TUD4-2-OG					
	蓝Blue	TUD4-2-BU					
		配套附件Accessory			配套附件Accessory		
盖板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.		
盖板Cover Plate	灰Gray	TUD2.5-2-GY-EA			TUD2.5-2-GY-EA		
	橙Orange	TUD2.5-2-OG-EA			TUD2.5-2-OG-EA		
跨接件Jumper							
极数Poles No.		订货号Order NO.			订货号Order NO.		
2		TJA6.2-2			TJA6.2-2		
3		TJA6.2-3			TJA6.2-3		
4		TJA6.2-4			TJA6.2-4		
5		TJA6.2-5			TJA6.2-5		
6		TJA6.2-6			TJA6.2-6		
7		TJA6.2-7			TJA6.2-7		
8		TJA6.2-8			TJA6.2-8		
9		TJA6.2-9			TJA6.2-9		
10		TJA6.2-10			TJA6.2-10		
正面标记(小)Front Marker(Small)		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB6.2-100			TMB6.2-100		
正面标记(大)Front Marker(Big)		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		306801			306801		
卷带标记（50米一卷）Winding marking （50 meters/roll)		TMZ9.6-50			TMZ9.6-50		

TU系列螺钉接线端子 TU Rail-mounted terminal blocks with screw clamp










		2.5mm² 双层接地端子 Double level ground terminl block			4mm² 双层接地端子 Double level ground terminl block		
		技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	5.2	69.9	64.5	6.2	69.9	64.5
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*	
接线容量Wire Range		带冷压头Furrule	柔性Fine Stranded	刚性Solid	带冷压头Furrule	柔性Fine Stranded	刚性Solid
	[mm²]	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4
	[AWG]	26-12	26-12	26-12	26-10	26-10	26-10
螺钉类型Screw Type	[*]		M2.5			M3	
扭矩Torque	[N.m]		0.4			0.5	
其余参数Other Parameters							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	9-11			9-11		
		订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green	TUD2.5-2-PE			TUD4-2-PE		
		配套附件Accessory			配套附件Accessory		
盖板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.		
盖板Cover Plate	灰Gray	TUD2.5-2-GY-EA			TUD2.5-2-GY-EA		
	橙Orange	TUD2.5-2-OG-EA			TUD2.5-2-OG-EA		
跨接件Jumper							
极数Poles No.		订货号Order NO.			订货号Order NO.		
2		*			*		
3		*			*		
4		*			*		
5		*			*		
6		*			*		
7		*			*		
8		*			*		
9		*			*		
10		*			*		
正面标记(小)Front Marker(Small)		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB5.2-120			TMB6.2-100		
正面标记(大)Front Marker(Big)		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		305801			306801		
卷带标记（50米一卷） Winding marking （50 meters/roll)		TMZ9.6-50			TMZ9.6-50		


新品 NEW






不提供保险管，图片只供参考使用
No fuse is provided. The picture is for reference only





不提供保险管，图片只供参考使用
No fuse is provided. The picture is for reference only





不提供保险管，图片只供参考使用
No fuse is provided. The picture is for reference only

		4mm² 带保险管接线端子 Terminal block with fuse			4mm² 带发光二极管保险管接线端子 Terminal block with LED and fuse			10mm² 螺帽式保险管端子 10mm² Fuse terminal block for cartridge fuse insert		
		技术参数Technical Parameter			技术参数Technical Parameter					
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]	8.2	53	43.2	8.2	53	43.2	12	57.9	46.2
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	600		800	600		800	600	
额定电流Rated Current	[A]	12	12		12	12		6.3	6.3	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-4	0.2-4	0.2-4	0.2-4	0.2-4	0.2-4	1.5-10	1.5-10	1.5-10
	[AWG]	22-10	22-10	22-10	22-10	22-10	22-10	22-6	22-6	22-6
螺钉类型Screw Type	[*]		M3			M3			M4	
扭矩Torque	[N.m]		0.5			0.5			1.2	
其余参数Other Parameters										
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0		
剥线长度Strip length	[mm]	8-9			8-9			10		
		订货信息Order Information			订货信息Order Information			订货信息Order Information		
产品Product	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TU4-HESI-GY			TU4-HESILED5-GY TU4-HESILED48-GY TU4-HESILED60-GY TU4-HESILED220-GY			TU10-NF(5X20)		
		配套附件Accessory			配套附件Accessory			配套附件Accessory		
盖板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
盖板Cover Plate	灰Gray	TU4-HESI-GY-EA			TU4-HESI-GY-EA					
跨接件Jumper										
极数Poles No.		订货号Order NO.			订货号Order NO.			订货号Order NO.		
2		*			*			310302		
3		*			*			310303		
4		*			*			310304		
5		*			*			310305		
6		*			*			310306		
7		*			*			310307		
8		*			*			310308		
9		*			*			310309		
10		*			*			310310		
正面标记(小)Front Marker(Small)		订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB8.2-50			TMB8.2-50			TMB10.2-10		
正面标记(大)Front Marker(Big)		订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		308801			308801			310801		
卷带标记（50米一卷） Winding marking （50 meters/roll)		TMZ9.6-50			TMZ9.6-50					