



**A POWER CORD SPECIALIZING IN INTELLIGENT
MANUFACTURING, SAFETY,
AND ENVIRONMENTAL PROTECTION**

30年 专业智造安全可靠的电源线



公司简介

COMPANY PROFILE

万能电子创始于 1995 年,是一家专注于电源线、橡胶线、数据线、连接线束的研发、生产与销售的国家级高新技术企业。目前已具备自产胶料、铜线、成缆、线材加工为一体的成熟供应链,电源线生产智能化程度位居行业首位。集团下设 2 家子公司,员工 1000 余人,年产值规模近 10 亿元。

Founded in 1995, is a national high-tech enterprise specializing in the R&D, production, and sales of power cords, rubber wires, data cables, and connecting wire harnesses. Currently, it has a mature supply chain that integrates self-production of rubber materials, copper wires, cabling, and wire processing. The intelligentization level of power cord production ranks first in the industry. We have two subsidiaries with more than 1,000 employees, and the annual output value is nearly 1 billion yuan.

慈溪市万能电子有限公司

地址: 浙江·宁波 慈溪市附海工业区经七路 28 号

电话: 15336641629 / 网址: www.wndz.com

COUNTRY	ORG.	SAFETY MARKS	COUNTRY	ORG.	SAFETY MARKS
 China	CCC		 Tai Wan <i>in china</i>	BSMI	
 USA	UL		 UK	BSI	
 Japan	PSE		 Korea	KC	
 Australia	SAA		 Argentina	IRAM	
 Brazil	INMETRO		 France	LCIE	
 Switzerland	SEV		 Sweden	SEMKO	
 Finland	FIMKO		 Norway	NEMKO	
 Denmark	DEMKO		 Belgium	CEBEC	
 Netherland	KEMA		 Austria	OVE	
 Germany	VDE		 Italy	IMQ	
 Russia	PCT		 South Africa	SABS	
 Canada	CSA		 Singapore	PSB	
 Mexico	NOM		 Indonesia	SNI	

Contents

CHINA FLEXIBLE CORD

60227 IEC 52(RVV) 300/300	60227 IEC 53(RVV) 300/500V	5
60245 IEC 53(YZ) 300/500V	60245 IEC 57(YZW) 450/750V	60245 IEC 66(YCW) 450/750V.....7

UL Cable Classification	8
--------------------------------	--------

PVC Flexible Cords	9
---------------------------	--------

T P T	9
-------	--------

SPT-1(W)/SPT-2(W)/SPT-3	10
-------------------------	---------

NISPT-1/NISPT-2	11
-----------------	---------

SVT	12
-----	---------

SJT/SJTW	13
----------	---------

ST/SJTW	14
---------	---------

HPN	15
-----	---------

HARMONISED (HAR) CABLE CLASSIFICATION

H03VVH2-F/H05VVH2-F	17
---------------------	---------

H03VV/H05VV	18
-------------	---------

H03V2V2H2-F/H05V2V2H2-F	19
-------------------------	---------

H03V2V2/H05V2V2	20
-----------------	---------

H05RR-F/ H05RN-F/H07RN-F	21
--------------------------	---------

52RVV 300/300	53RVV 300/500V	22
---------------	----------------	---------

JIS Cable Classification

(H)VFF/(H)VCTF/(H)VCTFK	23
-------------------------	---------

HHFF	24
------	---------

PLUG&Connector

 CHINA	25
---	---------

 ARGENTINA	45
---	---------

 AUSTRALIA	46
---	---------

 BRAZIL	49
--	---------

  DARMARK SWITZERLAND	51
---	---------

 ITALY	52
---	---------

 EUROPE	53
--	---------

 JAPAN	60
---	---------

 TAIWAN in china	63
---	---------

 KOREA	66
---	---------

 UK	68
--	---------

 AMERICA	69
---	---------

 SOUTH AFRICA	74
--	---------

 INDONESIA	75
---	---------

 INDIA	76
---	---------

 ISRAEL	78
--	---------

 THAILAN	79
---	---------

技术资讯	81
------	---------

IEC 60227	5 2	R	V	V	2	×	0.75 mm ²
1	2	3	4	5	6	7	8

1-IEC60227:International Electricity Committee Standard of Flexile Cable

2-52:Voltage Rating:300/300V 53:300/500V

3-R:Flexile Cable

4,5-V V:PVC Insulation Jacket

6-2:No. of Conductor

7-×:Without Ground Conductors G:With Ground Conductors

8-0.75mm²:Cross-sectional Size of Conductors


60227 IEC 52(RVV) 300/300V 60227 IEC 53(RVV) 300/500V

- ◆ Rating : 70℃, 300/300V, 300/500V
- ◆ Application: Power supply cord for Electrical Appliances
- ◆ Standard : GB5023



Type	Conductor			Insulation		Jacket			Max conductor resistance at 20℃ (Ω/km)
	Normal Area	No. of Conductor	Construction (No./mm)	Nom. Thickness (mm)	Min. Thickness (mm)	Nom. Thickness (mm)	Min. Thickness (mm)	OD	
60227 IEC 52(RVV) 300/300V	0.5	2C	16/0.20	0.50	0.35	0.60	0.41	3.5×5.2	39
	0.75		24/0.20	0.50	0.35	0.60	0.41	3.45×5.6	39
	0.5		16/0.20	0.50	0.35	0.60	0.41	5.3	39
	0.75		24/0.20	0.50	0.35	0.60	0.41	5.6	26
	0.5	3C	16/0.20	0.50	0.35	0.60	0.41	5.6	39
	0.75		24/0.20	0.50	0.35	0.60	0.41	5.9	26
60227 IEC 53(RVV) 300/500V	0.75	2C	24/0.20	0.60	0.44	0.80	0.58	4.05×6.4	39
	0.75	2C	24/0.20	0.60	0.44	0.80	0.58	6.4	26
	1.0		32/0.20	0.60	0.44	0.80	0.58	6.8	19.5
	1.0		32/0.20	0.60	0.44	0.80	0.58	4.2X6.7	19.5
	1.5		30/0.25	0.70	0.53	0.80	0.58	7.9	13.3
	0.75	3C	24/0.20	0.60	0.44	0.80	0.58	6.8	26
	1.0		32/0.20	0.60	0.44	0.80	0.58	7.1	19.5
	1.5		30/0.25	0.70	0.53	0.80	0.58	8.5	13.3


60227 IEC 56(RVV-90) 300/300V 60227 IEC 57(RVV-90) 300/500V


- ◆ Rating : 90℃, 300/300V, 300/500V
- ◆ Application: Power supply cord for Electrical Appliances
- ◆ Standard : GB5023



Type	Conductor			Insulation		Jacket			Max conductor resistance at 20℃ (Ω /km)
	Normal Area	No. of Conductor	Construction (No./mm)	Nom. Thickness (mm)	Min. Thickness (mm)	Nom. Thickness (mm)	Min. Thickness (mm)	OD	
60227 IEC 56(RVV-90) 300/300V	0.5	2C	16/0.20	0.50	0.35	0.60	0.41	3.5×5.2	39
	0.75		24/0.20	0.50	0.35	0.60	0.41	3.45×5.6	39
	0.5		16/0.20	0.50	0.35	0.60	0.41	5.3	39
	0.75		24/0.20	0.50	0.35	0.60	0.41	5.6	26
	0.5	3C	16/0.20	0.50	0.35	0.60	0.41	5.6	39
	0.75		24/0.20	0.50	0.35	0.60	0.41	5.9	26
60227 IEC 57(RVV-90) 300/500V	0.75	2C	24/0.20	0.60	0.44	0.80	0.58	4.05×6.4	39
	0.75	2C	24/0.20	0.60	0.44	0.80	0.58	6.4	26
	1.0		32/0.20	0.60	0.44	0.80	0.58	6.8	19.5
	1.0		32/0.20	0.60	0.44	0.80	0.58	4.2X6.7	19.5
	1.5		30/0.25	0.70	0.53	0.80	0.58	7.9	13.3
	0.75	3C	24/0.20	0.60	0.44	0.80	0.58	6.8	26
	1.0		32/0.20	0.60	0.44	0.80	0.58	7.1	19.5
	1.5		30/0.25	0.70	0.53	0.80	0.58	8.5	13.3


60245 IEC 53(YZ) 60245 IEC 57(YZW) 60245 IEC 66(YCW)

- ◆ Rating : 60℃, 300/500V, 450/750V
- ◆ Application: Power supply cord for Electrical Appliances
- ◆ Standard : IEC60245-4 , GB5013-4

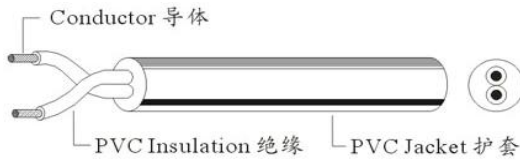

Type	Conductor			Insulation		Jacket			Max conductor resistance at 20℃ (Ω/km)
	Normal Area	No. of Conductor	Construction (No./mm)	Nom. Thickness (mm)	Min. Thickness (mm)	Nom. Thickness (mm)	Min. Thickness (mm)	OD	
60245 IEC 53(YZ) 300/500V	0.75	2C	24/0.20	0.60	0.44	0.80	0.58	6.3	26.7
	1.0		32/0.20	0.60	0.44	0.90	0.66	6.8	19.5
	1.5		30/0.25	0.80	0.62	1.00	0.75	8.4	13.3
	0.75	3C	24/0.20	0.60	0.44	0.90	0.66	6.8	26.7
	1.0		32/0.20	0.60	0.44	0.90	0.66	7.2	19.5
	1.5		30/0.25	0.80	0.62	1.00	0.75	8.9	13.3
	0.75	4C	24/0.20	0.60	0.44	0.90	0.66	7.4	26.7
	1.0		32/0.20	0.60	0.44	0.90	0.66	8.1	19.5
	1.5		30/0.25	0.80	0.62	1.10	0.83	9.9	13.3
	2.5		50/0.253	0.9	0.71	1.20	0.92	11.8	7.80
	0.75	5C	24/0.20	0.60	0.44	1.00	0.75	8.60	26.7
	1.0		32/0.20	0.60	0.44	1.00	0.75	8.85	19.5
	1.5		30/0.25	0.80	0.62	1.10	0.82	10.8	13.3
	2.5		50/0.253	0.9	0.71	1.30	1.00	12.9	7.80
60245 IEC 66(YCW) 450/750V	1.0	2C	32/0.20	0.80	0.62	1.30	1.00	8.80	19.5
	1.5		30/0.25	0.80	0.62	1.50	1.17	9.60	13.3
	2.5		50/0.253	0.90	0.71	1.70	1.34	11.40	7.80
	1.0	3C	32/0.20	0.80	0.62	1.40	1.09	9.40	19.5
	1.5		30/0.25	0.80	0.62	1.60	1.26	10.30	13.3
	2.5		50/0.253	0.90	0.71	1.80	1.43	12.20	7.80
	1.0	4C	32/0.20	0.80	0.62	1.5	1.17	10.5	19.5
	1.5		30/0.25	0.80	0.62	1.7	1.34	11.4	13.3
	2.5		50/0.253	0.90	0.71	1.9	1.51	13.5	7.80
	1.0	5C	32/0.20	0.80	0.62	1.6	1.26	11.6	19.5
	1.5		30/0.25	0.80	0.62	1.8	1.43	12.5	13.3
	2.5		50/0.253	0.90	0.71	2.0	1.54	15.0	7.80



UL Cable Classification

Description	code
Christmas Tree Thermoplastic	XT
Service Parallel Thermoplastic – 1/64” Insulation	SPT-1
Service Parallel Thermoplastic – 2/64” Insulation	SPT-2
Service Parallel Thermoplastic – 3/64” Insulation	SPT-3
Service Parallel Elastomer – 1/64” Insulation	SPE-1
Service Parallel Elastomer – 2/64” Insulation	SPE-2
Service Parallel Elastomer – 3/64” Insulation	SPE-3
Non-integrated double insulation flexible cord	NISPT-1/NISPT-2
Service Vacuum Thermoplastic	SVT
SVT with Oil-Resistant Jacket	SVTO
SVT with Oil-Resistant Insulation & Jacket	SVTOO
Service Vacuum Elastomer	SVE
Service Junior Thermoplastic	SJT
SJT with Oil-Resistant Jacket	SJTO
SJT with Oil-Resistant Insulation & Jacket	SJTOO
Service Junior Elastomer	SJE
Service Thermoplastic	ST
Service Elastomer	SE
ST with Oil-Resistant Jacket	STO
ST with Oil-Resistant Insulation & Jacket	STOO
Heater Parallel Neoprene	HPN

Note


1.Service parallel types-wall thickness for integral construction includes insulation and jacket combined.
Elastomer is a thermoplastic material with elastomeric similar to rubber.

PVC Insulation Flexible Cords



COLCK CORD/TPT



- ◆ Rating : 60℃, 300V
- ◆ Application: Decorative Lighting Electrical Equipment
- ◆ Standard : UL 62, UL1581 / CSA C22.2

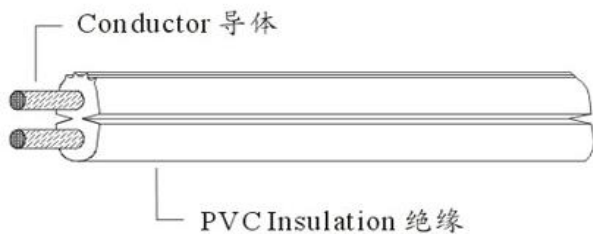

Type	Conductor			Insulation		Max conductor resistance at 20℃ (Ω /km)
	AWG	No. of Conductor	Construction (No./mm)	Nom. Thickness (mm)	OD	
TPT	27	2C	15/1(天梳)	0.76	2.7× 5.4	270


SPT-1(W) / SPT-2(W) / SPT-3

- ◇ Rating : 60℃, 75℃, 90℃, 105℃, 300V
- ◇ Application: Household Electric Equipment But(SPT3) used in humid environment operations, high-current equipment ,such as air conditioners refrigerator.
- ◇ Standard : UL 62, UL1581 / CSA C22.2

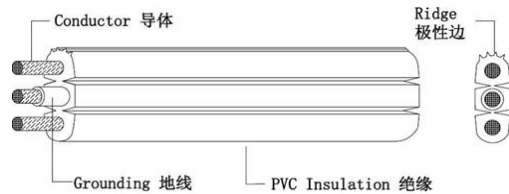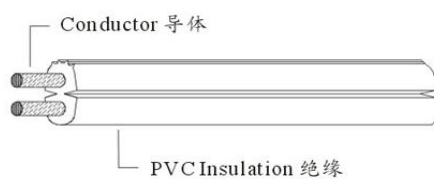


Type	Conductor			Insulation		Max conductor resistance at 20℃ (Ω /km)
	AWG	No. of Conductor	Construction (No./mm)	Nom. Thickness (mm)	OD	
SPT-1	20	2C	26/0.16	0.76	2.5× 5.0	35.74
		3C	26/0.16	0.76	2.5× 7.4	35.74
	18	2C	41/0.16	0.76	2.75× 5.6	22.4
		3C	41/0.16	0.76	2.7× 8.0	22.4
SPT-2	18	2C	41/0.16	1.14	3.5× 6.9	22.4
		3C	41/0.16	1.14	3.7× 8.7	22.4
	16	2C	65/0.16	1.14	3.8× 7.5	14.1
		3C	65/0.16	1.14	3.9× 9.9	14.1
SPT-3	18	2C	41/0.16	1.52	4.5× 9.0	22.4
		3C	41/0.16	1.52	4.4× 10.4	22.4
	16	2C	65/0.16	1.52	3.7× 7.4	14.1
		3C	65/0.16	1.52	4.6× 11.0	14.1
	14	2C	41/0.254	2.03	6.3× 12.6	8.89
		3C	41/0.254	2.03	6.0× 14.5	8.89
	12	2C	65/0.254	2.41	7.6× 15.2	5.57
		3C	65/0.254	2.41	7.4× 16.11	5.57
	10	2C	105/0.254	2.79	9.1× 18.2	3.51
		3C	105/0.254	2.79	9.1× 18.8	3.51
SPT-1W (Only 105℃)	20	2C	26/0.16	0.76	2.5× 5.0	35.74
	18	2C	41/0.16	0.76	2.7× 5.3	22.4
SPT-2W (Only 105℃)	18	2C	41/0.1	1.14	3.5× 6.9	22.4
	16	2C	65/0.16	1.14	3.8× 7.5	14.1



NISPT-1 / NISPT-2

- ◇ Rating : 60℃, 75℃, 90℃, 105℃, 300V
- ◇ Application: Household Electric Equipment ,such as fans, radios
- ◇ Standard : UL 62, UL1581 / CSA C22.2


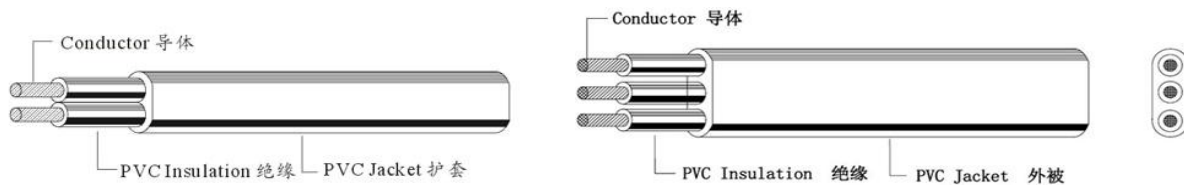


Type	Conductor			Insulation		Jacket			Max conductor resistance at 20℃ (Ω/km)
	No. of conductors	AWG	Construction (No./mm)	Nom thickness (mm)	Mini thickness (mm)	Nom thickness (mm)	Mini thickness (mm)	OD	
NISPT-1	3C	20	26/0.16	0.38	0.33	0.38	0.33	2.7×6.5	35.74
		18	41/0.16	0.38	0.33	0.38	0.33	3.2×8.2	22.4
	2C	20	26/0.16	0.38	0.33	0.38	0.33	2.7×5.0	35.74
		18	41/0.16	0.38	0.33	0.38	0.33	2.95×5.5	22.4
NISPT-2	3C	18	41/0.16	0.76	0.69	0.38	0.33	3.65×10.2	22.4
		16	65/0.16	0.76	0.69	0.38	0.33	4.05×11.6	14.1
	2C	18	41/0.16	0.76	0.69	0.38	0.33	3.65×6.95	22.4
		16	65/0.16	0.76	0.69	0.38	0.33	3.85×7.5	14.1



SVT



- ◇ Rating : 60℃, 75℃, 90℃, 105℃, 300V
- ◇ Application: For light portable tools ,blenders and vacuum cleaners; Shield for the computer's power supply line, remove EMI / RFI interference.
- ◇ Standard : UL 62, UL1581 / CSA C22.2

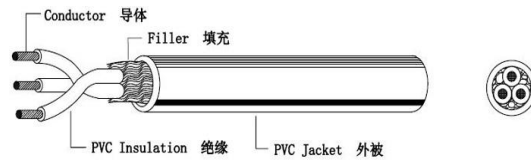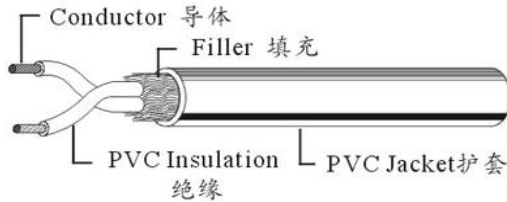

Type	Conductor			Insulation		Jacket			Max conductor resistance at 20℃ (Ω /km)
	No. of conductors	AWG	Construction (No./mm)	Nom thickness (mm)	Mini thickness (mm)	Nom thickness (mm)	Mini thickness (mm)	OD (mm)	
SVT	2C	18	41/0.16	0.38	0.34	0.76	0.61	6.0	22.4
		17	52/0.16	0.38	0.34	0.76	0.61	6.35	17.8
		16	65/0.16	0.38	0.34	0.76	0.61	6.7	14.1
	3C	18	41/0.16	0.76	0.69	0.76	0.61	6.3	22.4
		17	52/0.16	0.76	0.69	0.76	0.61	6.7	17.8
		16	65/0.16	0.76	0.69	0.76	0.61	6.9	14.1


SJT /SJTO /SJTOO /SJTW /SJTOW /SJTOOW

- ◇ Rating : 60℃, 75℃, 90℃, 105℃, 300V
- ◇ Application: For light portable tools ,blenders and vacuum cleaners; Shield for the computer's power supply line, remove EMI / RFI interference.
- ◇ Standard : UL 62, UL1581 / CSA C22.2

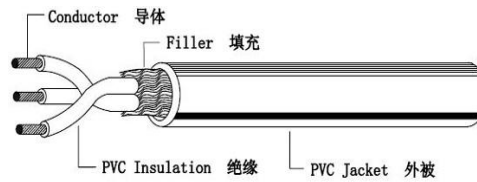
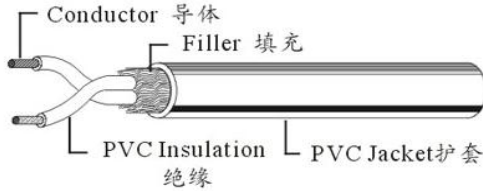


Type	Conductor			Insulation		Jacket			Max conductor resistance at 20℃ (Ω/km)
	AWG	No. of Conductor	Construction (No./mm)	Nom. Thickness (mm)	Mini thickness (mm)	Nom. Thickness (mm)	Mini thickness (mm)	OD (mm)	
SJT SJTO SJTOO SJTW SJTOW SJTOOW	18	2C	41/0.16	0.76	0.69	0.76	0.61	7.5	22.4
	17		52/0.16	0.76	0.69	0.76	0.61	7.8	17.8
	16		65/0.16	0.76	0.69	0.76	0.61	8.0	14.1
	14		41/0.16	0.76	0.69	0.76	0.61	9.0	8.89
	12		65/0.16	0.76	0.69	0.76	0.61	10.5	5.57
	10		104/0.16	1.14	1.02	1.52	1.22	14.1	3.51
	18	3C	41/0.16	0.76	0.69	0.76	0.61	7.8	22.4
	17		52/0.16	0.76	0.69	0.76	0.61	8.4	17.8
	16		65/0.16	0.76	0.69	0.76	0.61	8.4	14.1
	14		41/0.16	0.76	0.69	0.76	0.61	9.3	8.89
	12		65/0.16	0.76	0.69	0.76	0.61	11.0	5.57
	10		104/0.16	1.14	1.02	1.52	1.22	14.8	3.51
	18	4C	41/0.16	0.76	0.69	0.76	0.61	8.6	22.4
	17		52/0.16	0.76	0.69	0.76	0.61	8.8	17.8
	16		65/0.16	0.76	0.69	0.76	0.61	9.2	14.1
	14		41/0.16	0.76	0.69	0.76	0.61	10.3	8.89
	12		65/0.16	0.76	0.69	0.76	0.61	12.1	5.57
	10		104/0.16	1.14	1.02	1.52	1.22	16.4	3.51



ST / STW

- ◆ Rating : 60℃, 75℃, 90℃, 105℃, 300V
- ◆ Application: For power hand tools, Washing Machines, Medical Equipment and Office Machines etc
- ◆ Standard : UL 62, UL1581 / CSA C22.2

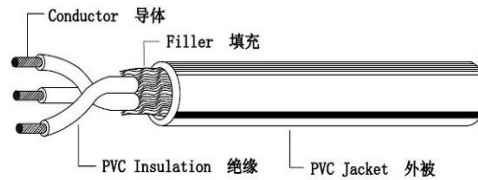
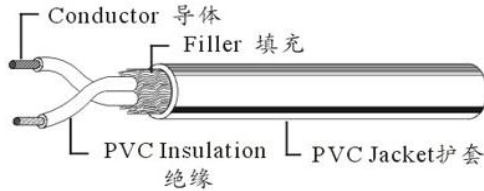


Type	Conductor			Insulation		Jacket			Max conductor resistance at 20℃ (Ω/km)
	AWG	No. of Conductor	Construction (No./mm)	Nom. Thickness (mm)	Min. Thickness (mm)	Nom. Thickness (mm)	Min. Thickness (mm)	OD (mm)	
ST STW	18	2C	41/0.16	0.76	0.69	1.52	1.22	8.8	22.4
	17		52/0.16	0.76	0.69	1.52	1.22	9.1	17.8
	16		65/0.16	0.76	0.69	1.52	1.22	9.45	14.1
	14		41/0.16	1.14	1.02	2.03	1.62	12.8	8.89
	12		65/0.16	1.14	1.02	2.41	1.93	14.6	5.57
	10		104/0.16	1.14	1.02	2.41	1.93	15.9	3.51
	18	3C	41/0.16	0.76	0.69	1.52	1.22	9.3	22.4
	17		52/0.16	0.76	0.69	1.52	1.22	9.95	17.8
	16		65/0.16	0.76	0.69	1.52	1.22	9.95	14.1
	14		41/0.16	1.14	1.02	2.03	1.62	13.5	8.89
	12		65/0.16	1.14	1.02	2.41	1.93	15.3	5.57
	10		104/0.16	1.14	1.02	2.41	1.93	16.8	3.51
	18	4C	41/0.16	0.76	0.69	1.52	1.22	9.95	22.4
	17		52/0.16	0.76	0.69	1.52	1.22	10.4	17.8
	16		65/0.16	0.76	0.69	1.52	1.22	10.7	14.1
	14		41/0.16	1.14	1.02	2.03	1.62	14.5	8.89
	12		65/0.16	1.14	1.02	2.41	1.93	16.5	5.57
	10		104/0.16	1.14	1.02	2.41	1.93	18.1	3.51




HPN

- ◆ Rating : 90°C, 105°C, 300V
- ◆ Application:
- ◆ Standard : UL 62, CSA C22.2

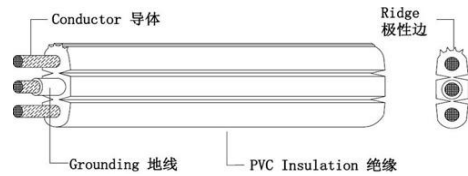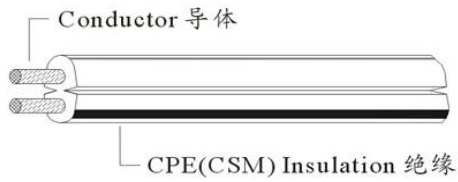


Type	Conductor			Insulation			OD (mm)	Max conductor resistance at 20°C (Ω /km)
	AWG	No. of Conductor	Constructio n (No./mm)	Nom thickness (mm)	Min. Thicknes s (mm)	Distance of Conductor (mm)		
HPN	18	2C	41/0.16	1.14	1.02	2.03	3.6×6.8	22.4
	16		65/0.16	1.14	1.02	2.03	3.9×7.8	14.1
	14		103/0.16	1.52	1.3	2.03	4.9×9.8	8.89
	18	3C	41/0.16	1.14	1.02	1.01	3.6×9.5	22.4
	16		65/0.16	1.14	1.02	1.01	4.0×10.3	14.1
	14		103/0.16	1.52	1.37	1.01	4.8×12.0	8.89

HARMONISED (HAR) CABLE CLASSIFICATION

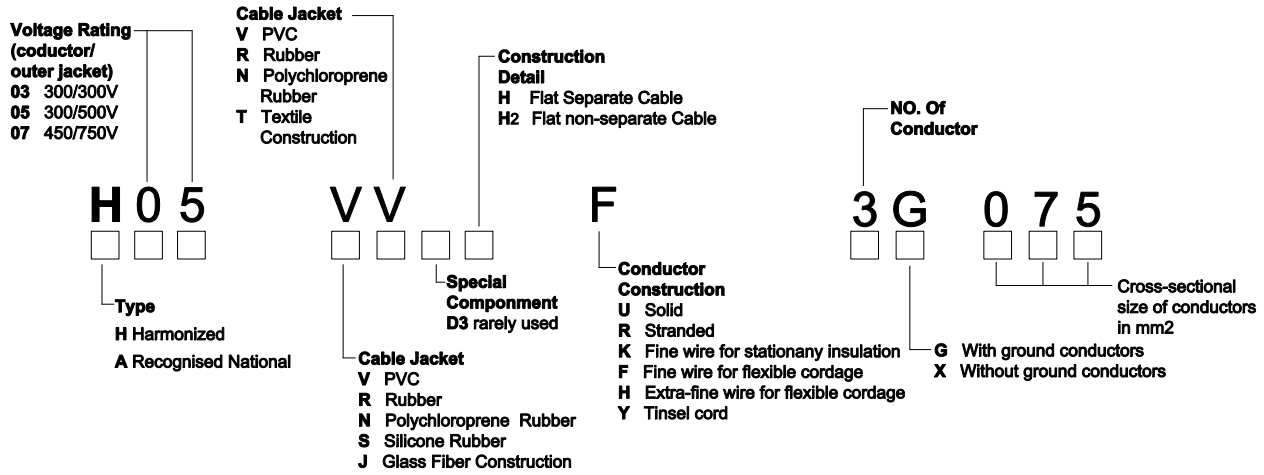

H03VVH2-F / H05VVH2-F



- ◇ Rating : 70℃, 300/300V, 300/500V
- ◇ Application: Power supply cord for Electrical Appliances
- ◇ Standard : IEC60227-5 EN50525-2-11

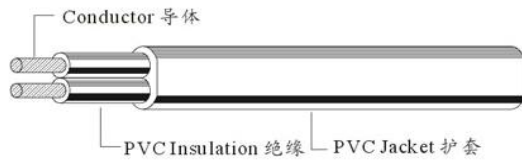

Type	Conductor			Insulation		Jacket			Max conductor resistance at 20℃ (Ω/km)
	Normal Area	No. of Conductor	Construction (No./mm)	Nom. Thickness (mm)	Min. Thickness (mm)	Nom. Thickness (mm)	Min. Thickness (mm)	OD (mm)	
H03VVH2-F	0.5	2C	16/0.20	0.50	0.35	0.60	0.41	3.5×5.2	39
	0.75		24/0.20	0.50	0.35	0.60	0.41	3.4×5.6	26
H05VVH2-F	0.75		24/0.20	0.6	0.44	0.80	0.58	4.05×6.4	26
	1.0		32/0.2	0.6	0.44	0.8	0.58	4.35×7.0	19.5

H03VV-F / H05VV-F


- ◆ Rating : 70℃, 300/300V, 300/500V
- ◆ Application: Power supply cord for Electrical Appliances
- ◆ Standard : IEC60227-5 , EN50525-2-11

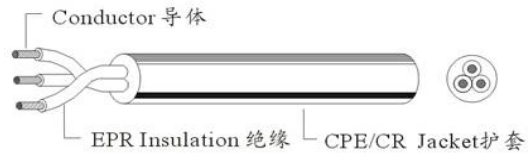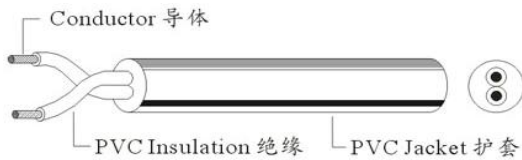

Type	Conductor			Insulation		Jacket			Max conductor resistance at 20℃ (Ω /km)
	Normal Area	No. of Conductor	Construction (No./mm)	Nom. Thickness (mm)	Min. Thickness (mm)	Nom. Thickness (mm)	Min. Thickness (mm)	OD (mm)	
H03VV-F	0.5	2C	16/0.20	0.50	0.35	0.60	0.41	5.3	39
	0.75		24/0.20	0.50	0.35	0.60	0.41	5.6	26
	0.5	3C	16/0.20	0.50	0.35	0.60	0.41	5.6	26
	0.75		24/0.20	0.50	0.35	0.60	0.41	5.9	26
H05VV-F	0.75	2C	24/0.20	0.60	0.44	0.80	0.58	6.4	26
	1.0		32/0.20	0.60	0.44	0.80	0.58	6.8	19.5
	1.5		30/0.25	0.70	0.53	0.9	0.66	7.9	13.3
	2.5		50/0.253	0.80	0.62	1.0	0.75	9.3	7.8
	0.75	3C	24/0.20	0.60	0.44	0.80	0.58	6.8	26
	1.0		32/0.20	0.60	0.44	0.80	0.58	7.1	19.5
	1.5		30/0.25	0.70	0.53	0.9	0.66	8.5	13.3
	2.5		50/0.253	0.80	0.62	1.10	0.83	10.1	7.8

H03V2V2H2-F / H05V2V2H2-F



- ◇ Rating : 90℃, 300/300V, 300/500V
- ◇ Application: Power supply cord for Electrical Appliances
- ◇ Standard : IEC60227-5 EN50525-2-11

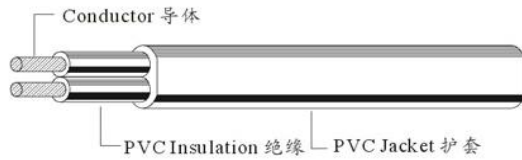

Type	Conductor			Insulation		Jacket			Max conductor resistance at 20℃ (Ω/km)
	Normal Area	No. of Conductor	Construction (No./mm)	Nom. Thickness (mm)	Min. Thickness (mm)	Nom. Thickness (mm)	Min. Thickness (mm)	OD (mm)	
H03V2V2H2-F	0.5	2C	16/0.20	0.50	0.35	0.60	0.41	3.5×5.2	39
	0.75		24/0.20	0.50	0.35	0.60	0.41	3.4×5.6	26
H05V2V2H2-F	0.75		24/0.20	0.6	0.44	0.80	0.58	4.05×6.4	26
	1.0		32/0.2	0.6	0.44	0.8	0.58	4.35×7.0	19.5

H03V2V2-F / H05V2V2-F


- ◇ Rating : 90℃, 300/300V, 300/500V
- ◇ Application: Power supply cord for Electrical Appliances
- ◇ Standard : IEC60227-5 , EN50525-2-11

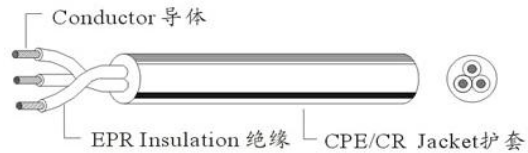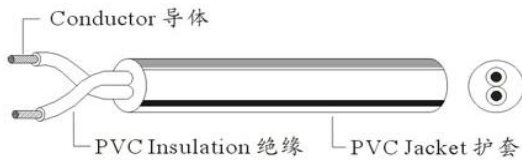

Type	Conductor			Insulation		Jacket			Max conductor resistance at 20℃ (Ω/km)
	Normal Area	No. of Conductor	Construction (No./mm)	Nom. Thickness (mm)	Min. Thickness (mm)	Nom. Thickness (mm)	Min. Thickness (mm)	OD (mm)	
H03V2V2-F	0.5	2C	16/0.20	0.50	0.35	0.60	0.41	5.3	39
	0.75		24/0.20	0.50	0.35	0.60	0.41	5.6	26
	0.5	3C	16/0.20	0.50	0.35	0.60	0.41	5.6	26
	0.75		24/0.20	0.50	0.35	0.60	0.41	5.9	26
H05V2V2-F	0.75	2C	24/0.20	0.60	0.44	0.80	0.58	6.4	26
	1.0		32/0.20	0.60	0.44	0.80	0.58	6.8	19.5
	1.5		30/0.25	0.70	0.53	0.9	0.66	7.9	13.3
	2.5		50/0.253	0.80	0.62	1.0	0.75	9.3	7.8
	0.75	3C	24/0.20	0.60	0.44	0.80	0.58	6.8	26
	1.0		32/0.20	0.60	0.44	0.80	0.58	7.1	19.5
	1.5		30/0.25	0.70	0.53	0.9	0.66	8.5	13.3
	2.5		50/0.253	0.80	0.62	1.10	0.83	10.1	7.8

H05RR-F / H05RN-F / H07RN-F

- ◇ Rating : 60℃, 300/500V, 300/500V, 450/750V
- ◇ Application: Power supply cord for Electrical Appliances
- ◇ Standard : IEC60245-4, EN50525-2-21

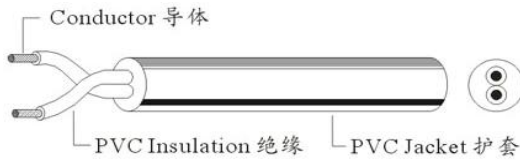

Type	Conductor			Insulation		Jacket			Max conductor resistance at 20℃ (Ω /km)
	Normal Area	No. of Conductor	Construction (No./mm)	Nom. Thickness (mm)	Min. Thickness (mm)	Nom. Thickness (mm)	Min. Thickness (mm)	OD (mm)	
H05RR-F	0.75	2C	24/0.20	0.60	0.54	0.80	0.58	6.3	26.7
	1.0		32/0.20	0.60	0.54	0.90	0.66	6.8	19.5
	1.5		30/0.25	0.80	0.72	1.00	0.75	8.4	13.3
	0.75	3C	24/0.20	0.60	0.54	0.90	0.66	6.8	26.7
	1.0		32/0.20	0.60	0.54	0.90	0.66	7.2	19.5
	1.5		30/0.25	0.80	0.72	1.00	0.75	8.9	13.3
H05RN-F	0.75	2C	24/0.20	0.60	0.54	0.80	0.58	6.3	26.7
	1.0		32/0.20	0.60	0.54	0.90	0.66	6.8	19.5
	0.75	3C	24/0.20	0.60	0.54	0.90	0.66	6.8	26.7
	1.0		32/0.20	0.60	0.54	0.90	0.66	7.2	19.5
H07RN-F	1.0	2C	32/0.20	0.80	0.62	1.30	1.00	8.80	19.5
	1.5		30/0.25	0.80	0.62	1.50	1.17	9.60	13.3
	2.5		50/0.253	0.90	0.71	1.70	1.34	11.40	7.80
	1.0	3C	32/0.20	0.80	0.62	1.40	1.09	9.40	19.5
	1.5		30/0.25	0.80	0.62	1.60	1.26	10.30	13.3
	2.5		50/0.253	0.90	0.71	1.80	1.43	12.20	7.80



JIS Cable Classification

Description	code
PVC Insulation Single-Core Cord	VSF
Heat-Resistant PVC Insulation Single-Core Cord	HVSF
PVC Insulated Twin-Twisted Cord	VTF
Heat-Resistant PVC Insulated Twin-Core Cord	HVTF
PVC Insulated Flat Cord	VFF
Heat-Resistant PVC Insulated Flat Cord	HVFF
PVC Insulated Cabtyre Round Cord	VCTF
Heat-Resistant PVC Insulated Cabtyre Round Cord	HVCTF
PVC Insulated Cabtyre Oval Cord	VCTFK
Heat-Resistant PVC Insulated Cabtyre Oval Cord	HVCTFK
Chlorosulfonafe Polyethylene Rubber-insulated Flat Cord	HHFF



Symbols Designate the Following

V:	Polyvinyl Chloride
SF:	Single Core Flexible Cord
TF:	Twin-twisted Flexible Cord
FF:	Flat Flexible Cord
CTF:	Cabtyre Cord
K:	Oval
H:	Heat-Resistant Insulation



(H)VFF / (H)VCTF / (H)VCTFK

- ◇ Rating :60℃, 75℃, 300V
- ◇ Application: Indoor Small Appliances
- ◇ Standard : JIS C3306, CNS 319

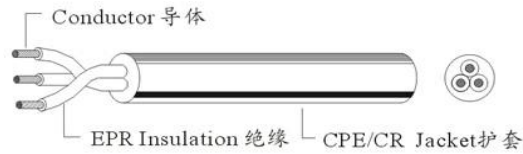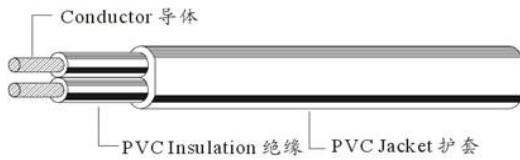

Type	Conductor			Insulation		Jacket			Max conductor resistance at 20℃ (Ω/km)
	Normal Area	No. of Conductor	Construction (No./mm)	Nom. Thickness (mm)	Min. Thickness (mm)	Nom. Thickness (mm)	Min. Thickness (mm)	OD (mm)	
VFF HVFF	0.5	2C	20/0.18	0.72	0.64			2.5×5.0	36.7
	0.75		30/0.18	0.72	0.64			2.7×5.4	24.4
	1.25		50/0.18	0.72	0.64			3.1×6.2	14.7
	2.0		37/0.26	0.72	0.64			3.4×6.8	9.50
VCTF HVCTF	0.75	2C	30/0.18	0.54	0.48	0.9	0.7	6.6	25.1
	1.25		50/0.18	0.54	0.48	0.9	0.7	7.4	15.1
	2.0		37/0.26	0.54	0.48	0.9	0.7	8.0	9.79
	0.75	3C	30/0.18	0.54	0.48	0.9	0.7	7.0	25.1
	1.25		50/0.18	0.54	0.48	0.9	0.7	7.8	15.1
	2.0		37/0.26	0.54	0.48	0.9	0.7	8.5	9.79
	0.75	4C	30/0.18	0.54	0.48	0.9	0.7	7.6	25.1
	1.25		50/0.18	0.54	0.48	0.9	0.7	8.5	15.1
	2.0		37/0.26	0.54	0.48	0.9	0.7	9.3	9.79
VCTFK HVCTFK	0.75	2C	30/0.18	0.54	0.48	0.9	0.7	4.3×6.6	24.4
	1.25		50/0.18	0.54	0.48	0.9	0.7	4.7×5.3	14.7
	2.0		37/0.26	0.54	0.48	0.9	0.7	5.0×8.0	9.50


HHFF / NNFF / SSFF / EPPFF

- ◇ Rating : 90℃, 300V
- ◇ Application: Indoor Small Appliances
- ◇ Standard : JIS C3301




Type	Conductor			Insulation			Max conductor resistance at 20℃ (Ω/km)
	Normal Area	No. of Conductor	Construction (No./mm)	Nom thickness (mm)	MIN thickness (mm)	OD (mm)	
HHFF	0.75	2C	30/0.18	0.9	0.8	3.2×6.4	25.8
	1.25		50/0.18	0.9	0.8	3.6×7.2	15.5
	2.0		37/0.26	0.9	0.8	3.9×7.8	9.91

Type	Conductor			Insulation			Max conductor resistance at 20℃ (Ω/km)
	Normal Area	No. of Conductor	Construction (No./mm)	Nom thickness (mm)	MIN thickness (mm)	OD (mm)	
NNFF	0.75	2C	30/0.18	0.9	0.8	3.2×6.4	25.8
SSFF	1.25		50/0.18	0.9	0.8	3.6×7.2	15.5
EPPFF	2.0		37/0.26	0.9	0.8	3.9×7.8	9.91





国 标 插 头 系 列

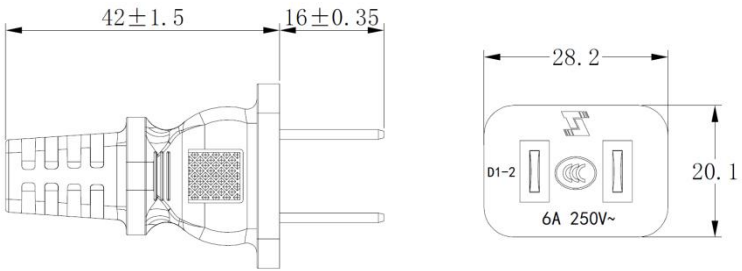

	产品描述	2-Pole Straight Plug(两芯插头)	
	产品标准	GB/T 2099.1	GB 1002
	额 定 值	2.5A/6A/10A 250V~	
	安规标志		
	额定电流	配线规格 (mm²)	
	2.5A	60227 IEC 52	2X 0.5
	2.5A	60227 IEC 52	2X 0.5 (扁)
	6A/10A	60227 IEC 52	2X 0.75
	6A/10A	60227 IEC 52	2X 0.75 (扁)
	6A/10A	60227 IEC 53	2X 0.75
	6A/10A	60227 IEC 53	2X 0.75 (扁)
	10A	60227 IEC 53	2X 1.0
	10A	60227 IEC 53	2X1.0 (扁)
	10A	60227 IEC 57	2X 0.75
	10A	60227 IEC 57	2X 0.75 (扁)
D1-2	10A	60245 IEC 53	2X 0.75
	10A	60245 IEC 53	2X1.0
	10A	60245 IEC 57	2X 0.75
	10A	60245 IEC 57	2X1.0
	10A	60245 IEC 57	2X1.0
			

国 标 插 头 系 列

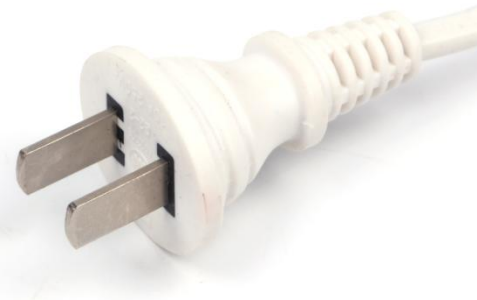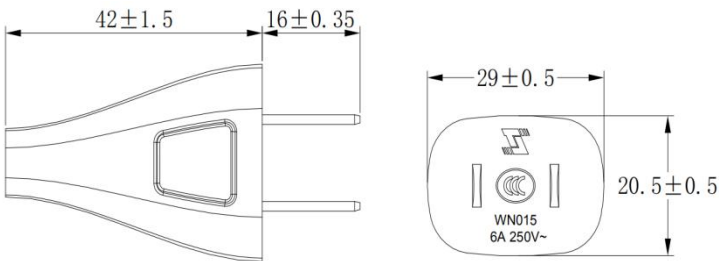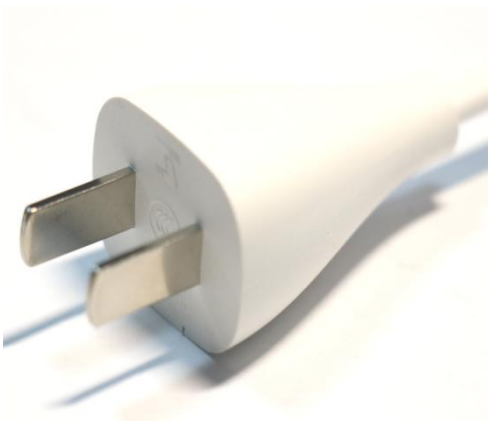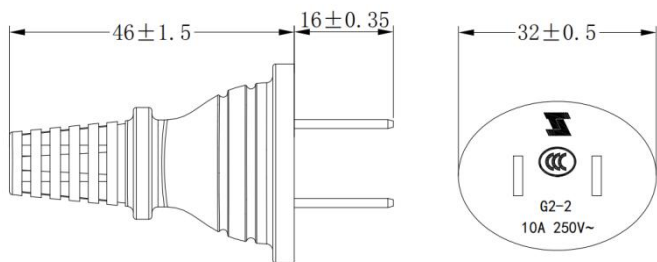


	产品描述	2-Pole Straight Plug(两芯插头)	
	产品标准	GB/T 2099.1	GB 1002
	额 定 值	2.5A/6A/10A 250V~	
	安规标志	CCC	
	额定电流	配线规格 (mm²)	
G2-2	2.5A	60227 IEC 52	2X 0.5 (扁)
	6A/10A	60227 IEC 53	2X 0.75 (扁)
			
	产品描述	2-Pole Straight Plug(两芯插头)	
	产品标准	GB/T 2099.1	GB 1002
	额 定 值	2.5A/6A/10A 250V~	
	安规标志	CCC	
	额定电流	配线规格 (mm²)	
WN015	2.5A	60227 IEC 52	2X 0.5 (扁)
	6A/10A	60227 IEC 52	2X 0.75 (扁)
	6A/10A	60227 IEC 53	2X 0.75 (扁)
	10A	60227 IEC 53	2X 1.0 (扁)
			

国标插头系列



WN002

产品描述	2-Pole Straight Plug(两芯插头)
产品标准	GB/T 2099.1 GB 1002
额定值	2.5A/6A/10A 250V~
安规标志	
额定电流	配线规格 (mm²)
2.5A	60227 IEC 52 2X 0.5 (扁)
6A/10A	60227 IEC 53 2X 0.75 (扁)
10A	60227 IEC 53 2X 1.0 (扁)

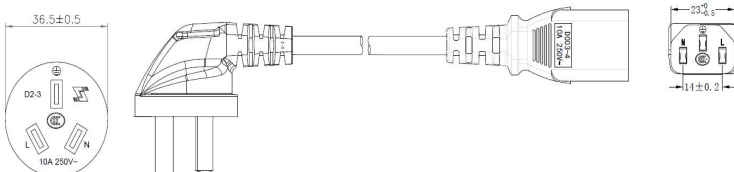

Technical drawing of the 2-Pole Straight Plug (两芯插头) showing dimensions and specifications.

Dimensions:

- Overall width: 36.5 ± 0.5
- Plug body width: 23.5 ± 0.5
- Plug body height: 14 ± 0.2
- Plug body depth: 15.5 ± 0.5



Specifications:

- Model: D2-3
- Rated current: 10A
- Rated voltage: 250V~
- Material: PBT
- Color: Black



SSA-2

产品描述	2-Pole Straight Plug(两芯插头)	
产品标准	GB/T 2099.1	GB 1002
额 定 值	6A/10A 250V~	
安规标志		
额定电流	配线规格 (mm ²)	
6A/10A	60227 IEC 53	2X 0.75
10A	60227 IEC 53	2X 1.0
10A	60245 IEC 66	2X 1.0
6A/10A	60245 IEC 53	2X 0.75
10A	60245 IEC 53	2X 1.0
6A/10A	60245 IEC 57	2X 0.75
10A	60245 IEC 57	2X 1.0


国 标 插 头 系 列





	产品描述	2-Pole Straight Plug(两芯插头)	
	产品标准	GB/T 2099.1	GB 1002
	额 定 值	6A/10A 250V~	
	安规标志		
	额定电流	配线规格 (mm²)	
	6A/10A	60227 IEC 53	2X 0.75
SSA-3	10A	60227 IEC 53	2X 1.0
	产品描述	2-Pole Straight Plug(两芯插头)	
	产品标准	GB/T 2099.1	GB 1002
	额 定 值	2.5A/6A/10A 250V~	
	安规标志		
	额定电流	配线规格 (mm²)	
	2.5A	60227 IEC 52	2X 0.5 (扁)
	6A/10A	60227 IEC 52	2X 0.75 (扁)
	6A/10A	60227 IEC 53	2X 0.75 (扁)
	G2-1		



WN004

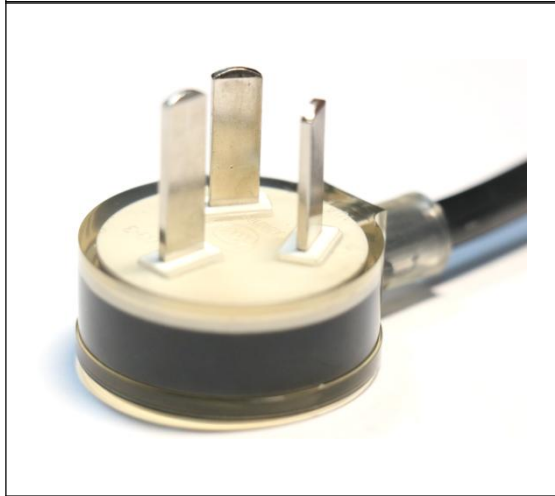

G3-1

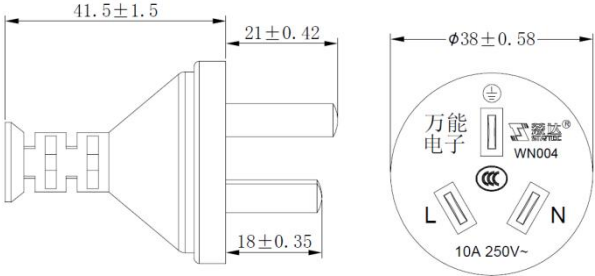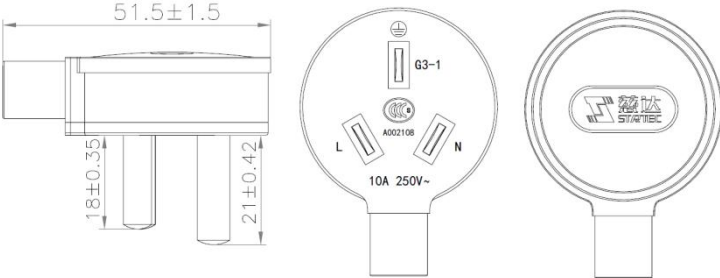产品描述	3-Pole Straight Plug(三芯插头)	
产品标准	GB/T 2099.1	GB 1002
额 定 值	2.5A/6A/10A 250V~	
安规标志		
额定电流	配线规格 (mm²)	
2.5A	60227 IEC 52	3X 0.5
6A/10A	60227 IEC 52	3X 0.75
6A/10A	60227 IEC 53	3X 0.75
10A	60227 IEC 53	3X 1.0
10A	60227 IEC 53	3X 1.5
6A/10A	60245 IEC 53	3X 0.75
10A	60245 IEC 53	3X 1.0
10A	60245 IEC 53	3X 1.5
6A/10A	60245 IEC 57	3X 0.75
10A	60245 IEC 57	3X 1.0
10A	60245 IEC 57	3X 1.5
		
产品描述	3-Pole Straight Plug(两芯插头)	
产品标准	GB/T 2099.1	GB 1002
额 定 值	6A/10A 250V~	
安规标志		
额定电流	配线规格 (mm²)	
6A/10A	60227 IEC 53	3X 0.75
10A	60227 IEC 53	3X 1.0
		

国 标 插 头 系 列



	产品描述	3-Pole Straight Plug(三芯插头)	
	产品标准	GB/T 2099.1	GB 1002
	额 定 值	2.5A/6A/10A 250V~	
	安规标志		
	额定电流	配线规格 (mm²)	
	2.5A	60227 IEC 52	3X 0.5
	6A/10A	60227 IEC 52	3X 0.75
	6A/10A	60227 IEC 53	3X 0.75
	10A	60227 IEC 53	3X 1.0
	10A	60227 IEC 53	3X 1.5
	6A/10A	60245 IEC 53	3X 0.75
	10A	60245 IEC 53	3X 1.0
D1-3	10A	60245 IEC 53	3X 1.5
	6A/10A	60245 IEC 57	3X 0.75
	10A	60245 IEC 57	3X 1.0
	10A	60245 IEC 57	3X 1.5

国 标 插 头 系 列



D2-3

产品描述 3-Pole Straight Plug(三芯插头)


产品标准 GB/T 2099.1 GB 1002

额 定 值 2.5A/6A/10A 250V~

安规标志

额定电流 配线规格 (mm²)

2.5A	60227 IEC 52	3X 0.5
6A/10A	60227 IEC 52	3X 0.75
6A/10A	60227 IEC 53	3X 0.75
10A	60227 IEC 53	3X 1.0
10A	60227 IEC 53	3X 1.5
6A/10A	60245 IEC 53	3X 0.75
10A	60245 IEC 53	3X 1.0
6A/10A	60245 IEC 57	3X 0.75-1.0

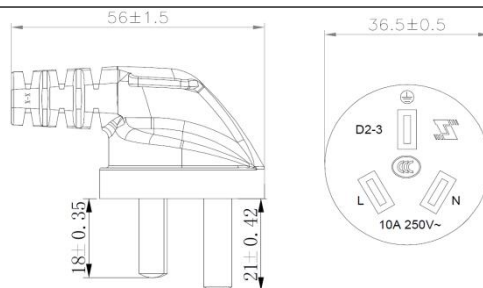

D1-5

产品描述 3-Pole Straight Plug(三芯插头)


产品标准 GB/T 2099.1 GB 1002

额 定 值 16A 250V~

安规标志

额定电流 配线规格 (mm²)

16A	60227 IEC 53	3X 1.0
16A	60227 IEC 53	3X 1.5
16A	60227 IEC 53	3X 2.5
16A	60245 IEC 53	3X 1.0
16A	60245 IEC 53	3X 1.5
16A	60245 IEC 53	3X 2.5
16A	60245 IEC 57	3X 1.0
16A	60245 IEC 57	3X 1.5-2.5

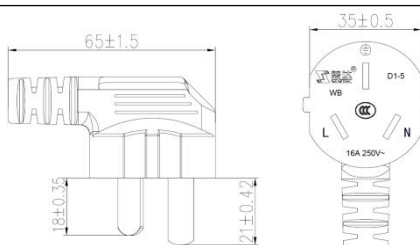



国 标 插 头 系 列



	产品描述	3-Pole Straight Plug(三芯插头)	
	产品标准	GB/T 2099.1	GB 1002
	额 定 值	2.5A/6A/10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	2.5A	60227 IEC 52	3X 0.5
	6A/10A	60227 IEC 52	3X 0.75
	6A/10A	60227 IEC 53	3X 0.75
	10A	60227 IEC 53	3X 1.0
	10A	60227 IEC 53	3X 1.5
	10A	60227 IEC 53	3X 0.75
	10A	60227 IEC 53	3X 1.0
D1-4	6A/10A	60245 IEC 53	3X 0.75
	10A	60245 IEC 53	3X 1.0
	6A/10A	60245 IEC 57	3X 0.75
	10A	60245 IEC 57	3X 1.0

国标插头系列

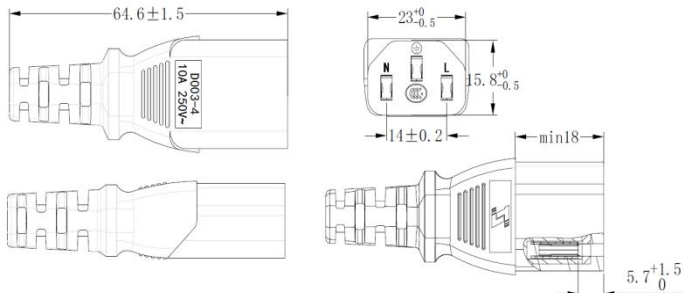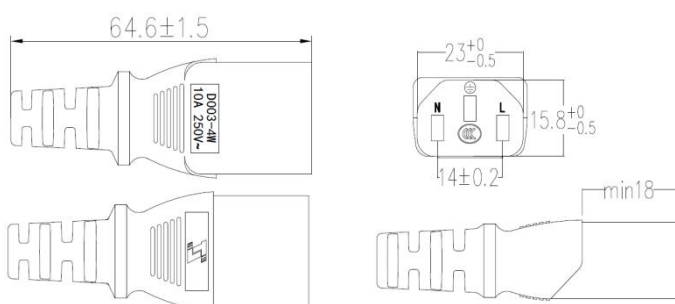


	产品描述	3-Pole Straight Connector(三芯连接器)	
	产品标准	GB/T 17465	
	额定值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	10A	60227 IEC 53	3X 0.75
D003-4	10A	60227 IEC 53	3X 1.0
	10A	60227 IEC 53	3X 1.5
	10A	60245 IEC 57	3X 0.75
	10A	60245 IEC 57	3X 1.0
			
	产品描述	3-Pole Straight Connector(三芯连接器)	
	产品标准	GB/T 17465	
	额定值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	10A	60227 IEC 53	3X 0.75
D003-4W	10A	60227 IEC 53	3X 1.0
	10A	60245 IEC 53	3X 0.75
	10A	60245 IEC 53	3X 1.0
	10A	60245 IEC 57	3X 0.75
	10A	60245 IEC 57	3X 1.0
			

国 标 插 头 系 列



WN110

产品描述	3-Pole Angled Connector(三芯尾插)		
产品标准	GB/T 17465		
额 定 值	10A 250V~		
安规标志			
额定电流	配线规格 (mm ²)		
10A	60227 IEC 53	3X	0.75
10A	60227 IEC 53	3X	1.0
10A	60227 IEC 53	3X	1.5




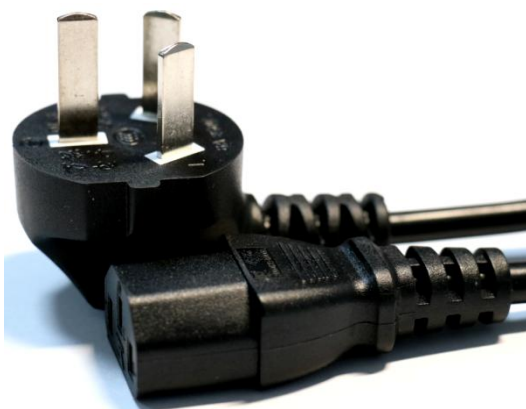


D1-3+D003-4

产品描述	Cord Set (插头组合)		
产品标准	GB/T 15934		
额 定 值	10A 250V~		
安规标志			
额定电流	配线规格 (mm ²)		
10A	60227 IEC 53	3X	0.75
10A	60227 IEC 53	3X	1.0
10A	60227 IEC 53	3X	1.5
10A	60245 IEC 53	3X	0.75
10A	60245 IEC 53	3X	1.0
10A	60245 IEC 57	3X	0.75
10A	60245 IEC 57	3X	1.0



国标插头系列

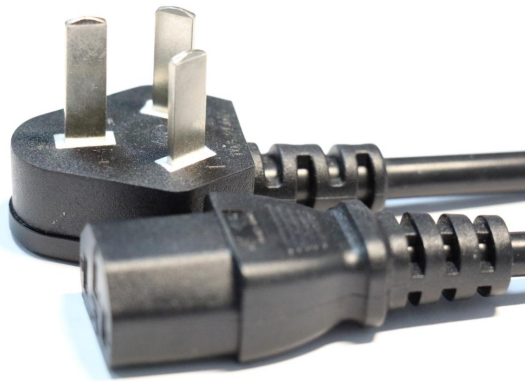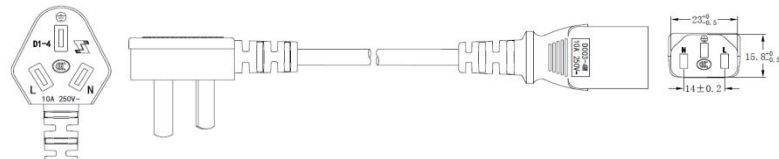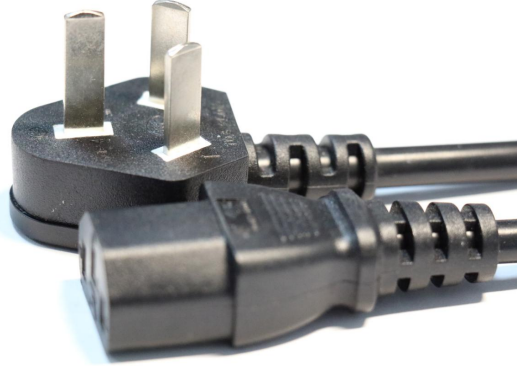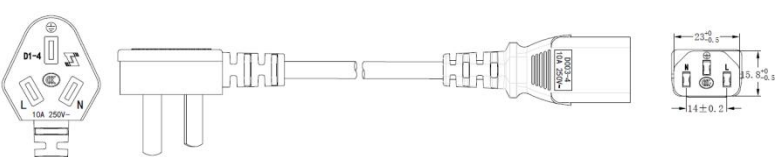

	产品描述	Cord Set (插头组合)	
	产品标准	GB/T 15934	
	额定值	10A 250V~	
	安规标志	CCC	
	额定电流	配线规格 (mm ²)	
	10A	60227 IEC 53	3X 0.75
D1-4+D003-4W	10A	60227 IEC 53	3X 1.0
			
	产品描述	Cord Set (插头组合)	
	产品标准	GB/T 15934	
	额定值	10A 250V~	
	安规标志	CCC	
	额定电流	配线规格 (mm ²)	
	10A	60227 IEC 52	3X 0.75
	10A	60227 IEC 53	3X 0.75
	10A	60227 IEC 53	3X 1.0
	10A	60245 IEC 53	3X 0.75
	10A	60245 IEC 53	3X 1.0
D1-4+D003-4	10A	60245 IEC 57	3X 0.75
	10A	60245 IEC 57	3X 1.0
			




国 标 插 头 系 列

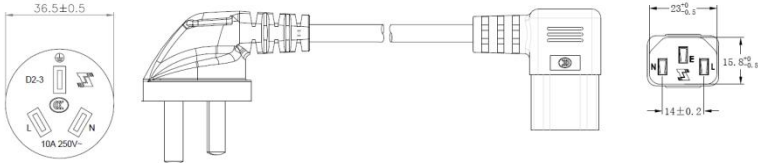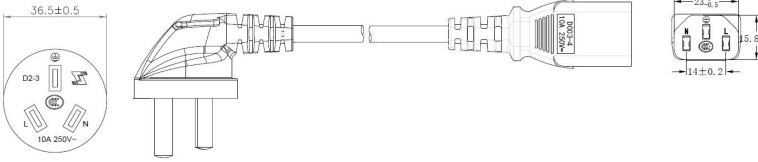

	产品描述	Cord Set (插头组合)		
	产品标准	GB/T 15934		
	额 定 值	10A 250V~		
	安规标志	CCC		
	额定电流	配线规格 (mm²)		
D2-3+WN110	10A	60227 IEC 53	3X	0.75
	10A	60227 IEC 53	3X	1.0
	10A	60227 IEC 53	3X	1.5
				
	产品描述	Cord Set (插头组合)		
	产品标准	GB/T 15934		
	额 定 值	10A 250V~		
	安规标志	CCC		
	额定电流	配线规格 (mm²)		
D2-3+D003-4	10A	60227 IEC 53	3X	0.75
	10A	60227 IEC 53	3X	1.0
	10A	60227 IEC 53	3X	1.5
				




国标插头系列

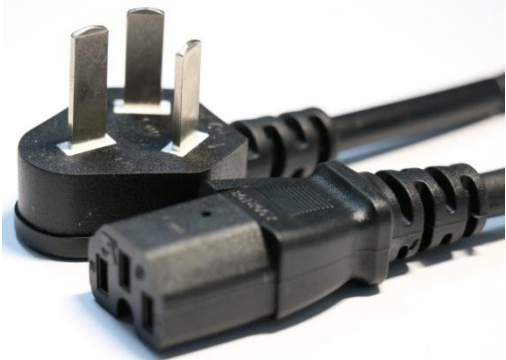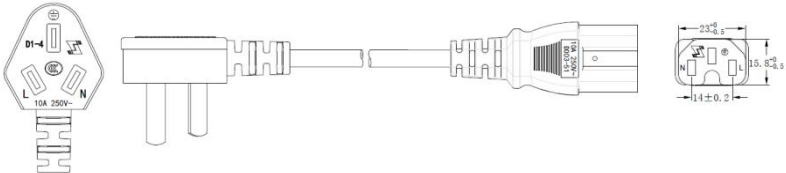

	产品描述	Cord Set (插头组合)		
	产品标准	GB/T 15934		
	额定值	10A 250V~		
	安规标志	CCC		
	额定电流	配线规格 (mm ²)		
WN004+D003-4	10A	60227 IEC 52	3X	0.75
	10A	60227 IEC 53	3X	0.75
	10A	60227 IEC 53	3X	1.0
	10A	60227 IEC 53	3X	1.5
				
	产品描述	Cord Set (插头组合)		
	产品标准	GB/T 15934		
	额定值	10A 250V~		
	安规标志	CCC		
	额定电流	配线规格 (mm ²)		
D1-4+D003-51	10A	60245 IEC 57	3X	0.75
	10A	60245 IEC 57	3X	1.0
				

国标插头系列

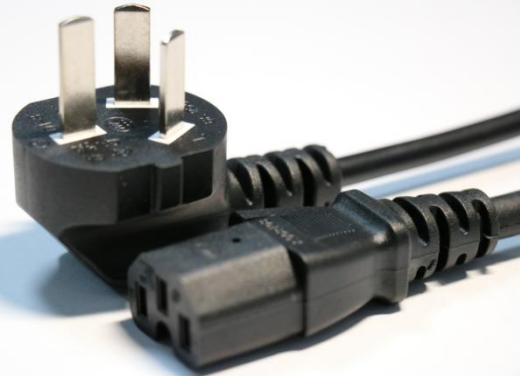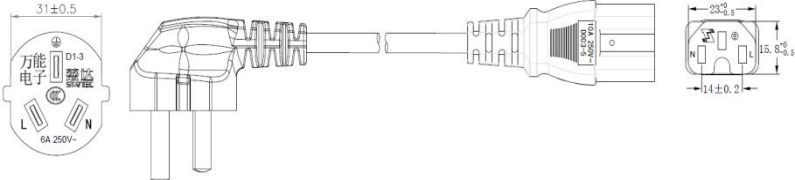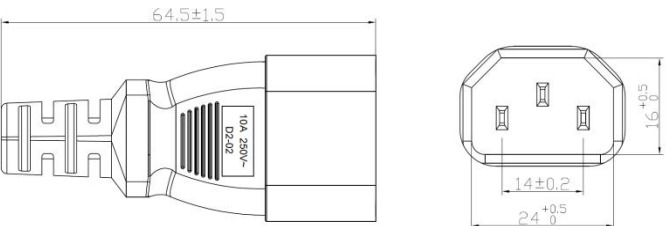

	产品描述	Cord Set (插头组合)	
	产品标准	GB/T 15934	
	额定值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
D1-3+D003-5	10A	60245 IEC 53	3X 0.75
	10A	60245 IEC 53	3X 1.0
	10A	60245 IEC 57	3X 0.75
	10A	60245 IEC 57	3X 1.0
			
	产品描述	3-Pole Straight Connector(三芯连接器)	
	产品标准	GB/T 17465	
	额定值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	10A	60227 IEC 53	3X 0.75
	10A	60227 IEC 53	3X 1.0
	10A	60227 IEC 53	3X 1.5
	10A	60245 IEC 53	3X 0.75
	10A	60245 IEC 53	3X 1.0
D2-2/WN012	10A	60245 IEC 53	3X 1.5
	10A	60245 IEC 57	3X 0.75
	10A	60245 IEC 57	3X 1.0
	10A	60245 IEC 57	3X 1.5
			

国标插头系列



WN024

产品描述	3-Pole Angled Connector(三芯连接器)
产品标准	GB/T 17465
额 定 值	16A 250V~
安规标志	CCC
额定电流	配线规格 (mm²)
16A	60227 IEC 53 3X 1.0
16A	60227 IEC 53 3X 1.5
16A	60227 IEC 53 3X 2.5

Technical drawing of the 3-Pole Angled Connector. The side view shows a length of 59.5 ± 1.5 mm. The front view shows a width of $29^{+0.5}_0$ mm and a height of $21^{+0.5}_0$ mm. The front view also shows the terminal markings: L, N, and a ground symbol. The side view shows the markings: WN024, 16A 250V~, and the CCC mark.






D1-3+D003-62

产品描述	Cord Set (插头组合)
产品标准	GB/T 15934
额定值	10A+2.5A 250V~
安规标志	
额定电流	配线规格 (mm²)
10A+2.5A	60227 IEC 53 3X 0.75
10A+2.5A	60227 IEC 53 3X 1.0

国标插头系列

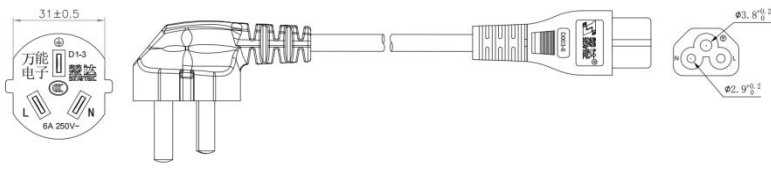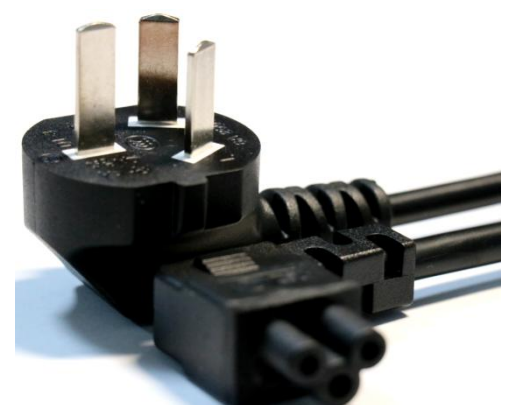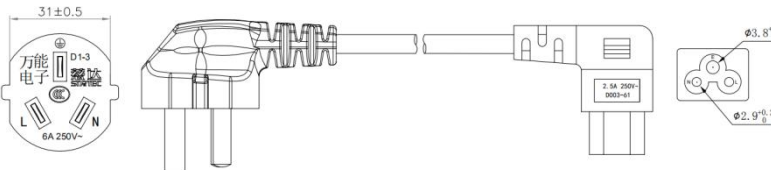

	产品描述	Cord Set (插头组合)		
	产品标准	GB/T 15934		
	额定值	10A+2.5A 250V~		
	安规标志	CCC		
	额定电流	配线规格 (mm ²)		
D1-3+D003-6	10A+2.5A	60227 IEC 53	3X 0.75	
	10A+2.5A	60227 IEC 53	3X 1.0	
				
	产品描述	Cord Set (插头组合)		
	产品标准	GB/T 15934		
	额定值	10A+2.5A 250V~		
	安规标志	CCC		
	额定电流	配线规格 (mm ²)		
D1-3+D003-61	10A+2.5A	60227 IEC 53	3X 0.75	
	10A+2.5A	60227 IEC 53	3X 1.0	
				

国标插头系列



D2-3+D003-62

产品描述	Cord Set (插头组合)		
产品标准	GB/T 15934		
额 定 值	10A+2.5A 250V~		
安规标志	CCC		
额定电流	配线规格 (mm²)		
10A+2.5A	60227 IEC 53	3X 0.75	
10A+2.5A	60227 IEC 53	3X 1.0	



D2-3+D003-6


产品描述	Cord Set (插头组合)		
产品标准	GB/T 15934		
额 定 值	10A+2.5A 250V~		
安规标志	CCC		
额定电流	配线规格 (mm²)		
10A+2.5A	60227 IEC 53	3X 0.75	
10A+2.5A	60227 IEC 53	3X 1.0	

国 标 插 头 系 列



D2-3+D003-61


产品描述	Cord Set (插头组合)		
产品标准	GB/T 15934		
额 定 值	10A+2.5A 250V~		
安规标志			
额定电流	配线规格 (mm²)		
10A+2.5A	60227 IEC 53	3X 0.75	
10A+2.5A	60227 IEC 53	3X 1.0	

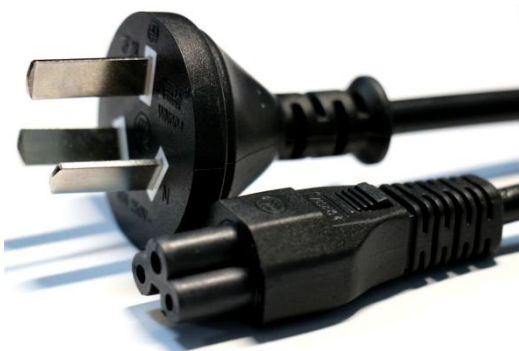

WN004+D003-6

产品描述	Cord Set (插头组合)		
产品标准	GB/T 15934		
额 定 值	10A+2.5A 250V~		
安规标志			
额定电流	配线规格 (mm²)		
10A+2.5A	60227 IEC 52	3X 0.75	
10A+2.5A	60227 IEC 53	3X 0.75	
10A+2.5A	60227 IEC 53	3X 1.0	

国 标 插 头 系 列

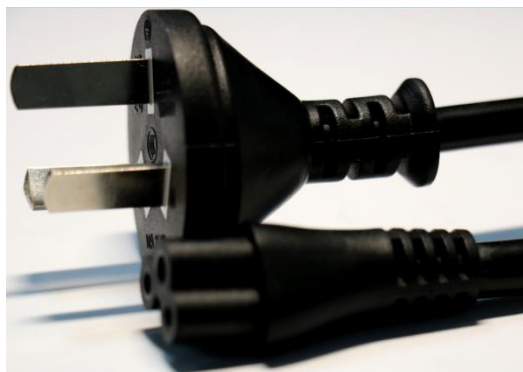

WN004+WN116

产品描述 Cord Set (插头组合)

产品标准 GB/T 15934

额 定 值 10A+2.5A 250V~


安规标志

额定电流 配线规格 (mm²)

10A+2.5A 60227 IEC 52 3X 0.75

10A+2.5A 60227 IEC 53 3X 0.75

10A+2.5A 60227 IEC 53 3X 1.0

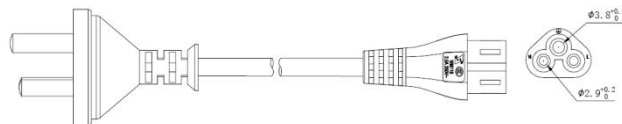

产品描述 Cord Set (插头组合)

产品标准 GB/T 15934

额 定 值 10A 250V~




安规标志

额定电流 配线规格 (mm²)

10A 60227 IEC 53 3X 0.75

10A 60227 IEC 53 3X 1.0

10A 60227 IEC 53 3X 1.5



D003-4+D2-02




国 标 插 头 系 列



	产品描述	Cord Set (插头组合)
	产品标准	GB/T 15934
	额 定 值	2.5A+2.5A/6A+2.5A 250V~
	安规标志	
	额定电流	配线规格 (mm ²)
	2.5A+2.5A 6A+2.5A	60227 IEC 52 2X 0.5 (扁) 60227 IEC 53 2X 0.75 (扁)
G2-1+M2-1		
	产品描述	Cord Set (插头组合)
	产品标准	GB/T 15934
	额 定 值	6A+2.5A 6A/10A+2.5A 250V~
	安规标志	
	额定电流	配线规格 (mm ²)
	6A+2.5A 6A/10A+2.5A	60227 IEC 52 2X 0.5 (扁) 60227 IEC 53 2X 0.75 (扁)
D1-2+M2-1		




国 标 插 头 系 列

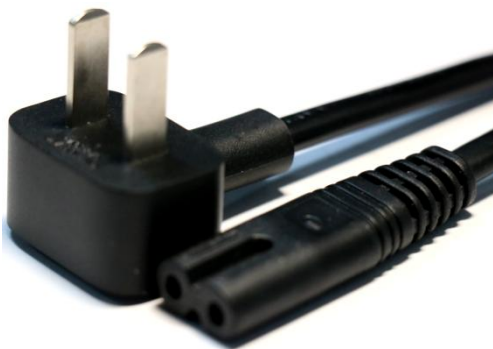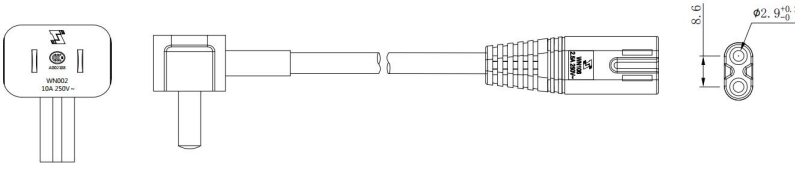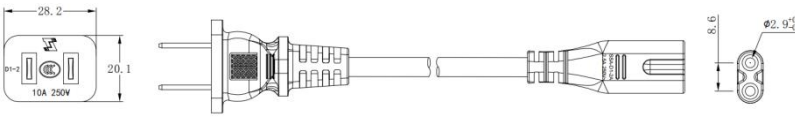

	产品描述	Cord Set (插头组合)
	产品标准	GB/T 15934
	额 定 值	2.5A+2.5A/6A+2.5A 250V~
	安规标志	
	额定电流	配线规格 (mm ²)
WN002+WN106	2.5A+2.5A	60227 IEC 52 2X 0.5 (扁)
	6A+2.5A	60227 IEC 53 2X 0.75 (扁)
		
	产品描述	Cord Set (插头组合)
	产品标准	GB/T 15934
	额 定 值	2.5A+2.5A/6A+2.5A 250V~
	安规标志	
	额定电流	配线规格 (mm ²)
	2.5A+2.5A	60227 IEC 52 2X 0.5 (扁)
	6A+2.5A	60227 IEC 53 2X 0.75 (扁)
D1-2+SSA-D1-2A		




国外插头系列

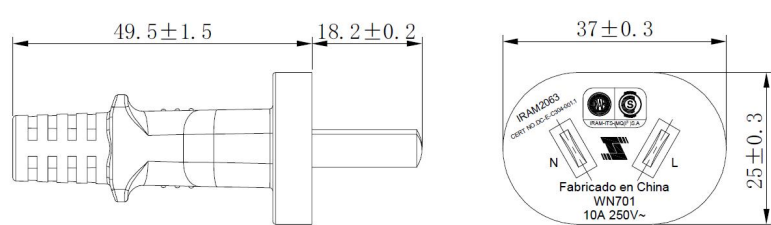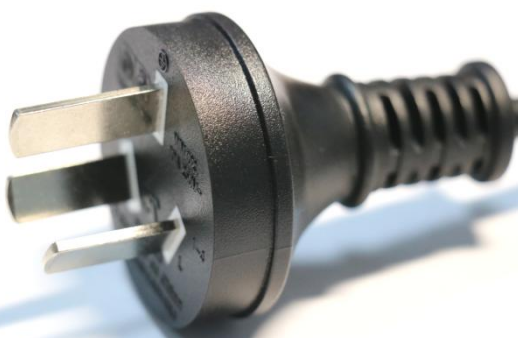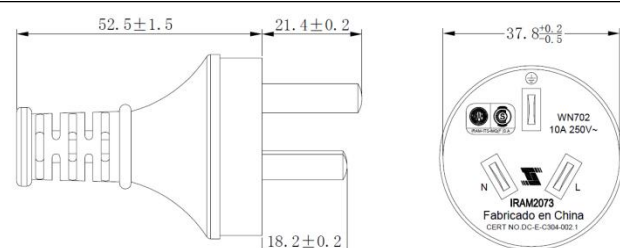

	产品描述	2-Pole Straight Plug(阿根廷两插)	
	产品标准	IRAM 2063	
	额 定 值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm²)	
	10A	H03VVH2-F 2x0.75	
	10A	H03VV-F 2x0.75	
WN701	10A	H05VV-F 2x0.75	
	10A	H05VV-F 2x1.0	
	10A	H05RR-F 2x0.75	
	10A	H05RR-F 2x1.0	
			
	产品描述	3-Pole Straight Plug(阿根廷三插)	
	产品标准	IRAM 2073	
	额 定 值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm²)	
	10A	H03VV-F	3G 0.75
	10A	H05VV-F	3G 0.75
WN702	10A	H05VV-F	3G 1.0
	10A	H05RR-F	3G 0.75
	10A	H05RR-F	3G 1.0
	10A	H05V2V2-F	3G 0.75
	10A	H05V2V2-F	3G 1.0
			




国外插头系列

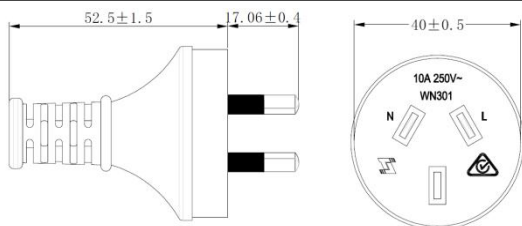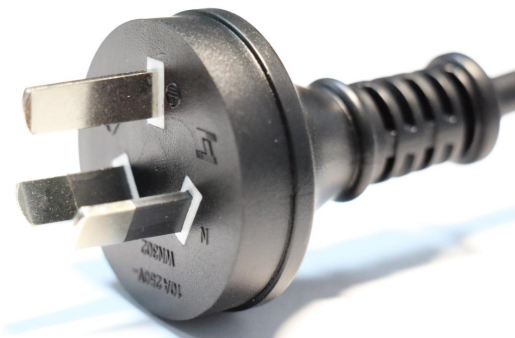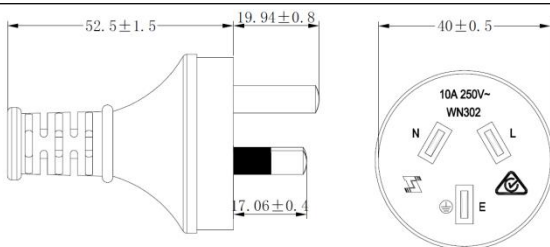

	产品描述	2-Pole Straight Plug(澳洲两插)	
	产品标准	AS/NZS 3112	
	额定值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	10A	H03VVH2-F	2x0.75
	10A	H03VV-F	2x0.75
	10A	H05VVH2-F	2x0.75
WN301	10A	H05VV-F	2x0.75-1.0
	10A	H05V2V2-F	2x0.75-1.0
	10A	H05RR-F	2x0.75-1.0
	10A	H05RN-F	2x0.75-1.0
			
	产品描述	3-Pole Straight Plug(澳洲三插)	
	产品标准	AS/NZS 3112	
	额定值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	10A	H03VV-F	3X 0.75
	10A	H05VV-F	3X 0.75
	10A	H05VV-F	3X 1.0
WN302	10A	H07VV-F	3X 0.75-1.0
	10A	H05RR-F	3X 0.75
	10A	H05RR-F	3X 1.0
	10A	H05RN-F	3X 0.75-1.0
	10A	H05V2V2-F	3X0.75-1.0
	10A	H05V2V2-F	3X1.5
	10A	H05VVH2-F	2X0.75
			



国外插头系列

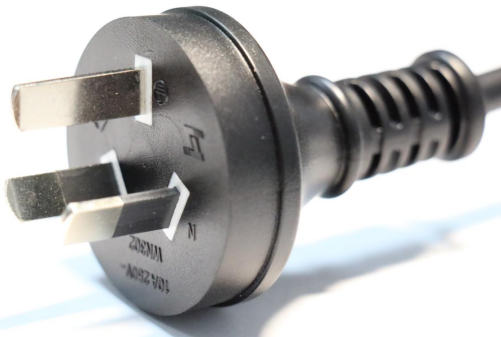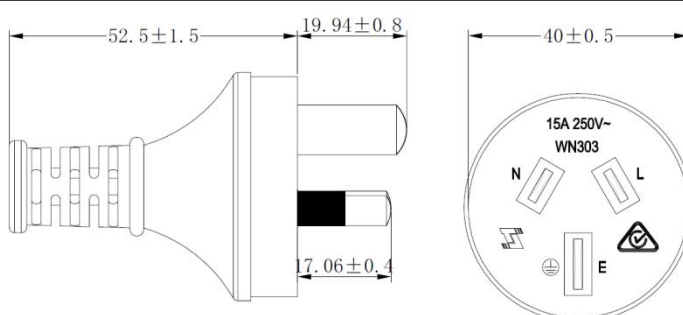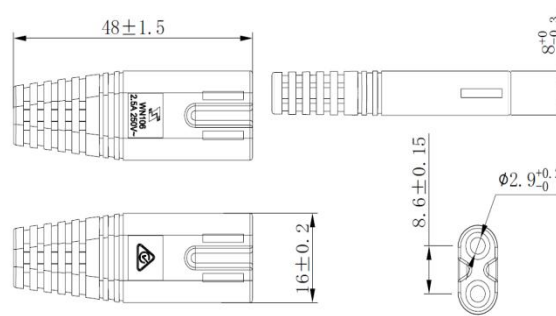

	产品描述	3-Pole Straight Plug(澳洲三插)	
	产品标准	AS/NZS 3112	
	额定值	15A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	15A	H05VV-F	3X 1.0
	15A	H07VV-F	3X 1.0
WN303	15A	H07VV-F	3X 1.5
	15A	H05RR-F	3X 1.0
	15A	H05RR-F	3X 1.5
	15A	H05RN-F	3X 1.0
			
	产品描述	2-Pole Straight Connector(两芯连接器)	
	产品标准	AS/NZS 4417	
	额定值	2.5A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	2.5A	H03VVH2-F	2X0.5
	2.5A	H03VVH2-F	2X0.75
	2.5A	H05VVH2-F	2X0.75
	WN106		


国外插头系列

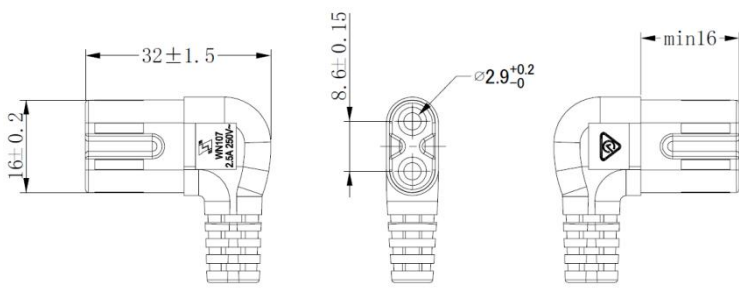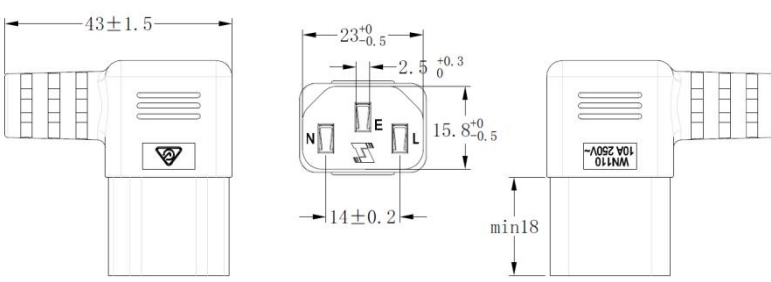

	产品描述	2-Pole Angled Connector(两芯连接器)	
	产品标准	AS/NZS 4417	
	额定值	2.5A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
WN107	2.5A	H03VVH2-F	2X0.5
	2.5A	H03VVH2-F	2X0.75
	2.5A	H05VVH2-F	2X0.75
			
	产品描述	3-Pole Angled Connector(三芯连接器)	
	产品标准	AS/NZS 4417	
	额定值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
WN110	10A	H05VV-F	3G 0.75
	10A	H05VV-F	3G 1.0
	10A	H07VV-F	3G 0.75
	10A	H07VV-F	3G 1.0
	10A	H05RR-F	3G 0.75
	10A	H05RR-F	3G 1.0
	10A	H05RN-F	3G 0.75
	10A	H05RN-F	3G 1.0
WN110			



国外插头系列

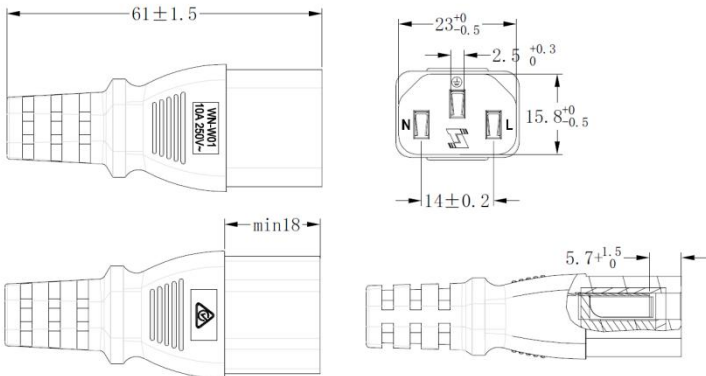

	产品描述	3-Pole Angled Connector(三芯连接器)	
	产品标准	AS/NZS 4417	
	额 定 值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm²)	
	10A	H03VV-F	3G 0.75
	10A	H05VV-F	3G 0.75
	10A	H05VV-F	3G 1.0
	10A	H07VV-F	3G 0.75
	10A	H07VV-F	3G 1.0
WN-W01	10A	H05RR-F	3G 0.75
	10A	H05RR-F	3G 1.0
	10A	H05RN-F	3G 0.75
	10A	H05RN-F	3G 1.0
			

国外插头系列

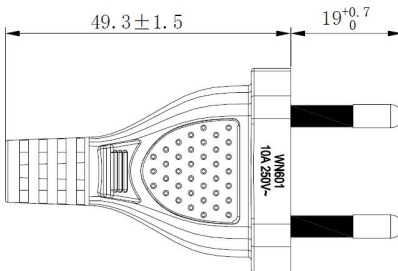

	产品描述	2-Pole Straight Plug(巴西两插)	
	产品标准	NBR 14136:2002	
	额定值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm²)	
	10A	H03VVH2-F	2x0.75
	10A	H03VV-F	2x0.75
	10A	H05VVH2-F	2x0.75
	10A	H05VV-F	2x0.75
	10A	H05VVH2-F	2x1.00
WN601	10A	H05VV-F	2x1.00
	10A	H05RR-F	2x0.75
	10A	H05RR-F	2x1.00
	10A	H05RN-F	2x0.75
	10A	H05RN-F	2x1.00
			
			


国外插头系列



	产品描述	3-Pole Straight Plug(巴西三插)	
	产品标准	NBR 14136:2002	
	额定值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	10A	H03VV-F	3G 0.75
	10A	H05VV-F	3G 0.75
	10A	H05VV-F	3G 1.0
	10A	H05V2V2-F	3G 0.75
	10A	H05V2V2-F	3G 1.0
WN602	10A	H05RR-F	3G 0.75
	10A	H05RR-F	3G 1.0
WN602	10A	H05RN-F	3G 0.75
	10A	H05RN-F	3G 1.0
	产品描述	3-Pole Straight Plug(巴西三插)	
	产品标准	NBR 14136:2002	
	额定值	16A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	16A	H05VV-F	3G 1.5
	16A	H05RR-F	3G 1.5
	16A	H05RR-F	3G 1.5
	16A	H05RR-F	3G 1.5
	16A	H05RR-F	3G 1.5
WN603	16A	H05RR-F	3G 1.5
	16A	H05RR-F	3G 1.5
WN603	16A	H05RR-F	3G 1.5
	16A	H05RR-F	3G 1.5




国外插头系列

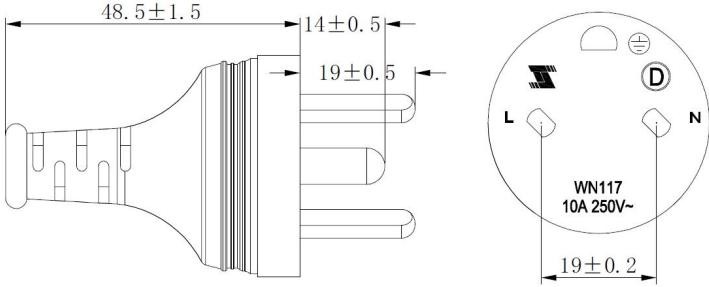

	产品描述	3-Pole Straight Plug(丹麦三插)	
	产品标准	IEC 60884-1,SB107-2-DI	
WN117	额 定 值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm²)	
	10A	H03VV-F	3G 0.75
	10A	H05VV-F	3G 0.75
	10A	H05VV-F	3G 1.00
			



国外插头系列

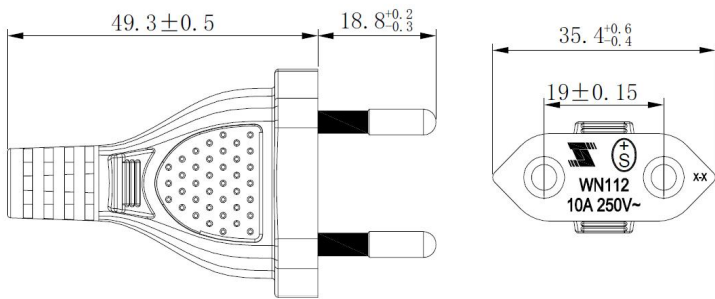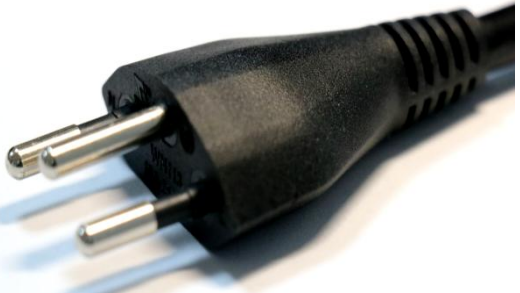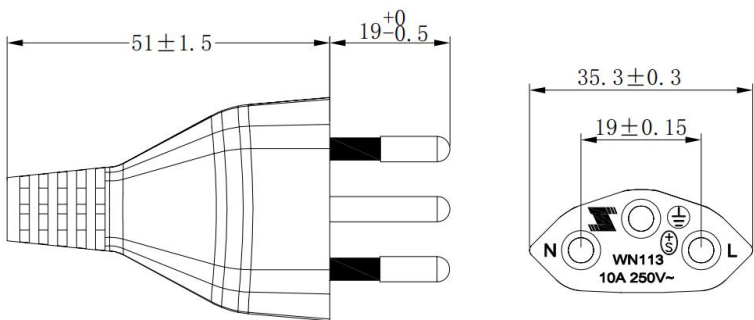

	产品描述	2-Pole Straight Plug(瑞士两插)	
	产品标准	IEC 60884-1,SEV1011:2009	
	额定值	10A 250V~	
	安规标志	Ⓢ	
	额定电流	配线规格 (mm ²)	
WN112	10A	H03VVH2-F	2X0.75
	10A	H05VVH2-F	2X0.75
	10A	H05VV-F	2X0.75
	10A	H05VV-F	2X1.0
			
	产品描述	3-Pole Straight Plug(瑞士三插)	
	产品标准	IEC 60884-1,SEV1011:2009	
	额定值	10A 250V~	
	安规标志	Ⓢ	
	额定电流	配线规格 (mm ²)	
WN113	10A	H03VV-F	3G 0.75
	10A	H05VV-F	3G 0.75
	10A	H05VV-F	3G 1.0
			

国外插头系列

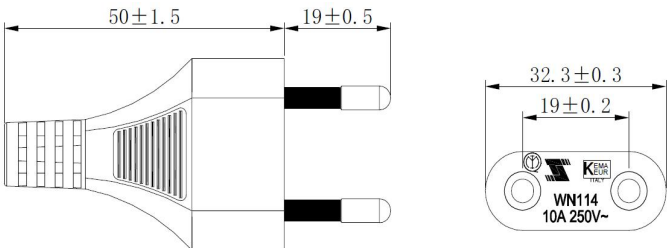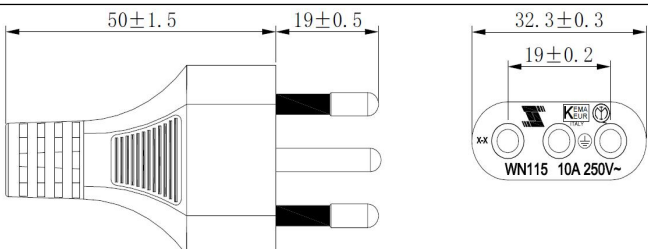

	产品描述	2-Pole Straight Plug(意大利两插)	
	产品标准	CEI23-50-II	
	额定值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	10A	H03VVH2-F	2X0.75
	10A	H03VV-F	2X0.75
	10A	H05VV-F	2X0.75
WN114	10A	H05VV-F	2X1.0
	10A	H05RR-F	2X0.75
	10A	H05RR-F	2X1.0
	10A	H05RN-F	2X1.0
			
	产品描述	3-Pole Straight Plug(意大利三插)	
	产品标准	CEI23-50-II	
	额定值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	10A	H03VV-F	3G 0.75
	10A	H05VV-F	3G 0.75
	10A	H05VV-F	3G 1.0
WN115	10A	H05VV-F	3G 1.5
	10A	H05RR-F	3G 0.75
	10A	H05RR-F	3G 1.0
	10A	H05RR-F	3G 1.5
			




国外插头系列




WN106

产品描述	2-Pole Straight Connector(欧规连接器)
产品标准	EN 60320
额定值	2.5A 250V~
安规标志	
额定电流	配线规格 (mm ²)
2.5A	H03VVH2-F 2X0.5
2.5A	H03VVH2-F 2X0.75
2.5A	H05VVH2-F 2X0.75

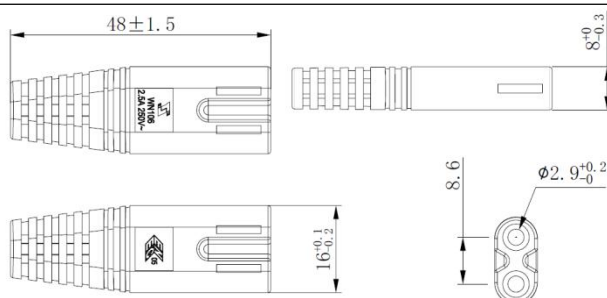



WN107

产品描述	2-Pole Angled Connector(欧规连接器)
产品标准	EN 60320
额定值	2.5A 250V~
安规标志	
额定电流	配线规格 (mm ²)
2.5A	H03VVH2-F 2X0.5
2.5A	H03VVH2-F 2X0.75
2.5A	H05VVH2-F 2X0.75

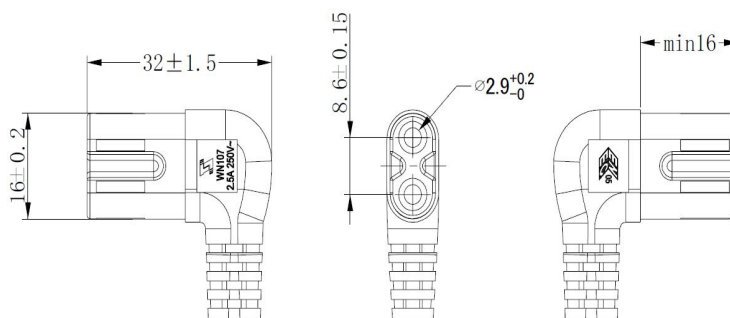

国外插头系列

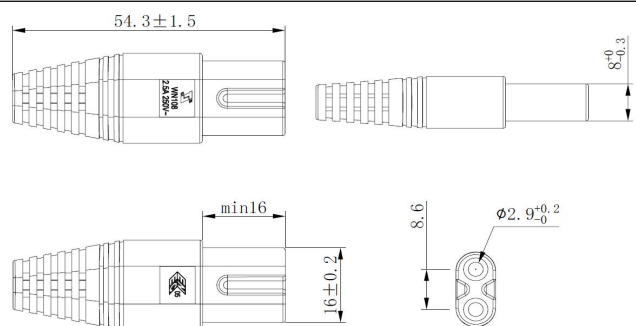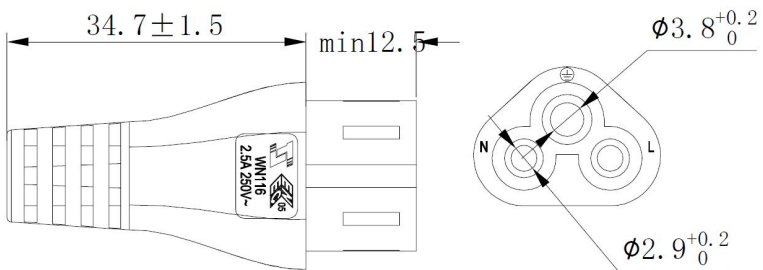

	产品描述	2-Pole Straight Connector(欧规连接器)	
	产品标准	EN 60320	
	额 定 值	2.5A 250V~	
	安规标志		
WN108	额定电流	配线规格 (mm²)	
	2.5A	H03VVH2-F 2X0.5	
	2.5A	H03VVH2-F 2X0.75	
	2.5A	H05VVH2-F 2X0.75	
			
	产品描述	3-Pole Straight Connector(欧规连接器)	
	产品标准	EN 60320	
	额 定 值	2.5A 250V~	
	安规标志		
WN116	额定电流	配线规格 (mm²)	
	2.5A	H03VV-F	3G 0.75
	2.5A	H05VV-F	3G 0.75
	2.5A	H05VV-F	3G 1.0
			

国外插头系列



WN110

产品描述	3-Pole Angled Connector(欧规连接器)
产品标准	EN 60320
额 定 值	10A 250V~
安规标志	
额定电流	配线规格 (mm²)
10A	H05VV-F 3G0.75
10A	H05VV-F 3G1.0




WN-W01

产品描述	3-Pole Straight Connector(欧规连接器)
产品标准	EN 60320
额 定 值	10A 250V~
安规标志	
额定电流	配线规格 (mm²)
10A	H05VV-F 3G 0.75
10A	H05VV-F 3G 1.0

国外插头系列

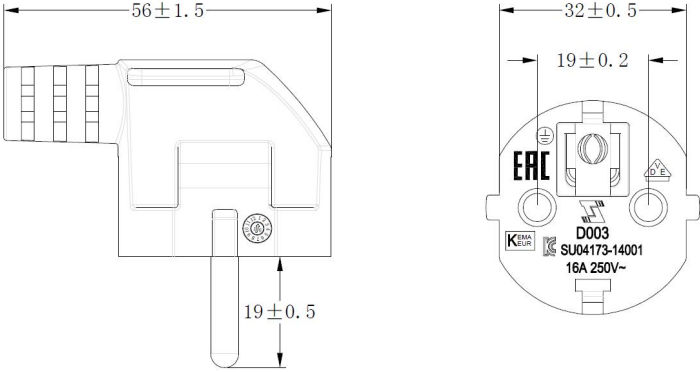

	产品描述	3-Pole Angled Plug(欧规三插)	
	产品标准	VDE0620-2-1 IEC60884-1	
	额 定 值	16A 250V~	
	安规标志	  	
	额定电流	配线规格 (mm²)	
	2.5A	H03VV-F	3G 0.75
	2.5A	H05VV-F	3G 0.75
	6A/10A	H05VV-F	3G 1.0
	6A/10A	H05VV-F	3G 1.50
	6A/10A	H05V2V2-F	3G 0.75
	6A/10A	H05V2V2-F	3G 1.0
	10A	H05V2V2-F	3G 1.50
	10A	H05RR-F	3G 0.75
	10A	H05RR-F	3G 1.0
	10A	H05RR-F	3G 1.50
D003	10A	H05RN-F	3G 0.75
	10A	H05RN-F	3G 1.0
	10A	H07RN-F	3G 1.0-1.5
			



国外插头系列




	产品描述	3-Pole Straight Plug(欧规三插)	
	产品标准	VDE0620-2-1 IEC60884-1	
	额定值	16A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	16A	H03VV-F	3G 0.75
	16A	H05VV-F	3G 0.75
	16A	H05VV-F	3G 1.0
	16A	H05VV-F	3G 1.50
	16A	H05RR-F	3G 0.75
	16A	H05RR-F	3G 1.0
	16A	H05RR-F	3G 1.50
	16A	H05RN-F	3G 0.75
	16A	H05RN-F	3G 1.0
	产品描述	2-Pole Straight Plug(欧规两插)	
	产品标准	VDE0620-2-1 IEC60884-1	
	额定值	16A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	16A	H05VV-F	2X 0.75
	16A	H05VV-F	2X 1.0
	16A	H05RR-F	2X 0.75
	16A	H05RR-F	2X 1.0
	16A	H05RN-F	2X 0.75
	16A	H05RN-F	2X 1.0
	16A	H07RN-F	2X 1.0
	WN102		
	WN103		



国外插头系列

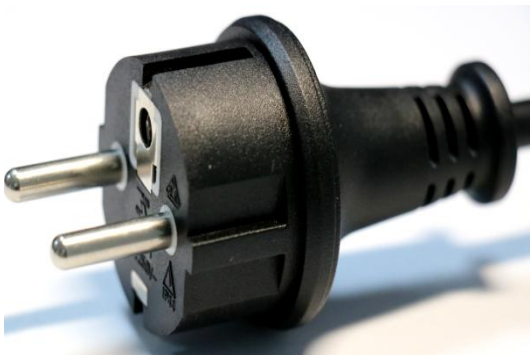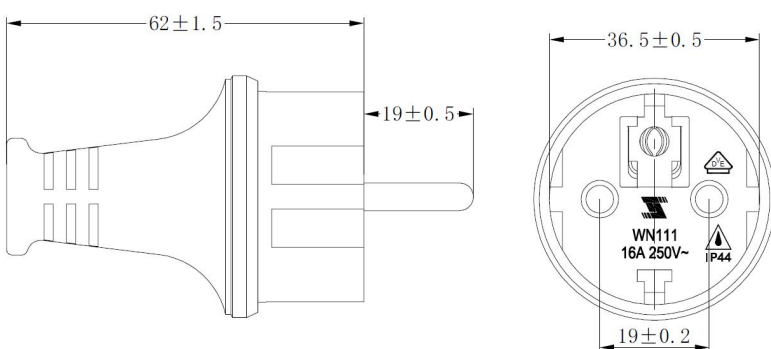

	产品描述	3-Pole Straight Plug(欧规两插)	
	产品标准	VDE0620-2-1 IEC60884-1	
	额 定 值	16A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	16A	H05VV-F	3G 0.75
	16A	H05VV-F	3G 1.0
	16A	H05RR-F	3G 0.75
WN111	16A	H05RR-F	3G 1.0
	16A	H05RN-F	3G0.75
	16A	H05RN-F	3G1.0
	16A	H07RN-F	3G1.0
			



国外插头系列



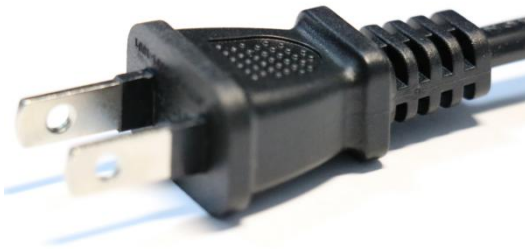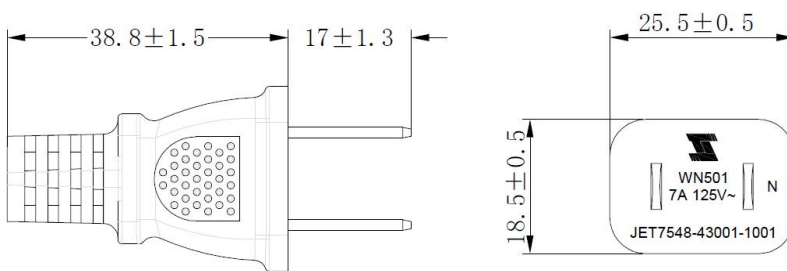	产品描述	2-Pole Straight Plug(日规两插)	
	产品标准	JIS C8303, JIS C8306	
	额 定 值	7~15A 125V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	7A	HVFF	2x0.75
	7A	HVFF	2x0.75
	7A	HHFF	2x0.75
	7A	VCTFK	2x0.75
	7A	HVCTFK	2x0.75
	7A	VCTF	2x0.75
	7A	HVCTF	2x0.75
	12A	VFF	2x1.25
	12A	HVFF	2x1.25
	12A	HHFF	2x1.25
	12A	VCTFK	2x1.25
	12A	HVCTFK	2x1.25
	12A	VCTF	2x1.25
	12A	HVCTF	2x1.25
	15A	VFF	2x2.0
	15A	HVFF	2x2.0
	15A	HHFF	2x2.0
	15A	VCTFK	2x2.0
	15A	HVCTFK	2x2.0
	15A	VCTF	2x2.0
	15A	HVCTF	2x2.0
WN501			

国外插头系列

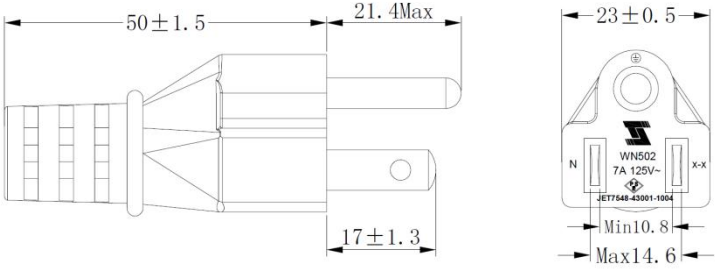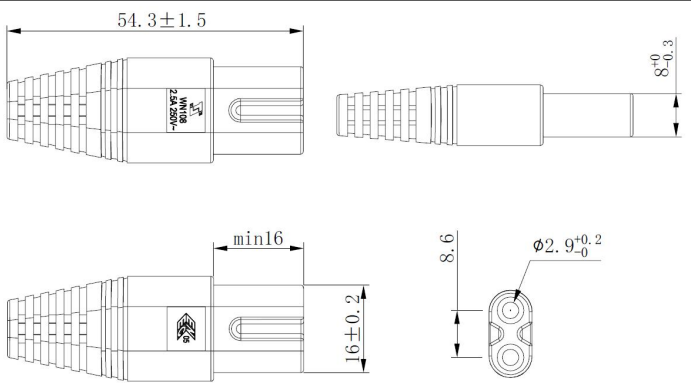

	产品描述	3-Pole Straight Plug(日规三插)	
	产品标准	JIS C8303, JIS C8306	
	额定值	7~15A 125V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	7A	VCTF	3x0.75
	12A	VCTF	3x1.25
WN502	15A	VCTF	3x2.00
	7A	HVCTF	3x0.75
	12A	HVCTF	3x1.25
	15A	HVCTF	3x2.00
			
	产品描述	2-Pole Straight Connector(日规连接器)	
	产品标准	EN60320-3	
	额定值	7A 125V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	7A	VFF	2x0.75
	7A	HVFF	2x0.75
WN106	7A	HHFF	2x0.75
	7A	VCTFK	2x0.75
	7A	HVCTFK	2x0.75
			

国外插头系列



WN504

产品描述 3-Pole Straight Connector(日规连接器)

产品标准 EN60320-3

额定值 7~15A 125V~

安规标志 JET

额定电流 配线规格 (mm²)

7A VCTF 3x0.75


12A VCTF 3x1.25

15A VCTF 3x2.00

7A HVCTF 3x0.75

12A HVCTF 3x1.25

15A HVCTF 3x2.00

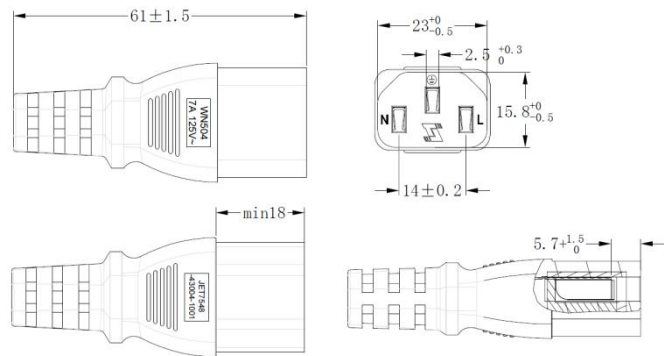

WN012

产品描述 3-Pole Straight Connector(日规连接器)

产品标准 EN60320-3


额定值 12A 125V~

安规标志 JET

额定电流 配线规格 (mm²)

12A VCTF 3X1.25

12A HVCTF 3X1.25

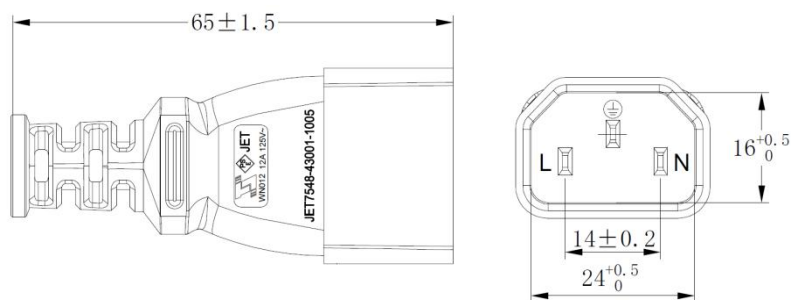

国外插头系列





WN012

产品描述	3-Pole Straight Connector(日规连接器)		
产品标准	EN60320-3		
额 定 值	12A 125V~		
安规标志	JET		
额定电流	配线规格 (mm²)		
12A	VCTF	3X1.25	
12A	HVCTF	3X1.25	

台 湾 插 头 系 列

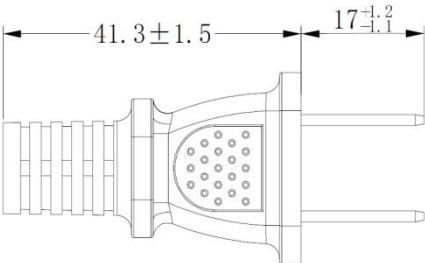

	产品描述	2-Pole Straight Plug(台湾两插)	
	产品标准	CNS 10917-2	
	额 定 值	7~15A 125V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	7A	VFF/HVFF	2X0.75
	11A	VFF/HVFF	2X1.25
	15A	VFF/HVFF	2X2.0
	7A	VCTF/HVCTF	2x0.75
	11A	VCTF/HVTCF	2x1.25
	15A	VCTF/HVCTF	2x2.00
	7A	VCTFK/HVCTFK	2x0.75
	11A	VCTFK/HVCTFK	2x1.25
	15A	VCTFK/HVTCFK	2x2.00
WN201	7A	PNCTF	2X0.75
	11A	PNCTF	2X1.25
	15A	PNCTF	2X2.0
 			

台湾插头系列



WN203

产品描述	3-Pole Straight Plug(台湾三插)	
产品标准	CNS 10917-2	
额 定 值	7~15A 125V~	
安规标志		
额定电流	配线规格 (mm ²)	
7A	VCTF/HVCTF	3x0.75
11A	VCTF/HVCTF	3x1.25
15A	VCTF/HVCTF	3x2.0
7A	PNCTF	3X0.75
11A	PNCTF	3X1.25
15A	PNCTF	3X2.0




WN201+WN204

产品描述	Cord Set (插头组合)	
产品标准	CNS 10917-2	
额 定 值	7A 125V~	
安规标志		
额定电流	配线规格 (mm ²)	
7A	VFF	2X0.75
7A	HVFF	2X0.75
7A	VCTFK	2x0.75
7A	HVCTFK	2x0.75
7A	PNCTFK	2X0.75

台湾插头系列




产品描述	Cord Set (插头组合)		
产品标准	CNS 10917-2		
额 定 值	7~15A 125V~		
安规标志			
额定电流	配线规格 (mm²)		
7A	VCTF/HVCTF	3x0.75	
11A	VCTF/HVCTF	3x1.25	
15A	VCTF/HVCTF	3x2.0	
7A	PNCTF	3X0.75	
11A	PNCTF	3X1.25	
15A	PNCTF	3X2.0	

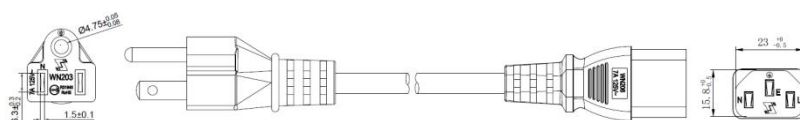

WN203+WN206







产品描述	Cord Set (插头组合)
产品标准	CNS 10917-2
额 定 值	7A/2.5A 125V~
安规标志	
额定电流	配线规格 (mm²)
2.5A/7A	VCTF/HVCTF 3x0.75
2.5A/7A	PNCTF 3X0.75

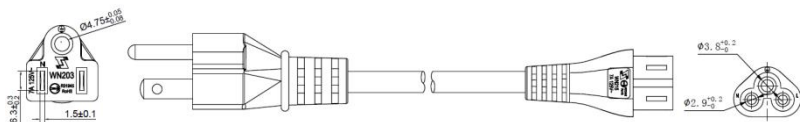

WN203+WN215

国外插头系列

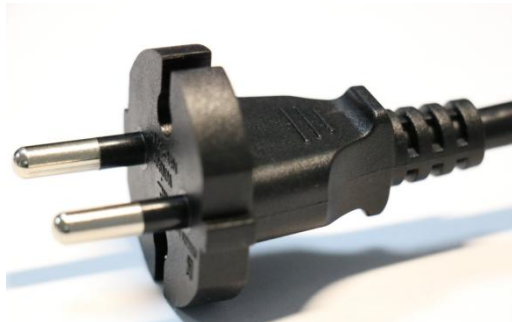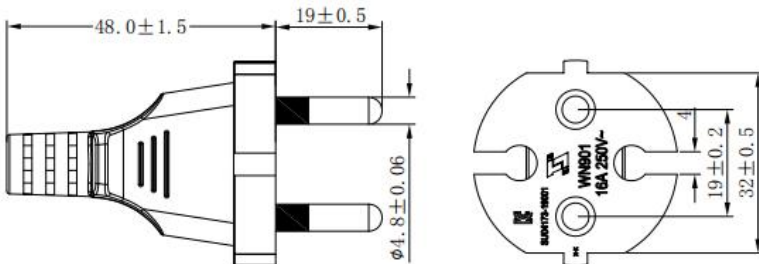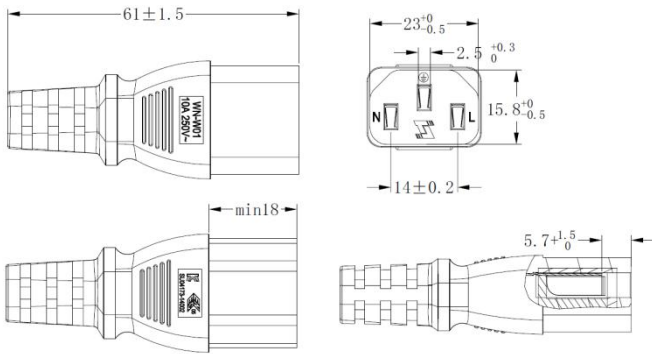

	产品描述	2-Pole Straight Plug(韩国两插)	
	产品标准	KC 60884-1	
	额定值	16A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	16A	H05VV-F	2X 0.75
	16A	H05VV-F	2X 1.0
	16A	H05VV-F	2X1.5
	16A	H05VVH2-F	2X0.75
	16A	H05RR-F	2X0.75
WN901	16A	H05RR-F	2X1.0
	16A	H05RN-F	2X0.75-1.0
	16A	H07RN-F	2X1.0-1.5
			
	产品描述	3-Pole Straight Connector(韩国连接器)	
	产品标准	KC60320-1	
	额定值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	10A	H05VV-F	3G 0.75
	10A	H05VV-F	3G 1.0
WN-W01			
			

国外插头系列



产品描述	3-Pole Angled Plug(韩国三插)
------	--------------------------

产品标准	KC 60884-1
------	------------




额定值	16A 250V~
-----	-----------

安规标志	
------	--

额定电流	配线规格 (mm ²)
------	-------------------------

16A	H03VV-F	3G 0.50
16A	H03VV-F	3G 0.75
16A	H05VV-F	3G 0.75
16A	H05VV-F	3G 1.00
16A	H05VV-F	3G 1.50
16A	H05V2V2-F	3G 0.75
16A	H05V2V2-F	3G 1.00
16A	H05V2V2-F	3G 1.50
16A	H05RR-F	3G 0.75-1.0
16A	H05RN-F	3G 0.75-1.0
16A	H07RN-F	3G 1.00
16A	H07RN-F	3G 1.50

D003

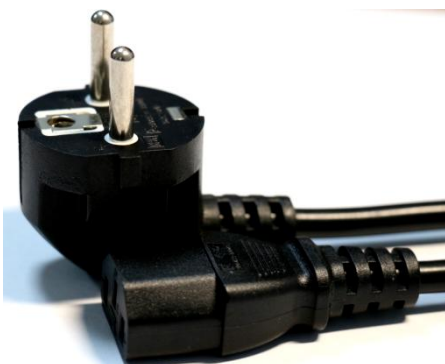

产品描述	Cord Set (插头组合)
------	-----------------




产品标准	KC60799
------	---------

额定值	10A 250V~
-----	-----------

安规标志	
------	--

额定电流	配线规格 (mm ²)
------	-------------------------



10A	H05VV-F	3G 0.75
10A	H05VV-F	3G 1.0

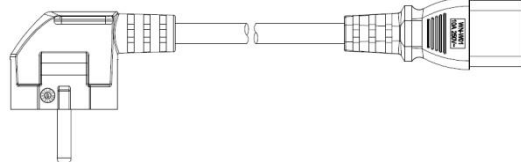

D003+WN-W01

国外插头系列

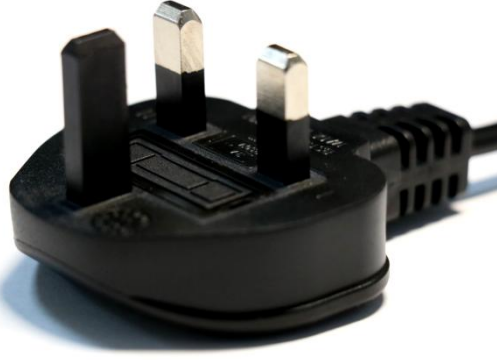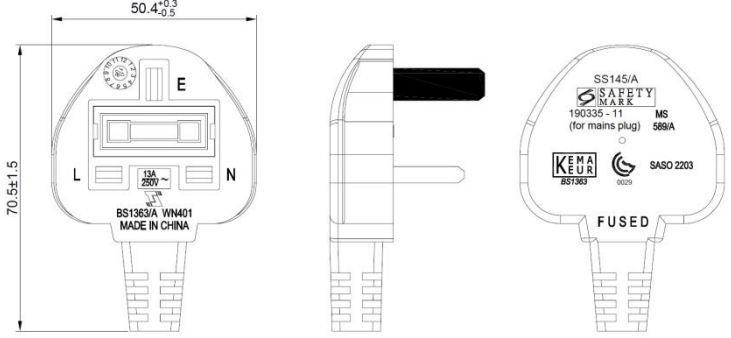

	产品描述	2-Pole Angled Plug(英规两插)	
	产品标准	BS 1363-1	
	额 定 值	3A/6A/10A/13A 250V~	
	安规标志	   	
	额定电流	配线规格 (mm ²)	
	3A	H03VVH2-F	2X0.5
	6A	H03VVH2-F	2X0.75
WN401 (With ISOD)	6A	H05VVH2-F	2X0.75
	6A	H05VV-F	2X0.75
	10A	H05VV-F	2X1.0
	6A	H05RR-F	2X0.75
			

国外插头系列



WN401

产品描述 3-Pole Angled Plug(英规三插)


产品标准 BS 1363-1

额定值 3A/6A/10A/13A 250V~

安规标志 KEMA SAFETY MARK SASO MS 589/A

额定电流 配线规格 (mm²)

3A	H03VVH2-F	2X0.5
6A	H03VVH2-F	2X0.75
6A	H05VVH2-F	2X0.75
6A	H05VV-F	2X0.75
10A	H05VV-F	2X1.0
6A	H05RR-F /H05RN-F	2X0.75
10A	H05RN-F/H07RN-F	2X1.0
13A	H07RN-F	2X1.5
6A	H03VV-F/H05VV-F	3G 0.75
10A	H05VV-F	3G 1.0
6A	H05RR-F/H05RN-F	3G 0.75
10A	H05RR-F/H05RN-F	3G 1.0
13A	H05VV-F/H05RR-F	3G 1.5
6A	H05V2V2-F	3G 0.75
10A	H05V2V2-F	3G 1.0
13A	H05V2V2-F	3G 1.5

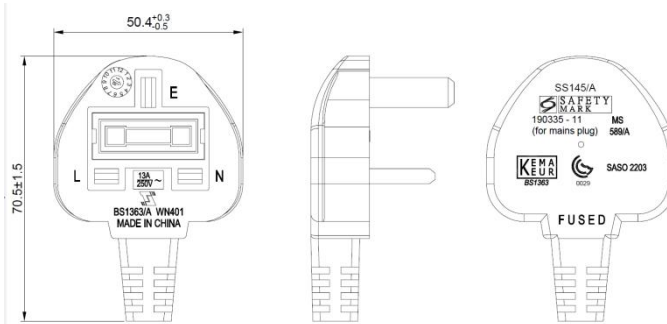


国外插头系列




WN201

产品描述	NEMA 1-15P 2-Pole Straight Plug	
产品标准	UL817, CSA C22.2	
额定值	0.5A/7A/10A/13A/15A 125V~	
安规标志		
额定电流	配线规格 (mm ²)	
7A/10A	SPT-1	18/2C
7A/10A	SPT-2	18/2C
7A/10A	NSPT-1	18/2C
7A/10A	NSPT-2	18/2C
7A/10A	SVT	18/2C
7A/10A	SJT	18/2C
7A/10A	HPN	18/2C
13A/15A	HPN	16/2C
0.5A	TPT	27/2C
13A	SPT-2	16/2C
15A	SJT	14/2C

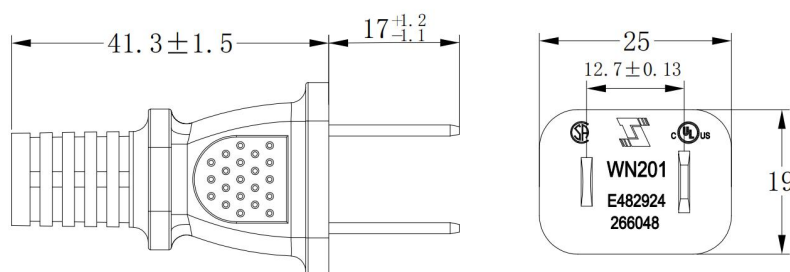

WN202

产品描述	NEMA 1-15P 2-Pole Straight Plug	
产品标准	UL817, CSA C22.2	
额定值	7A/10A 125V~	
安规标志		
额定电流	配线规格 (mm ²)	
7A/10A	NISPT-1	18/2C
7A/10A	SPT-2	18/2C
7A/10A	NSPT-2	18/2C

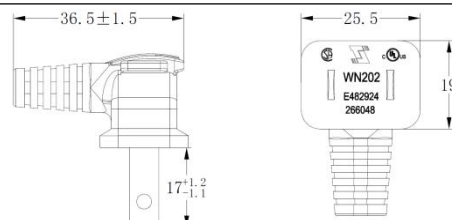


国外插头系列



产品描述	NEMA 5-15P 3-Pole Straight Plug	
产品标准	UL817, CSA C22.2	
额 定 值	7A/10A/13A/15A 125V~	
安规标志		
额定电流	配线规格 (mm²)	
7A/10A	SPT-1	18/3C
7A/10A	SPT-2	18/3C
7A/10A	SPT-3	18/3C
7A/10A	SVT	18/3C
10A	SJT	18/3C
10A	SJTW	18/3C
10A	HPN	18/3C
13A	SPT-2	16/3C
13A	SPT-3	16/3C
13A	SVT	16/3C
13A	SJT	16/3C
13A	SJTW	16/3C
15A	HPN	16/3C
15A	SJT	14/3C
15A	SJTW	14/3C

WN203

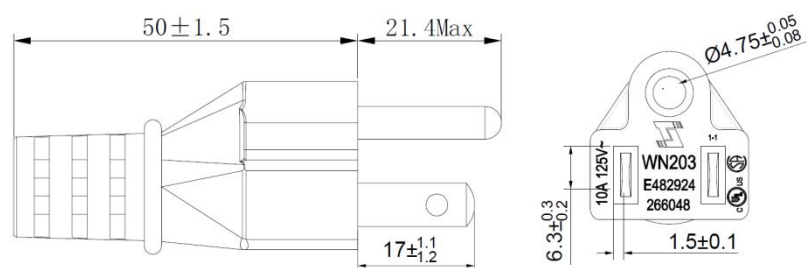

国外插头系列



WN204

产品描述	2-Pole Straight Connector (美规连接器)
------	-----------------------------------

产品标准	UL60320
------	---------

额定值	7A 125V~
-----	----------

安规标志	
------	--


额定电流	配线规格 (mm ²)
------	-------------------------

7A	NISPT-1	18/2C
----	---------	-------

7A	SPT-1	18/2C
----	-------	-------

7A	SPT-2	18/2C
----	-------	-------

7A	NSPT-2	18/2C
----	--------	-------

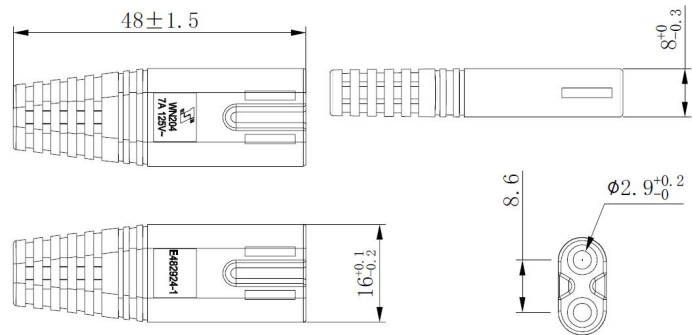

WN205

产品描述	2-Pole Angled Connector (美规连接器)
------	---------------------------------

产品标准	UL60320
------	---------

额定值	7A 125V~
-----	----------

安规标志	
------	--


额定电流	配线规格 (mm ²)
------	-------------------------

7A	NISPT-1	18/2C
----	---------	-------

7A	SPT-1	18/2C
----	-------	-------

7A	SPT-2	18/2C
----	-------	-------

7A	NSPT-2	18/2C
----	--------	-------

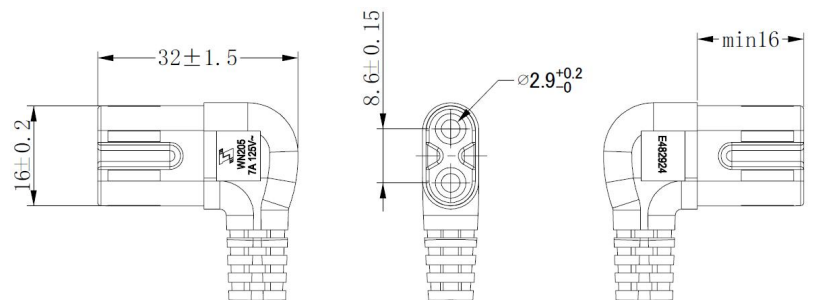


国外插头系列



	产品描述	3-Pole Straight Connector (美规连接器)	
	产品标准	UL60320	
	额定值	7A 10A 13A 125V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	7A/10A	SPT-2	18/3C
	7A/10A	SPT-3	18/3C
	7A/10A	SVT	18/3C
	7A/10A	SJT	18/3C
	7A/10A	HPN	18/3C
	13A	SPT-2	16/3C
	13A	SPT-3	16/3C
WN206	13A	SVT	16/3C
	13A	SJT	16/3C
	15A	HPN	16/3C
	产品描述	3-Pole Straight Connector (美规连接器)	
	产品标准	UL60320	
	额定值	7A 125V~	
	安规标志		
WN215	额定电流	配线规格 (mm ²)	
	7A	SPT-2	18/3C
	7A	SVT	18/3C
	7A	SJT	18/3C



国外插头系列

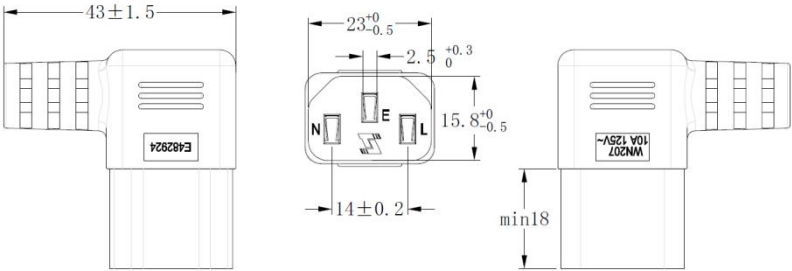

	产品描述	3-Pole Angled Connector（美规连接器）	
	产品标准	UL60320	
	额定值	7A 125V~	
	安规标志		
	额定电流	配线规格（mm²）	
	7A/10A	SPT-2	18/3C
	7A/10A	SPT-3	18/3C
	7A/10A	SVT	18/3C
	7A/10A	SJT	18/3C
	7A/10A	HPN	18/3C
	13A	SPT-2	16/3C
	13A	SPT-3	16/3C
	13A	SVT	16/3C
WN207	13A	SJT	16/3C
	15A	HPN	16/3C
			

国外插头系列

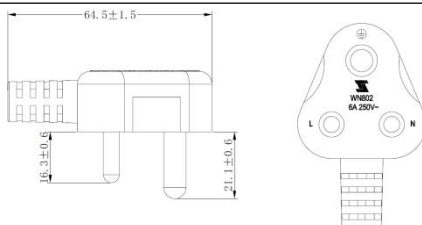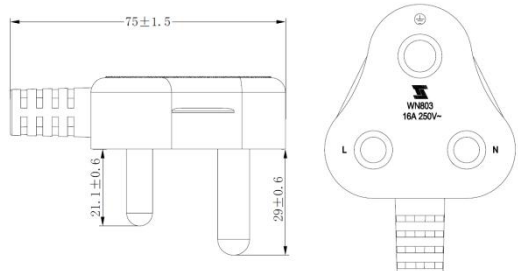



	产品描述	3-Pole Angled Plug (南非三插)	
	产品标准	SANS 164-1	
	额定值	6A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	6A	H03VV-F	3G 0.5
WN802	6A	H03VV-F	3G 0.75
	6A	H05VV-F	3G 0.75
	6A	H05RR-F	3G 0.75
	6A	H05RN-F	3G 0.75
			
	产品描述	3-Pole Angled Plug (南非三插)	
	产品标准	SANS 164-1	
	额定值	16A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	16A	H03VV-F	3G 0.75
	16A	H05VV-F	3G 0.75
	16A	H05VV-F	3G 1.0
	16A	H05VV-F	3G 1.0
	16A	H05RR-F	3G 0.75
WN803	16A	H05RR-F	3G 1.0
	16A	H05RR-F	3G 1.0
	16A	H05RR-F	3G 1.0
	16A	H05RN-F	3G 0.75
	16A	H05RN-F	3G 1.0
			

国外插头系列





D003-SOLID PIN

产品描述	3-Pole Angled Plug (印尼三插)	
产品标准	SNI IEC 60884-1	
额定值	16A 250V~	
安规标志		
额定电流	配线规格 (mm ²)	
16A	H03VV-F	3G 0.75
16A	H05VV-F	3G 0.75
16A	H05VV-F	3G 1.0
16A	H05VV-F	3G 1.50
16A	H05RR-F	3G 0.75
16A	H05RR-F	3G 1.0
16A	H05RR-F	3G 1.50
16A	H05RN-F	3G 0.75
16A	H05RN-F	3G 1.0



WN103-SOLID PIN

产品描述	2-Pole Straight Plug (印尼两插)	
产品标准	SNI IEC 60884-1	
额定值	16A 250V~	
安规标志		
额定电流	配线规格 (mm ²)	
16A	H03VVH2-F	2X 0.75
16A	H03VV-F	2X 0.75
16A	H05VVH2-F	2X 0.75
16A	H05VVH2-F	2X 1.0
16A	H05VV-F	2X 0.75
16A	H05VV-F	2X 1.0
16A	H05RR-F	2X 0.75
16A	H05RR-F	2X 1.0




国外插头系列



产品描述	3-Pole Straight Plug (印尼三插)		
产品标准	SNI IEC 60884-1		
额 定 值	16A 250V~		
安规标志			
额定电流	配线规格 (mm²)		
16A	H03VV-F	3G	0.75
16A	H05VV-F	3G	0.75
16A	H05VV-F	3G	1.0
16A	H05VV-F	3G	1.50
16A	H05RR-F	3G	0.75
16A	H05RR-F	3G	1.0
16A	H05RR-F	3G	1.50
16A	H05RN-F	3G	0.75
16A	H05RN-F	3G	1.0

WN102-SOLID PIN

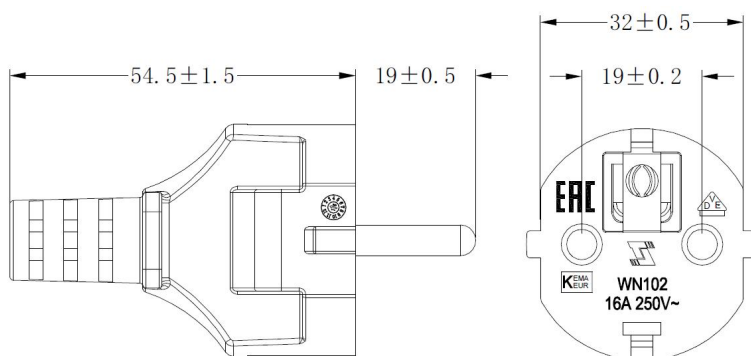

国外插头系列



WN808

产品描述 3-Pole Straight Plug (以色列三插)

产品标准 IS32

额定值 16A 250V~


安规标志

额定电流 配线规格 (mm²)

16A H03VV-F 3G 0.75

16A H05VV-F 3G 0.75

16A H05VV-F 3G 1.0

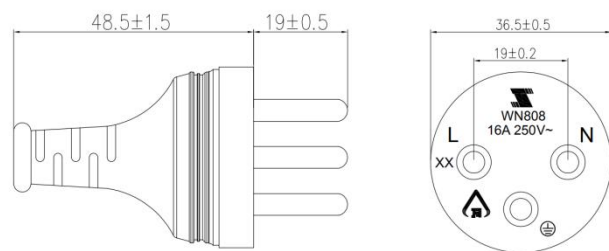

WN812

产品描述 3-Pole Straight Plug (以色列三插)

产品标准 IS32

额定值 16A 250V~


安规标志

额定电流 配线规格 (mm²)

16A H03VV-F 3G 0.75

16A H05VV-F 3G 0.75

16A H05VV-F 3G 1.0

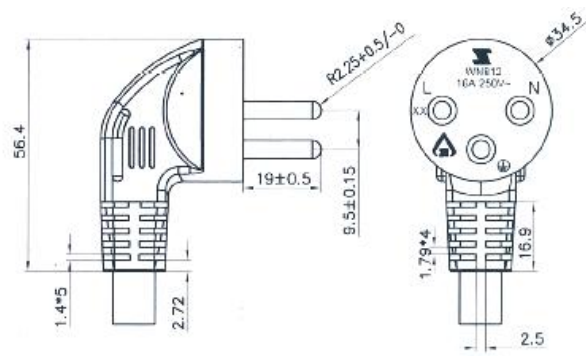

国外插头系列



WN804

产品描述 2-Pole Straight Plug (泰国两插)


产品标准 TIS 166-2549

额定值 2.5A/10A/16A 250V~

安规标志

额定电流 配线规格 (mm²)

2.5A	H03VV-F	2X 0.5
10A	H03VV-F	2X 0.75
10A	H03VVH2-F	2X 0.75
10A	H05VV-F	2X 0.75
16A	H05VV-F	2X 1.0
10A	H05RR-F	2X 0.75
16A	H05RR-F	2X 1.0

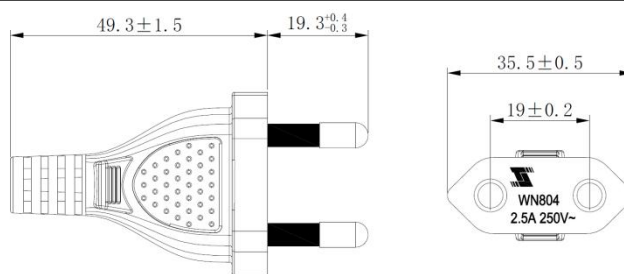

WN805

产品描述 3-Pole Angled Plug (泰国三插)


产品标准 TIS 166-2549

额定值 10A/16A 250V~

安规标志

额定电流 配线规格 (mm²)

10A	H03VV-F	3G 0.75
10A	H05VV-F	3G 0.75
16A	H05VV-F	3G 1.0
16A	H05VV-F	3G 1.5
10A	H05RR-F	3G 0.75
16A	H05RR-F	3G 1.0

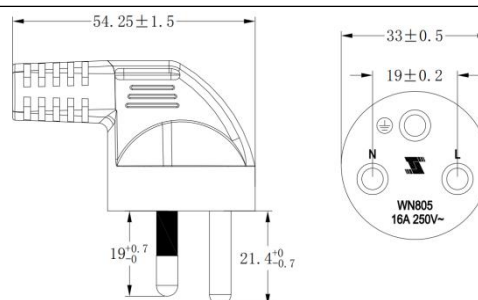

国外插头系列



WN806

产品描述	3-Pole Straight Plug (泰国三插)		
产品标准	TIS 166-2549		
额 定 值	10A/16A 250V~		
安规标志			
额定电流	配线规格 (mm²)		
10A	H03VV-F	3G	0.75
10A	H05VV-F	3G	0.75
16A	H05VV-F	3G	1.0
16A	H05VV-F	3G	1.5
10A	H05RR-F	3G	0.75
16A	H05RR-F	3G	1.0
16A	H05RR-F	3G	1.5

TECHNICAL INFORMATION 技术资讯









Courant assigné du connecteur A	Classe du matériel	Température maximale des broches du socle	TYPE DE CONNECTEUR		Type de câble souple			Fiche
			Numéro de la feuille de norme pour: le socle de connecteur	la prise mobile	Construction démontable autorisée	Type le plus léger autorisé	Section minimale mm	Feuille de norme de la CEI 60083
0,2	II	70 °C			Non	60227 IEC 41	- ^a	A 1-15 B C 5
2,5	I	70 °C			Non	60227 IEC 52	0,75	A 5-15 B 2 C 2b C 4
2,5	II	70 °C			Non	60227 IEC 52	0,75 ^b	A 1-15 B 2 C 5 C 6
6	II	70 °C			Non	60227 IEC 52	0,75	A 1-15 B 2 C 6
10	I	70 °C			Oui	60227 IEC 53 ou 60245 IEC 53	0,75 ^c	A 5-15 B 2 C 2b C 3b C 4
10	I	120 °C			Oui	60245 IEC 53 ou 60245 IEC 51	0,75 ^c	A 5-15 B 2 C 2b C 3b C 4

Figure 1 – Tableau des différents types de connecteurs



一品三规自动化产品展示

随着时代进步和科学技术的迅猛发展，信息化产品和智能化产品的快速更新换代，消费者对产品的认知程度越来越强、对产品的成本意识感也越来越透明化、对产品的审美观要求也越来越高。在这个高速发展和信息化时代制造型企业要生存和发展就只有另辟蹊径，着力打造低成本、高品质的智能化产品。

万能公司第六个五年规划（2021-2025），全力打造智能化工厂，从原材料零件设计组装、到电源线插头设计实现全线自动化智能制造模式，找一些优质客户和有一定体量电源线需求的客户，结合万能电源线产品一品三规推广，不断推行客户产品规格整合的模式，来降低制造成本、减少人工的需求、保证产品一致性，进而达到与客户双赢的局面。






国 标 插 头 系 列

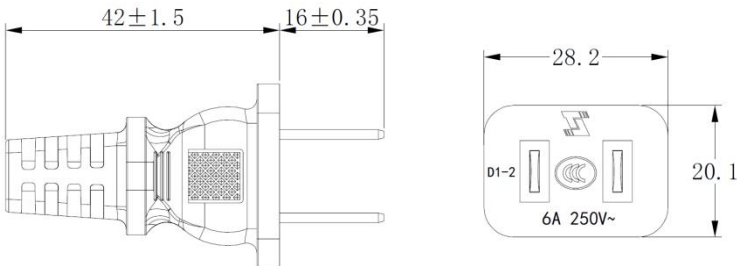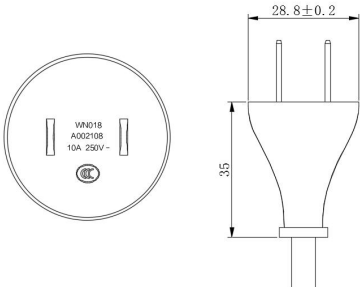

	产品描述	2-Pole Straight Plug(两芯插头)	
	产品标准	GB/T 2099.1	GB 1002
	额 定 值	6A/10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	6A	60227 IEC 52	2X 0.5
	6A	60227 IEC 52	2X 0.5 (扁)
	6A/10A	60227 IEC 52	2X 0.75
	6A/10A	60227 IEC 52	2X 0.75 (扁)
	6A/10A	60227 IEC 52	2X 0.75
D1-2	6A/10A	60227 IEC 53	2X 0.75 (扁)
	6A/10A	60227 IEC 53	2X 0.75
	6A/10A	60227 IEC 53	2X1.0
	6A/10A	60227 IEC 53	2X1.0 (扁)
			
	产品描述	2-Pole Straight Plug(两芯插头)	
	产品标准	GB/T 2099.1	GB 1002
	额 定 值	6A/10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	6A/10A	60227 IEC 52	2X 0.5 (扁)
	6A/10A	60227 IEC 53	2X 0.75 (扁)
WN018			





国 标 插 头 系 列

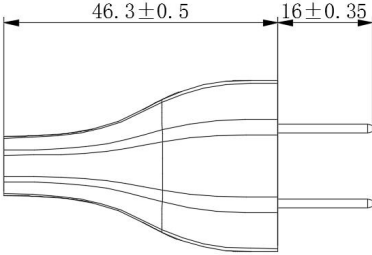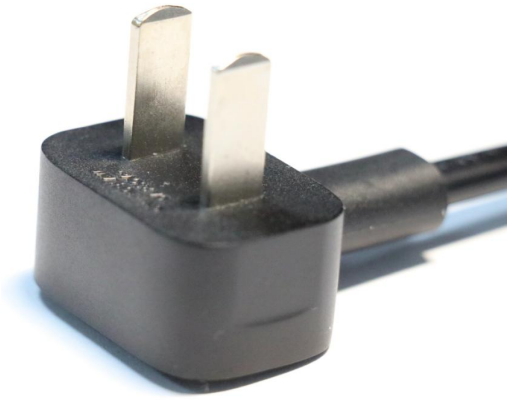

	产品描述	2-Pole Straight Plug(两芯插头)	
	产品标准	GB/T 2099.1	GB 1002
	额 定 值	6A 250V~	
	安规标志		
	额定电流	配线规格 (mm²)	
	6A	60227 IEC 52	2X 0.5 (扁)
	6A	60227 IEC 52	2X 0.75 (扁)
WN015	 		
	产品描述	2-Pole Angled Plug(两芯插头)	
	产品标准	GB/T 2099.1	GB 1002
	额 定 值	6A/10A 250V~	
	安规标志		
	额定电流	配线规格 (mm²)	
	6A	60227 IEC 52	2X 0.5
	10A	60227 IEC 53	2X 0.75 (扁)
	  		
	产品描述	2-Pole Angled Plug(两芯插头)	
	产品标准	GB/T 2099.1	GB 1002
	额 定 值	6A/10A 250V~	
	安规标志		
	额定电流	配线规格 (mm²)	
	6A	60227 IEC 52	2X 0.5
WN002	10A	60227 IEC 53	2X 0.75 (扁)

国标插头系列

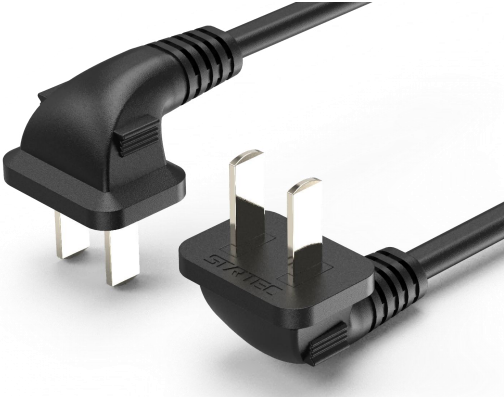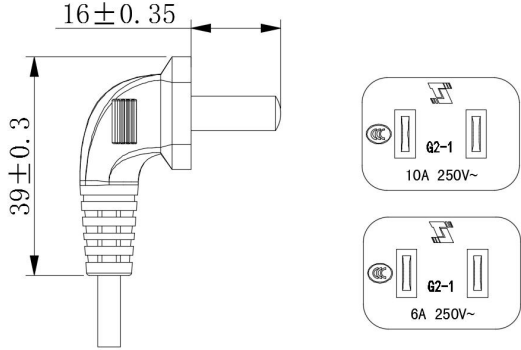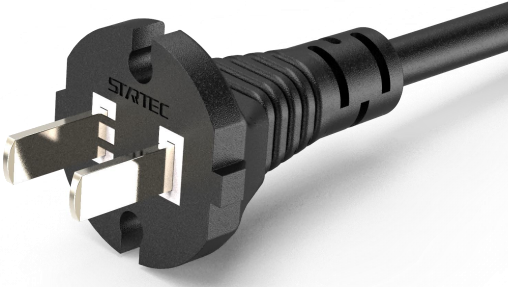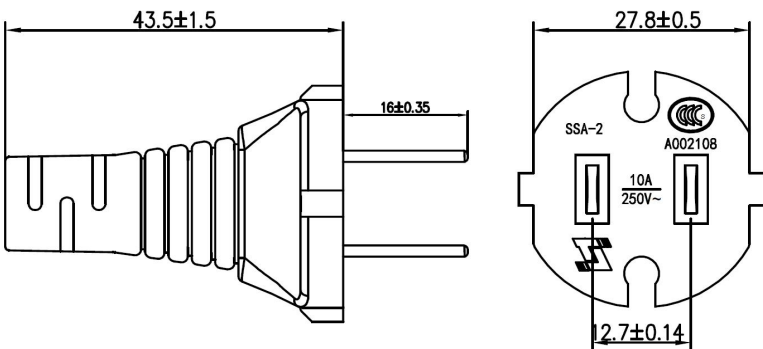

	产品描述	2-Pole Angled Plug(两芯插头)	
	产品标准	GB/T 2099.1	GB 1002
	额定值	6A/10A 250V~	
	安规标志	CCC	
	额定电流	配线规格 (mm ²)	
	6A 10A	60227 IEC 52 60227 IEC 52	2X 0.5 (扁) 2X 0.75 (扁)
G2-1			
	产品描述	2-Pole Straight Plug(两芯插头)	
	产品标准	GB/T 2099.1	GB 1002
	额定值	10A 250V~	
	安规标志	CCC	
	额定电流	配线规格 (mm ²)	
	10A 10A 10A	60227 IEC 53 60227 IEC 53 60227 IEC 66	2X 0.75 2X 1.0) 2X 1.0
SSA-2			

国标插头系列



D1-4

产品描述 3-Pole Straight Plug(三芯插头)



产品标准 GB/T 2099.1 GB 1002

额定值 6A/10A 250V~

安规标志

额定电流 配线规格 (mm²)

6A	60227 IEC 52	3X 0.5
6A	60227 IEC 52	3X 0.75
6A/10A	60227 IEC 53	3X 0.75
10A	60227 IEC 53	3X 1.0
10A	60227 IEC 53	3X 1.5
10A	60227 IEC 57	3X 0.75
10A	60227 IEC 57	3X 1.0

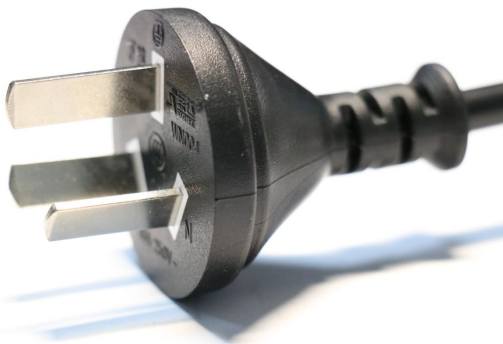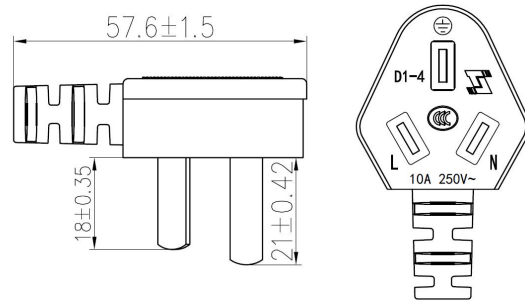

WN004

产品描述 3-Pole Straight Plug(三芯插头)


产品标准 GB/T 2099.1 GB 1002

额定值 6A/10A 250V~

安规标志









额定电流 配线规格 (mm²)

6A/10A	60227 IEC 52	3X 0.5
6A/10A	60227 IEC 52	3X 0.75
6A/10A	60227 IEC 53	3X 0.75
10A	60227 IEC 53	3X 1.0
10A	60227 IEC 53	3X 1.5

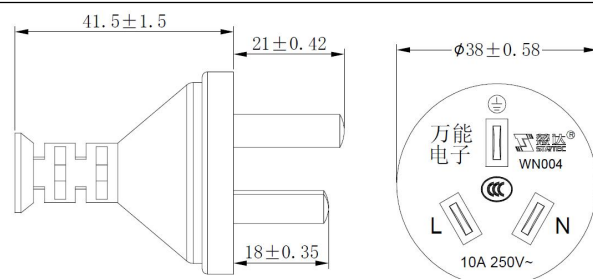

国标插头系列

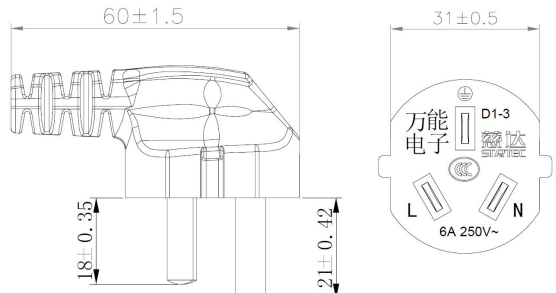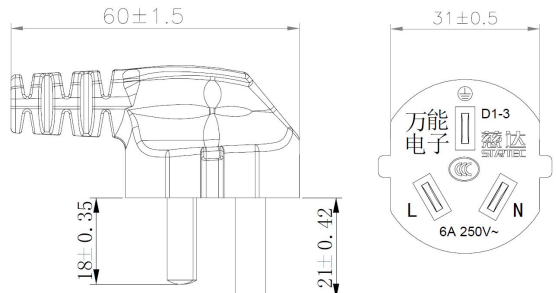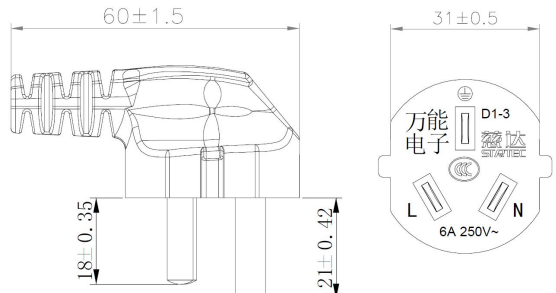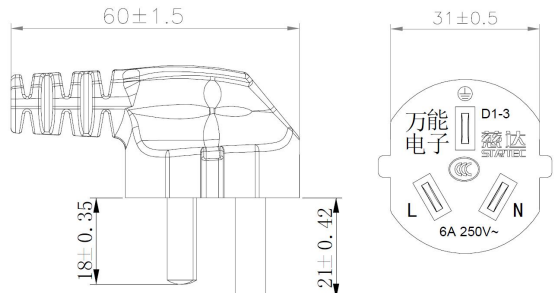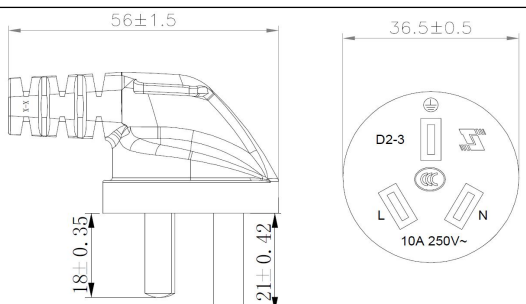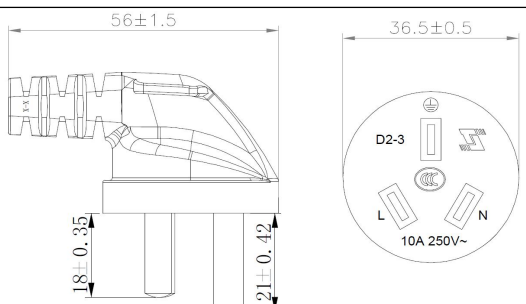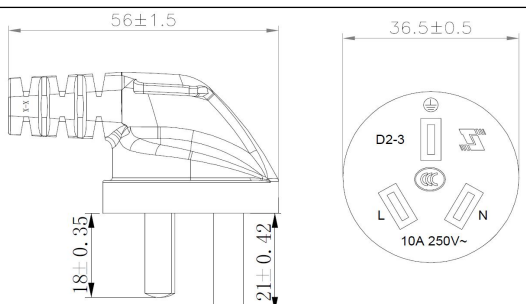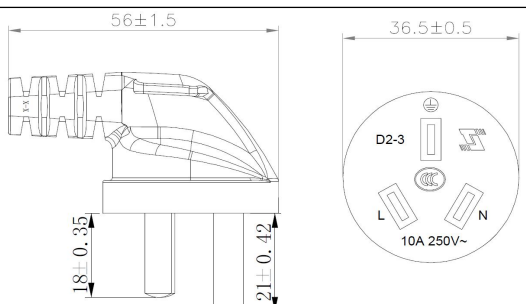

	产品描述	3-Pole Straight Plug(三芯插头)	
	产品标准	GB/T 2099.1	GB 1002
	额定值	6A/10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	6A	60227 IEC 52	3X 0.5
	6A	60227 IEC 52	3X 0.75
	6A/10A	60227 IEC 53	3X 0.75
	10A	60227 IEC 53	3X 1.0
	10A	60227 IEC 53	3X 1.5
	10A	60227 IEC 57	3X 0.75
	10A	60227 IEC 57	3X 1.0
			
			
			
			
	产品描述	3-Pole Straight Plug(三芯插头)	
	产品标准	GB/T 2099.1	GB 1002
	额定值	6A/10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	6A	60227 IEC 52	3X 0.5
	6A	60227 IEC 52	3X 0.75
	6A/10A	60227 IEC 53	3X 0.75
	10A	60227 IEC 53	3X 1.0
	10A	60227 IEC 53	3X 1.5
	10A	60227 IEC 57	3X 0.75
	10A	60227 IEC 57	3X 1.0
			
			
			
			

国 标 插 头 系 列



WN031

产品描述 3-Pole Straight Plug(三芯插头)

产品标准 GB/T 2099.1 GB 1002


额 定 值 10A 250V~

安规标志

额定电流 **配线规格 (mm²)**

10A 60227 IEC 53 3X 1.0

10A 60227 IEC 53 3X 0.75

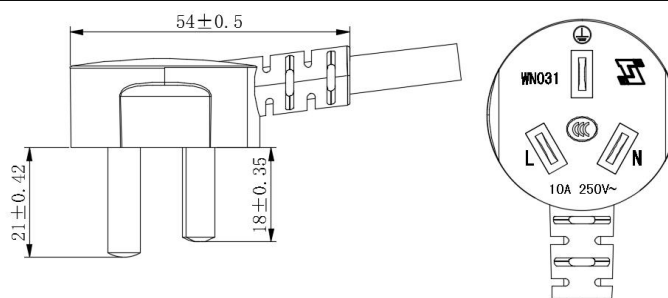

WN041

产品描述 3-Pole Straight Plug(三芯插头)

产品标准 GB/T 2099.1 GB 1002

额 定 值 6A/10A 250V~

安规标志

额定电流 **配线规格 (mm²)**

6A/10A 60227 IEC 53 3X 0.75

6A/10A 60227 IEC 53 3X 0.75


10A 60227 IEC 53 3X 1.0

10A 60245 IEC53 3X0.75

10A 60245 IEC53 3X1.0



10A 60245 IEC57 3X0.75

10A 60245 IEC57 3X1.0

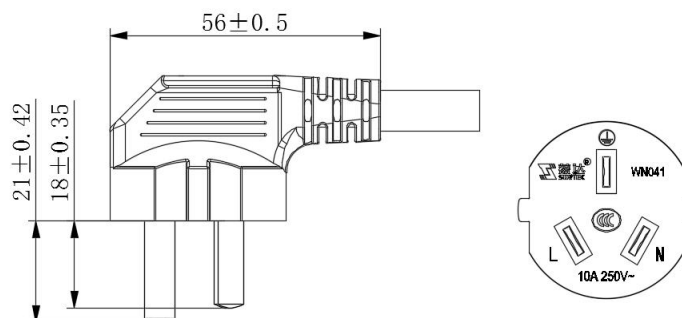



国 标 插 头 系 列

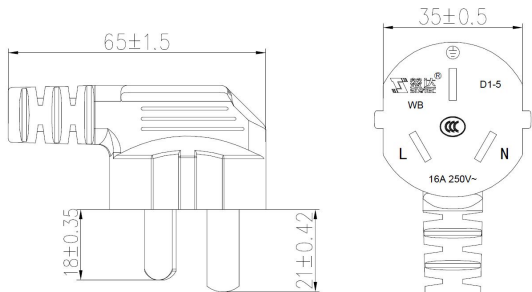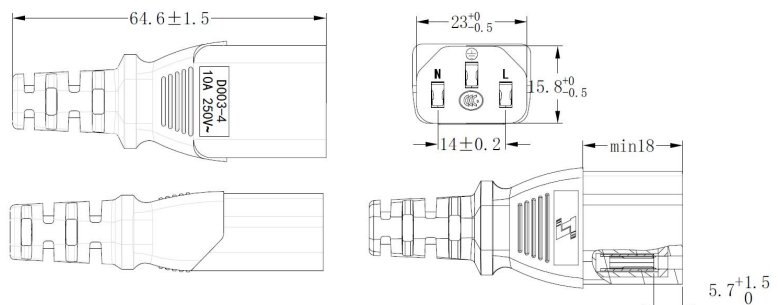

	产品描述	3-Pole Straight Plug(三芯插头)	
	产品标准	GB/T 2099.1	GB 1002
	额 定 值	16A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
D1-5	16A	60227 IEC 53	3X 1.0
	16A	60227 IEC 53	3X 1.5
	16A	60227 IEC 53	3X 2.5
	16A	60227 IEC 57	3X 1.5
			
	产品描述	3-Pole Straight Connector(三插连接器)	
	产品标准	GB/T 17465	
	额 定 值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	10A	60227 IEC 52	3X 0.75
	10A	60227 IEC 53	3X 0.75
	10A	60227 IEC 53	3X 1.0
	10A	60227 IEC 53	3X 1.5
	10A	60227 IEC 57	3X 0.75
	10A	60227 IEC 57	3X 1.0
			





国 标 插 头 系 列

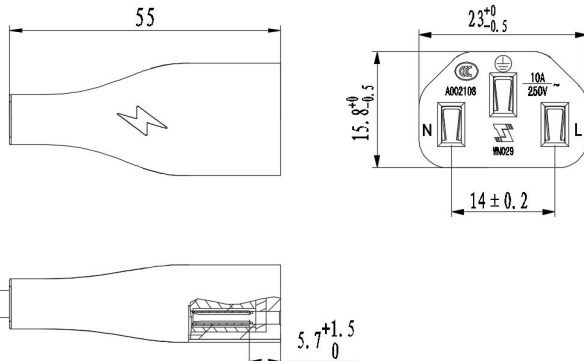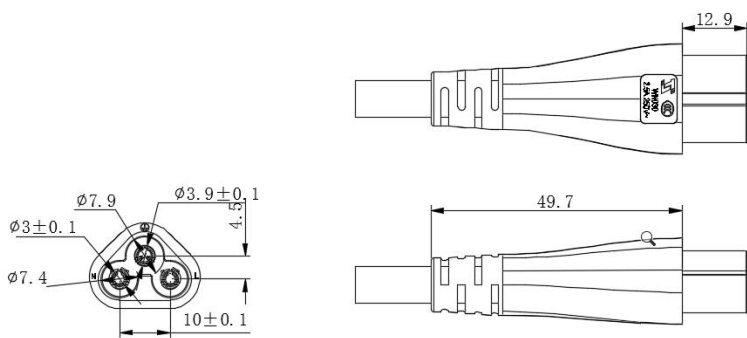


	产品描述	3-Pole Straight Connector(三插连接器)	
	产品标准	GB/T 17465	
	额 定 值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
WN029	10A	60227 IEC 52	3X 0.75
	10A	60227 IEC 53	3X 0.75
	10A	60227 IEC 53	3X 1.0
			
	产品描述	3-Pole Angled Connector(三插连接器)	
	产品标准	GB/T 17465	
	额 定 值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
WN031	10A	60227 IEC 53	3X 0.75
	10A	60227 IEC 53	3X 1.0
	10A	60227 IEC 53	3X 1.5
			

国标插头系列

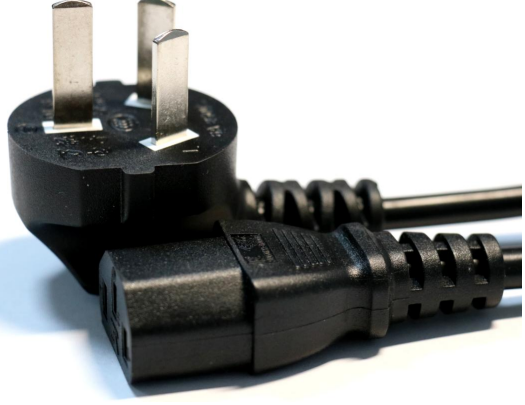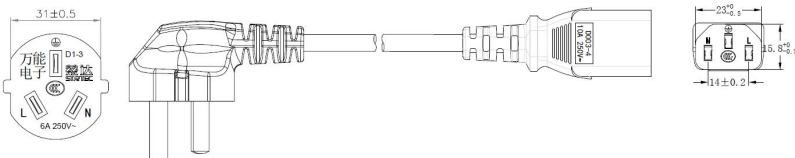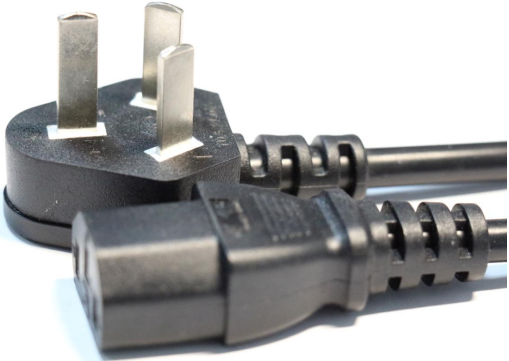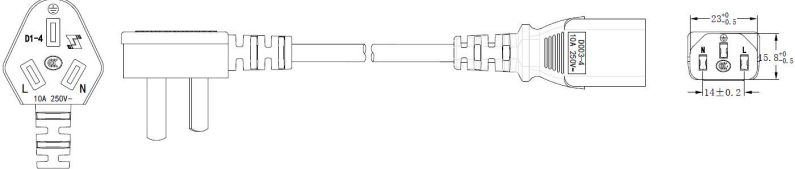


	产品描述	Cord Set (插头组合)	
	产品标准	GB/T 15934	
	额定值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	10A	60227 IEC 53	3X 0.75
D1-3+D003-4	10A	60227 IEC 53	3X 1.0
	10A	60227 IEC 53	3X 1.5
	10A	60227 IEC 57	3X 0.75
	10A	60227 IEC 57	3X 1.0
			
	产品描述	Cord Set (插头组合)	
	产品标准	GB/T 15934	
	额定值	10A 250V~	
	安规标志		
	额定电流	配线规格 (mm ²)	
	10A	60227 IEC 52	3X 0.75
D1-4+D003-4	10A	60227 IEC 53	3X 0.75
	10A	60227 IEC 53	3X 1.0
			

国标插头系列

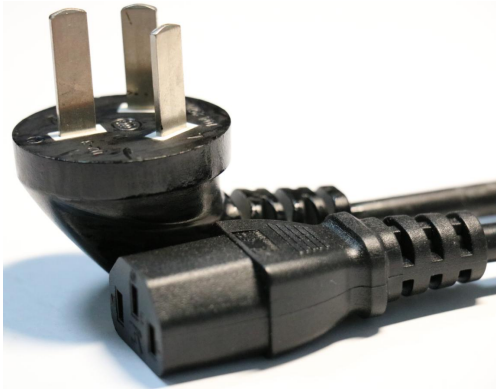

D2-3+D003-4

产品描述	Cord Set (插头组合)		
产品标准	GB/T 15934		
额定值	10A 250V~		
安规标志			
额定电流	配线规格 (mm ²)		
10A	60227 IEC 53	3X	0.75
10A	60227 IEC 53	3X	1.0
10A	60227 IEC 53	3X	1.5




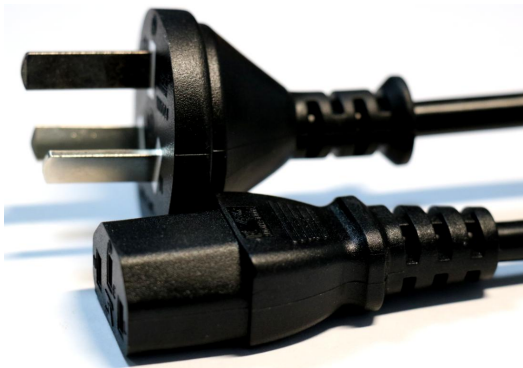


WN004+D003-4

产品描述	Cord Set (插头组合)		
产品标准	GB/T 15934		
额定值	10A 250V~		
安规标志			
额定电流	配线规格 (mm ²)		
10A	60227 IEC 52	3X	0.75
10A	60227 IEC 53	3X	0.75
10A	60227 IEC 53	3X	1.0
10A	60227 IEC 53	3X	1.5


国标插头系列

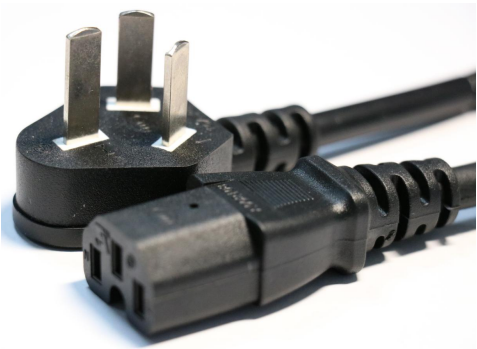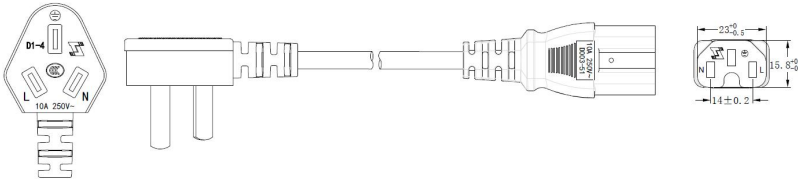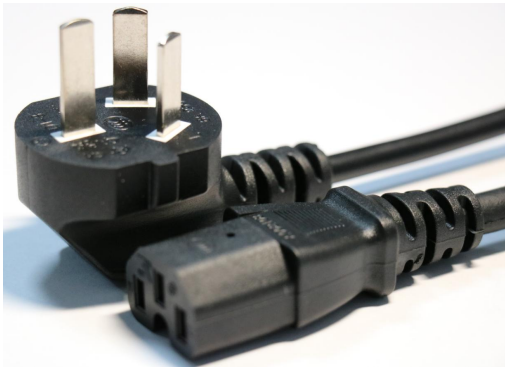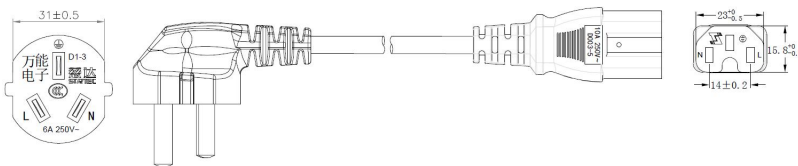


	产品描述	Cord Set (插头组合)	
	产品标准	GB/T 15934	
	额 定 值	10A 250V~	
	安规标志	CCC	
	额定电流	配线规格 (mm ²)	
D1-4+D003-51	10A	60245 IEC 57	3X 0.75
	10A	60245 IEC 57	3X 1.0
			
	产品描述	Cord Set (插头组合)	
	产品标准	GB/T 15934	
	额 定 值	10A 250V~	
	安规标志	CCC	
	额定电流	配线规格 (mm ²)	
D1-3+D003-5	10A	60245 IEC 57	3X 0.75
	10A	60245 IEC 57	3X 1.0
			


国标插头系列

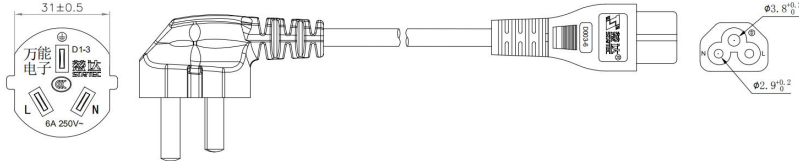

	<table><tr><th>产品描述</th><th colspan="2">Cord Set (插头组合)</th></tr><tr><th>产品标准</th><td colspan="2">GB/T 15934</td></tr><tr><th>额 定 值</th><td colspan="2">10A+2.5A 250V~</td></tr><tr><th>安规标志</th><td colspan="2"></td></tr><tr><th>额定电流</th><th colspan="2">配线规格 (mm²)</th></tr><tr><td>10A+2.5A</td><td>60227 IEC 53</td><td>3X 0.75</td></tr><tr><td>10A+2.5A</td><td>60227 IEC 53</td><td>3X 1.0</td></tr></table>	产品描述	Cord Set (插头组合)		产品标准	GB/T 15934		额 定 值	10A+2.5A 250V~		安规标志			额定电流	配线规格 (mm²)		10A+2.5A	60227 IEC 53	3X 0.75	10A+2.5A	60227 IEC 53	3X 1.0
产品描述	Cord Set (插头组合)																					
产品标准	GB/T 15934																					
额 定 值	10A+2.5A 250V~																					
安规标志																						
额定电流	配线规格 (mm²)																					
10A+2.5A	60227 IEC 53	3X 0.75																				
10A+2.5A	60227 IEC 53	3X 1.0																				
D1-3+D003-6																						

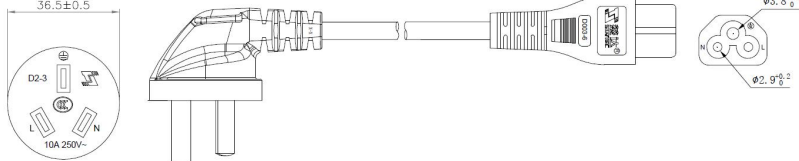	<table><tr><th>产品描述</th><th colspan="2">Cord Set (插头组合)</th></tr><tr><th>产品标准</th><td colspan="2">GB/T 15934</td></tr><tr><th>额 定 值</th><td colspan="2">10A+2.5A 250V~</td></tr><tr><th>安规标志</th><td colspan="2"></td></tr><tr><th>额定电流</th><th colspan="2">配线规格 (mm²)</th></tr><tr><td>10A+2.5A</td><td>60227 IEC 53</td><td>3X 0.75</td></tr><tr><td>10A+2.5A</td><td>60227 IEC 53</td><td>3X 1.0</td></tr></table>	产品描述	Cord Set (插头组合)		产品标准	GB/T 15934		额 定 值	10A+2.5A 250V~		安规标志			额定电流	配线规格 (mm²)		10A+2.5A	60227 IEC 53	3X 0.75	10A+2.5A	60227 IEC 53	3X 1.0
产品描述	Cord Set (插头组合)																					
产品标准	GB/T 15934																					
额 定 值	10A+2.5A 250V~																					
安规标志																						
额定电流	配线规格 (mm²)																					
10A+2.5A	60227 IEC 53	3X 0.75																				
10A+2.5A	60227 IEC 53	3X 1.0																				
D2-3+D003-6																						

国 标 插 头 系 列

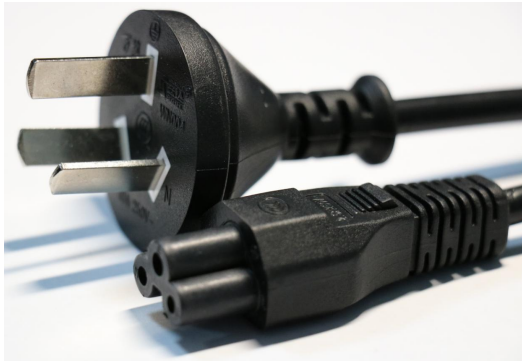

产品描述

Cord Set (插头组合)

产品标准

GB/T 15934

额 定 值

10A+2.5A 250V~

安规标志




额定电流

配线规格 (mm²)

10A+2.5A	60227 IEC 52	3X 0.75
10A+2.5A	60227 IEC 53	3X 0.75
10A+2.5A	60227 IEC 53	3X 1.0

WN004+D003-6

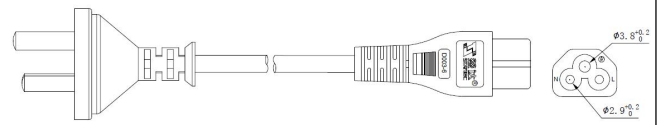

产品描述

Cord Set (插头组合)

产品标准

GB/T 15934

额 定 值

10A+2.5A 250V~

安规标志




额定电流

配线规格 (mm²)



10A+2.5A	60227 IEC 52	3X 0.75
10A+2.5A	60227 IEC 53	3X 0.75
10A+2.5A	60227 IEC 53	3X 1.0

WN004+WN031

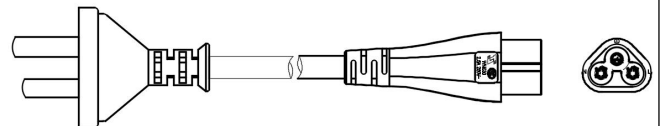



国标插头系列

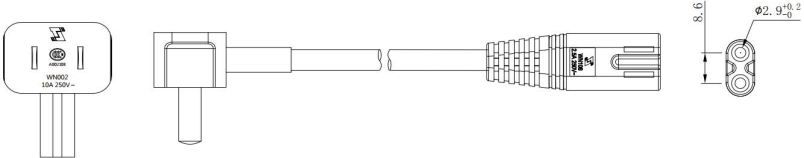

	产品描述	Cord Set (插头组合)
	产品标准	GB/T 15934
	额 定 值	6A/10A+2.5A 250V~
	安规标志	
	额定电流	配线规格 (mm ²)
WN002+WN106	6A+2.5A	60227 IEC 52 2X 0.5 (扁)
	6A/10A+2.5A	60227 IEC 53 2X 0.75 (扁)
		
	产品描述	Cord Set (插头组合)
	产品标准	GB/T 15934
	额 定 值	6A/10A+2.5A 250V~
	安规标志	
	额定电流	配线规格 (mm ²)
	6A+2.5A	60227 IEC 52 2X 0.75 (扁)
	6A/10A+2.5A	60227 IEC 53 2X 0.75 (扁)
D1-2+SSA-D1-2A		
	产品描述	Cord Set (插头组合)
	产品标准	GB/T 15934
	额 定 值	6A/10A+2.5A 250V~
	安规标志	


国外插头系列

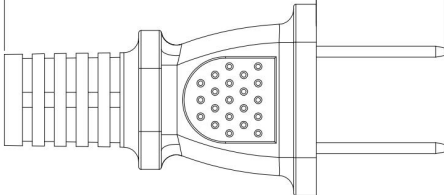

	产品描述	NEMA 1-15P 2-Pole Straight Plug	
	产品标准	UL817, CSA C22.2	
	额 定 值	0.5A/7A/10A/13A/15A 125V~	
	安规标志	UL SP	
	额定电流	配线规格 (mm²)	
	7A/10A	SPT-1	18/2C
	7A/10A	SPT-2	18/2C
	7A/10A	SPT-2	16/2C
	7A/10A	NSPT-1	18/2C
	7A/10A	NSPT-2	18/2C
WN201	7A/10A	SVT	18/2C
	7A/10A	SJT	18/2C
	7A/10A	HPN	18/2C
	13A/15A	HPN	16/2C
	0.5A	TPT	27/2C
41.3±1.5 17^{+1.2}_{-1.1}  25 12.7±0.13 			

国外插头系列

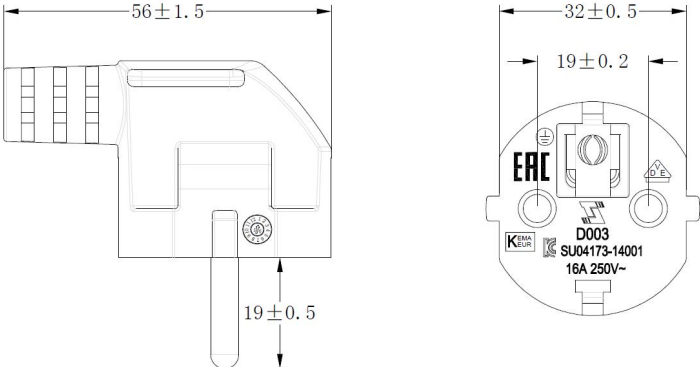

	产品描述	3-Pole Angled Plug(欧规三插)	
	产品标准	VDE0620-2-1 IEC60884-1	
	额 定 值	16A 250V~	
	安规标志		
	额定电流	配线规格 (mm²)	
	2.5A	H03VV-F	3G 0.75
	2.5A	H05VV-F	3G 0.75
	6A/10A	H05VV-F	3G 1.0
	6A/10A	H05VV-F	3G 1.50
	6A/10A	H05RR-F	3G 0.75
D003	6A/10A	H05RR-F	3G 1.0
	10A	H05RR-F	3G 1.50
	10A	H05RN-F	3G 0.75
	10A	H05RN-F	3G 1.0
			



WN102

产品描述	3-Pole Straight Plug(欧规三插)		
产品标准	VDE0620-2-1 IEC60884-1		
额定值	16A 250V~		
安规标志	  		
额定电流	配线规格 (mm²)		
16A	H03VV-F	3G 0.75	
16A	H05VV-F	3G 0.75	
16A	H05VV-F	3G 1.0	
16A	H05VV-F	3G 1.50	
16A	H05RR-F	3G 0.75	
16A	H05RR-F	3G 1.0	
16A	H05RR-F	3G 1.50	
16A	H05RN-F	3G 0.75	
16A	H05RN-F	3G 1.0	

Technical drawing of the 3-Pole Straight Plug showing side and front views with dimensions.

Side View Dimensions:

- Overall length: 54.5 ± 1.5
- Distance from base to plug tip: 19 ± 0.5

Front View Dimensions:

- Overall width: 32 ± 0.5
- Distance between mounting holes: 19 ± 0.2

Front View Details:

- Markings: EAC, VDE, KEMA, WH102, 16A 250V~
- Mounting holes: Two circular holes for mounting.

慈溪市万能电子有限公司
CIXI WANNENG ELECTRON CO.,LTD.

📍 浙江省慈溪市附海工业区经七路28号

☎ 0574-6355 4638

🌐 www.wndz.com

✉ wndz@wndz.com

